
MCHOSE

K99 MECHANICAL KEYBOARD

Warm Reminder: The product images shown are for illustrative purposes only; the actual product shall prevail.

PRODUCT OVERVIEW

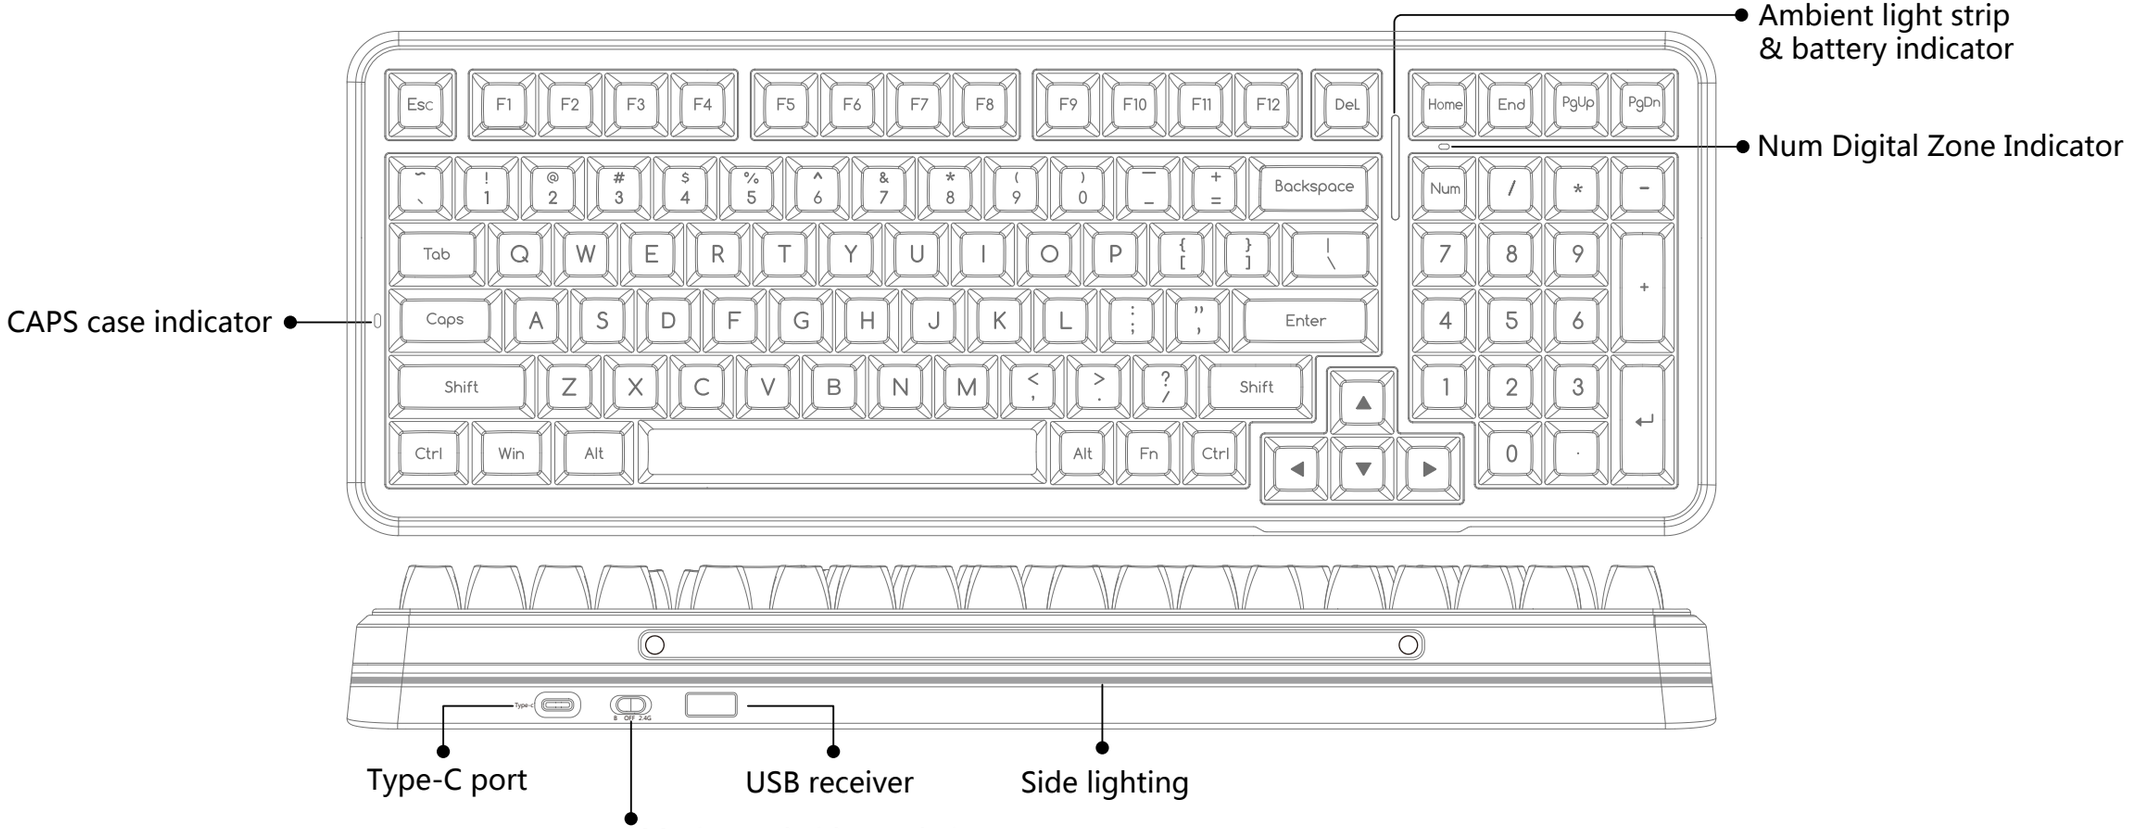


1. Indicator Lights
- CAPS Indicator Light: The CAPS key indicator light differentiates between uppercase and lowercase states. It remains on when in the uppercase state.
- Win Indicator Light: The Win key indicator light differentiates the locked state of the Win key. It stays on when the Win key is locked, and the Win key cannot be used at this time.

2. Windows / Mac Systems
- FN + A = Windows system; FN + S = Mac mode. The ALT key functions as the Command key, and FN + F1 - F12 enables normal input of F1 - F12.
- In the Windows system, when switching to Mac system mode, the Windows key and the left Alt key will be swapped, and the F1 - F12 keys will function as multimedia keys.

CONNECTION MODE

2.4G wireless connection:

- Slide the mode - switching switch to [2.4G].
- Take out the receiver from the storage slot.
- Insert the receiver into the computer's USB port.
- Manual pairing (factory - default paired): Long - press 【FN+`~】 for 3 seconds until the indicator light flashes rapidly. Insert the receiver into the computer's USB port. When the connection is successful, the indicator light will return to normal mode.

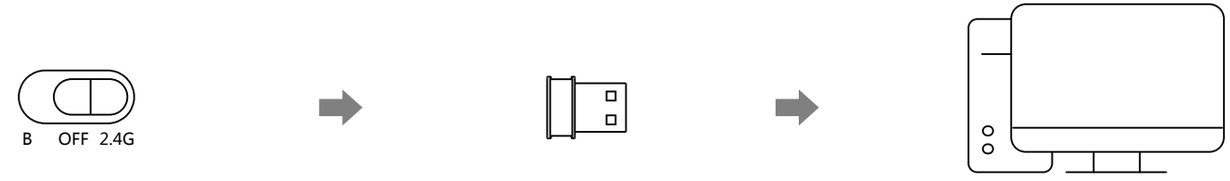

Wired connection:

- Slide the mode - switching switch to the [OFF] mode.
- Plug one end of the Type - C USB cable into the corresponding port of the keyboard.
- Plug the other end of the USB cable into the corresponding port of the computer to start using it.



Wireless connection:

- Slide the mode - switching switch to the [B] mode.
- Long - press 【FN + 1!】 to start pairing. The indicator light will flash rapidly during pairing.
- Press 【FN + 1!】, 【FN + 2@】, 【FN + 3#】 to switch devices.



Pairing name :
【MCHOSE K99 3.0】/ 【MCHOSE K99 5.0】

DRIVER INTRODUCTION

M HUB Web : https://www.mchose.com.cn

Open the URL in your browser,

Click [Enter M HUB WEB] - [Allow Browser Access], then select the corresponding product model to connect.


M HUB Driver : https://www.maicong.cn

Open the URL in your browser,

Click [Driver] - [Download M HUB Driver]

*The M HUB client driver currently only supports Windows 10 and above operating systems; Windows 7 and macOS operating systems are not supported for now.


FN COMBINATION KEY



+

Lighting function			
ESC	Long press for 3 seconds to restore default settings	←	Backlight speed -
Del	Switch lighting mode	→	Backlight speed +
End	Switch side lighting mode	¯	Switch backlight color
|	Switch side lighting color	Right Shift	Turn on/off backlight
{ [	Side lighting brightness -	+=	Switch status indicator light color
] }	Side lighting brightness +	2	Status indicator light brightness -
: ;	Side lighting speed -	8	Status indicator light brightness +
“ ’	Side lighting speed +	6	Status indicator light speed +
↑	Backlight brightness +	4	Status indicator light speed -
↓	Backlight brightness -	Home	Change status indicator light effect mode


FN MULTIMEDIA FUNCTION



+

Win system

Key	Multimedia combination function	Multimedia function (single press)
F1	Screen brightness -	F1
F2	Screen brightness +	F2
F3	Win+Tab	F3
F4	Win+E	F4
F5	None	F5
F6	None	F6
F7	Previous track	F7
F8	Play/Pause	F8
F9	Next track	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12



+

Mac system

Key	Multimedia combination function	Multimedia function (single press)
F1	F1	Brightness -
F2	F2	Brightness +
F3	F3	Win+Tab
F4	F4	Win+E
F5	F5	None
F6	F6	None
F7	F7	Previous track
F8	F8	Play/Pause
F9	F9	Next track
F10	F10	Mute
F11	F11	Volume -
F12	F12	Volume +

POWER MANAGEMENT


1. Battery Check

In wireless mode (2.4G/wireless) and when the device is connected,
the [status indicator light] switches to the always - on mode,
and the keyboard will display the battery level color.

🔴 Indicates low battery 🟠 Indicates medium battery 🟢 Indicates high battery

2. Charging method

- In any mode, connecting the keyboard to the computer via the provided data cable will charge the keyboard.
- During charging, the [status indicator light] flows quickly from bottom to top. When fully charged, the [status indicator light] returns to its normal lighting effect. The charging lighting effect is only displayed when the [status indicator light] is in the always - on mode.

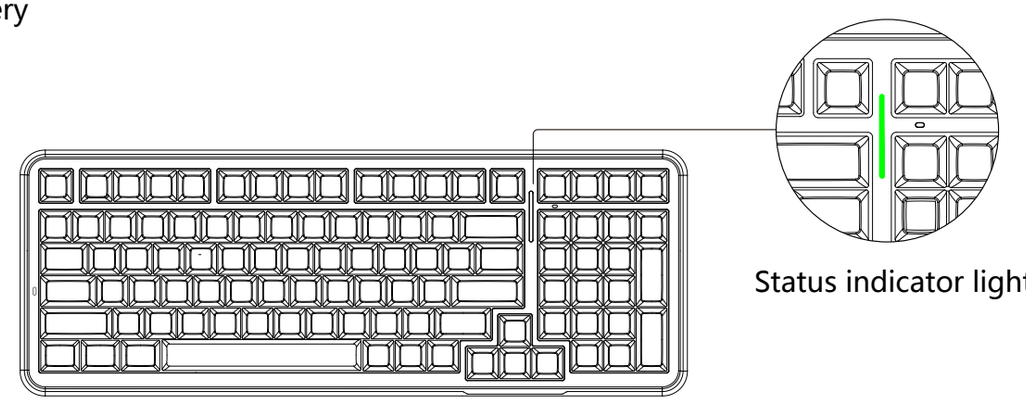

Status indicator light

3. Sleep function

- In wireless mode, if there is no keyboard activity, the backlight will turn off after 3 minutes, and the wireless/2.4G connection will disconnect after 30 minutes. Press any key to reconnect.

Note: This device has been tested and complies with the limits for Class B digital devices under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installations.
This device generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation.
If this device does cause harmful interference to radio or television reception (which can be determined by turning the device off and on), we encourage the user to try one or more of the following measures to correct the interference:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
Changes or modifications not expressly approved by the responsible party could void the user’ s authority to operate the equipment.
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.

CHARGING INSTRUCTION

1.It is recommended to charge the keyboard only via the computer's USB port.
2.Do not use a fast - charging mobile phone charger to charge the keyboard.
3.Do not use substandard or non - compliant power adapters to charge the keyboard.
4.Do not use power adapters with over - voltage or over - current to charge the keyboard.
5.Keep away from high - temperature devices when charging.
6.Turn off the power switch when not in use for an extended period.

These charging instructions also apply to other rechargeable devices (keyboard/mouse/headphones/speakers, etc.).