



2027 | ISO A, B, C, D, E, F, G, H | 15 m/s | nominal damping ratio 0.70


Front corner

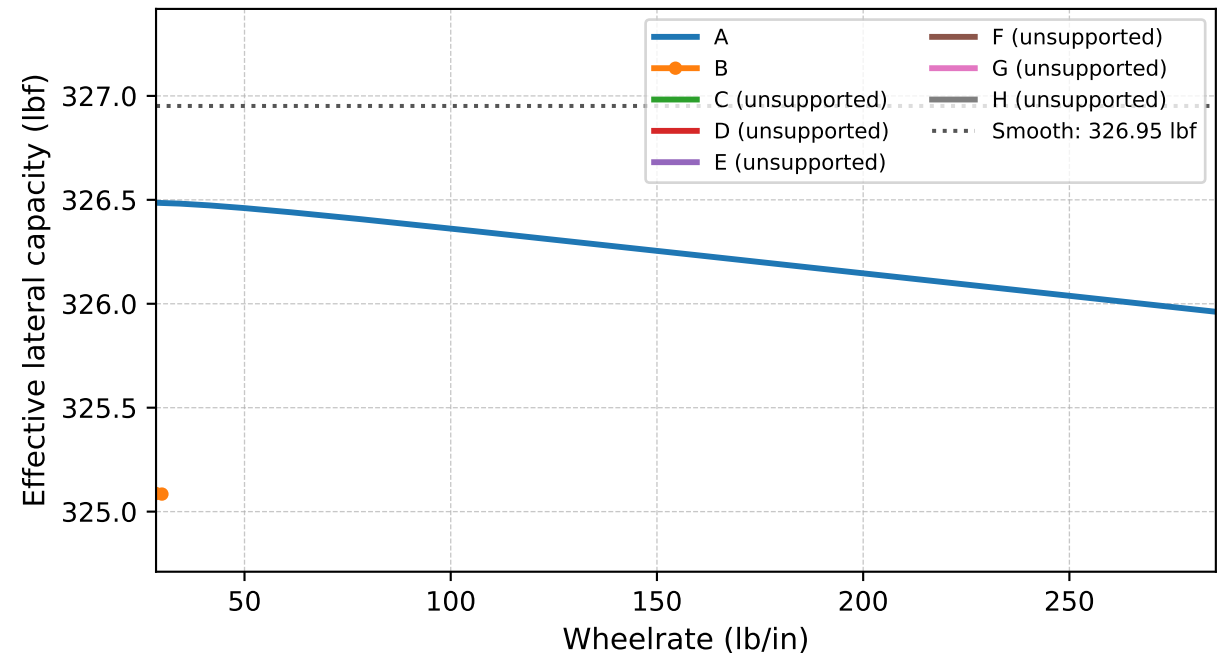


Front corner

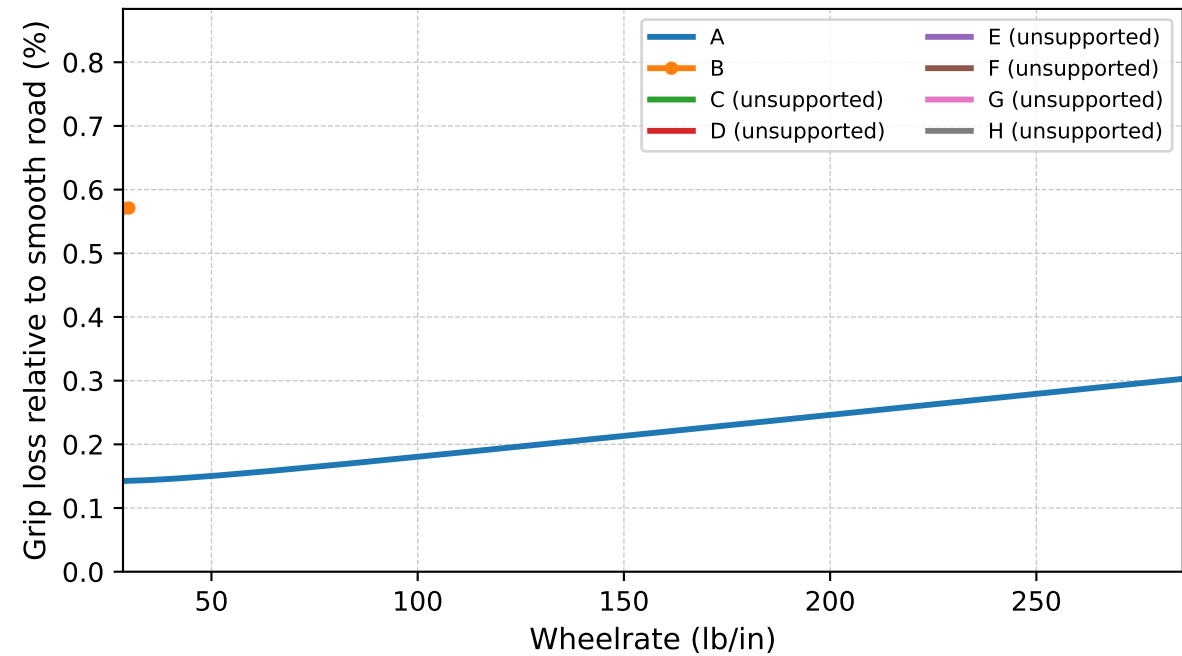

Rear corner

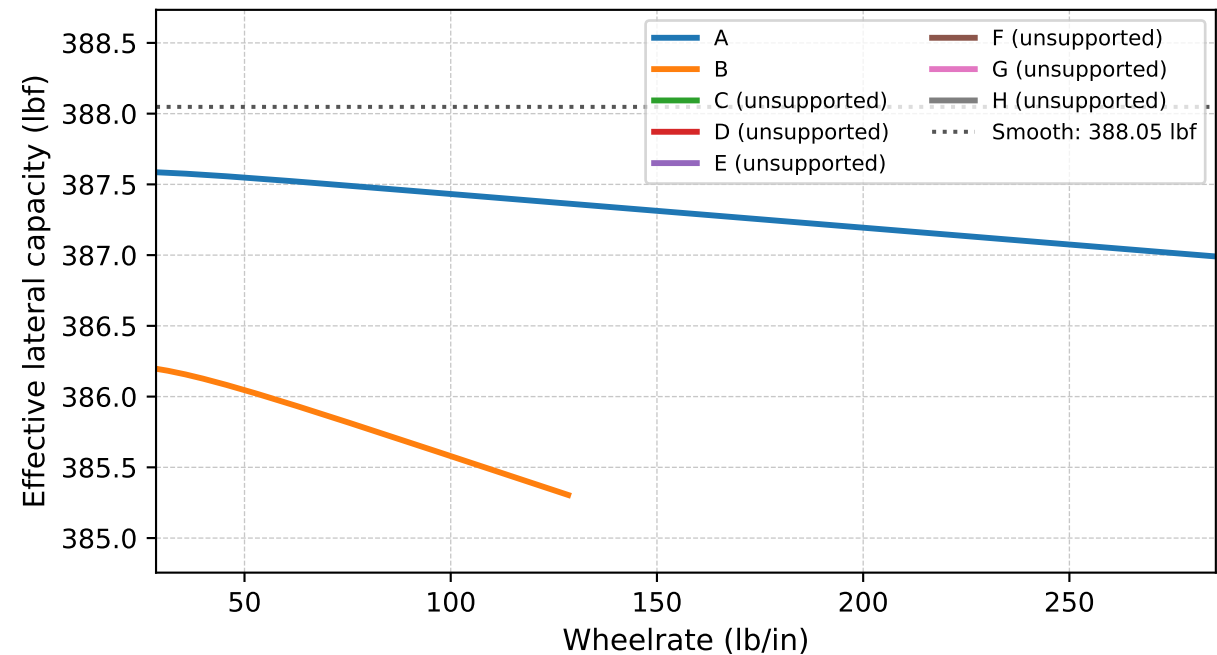

Rear corner

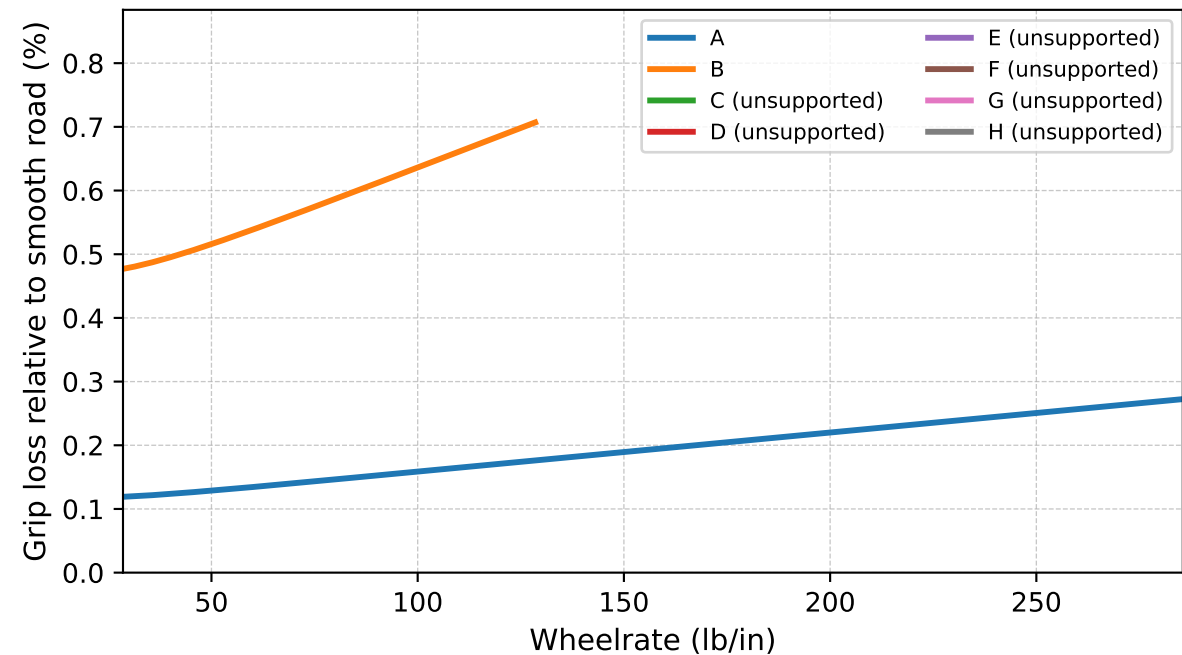

Grip = maximum mean $+F_y$ at one fixed slip angle; zero camber, zero longitudinal slip. MF5.2 quasi-steady screening, not measured vehicle grip.

3 matched 64 s periodic road records; line = mean of record capacities; shading = record range (not confidence interval).

Blank segments: at least one record cannot be bounded inside the tire's 100–1800 N fit. No clipping, extrapolation, or averaging only passing records.

ISO band 0.01–10 cycles/m; fixed static mean loads. No anti geometry, aero, tire relaxation, or travel limits. Capacity axes zoomed separately; all axes linear.