



2027 quarter-car | ISO A, B, C, D, E, F, G, H | 15 m/s | nominal damping ratio 0.70


Front corner | contact-load variation

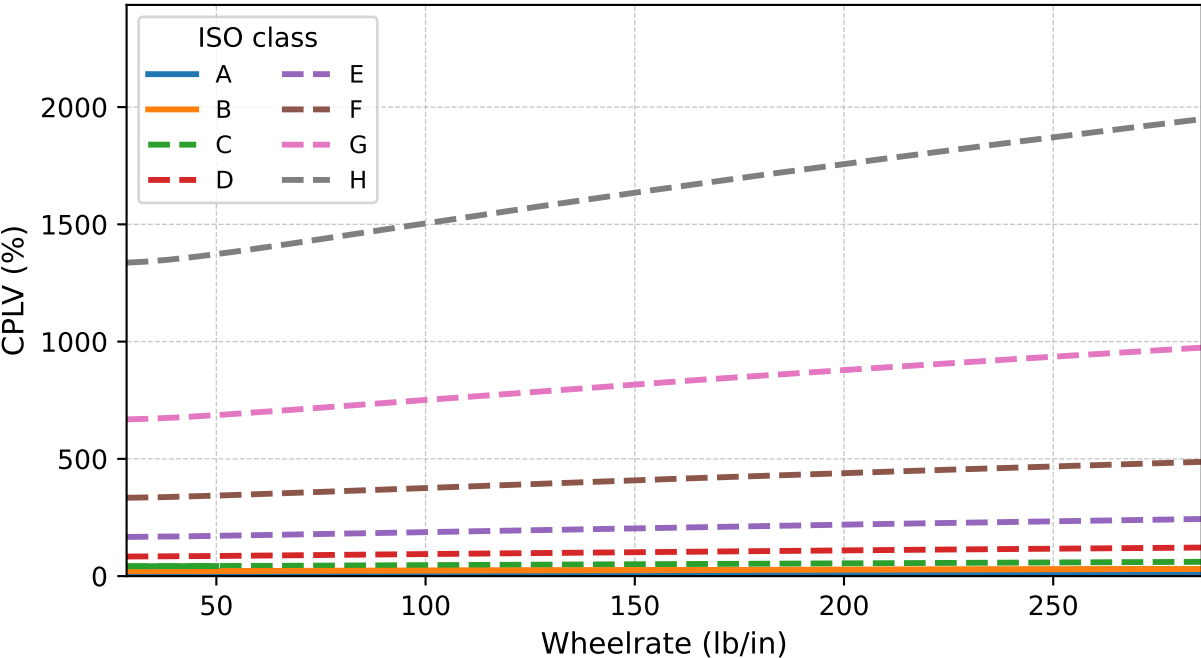


Front corner | mean contact load

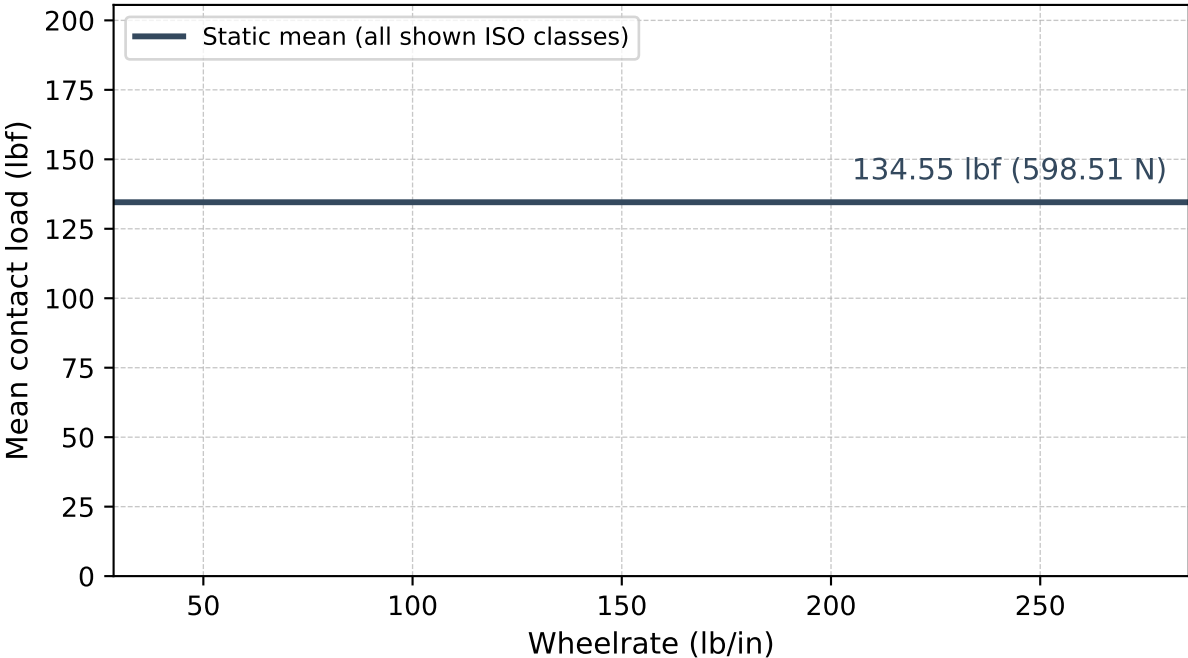

Rear corner | contact-load variation

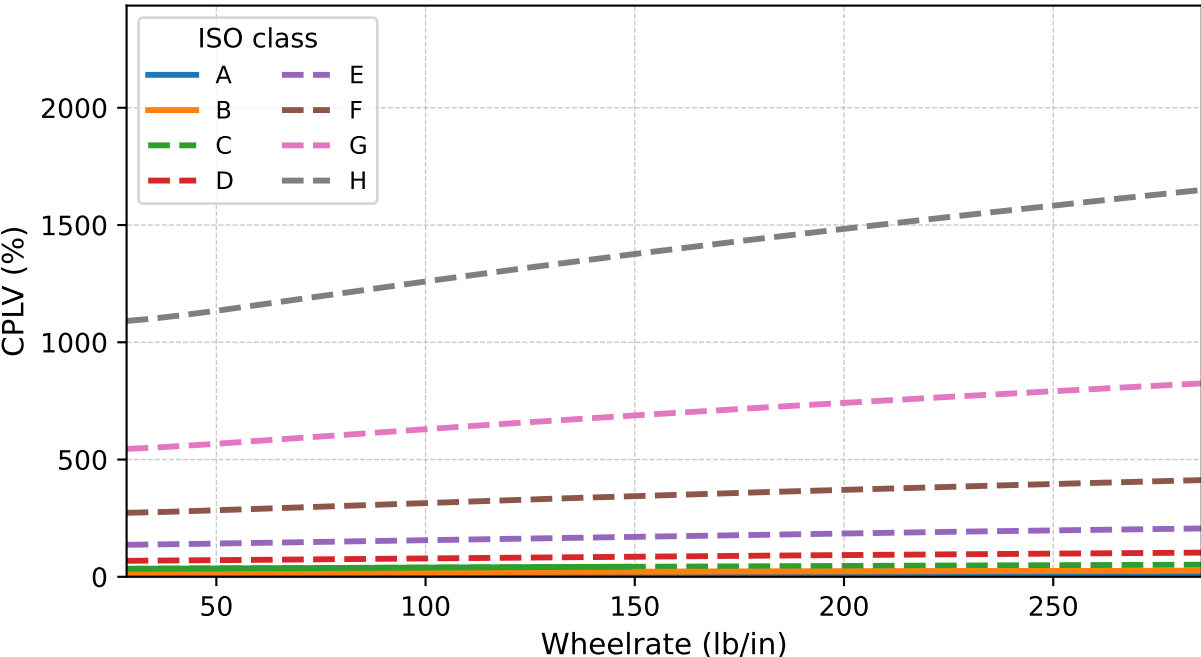

Rear corner | mean contact load

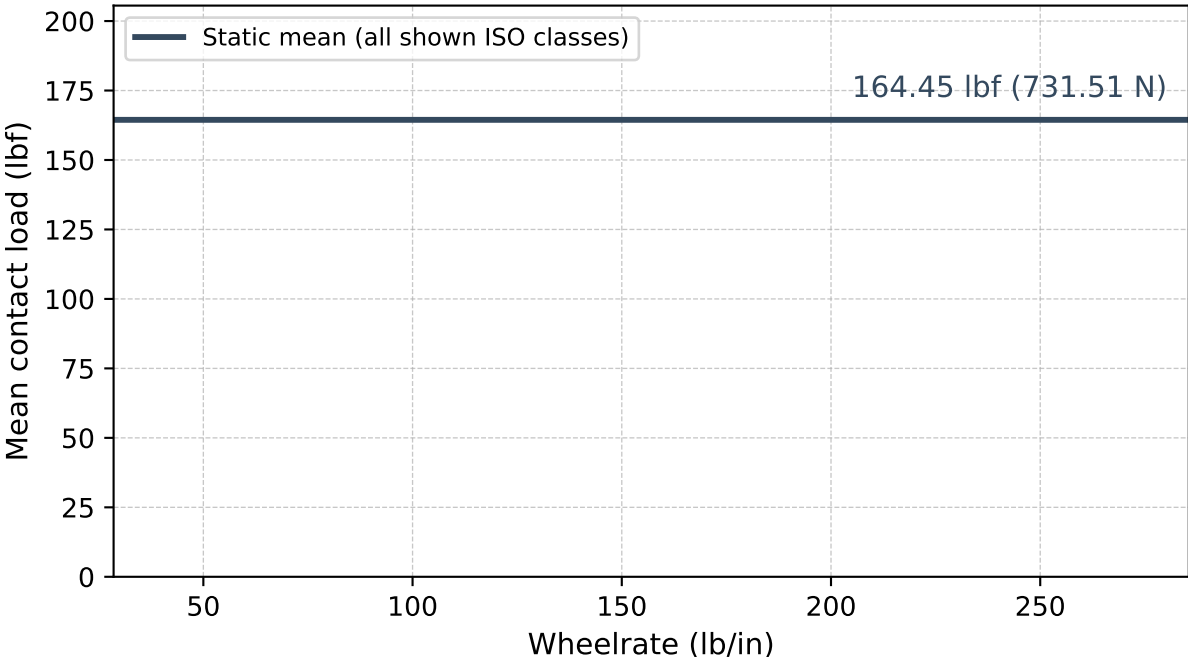

CPLV = $100 \times \text{RMS}(\text{load fluctuation}) / \text{mean load}$. ISO PSD: $w=2$, 0.01–10 cycles/m. Tire properties from 2027.yml.

Solid: Gaussian unloading probability <1%. Dashed: linear extrapolation beyond this screen. Screen passing does not verify suspension travel or grip.

Wheel damping recalculated at every rate (SI units): $c = 2 \times 0.70 \times \sqrt{(\text{wheelrate} \times \text{sprung corner mass})}$. This is a nominal sprung-mass ratio, not an exact coupled-mode ratio.

Mean load is fixed by static weight. No anti geometry, braking/drive force, or aero response is modeled; these plots do not predict anti-to-grip effects.