








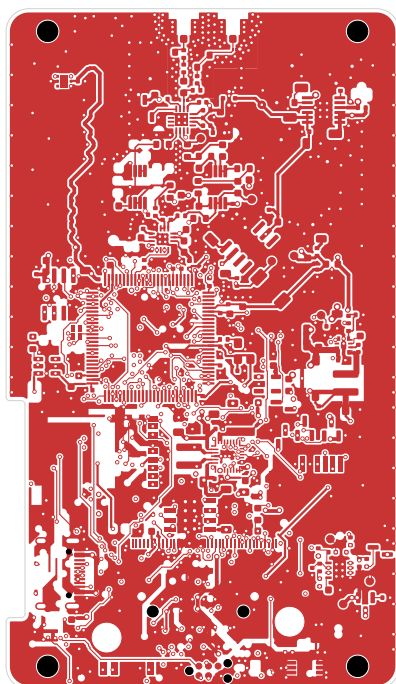


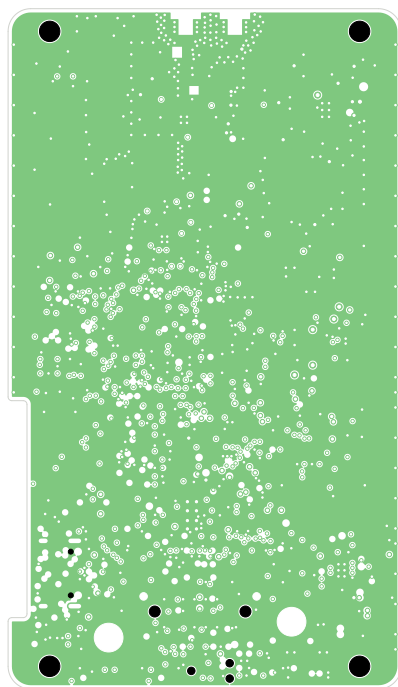


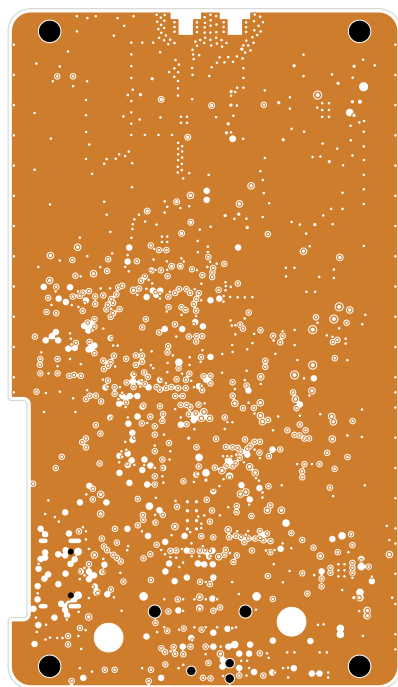


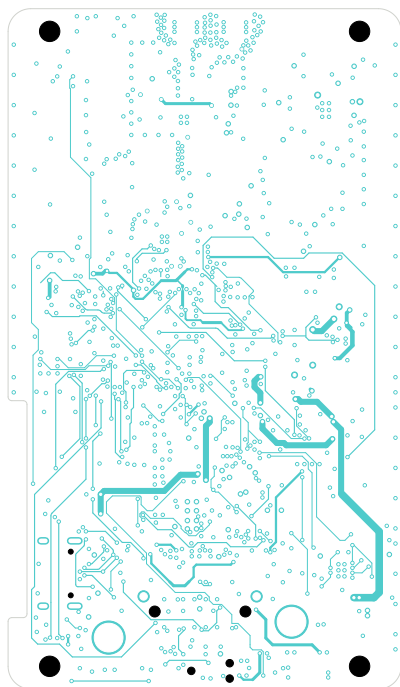


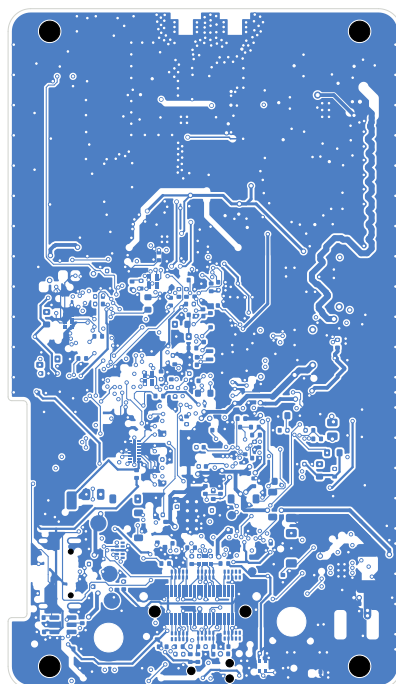


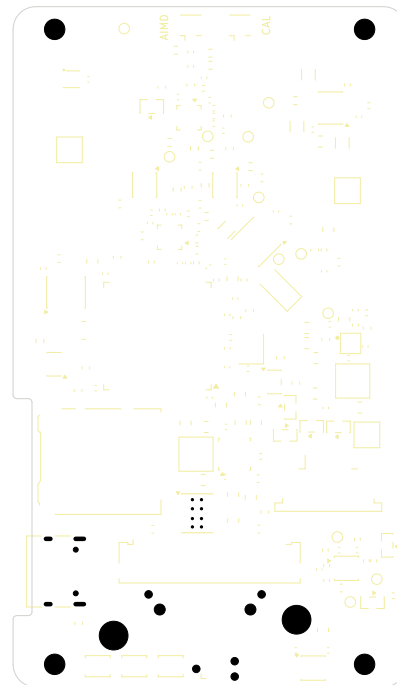

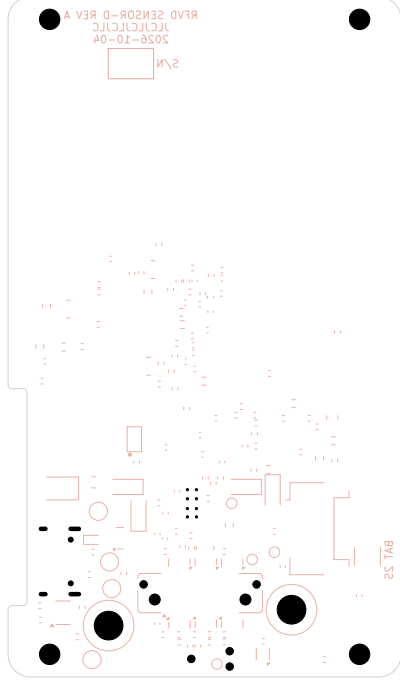

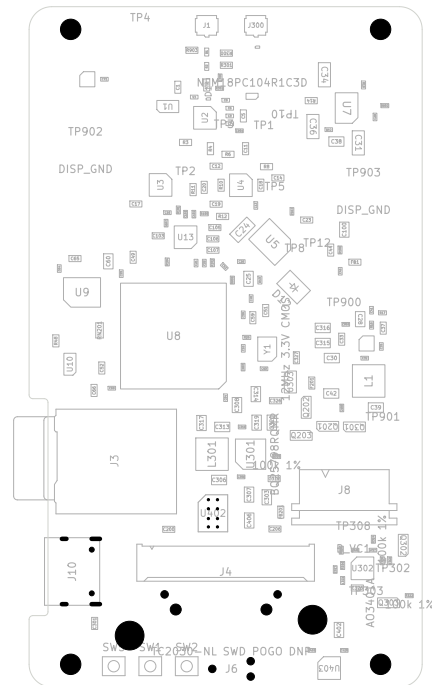

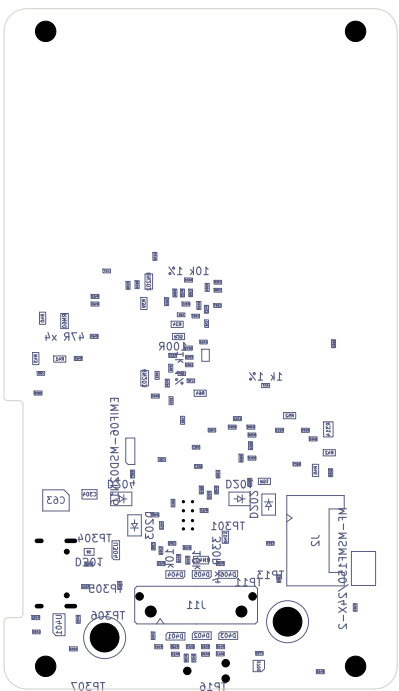

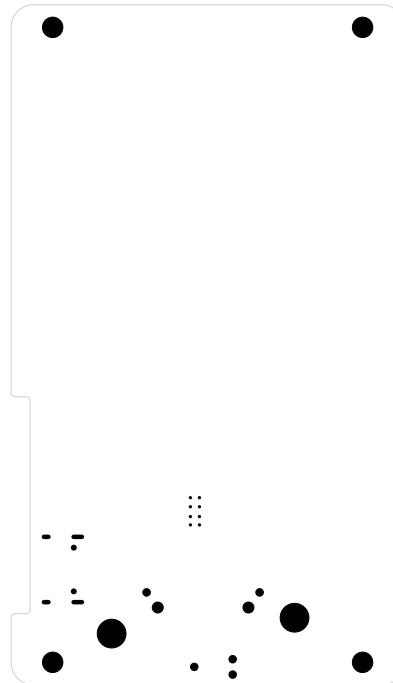

FAB NOTES — RFVD SENSOR—D REV A
1. 6 LAYERS, JLC06161H—3313 IMPEDANCE STACKUP, 1.6 MM FINISHED
2. COPPER: OUTER 1 OZ (35 UM), INNER 0.5 OZ (15.2 UM)
3. LAYERS: F / IN1 GND / IN2 GND / IN3 SIGNAL / IN4 GND / B
4. ALL VIAS IPC-4761 TYPE VII: RESIN FILLED AND COPPER CAPPED (POFV)
5. FINISH ENIG: GREEN SOLDER MASK; WHITE SILKSCREEN
6. MIN TRACK / SPACE 0.10 / 0.10 MM; MIN VIA 0.45 / 0.20 MM
7. IMPEDANCE: NET CLASS RF_50R, 0.15 MM ON F.CU OVER IN1 GND = 50 OHM