

This document provides additional assistance with wiring your Extron IPL PRO enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instruction, refer to the user's manual for the specific Extron IPL PRO enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Matrix Switcher
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-UHD-PRO3-44M, AT-UHD-PRO3-88M, AT-UHD-PRO3-1616M

Tested on the Following Software and Firmware Versions:

IP Link Pro Control Processor Firmware	Touch Link Panel Firmware	GS Version
2.04.0000-b007	2.01.0001-b001	1.2.2

Version History

Module Version	Date	Notes
1_0_5_0	12/28/2016	Initial Version

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'. Example:
InterfaceName.Unidirectional = 'True'
- connectionCounter variable must be set the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15. Example:
InterfaceName.connectionCounter = 5

Control Commands, States, and Qualifiers:

AllOutputs ¹	'1' – '4'
AllOutputs ²	'1' – '8'
AllOutputs ³	'1' – '16'
ExecutiveMode	'On' 'Off'
MatrixTieCommand ¹	None
['Input']	'1' – '4'
['Output']	'1' – '5' 'All'
MatrixTieCommand ²	None
['Input']	'1' – '8'
['Output']	'1' – '10' 'All'
MatrixTieCommand ³	None
['Input']	'1' – '16'
['Output']	'1' – '20' 'All'
MirrorHDMItoHDBaseT ¹	None
['HDBaseT Port']	'1' – '4' 'Unmirror'
MirrorHDMItoHDBaseT ²	'HDMI Port 8' 'HDMI Port 10'
['HDBaseT Port']	'1' – '9' 'Unmirror'
MirrorHDMItoHDBaseT ³	'HDMI Port 17' 'HDMI Port 18' 'HDMI Port 19' 'HDMI Port 20'
['HDBaseT Port']	'1' – '16' 'Unmirror'
OutputMute ¹	'On' 'Off'
['Output']	'1' – '5'
OutputMute ²	'On' 'Off'
['Output']	'1' – '10'
OutputMute ³	'On' 'Off'
['Output']	'1' – '20'
OutputVolume ¹	-79 to 15 in steps of 1 dB
['Output']	'1' – '5'
OutputVolume ²	-79 to 15 in steps of 1 dB
['Output']	'1' – '10'
OutputVolume ³	-79 to 15 in steps of 1 dB
['Output']	'1' – '20'
Power	'On' 'Off'

PresetClear	'0' – '8'
PresetRecall	'0' – '8'
PresetSave	'0' – '8'
Reset	None

¹ For AT-UHD-PRO3-44M model only.

² For AT-UHD-PRO3-88M model only.

³ For AT-UHD-PRO3-1616M model only.

Status Available:

ConnectionStatus	'Connected'	'Disconnected'
InputTieStatus ¹	'Tied'	'Untied'
['Input']	'1' – '4'	
['Output']	'1' – '5'	
InputTieStatus ²	'Tied'	'Untied'
['Input']	'1' – '8'	
['Output']	'1' – '10'	
InputTieStatus ³	'Tied'	'Untied'
['Input']	'1' – '16'	
['Output']	'1' – '20'	
OutputMute ¹	'On'	'Off'
['Output']	'1' – '5'	
OutputMute ²	'On'	'Off'
['Output']	'1' – '10'	
OutputMute ³	'On'	'Off'
['Output']	'1' – '20'	
OutputTieStatus ¹	'1' – '4'	
['Output']	'1' – '5'	
OutputTieStatus ²	'1' – '8'	
['Output']	'1' – '10'	
OutputTieStatus ³	'1' – '16'	
['Output']	'1' – '20'	
OutputVolume ¹	-79 to 15 in steps of 1 dB	
['Output']	'1' – '5'	
OutputVolume ²	-79 to 15 in steps of 1 dB	
['Output']	'1' – '10'	
OutputVolume ³	-79 to 15 in steps of 1 dB	
['Output']	'1' – '20'	
Power	'On'	'Off'

¹ For AT-UHD-PRO3-44M model only.

² For AT-UHD-PRO3-88M model only.

³ For AT-UHD-PRO3-1616M model only.

Cable and Adapter Requirements:

Captive Screw to Captive Screw


Notes for the Device:

Serial communication:

Port Type: RS-232
Baud Rate: 115200
Data Bits: 8

Parity: None
Stop Bits: One
Flow Control: None

Pin Assignments Diagram

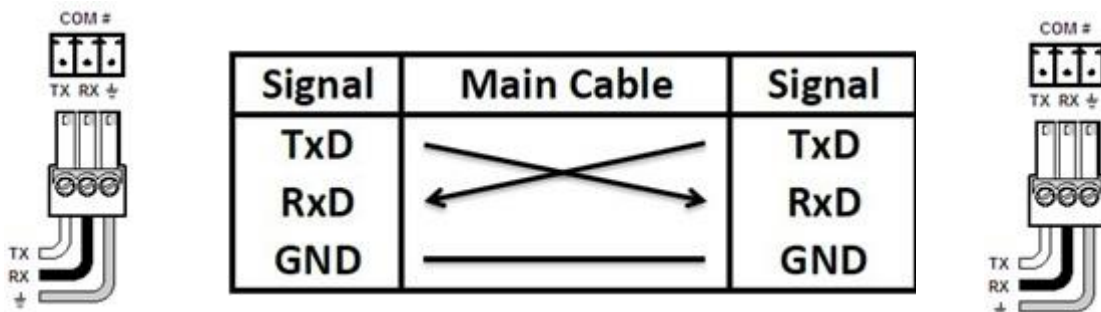

General Notes:

Network communication:

When configuring the Ethernet interface, be sure the device settings match that of the GS interface settings.

Port Type:	Ethernet
Default Port:	23
Logon Credentials Supported:	No
Multi-Connection Capabilities:	Undetermined
Port Changeability:	Yes

Ethernet Module Configuration Description:

Please refer to user manual for settings and changes to the network communication

Notes for the Device:

Appendix A. Set Commands

All Outputs 1	All1\x0D
All Outputs 2	All2\x0D
All Outputs 3	All3\x0D
All Outputs 4	All4\x0D
All Outputs 5	All5\x0D
All Outputs 6	All6\x0D
All Outputs 7	All7\x0D
All Outputs 8	All8\x0D
Executive Mode Off	Unlock\x0D
Executive Mode On	Lock\x0D
Matrix Tie Command Input 1 Output All	x1All\x0D
Matrix Tie Command Input 2 Output All	x2All\x0D
Matrix Tie Command Input 3 Output All	x3All\x0D
Matrix Tie Command Input 4 Output All	x4All\x0D
Matrix Tie Command Input 5 Output All	x5All\x0D
Matrix Tie Command Input 6 Output All	x6All\x0D
Matrix Tie Command Input 7 Output All	x7All\x0D
Matrix Tie Command Input 8 Output All	x8All\x0D
Mirror HDMI to HDBaseT HDBaseT Port 1	MirrorHdmi5 Out1\x0D
Mirror HDMI to HDBaseT HDBaseT Port 2	MirrorHdmi5 Out2\x0D
Mirror HDMI to HDBaseT HDBaseT Port 3	MirrorHdmi5 Out3\x0D
Mirror HDMI to HDBaseT HDBaseT Port 4	MirrorHdmi5 Out4\x0D
Mirror HDMI to HDBaseT HDBaseT Port Unmirror	UnMirrorHdmi5\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 1	MirrorHdmi10 Out1\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 2	MirrorHdmi10 Out2\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 3	MirrorHdmi10 Out3\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 4	MirrorHdmi10 Out4\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 5	MirrorHdmi10 Out5\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 6	MirrorHdmi10 Out6\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 7	MirrorHdmi10 Out7\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port 9	MirrorHdmi10 Out9\x0D
Mirror HDMI to HDBaseT HDMI Port 10 HDBaseT Port Unmirror	UnMirror10\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 1	MirrorHdmi8 Out1\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 2	MirrorHdmi8 Out2\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 3	MirrorHdmi8 Out3\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 4	MirrorHdmi8 Out4\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 5	MirrorHdmi8 Out5\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 6	MirrorHdmi8 Out6\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 7	MirrorHdmi8 Out7\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port 9	MirrorHdmi8 Out9\x0D
Mirror HDMI to HDBaseT HDMI Port 8 HDBaseT Port Unmirror	UnMirror8\x0D
Output Mute Off Output 1	VOUTMute1 off\x0D
Output Mute Off Output 10	VOUTMute10 off\x0D
Output Mute Off Output 2	VOUTMute2 off\x0D
Output Mute Off Output 3	VOUTMute3 off\x0D

Output Mute Off Output 4	VOUTMute4 off\x0D
Output Mute Off Output 5	VOUTMute5 off\x0D
Output Mute Off Output 6	VOUTMute6 off\x0D
Output Mute Off Output 7	VOUTMute7 off\x0D
Output Mute Off Output 8	VOUTMute8 off\x0D
Output Mute Off Output 9	VOUTMute9 off\x0D
Output Mute On Output 1	VOUTMute1 on\x0D
Output Mute On Output 10	VOUTMute10 on\x0D
Output Mute On Output 2	VOUTMute2 on\x0D
Output Mute On Output 3	VOUTMute3 on\x0D
Output Mute On Output 4	VOUTMute4 on\x0D
Output Mute On Output 5	VOUTMute5 on\x0D
Output Mute On Output 6	VOUTMute6 on\x0D
Output Mute On Output 7	VOUTMute7 on\x0D
Output Mute On Output 8	VOUTMute8 on\x0D
Output Mute On Output 9	VOUTMute9 on\x0D
Output Volume 15 Output 1	VOUT1 (15.0)\x0D
Output Volume 15 Output 10	VOUT10 (15.0)\x0D
Output Volume 15 Output 2	VOUT2 (15.0)\x0D
Output Volume 15 Output 3	VOUT3 (15.0)\x0D
Output Volume 15 Output 4	VOUT4 (15.0)\x0D
Output Volume 15 Output 5	VOUT5 (15.0)\x0D
Output Volume 15 Output 6	VOUT6 (15.0)\x0D
Output Volume 15 Output 7	VOUT7 (15.0)\x0D
Output Volume 15 Output 8	VOUT8 (15.0)\x0D
Output Volume 15 Output 9	VOUT9 (15.0)\x0D
Output Volume -79 Output 1	VOUT1 (-79.0)\x0D
Output Volume -79 Output 10	VOUT10 (-79.0)\x0D
Output Volume -79 Output 2	VOUT2 (-79.0)\x0D
Output Volume -79 Output 3	VOUT3 (-79.0)\x0D
Output Volume -79 Output 4	VOUT4 (-79.0)\x0D
Output Volume -79 Output 5	VOUT5 (-79.0)\x0D
Output Volume -79 Output 6	VOUT6 (-79.0)\x0D
Output Volume -79 Output 7	VOUT7 (-79.0)\x0D
Output Volume -79 Output 8	VOUT8 (-79.0)\x0D
Output Volume -79 Output 9	VOUT9 (-79.0)\x0D
Power Off	PWOFF\x0D
Power On	PWON\x0D
Preset Clear 0	Clear0\x0D
Preset Clear 1	Clear1\x0D
Preset Clear 2	Clear2\x0D
Preset Clear 3	Clear3\x0D
Preset Clear 4	Clear4\x0D
Preset Clear 5	Clear5\x0D
Preset Clear 6	Clear6\x0D
Preset Clear 7	Clear7\x0D
Preset Clear 8	Clear8\x0D
Preset Recall 0	Recall0\x0D

Preset Recall 1	Recall1\x0D
Preset Recall 2	Recall2\x0D
Preset Recall 3	Recall3\x0D
Preset Recall 4	Recall4\x0D
Preset Recall 5	Recall5\x0D
Preset Recall 6	Recall6\x0D
Preset Recall 7	Recall7\x0D
Preset Recall 8	Recall8\x0D
Preset Save 0	Save0\x0D
Preset Save 1	Save1\x0D
Preset Save 2	Save2\x0D
Preset Save 3	Save3\x0D
Preset Save 4	Save4\x0D
Preset Save 5	Save5\x0D
Preset Save 6	Save6\x0D
Preset Save 7	Save7\x0D
Preset Save 8	Save8\x0D
Reset None	Mreset\x0D

Appendix B. Query Commands

Heartbeat None	Status\x0D
Output Mute Output 1	VOUTMute1 sta\x0D
Output Mute Output 10	VOUTMute10 sta\x0D
Output Mute Output 2	VOUTMute2 sta\x0D
Output Mute Output 3	VOUTMute3 sta\x0D
Output Mute Output 4	VOUTMute4 sta\x0D
Output Mute Output 5	VOUTMute5 sta\x0D
Output Mute Output 6	VOUTMute6 sta\x0D
Output Mute Output 7	VOUTMute7 sta\x0D
Output Mute Output 8	VOUTMute8 sta\x0D
Output Mute Output 9	VOUTMute9 sta\x0D
Output Volume Output 1	VOUT1 sta\x0D
Output Volume Output 10	VOUT10 sta\x0D
Output Volume Output 2	VOUT2 sta\x0D
Output Volume Output 3	VOUT3 sta\x0D
Output Volume Output 4	VOUT4 sta\x0D
Output Volume Output 5	VOUT5 sta\x0D
Output Volume Output 6	VOUT6 sta\x0D
Output Volume Output 7	VOUT7 sta\x0D
Output Volume Output 8	VOUT8 sta\x0D
Output Volume Output 9	VOUT9 sta\x0D
Power None	PWSTA\x0D