

This document provides additional assistance with wiring your Extron IPL PRO enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instruction, refer to the user's manual for the specific Extron IPL PRO enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Scaler
Manufacturer: Atlona
Firmware Version: N/A
Model(s): AT-HDVS-200-RX

Tested on the Following Software and Firmware Versions:

IP Link Pro Control Processor Firmware	Touch Link Panel Firmware	GS Version
2.04.0000-b007	2.01.0001-b001	1.2.3

Version History

Module Version	Date	Notes
1_0_0_0	4/11/2017	Initial Version

Module Notes

- Unidirectional variable must be set to 'True' if status is not required. Default value is 'False'. Example:
InterfaceName.Unidirectional = 'True'
- connectionCounter variable must be set the number of queries that will be sent to the device before displaying 'Disconnected' if no response is received. Default value is 15. Example:
InterfaceName.connectionCounter = 5
- Controlling the Relay command is only possible when the Relay Control option in the Web GUI is set to "Manual". Go to the Web GUI by entering the IP address of the device in your browser address bar.
- Network setting of this device defaults to DHCP. The Username is "root" and the Password is "Atlona".
- The Audio Mute and Output Volume command must be sent to the TX device, even when the Audio Output is on the RX device.

Control Commands, States, and Qualifiers:

AspectRatio	'Full'	'16:9'	'16:10'
	'4:3'	'Keep Ratio'	
AudioMute	'On'	'Off'	
OutputResolution	'800x600p60'	'1024x768p60'	'1280x800p60'
	'1280x1024p60'	'1366x768p60'	'1400x1050p60'
	'1600x900p60RB'	'1600x1200p60'	'1680x1050p60'
	'1920x1200pRB'	'1280x720p25'	'1280x720p29'
	'1280x720p30'	'1280x720p50'	'1280x720p59'
	'1280x720p60'	'1920x1080i50'	'1920x1080i59'
	'1920x1080i60'	'1920x1080p23'	'1920x1080p24'
	'1920x1080p25'	'1920x1080p29'	'1920x1080p30'
	'1920x1080p50'	'1920x1080p59'	'1920x1080p60'
	'Input'	'Native'	
OutputVolume	-80 to 0 in steps of 1		
PictureReset	None		
Relay	'Open'	'Close'	
['Number']	'1' – '2'		

Status Available:

AudioMute	'On'		'Off'
ConnectionStatus	'Connected'		'Disconnected'
OutputResolution	'800x600p60'	'1024x768p60'	'1280x800p60'
	'1280x1024p60'	'1366x768p60'	'1400x1050p60'
	'1600x900p60RB'	'1600x1200p60'	'1680x1050p60'
	'1920x1200pRB'	'1280x720p25'	'1280x720p29'
	'1280x720p30'	'1280x720p50'	'1280x720p59'
	'1280x720p60'	'1920x1080i50'	'1920x1080i59'
	'1920x1080i60'	'1920x1080p23'	'1920x1080p24'
	'1920x1080p25'	'1920x1080p29'	'1920x1080p30'
	'1920x1080p50'	'1920x1080p59'	'1920x1080p60'
	'Input'	'Native'	

Cable and Adapter Requirements:

Captive Screw to Captive Screw

Notes for the Device:

Serial communication:

Port Type: RS-232

Baud Rate: 115200


Data Bits: 8

Parity: None

Stop Bits: One

Flow Control: None

Pin Assignments Diagram

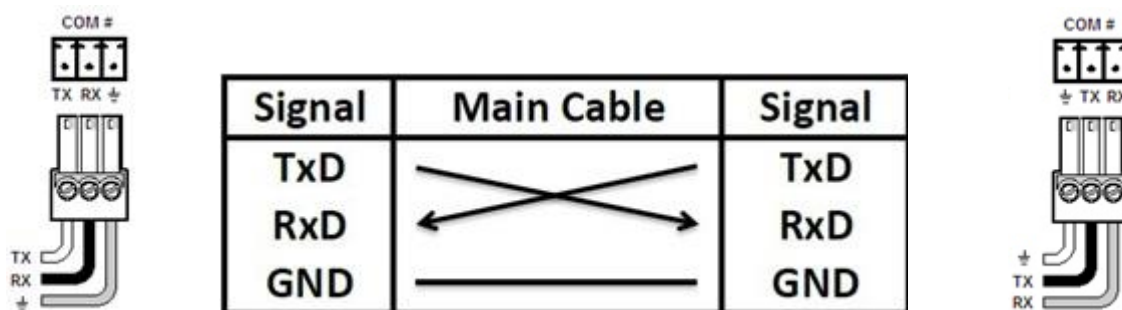

General Notes:

Network communication:

When configuring the Ethernet interface, be sure the device settings match that of the GS interface settings.

Port Type:	Ethernet
Default Port:	23
Logon Credentials Supported:	No
Multi-Connection Capabilities:	Undetermined
Port Changeability:	Yes

Ethernet Module Configuration Description:

Please refer to user manual for settings and changes to the network communication

Notes for the Device:

Appendix A. Set Commands

Aspect Ratio 16:10	Aspect 2\x0D
Aspect Ratio 16:9	Aspect 1\x0D
Aspect Ratio 4:3	Aspect 3\x0D
Aspect Ratio Full	Aspect 0\x0D
Aspect Ratio Keep Ratio	Aspect 4\x0D
Audio Mute Off	VOuTMute off\x0D
Audio Mute On	VOuTMute on\x0D
Output Resolution 1024x768p60	VidOutRes 1\x0D
Output Resolution 1280x1024p60	VidOutRes 3\x0D
Output Resolution 1280x720p25	VidOutRes 10\x0D
Output Resolution 1280x720p29	VidOutRes 11\x0D
Output Resolution 1280x720p30	VidOutRes 12\x0D
Output Resolution 1280x720p50	VidOutRes 13\x0D
Output Resolution 1280x720p59	VidOutRes 14\x0D
Output Resolution 1280x720p60	VidOutRes 15\x0D
Output Resolution 1280x800p60	VidOutRes 2\x0D
Output Resolution 1366x768p60	VidOutRes 4\x0D
Output Resolution 1400x1050p60	VidOutRes 5\x0D
Output Resolution 1600x1200p60	VidOutRes 7\x0D
Output Resolution 1600x900p60RB	VidOutRes 6\x0D
Output Resolution 1680x1050p60	VidOutRes 8\x0D
Output Resolution 1920x1080i50	VidOutRes 16\x0D
Output Resolution 1920x1080i59	VidOutRes 17\x0D
Output Resolution 1920x1080i60	VidOutRes 18\x0D
Output Resolution 1920x1080p23	VidOutRes 19\x0D
Output Resolution 1920x1080p24	VidOutRes 20\x0D
Output Resolution 1920x1080p25	VidOutRes 21\x0D
Output Resolution 1920x1080p29	VidOutRes 22\x0D
Output Resolution 1920x1080p30	VidOutRes 23\x0D
Output Resolution 1920x1080p50	VidOutRes 24\x0D
Output Resolution 1920x1080p59	VidOutRes 25\x0D
Output Resolution 1920x1080p60	VidOutRes 26\x0D
Output Resolution 1920x1200pRB	VidOutRes 9\x0D
Output Resolution 800x600p60	VidOutRes 0\x0D
Output Resolution Input	VidOutRes 27\x0D
Output Resolution Native	VidOutRes 28\x0D
Output Volume 0	VOuT 0\x0D
Output Volume -80	VOuT -80\x0D
Picture Reset None	PicReset\x0D
Relay Close Number 1	RelayAct1 close\x0D
Relay Close Number 2	RelayAct2 close\x0D
Relay Open Number 1	RelayAct1 open\x0D
Relay Open Number 2	RelayAct2 open\x0D

Appendix B. Query Commands

Audio Mute	VOUTMute sta\x0D
Output Resolution	VidOutRes sta\x0D