
This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scriptor Modules, refer to the "[Guide to Using Scriptor Modules](#)" document.

Device Specifications

Device Type: Audio Processor
Manufacturer: Crown Audio
Firmware Version: N/A
Model(s): CDi DriveCore 2 | 300

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scriptor Version
2.08.0001-b006	1.4.2

Version History

Module Version	Date	Notes
1_0_1_0	4/4/2018	Initial Version

Module Notes

- SourceAddress variable must be set accordingly. Default value is '1'. Source Address ranges from '1' to '255'.
Example: InterfaceName.SourceAddress = '1'
- DeviceID variable must be set accordingly. Default value is '1'. Device ID ranges from '1' to '255'.
Example: InterfaceName.DeviceID = '1'

Supported Class and Example

EthernetClass
InterfaceName = ModuleName.EthernetClass('192.168.254.254', 3804, Model='CDi DriveCore 2 300')

Device Configuration Notes

- The Crown CDi DriveCore 2|300 can be found in the devices menu under Crown → CDi DriveCore Series as shown in Figure 1.
- If this option is not available, make sure you are using a software version of 1.96 or greater
- Once the CDi Drivecore 2|300 is added, add a third-party controller from the Controllers menu.

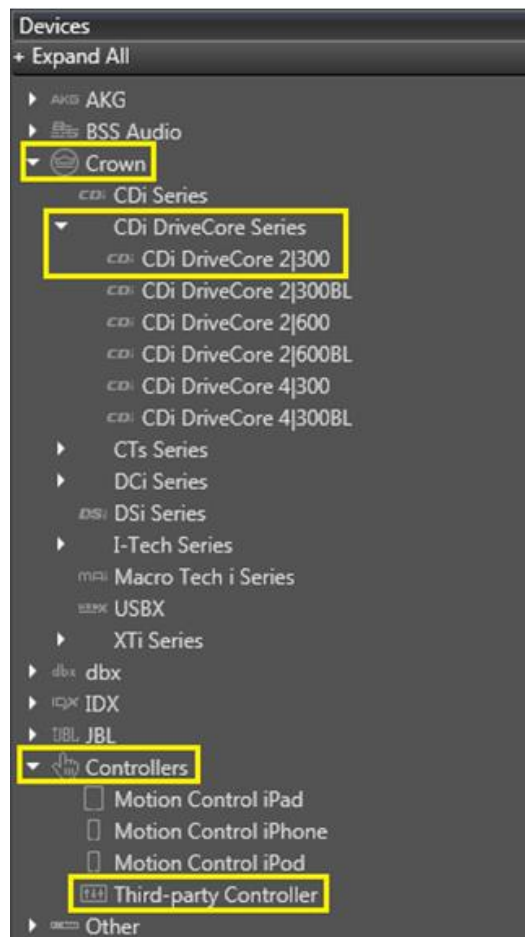


Figure 1: Devices Menu location for both the CDi DriveCore2|300 and the Third-party controller

- The Device ID in the module refers to the Number highlighted in the room window seen in Figure 2. This can be changed by double clicking and typing a new value. (Module supports 1-255)

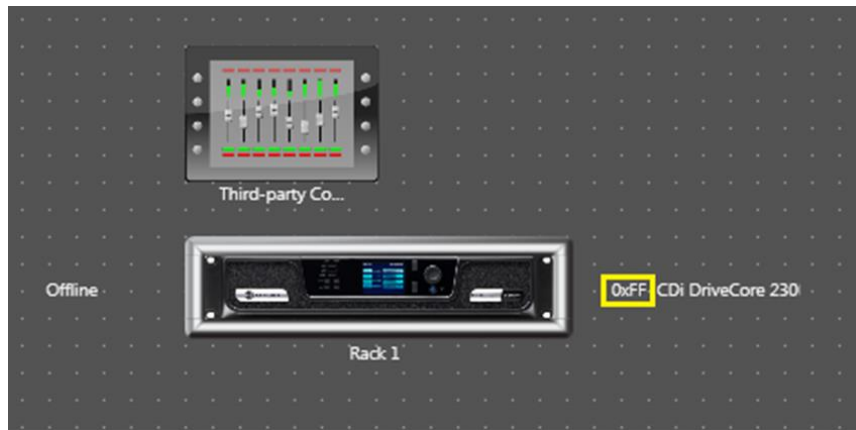
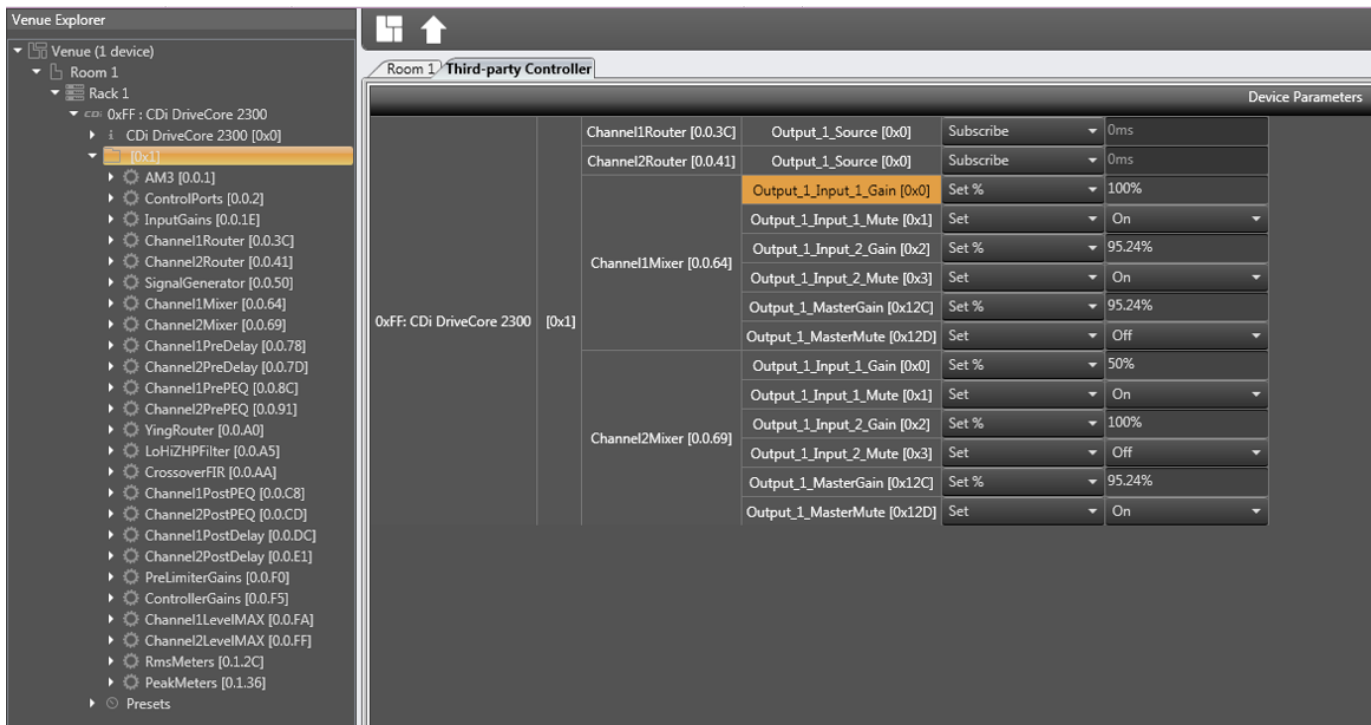


Figure 2: 0xFF (255) is the current Device ID configured

- Once you have both the Third-party Controller and the CDi DriveCore 2|300 in the same room window, double click on the Third-party Controller and you will see the menu where you can add controllable commands. Figure 3 shows all available commands in the driver.
- By entering the Third-Party Controller tab shown in Figure 3, you can find options for what you can control based on the other units in your room. For example, below we have a CDi DriveCore 2|300 in the configuration, and available commands can be seen in the expanded menu. Drag the desired commands into the Third-Party Control panel to the right.


Figure 3: Venue Explorer Example

- The source address is the highlighted field in Figure 4. The driver supports values between 1 – 255.

Prefix: <none> Source Address: 255 IP Address: 0.0.0.0

Seoarator: , Base: Hex

Format: Export

Room 1 Third-party Controller

		Channel1Router [0.0.3C]	Output_1_Source [0x0]	Subscribe	0ms
0xFF: CDi DriveCore 2300 [0x1]	Channel2Router [0.0.41]	Output_1_Source [0x0]	Subscribe	0ms	
		Output_1_Input_1_Gain [0x0]	Set %	100%	
	Channel1Mixer [0.0.64]	Output_1_Input_1_Mute [0x1]	Set	On	
		Output_1_Input_2_Gain [0x2]	Set %	95.24%	
		Output_1_Input_2_Mute [0x3]	Set	On	
		Output_1_MasterGain [0x12C]	Set %	95.24%	
		Output_1_MasterMute [0x12D]	Set	Off	
		Channel2Mixer [0.0.69]	Output_1_Input_1_Gain [0x0]	Set %	50%
	Output_1_Input_1_Mute [0x1]		Set	On	
	Output_1_Input_2_Gain [0x2]		Set %	100%	
	Output_1_Input_2_Mute [0x3]		Set	Off	
	Output_1_MasterGain [0x12C]		Set %	95.24%	
	Output_1_MasterMute [0x12D]		Set	On	

Figure 4: Source Address value is highlighted and it must be configured using the Venue Explorer

Set Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command	Value	
Ch1ControllerGain	0 to 100 in steps of 1 dB	
# Ch1ControllerGain example InterfaceName.Set('Ch1ControllerGain', 100)		
Command	Value	Value
Ch1ControllerMute	'On'	'Off'
# Ch1ControllerMute example InterfaceName.Set('Ch1ControllerMute', 'On')		
Command	Value	
Ch1InputGain	0 to 100 in steps of 1 dB	
# Ch1InputGain example InterfaceName.Set('Ch1InputGain', 100)		
Command	Value	Value
Ch1InputMute	'On'	'Off'
# Ch1InputMute example InterfaceName.Set('Ch1InputMute', 'On')		
Command	Value	
Ch1MixerOutputGainforInput1	0 to 100 in steps of 1 dB	
# Ch1MixerOutputGainforInput1 example InterfaceName.Set('Ch1MixerOutputGainforInput1', 100)		
Command	Value	
Ch1MixerOutputGainforInput2	0 to 100 in steps of 1 dB	
# Ch1MixerOutputGainforInput2 example InterfaceName.Set('Ch1MixerOutputGainforInput2', 100)		
Command	Value	
Ch1MixerOutputMasterGain	0 to 100 in steps of 1 dB	
# Ch1MixerOutputMasterGain example InterfaceName.Set('Ch1MixerOutputMasterGain', 100)		
Command	Value	Value
Ch1MixerOutputMasterMute	'On'	'Off'
# Ch1MixerOutputMasterMute example InterfaceName.Set('Ch1MixerOutputMasterMute', 'On')		
Command	Value	Value
Ch1MixerOutputMuteforInput1	'On'	'Off'

Global Scripter Module Communication Sheet

# Ch1MixerOutputMuteforInput1 example InterfaceName.Set('Ch1MixerOutputMuteforInput1', 'On')			
Command Ch1MixerOutputMuteforInput2	Value 'On'	Value 'Off'	
# Ch1MixerOutputMuteforInput2 example InterfaceName.Set('Ch1MixerOutputMuteforInput2', 'On')			
Command Ch1PreLimiterGain	Value 0 to 100 in steps of 1 dB		
# Ch1PreLimiterGain example InterfaceName.Set('Ch1PreLimiterGain', 100)			
Command Ch1PreLimiterMute	Value 'On'	Value 'Off'	
# Ch1PreLimiterMute example InterfaceName.Set('Ch1PreLimiterMute', 'On')			
Command Ch1RouterOutputSource	Value 'Analog Input 1' None	Value 'Analog Input 2'	Value 'Analog Input 1 and 2'
# Ch1RouterOutputSource example InterfaceName.Set('Ch1RouterOutputSource', 'Analog Input 1')			
Command Ch2ControllerGain	Value 0 to 100 in steps of 1 dB		
# Ch2ControllerGain example InterfaceName.Set('Ch2ControllerGain', 100)			
Command Ch2ControllerMute	Value 'On'	Value 'Off'	
# Ch2ControllerMute example InterfaceName.Set('Ch2ControllerMute', 'On')			
Command Ch2InputGain	Value 0 to 100 in steps of 1 dB		
# Ch2InputGain example InterfaceName.Set('Ch2InputGain', 100)			
Command Ch2InputMute	Value 'On'	Value 'Off'	
# Ch2InputMute example InterfaceName.Set('Ch2InputMute', 'On')			
Command Ch2MixerOutputGainforInput1	Value 0 to 100 in steps of 1 dB		
# Ch2MixerOutputGainforInput1 example InterfaceName.Set('Ch2MixerOutputGainforInput1', 100)			
Command Ch2MixerOutputGainforInput2	Value 0 to 100 in steps of 1 dB		
# Ch2MixerOutputGainforInput2 example			

InterfaceName.Set('Ch2MixerOutputGainforInput2', 100)			
Command Ch2MixerOutputMasterGain	Value 0 to 100 in steps of 1 dB		
# Ch2MixerOutputMasterGain example InterfaceName.Set('Ch2MixerOutputMasterGain', 100)			
Command Ch2MixerOutputMasterMute	Value 'On'	Value 'Off'	
# Ch2MixerOutputMasterMute example InterfaceName.Set('Ch2MixerOutputMasterMute', 'On')			
Command Ch2MixerOutputMuteforInput1	Value 'On'	Value 'Off'	
# Ch2MixerOutputMuteforInput1 example InterfaceName.Set('Ch2MixerOutputMuteforInput1', 'On')			
Command Ch2MixerOutputMuteforInput2	Value 'On'	Value 'Off'	
# Ch2MixerOutputMuteforInput2 example InterfaceName.Set('Ch2MixerOutputMuteforInput2', 'On')			
Command Ch2PreLimiterGain	Value 0 to 100 in steps of 1 dB		
# Ch2PreLimiterGain example InterfaceName.Set('Ch2PreLimiterGain', 100)			
Command Ch2PreLimiterMute	Value 'On'	Value 'Off'	
# Ch2PreLimiterMute example InterfaceName.Set('Ch2PreLimiterMute', 'On')			
Command Ch2RouterOutputSource	Value 'Analog Input 1' None	Value 'Analog Input 2'	Value 'Analog Input 1 and 2'
# Ch2RouterOutputSource example InterfaceName.Set('Ch2RouterOutputSource', 'Analog Input 1')			

Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface

Port Type:	Ethernet
Default Port:	3804
Logon Credentials Supported:	No
Multi-Connection Capabilities:	Undetermined
Port Changeability:	No

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication

Notes for the Device

Appendix A. Set Commands

Commands below only work when SourceAddress is set to '1' and DeviceID is set to '1'.

Ch 1 Controller Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF5\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x00\x00
Ch 1 Controller Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\xF5\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x7F\xFF
Ch 1 Controller Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\xF5\x01\x00\x00\x05\x00\x00\x00\x01\x00\x01\x00\x00
Ch 1 Controller Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\xF5\x01\x00\x00\x05\x00\x00\x00\x01\x00\x01\x00\x01
Ch 1 Input Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x1E\x01\x02\x00\x05\x00\x00\x00\x01\x00\x0A\x00\x00
Ch 1 Input Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x1E\x01\x02\x00\x05\x00\x00\x00\x01\x00\x0A\x7F\xFF
Ch 1 Input Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x1E\x01\x00\x00\x05\x00\x00\x00\x01\x00\x0B\x00\x00
Ch 1 Input Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x1E\x01\x00\x00\x05\x00\x00\x00\x01\x00\x0B\x00\x01
Ch 1 Mixer Output Gain for Input 1 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x00\x00
Ch 1 Mixer Output Gain for Input 1 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x7F\xFF
Ch 1 Mixer Output Gain for Input 2 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x00\x02\x00\x00
Ch 1 Mixer Output Gain for Input 2 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x00\x02\x7F\xFF
Ch 1 Mixer Output Master Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x01,\x00\x00
Ch 1 Mixer Output Master Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x02\x00\x05\x00\x00\x00\x01\x01,\x7F\xFF
Ch 1 Mixer Output Master Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x00\x00\x05\x00\x00\x00\x01\x01-\x00\x00
Ch 1 Mixer Output Master Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x01\x00\x00\x00d\x01\x00\x00\x05\x00\x00\x00\x01\x01-\x00\x01

Global Scripter Module Communication Sheet

Revision: 4/4/2018

Ch 1 Mixer Output Mute for Input 1 Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00d\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x01\x00\x00
Ch 1 Mixer Output Mute for Input 1 On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00d\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x01\x00\x01
Ch 1 Mixer Output Mute for Input 2 Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00d\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x03\x00\x00
Ch 1 Mixer Output Mute for Input 2 On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00d\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x03\x00\x01
Ch 1 Pre Limiter Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x02\x00 \x05\x00\x00\x00\x01\x00\x0A\x00\x00
Ch 1 Pre Limiter Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x02\x00 \x05\x00\x00\x00\x01\x00\x0A\x00\x7F\xFF
Ch 1 Pre Limiter Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x0B\x00\x00
Ch 1 Pre Limiter Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x0B\x00\x01
Ch 1 Router Output Source Analog Input 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00<\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x00\x01\x00
Ch 1 Router Output Source Analog Input 1 and 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00<\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x00\x01\x02
Ch 1 Router Output Source Analog Input 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00<\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x00\x01\x01
Ch 1 Router Output Source None	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00<\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x00\x01\x03
Ch 2 Controller Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF5\x01\x02\x00 \x05\x00\x00\x00\x01\x00\x02\x00\x00
Ch 2 Controller Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF5\x01\x02\x00 \x05\x00\x00\x00\x01\x00\x02\x7F\xFF
Ch 2 Controller Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF5\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x03\x00\x00
Ch 2 Controller Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF5\x01\x00\x00 \x05\x00\x00\x00\x01\x00\x03\x00\x01
Ch 2 Input Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\x1E\x01\x02\x00 \x05\x00\x00\x00\x01\x00\x14\x00\x00

Global Scripter Module Communication Sheet

Revision: 4/4/2018

Ch 2 Input Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\x1E\x01\x02\x00\x05\x00\x00\x00\x01\x00\x14\x7F\xFF
Ch 2 Input Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\x1E\x01\x00\x00\x05\x00\x00\x00\x01\x00\x15\x00\x00
Ch 2 Input Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00\x1E\x01\x00\x00\x05\x00\x00\x00\x01\x00\x15\x00\x01
Ch 2 Mixer Output Gain for Input 1 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x00\x00
Ch 2 Mixer Output Gain for Input 1 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x00\x00\x7F\xFF
Ch 2 Mixer Output Gain for Input 2 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x00\x02\x00\x00
Ch 2 Mixer Output Gain for Input 2 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x00\x02\x7F\xFF
Ch 2 Mixer Output Master Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x01,\x00\x00
Ch 2 Mixer Output Master Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x02\x00\x05\x00\x00\x00\x01\x01,\x7F\xFF
Ch 2 Mixer Output Master Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x01-\x00\x00
Ch 2 Mixer Output Master Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x01-\x00\x01
Ch 2 Mixer Output Mute for Input 1 Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x00\x01\x00\x00
Ch 2 Mixer Output Mute for Input 1 On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x00\x01\x00\x01
Ch 2 Mixer Output Mute for Input 2 Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x00\x00
Ch 2 Mixer Output Mute for Input 2 On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00i\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x00\x01
Ch 2 Pre Limiter Gain 0	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x02\x00\x05\x00\x00\x00\x01\x00\x14\x00\x00
Ch 2 Pre Limiter Gain 100	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x02\x00\x05\x00\x00\x00\x01\x00\x14\x7F\xFF

Global Scripter Module Communication Sheet

Ch 2 Pre Limiter Mute Off	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x00\x00\x05\x00\x00\x00\x01\x00\x15\x00\x00
Ch 2 Pre Limiter Mute On	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00\xF0\x01\x00\x00\x05\x00\x00\x00\x01\x00\x15\x00\x01
Ch 2 Router Output Source Analog Input 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00A\x01\x00\x00\x05\x00\x00\x00\x01\x00\x00\x01\x00
Ch 2 Router Output Source Analog Input 1 and 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00A\x01\x00\x00\x05\x00\x00\x00\x01\x00\x00\x01\x02
Ch 2 Router Output Source Analog Input 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00A\x01\x00\x00\x05\x00\x00\x00\x01\x00\x00\x01\x01
Ch 2 Router Output Source None	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x01\x00\x00A\x01\x00\x00\x05\x00\x00\x00\x01\x00\x00\x01\x03