

This document provides additional assistance with wiring your Extron IP Link Pro Control Processor to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific IP Link Pro Control Processor or the documentation supplied by the manufacturer of the controlled device.

For more information on using Global Scriptor Modules, refer to the "[Guide to Using Scriptor Modules](#)" document.

Device Specifications

Device Type: Audio Processor
Manufacturer: Crown Audio
Firmware Version: N/A
Model(s): DCi 2|300N, DCi 2|600N, DCi 2|1250N, DCi 2|2400N, DCi 4|300N, DCi 4|600N, DCi 4|1250N, DCi 4|2400N, DCi 8|300N, DCi 8|600N

Tested on the Following Software and Firmware Versions

IP Link Pro Control Processor Firmware	Global Scriptor Version
2.08.0002-b001	1.4.2

Version History

Module Version	Date	Notes
1_0_0_0	4/17/2018	Initial Version

Module Notes

- DeviceID variable must be set accordingly. Default value is '1'. Device ID ranges from '1' to '255'.
Example: InterfaceName.DeviceID = '1'
- SourceAddress variable must be set accordingly. Default value is '1'. Source Address ranges from '1' to '255'.
Example: InterfaceName.SourceAddress = '1'

Supported Class and Example

EthernetClass

```
InterfaceName = ModuleName.EthernetClass('192.168.254.254', 3804, Model='DCi 2|300N')
```

Device Configuration Notes

- The Crown DCi 4|300N can be found in the devices menu under Crown → DCi Series. (Figure 1)
- If this option is not available, make sure you are using a software version of 2.15 or greater
- Once the DCi 4|300N is added, add a third-party controller from the Controllers menu.
- The DeviceID variable in the module refers to the Number highlighted in the room window shown in Figure 2. This can be changed by double clicking and typing a new value. (Module supports '1' – '255')

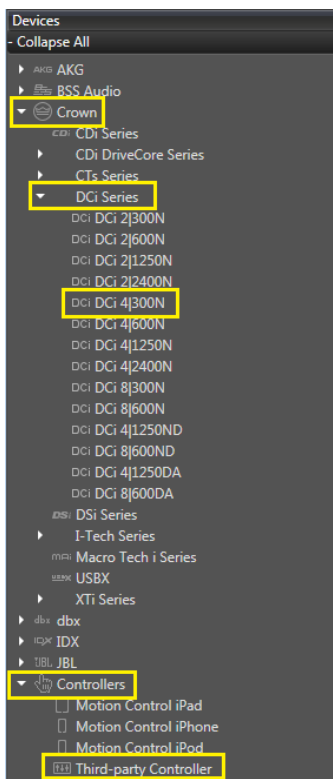


Figure 1: Devices Menu locations for both the DCi 4|300 and the third-party controller



Figure 2: 0x1 (1) is the current configured Device ID

- Once you have both the third-party controller and the DCi 4|300N in the same room window, double click on the third-party controller and you will see the menu where you can add controllable commands. Figure 3 shows all available commands in the module.
- By entering the Third-party Controller tab shown in Figure 3, you can find options for what can be controlled based on the other units in your room. For example, we have a DCi 4|300N in the configuration, and available commands can be seen in the expanded menu. Drag the desired commands into the Third-party Controller panel to the right.
- The Source Address is the highlighted field in center top of Figure 3. The module supports values between '1' – '255'.

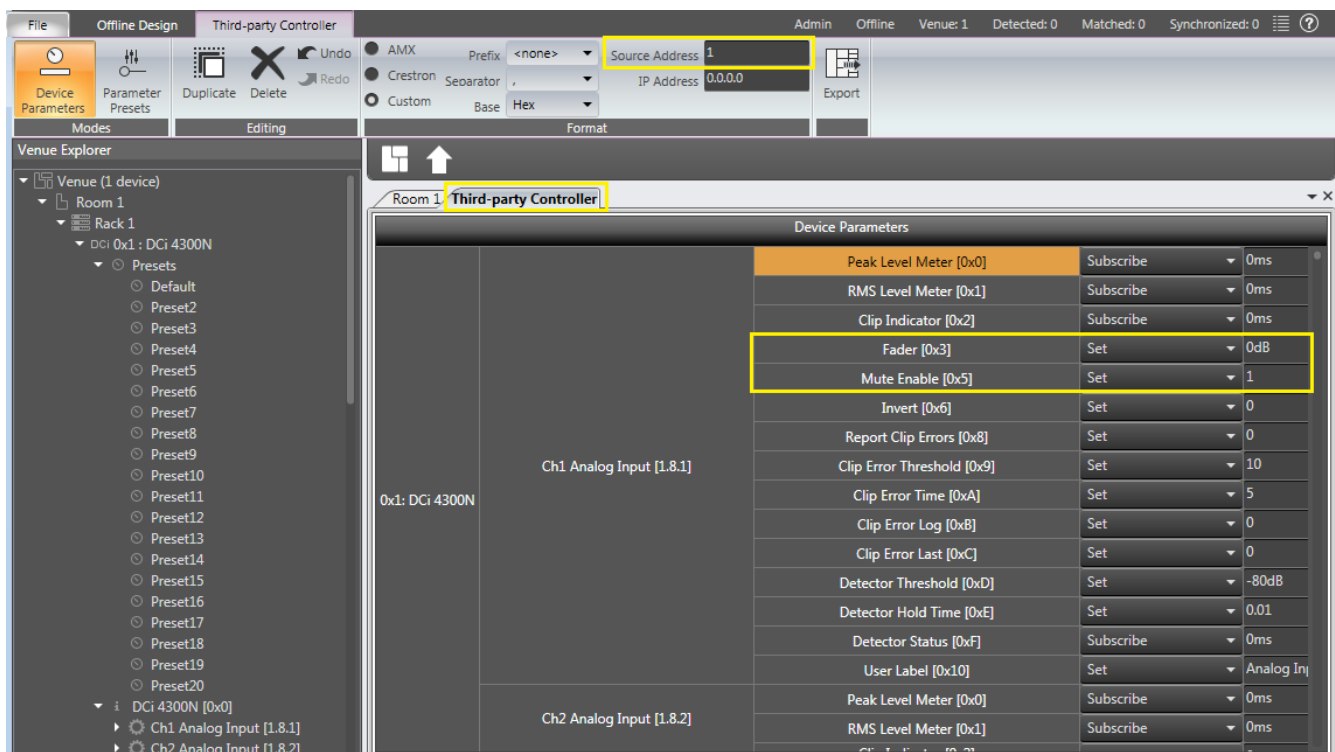


Figure 3: Venue Explorer Example

Set Commands

Format with Qualifier:

```
InterfaceName.Set(Command, Value, {'Qualifier Key': 'Qualifier Value'})
```

Format without Qualifier:

```
InterfaceName.Set(Command, Value)
```

Command AnalogInputFader	Value -100 to 0 in steps of 0.5 dB	
Qualifier Key 'Channel'	Qualifier Value '1' – '8'	
# AnalogInputFader example InterfaceName.Set('AnalogInputFader', 0, {'Channel': '1'})		
Command AnalogInputMute	Value 'On'	Value 'Off'
Qualifier Key 'Channel'	Qualifier Value '1' – '8'	
# AnalogInputMute example InterfaceName.Set('AnalogInputMute', 'On', {'Channel': '1'})		
Command PresetRecall	Value '1' – '20'	
# PresetRecall example InterfaceName.Set('PresetRecall', '1')		
Command PresetSave	Value '1' – '20'	
# PresetSave example InterfaceName.Set('PresetSave', '1')		
Command ProcessingOutputFader	Value -100 to 0 in steps of 0.5 dB	
Qualifier Key 'Channel'	Qualifier Value '1' – '8'	
# ProcessingOutputFader example InterfaceName.Set('ProcessingOutputFader', 0, {'Channel': '1'})		
Command ProcessingOutputMute	Value 'On'	Value 'Off'
Qualifier Key 'Channel'	Qualifier Value '1' – '8'	
# ProcessingOutputMute example InterfaceName.Set('ProcessingOutputMute', 'On', {'Channel': '1'})		

Network communication

When configuring the Ethernet module, be sure device settings match those of the Global Scripter ethernet interface

Port Type:	Ethernet
Default Port:	3804
Logon Credentials Supported:	No
Multi-Connection Capabilities:	Undetermined
Port Changeability:	No

Ethernet Module Configuration Description

Please refer to user manual for settings and changes to the network communication

Notes for the Device

Appendix A. Set Commands

The commands below only work if DeviceID is set to '1' and SourceAddress is set to '1'.

Analog Input Fader -100 Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Analog Input Fader 0 Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Analog Input Fader -100 Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Analog Input Fader 0 Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Analog Input Fader -100 Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Analog Input Fader 0 Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Analog Input Fader -100 Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Analog Input Fader 0 Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Analog Input Mute Off Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x00
Analog Input Mute On Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x01
Analog Input Mute Off Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x00
Analog Input Mute On Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x01
Analog Input Mute Off Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x00
Analog Input Mute On Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x01
Analog Input Mute Off Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x00
Analog Input Mute On Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x01\x08\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x05\x01\x01

Global Scripter Module Communication Sheet

Revision: 4/17/2018

Preset Recall 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x15\x04\x00\x01\x00\x00\x05\x00\x00\x00\x01\x00\x04\x01\x01
Preset Recall 20	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x15\x04\x00\x01\x00\x00\x05\x00\x00\x00\x01\x00\x04\x01\x14
Preset Save 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x15\x04\x00\x01\x00\x00\x05\x00\x00\x00\x01\x00\x02\x01\x01
Preset Save 20	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x15\x04\x00\x01\x00\x00\x05\x00\x00\x00\x01\x00\x02\x01\x14
Processing Output Fader -100 Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Processing Output Fader 0 Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Processing Output Fader -100 Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Processing Output Fader 0 Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Processing Output Fader -100 Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Processing Output Fader 0 Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Processing Output Fader -100 Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\x00
Processing Output Fader 0 Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x03\x01\xC8
Processing Output Mute Off Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x00
Processing Output Mute On Channel 1	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x01\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x01
Processing Output Mute Off Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x00
Processing Output Mute On Channel 8	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x08\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x01
Processing Output Mute Off Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x00

Global Scripter Module Communication Sheet

Processing Output Mute On Channel 4	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x04\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x01
Processing Output Mute Off Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x00
Processing Output Mute On Channel 2	\x02\x19\x00\x00\x00\x1F\x00\x01\x00\x00\x00\x00\x00\x01\x00\x0F\x16\x02\x01\x00\x00\x05\x00\x00\x00\x01\x00\x06\x01\x01