


SUBSTATION A - 230 kV BAY L1 - CURRENT TRANSFORMER DETAILS

CT 52-L1 (3 x single-phase, outdoor, free-standing) nameplate: 1200:5 MR C800 RF 2.0

NAMEPLATE TAP CHART

secondary winding (multi-ratio)

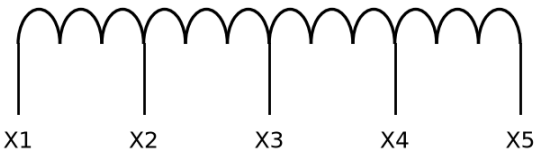

X1-X2	100:5
X2-X3	200:5
X3-X4	300:5
X4-X5	600:5
X1-X3	300:5
X2-X4	500:5
X3-X5	900:5
X1-X4	600:5
X2-X5	1100:5
X1-X5	1200:5

SECONDARY CONNECTIONS (DESIGN)

Core	Function	Connect	Ratio	Burden / destination
1	Line protection	X1-X5	1200:5	L1-21 relay A, IA/IB/IC
2	Bus differential	X1-X5	1200:5	87B-230 zone 2
3	Metering	X1-X5	1200:5	revenue meter M-L1

Polarity: P1 toward the 230 kV bus (all cores).

Core 1 at full ratio (1200:5).

DWG A-E-1107 REV B

230 kV protection, bay L1

Scale: none Sheet 1 of 1