


SUBSTATION B - 230 kV BAY L1 - CURRENT TRANSFORMER DETAILS

CT 52-L1 (3 x single-phase, outdoor, free-standing) nameplate: 2000:5 MR C800 RF 2.0

NAMEPLATE TAP CHART

secondary winding (multi-ratio)

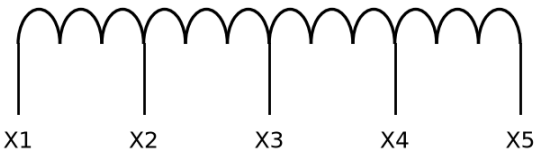

X1-X2	250:5
X2-X3	400:5
X3-X4	800:5
X4-X5	550:5
X1-X3	650:5
X2-X4	1200:5
X3-X5	1350:5
X1-X4	1450:5
X2-X5	1750:5
X1-X5	2000:5

SECONDARY CONNECTIONS (DESIGN)

Core	Function	Connect	Ratio	Burden / destination
1	Line protection	X2-X4	1200:5	L1-21 relay B, IA/IB/IC
2	Bus differential	X1-X5	2000:5	87B-230 zone 1
3	Metering	X2-X4	1200:5	revenue meter M-L1

Polarity: P1 toward the 230 kV bus (all cores).

Core 1 tap selected to match the L1 relays at both line ends (1200:5).

Rev C: CT replaced after failure (like-for-like 2000:5 MR, C800), 2026-05.

DWG B-E-2214 REV C

230 kV protection, bay L1

Scale: none Sheet 1 of 1