


SUBSTATION A - 230 kV BAY L1 - CURRENT TRANSFORMER DETAILS

CT 52-L1 (3 x single-phase, outdoor) nameplate: 1200:5 MR C800 RF 2.0

secondary winding (multi-ratio), one per core

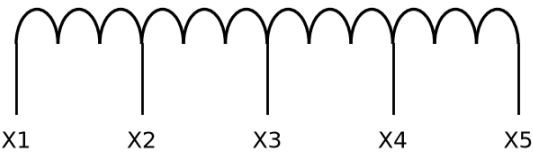

NAMEPLATE TAP CHART

X1-X2	100:5
X2-X3	200:5
X3-X4	300:5
X4-X5	600:5
X1-X3	300:5
X2-X4	500:5
X3-X5	900:5
X1-X4	600:5
X2-X5	1100:5
X1-X5	1200:5

SECONDARY CORES

Core	Function	Destination
1	Line protection	L1-21 line relay (relay A), IA/IB/IC
2	Bus differential	87B-230 zone 2
3	Metering	revenue meter M-L1

Polarity: P1 toward the 230 kV bus (all cores).

Secondary taps: as required by the ratio set in the connected device (protection settings / metering schedule).

Unused taps left open; X-terminal shorting links removed only on the landed pair.

DWG A-E-1107 REV B
230 kV protection, bay L1
Scale: none