


SUBSTATION B - 230 kV BAY L1 - CURRENT TRANSFORMER DETAILS

CT 52-L1 (3 x single-phase, outdoor) nameplate: 2000:5 MR C800 RF 2.0

secondary winding (multi-ratio), one per core

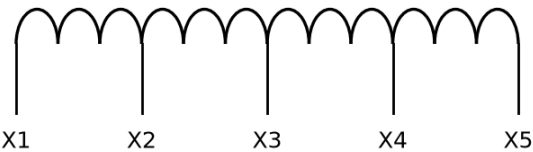

NAMEPLATE TAP CHART

X1-X2	250:5
X2-X3	400:5
X3-X4	800:5
X4-X5	550:5
X1-X3	650:5
X2-X4	1200:5
X3-X5	1350:5
X1-X4	1450:5
X2-X5	1750:5
X1-X5	2000:5

SECONDARY CORES

Core	Function	Destination
1	Line protection	L1-21 line relay (relay B), IA/IB/IC
2	Bus differential	87B-230 zone 1
3	Metering	revenue meter M-L1

Polarity: P1 toward the 230 kV bus (all cores).

Secondary taps: as required by the ratio set in the connected device (protection settings / metering schedule).

Unused taps left open; X-terminal shorting links removed only on the landed pair.

DWG B-E-2214 REV B


230 kV protection, bay L1

Scale: none

SUBSTATION B - 230 kV BAY L2 - CURRENT TRANSFORMER DETAILS

CT 52-L2 (3 x single-phase, outdoor) nameplate: 2000:5 MR C800 RF 2.0

secondary winding (multi-ratio), one per core

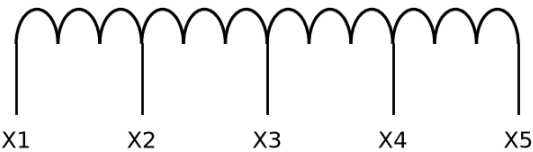

NAMEPLATE TAP CHART

X1-X2	250:5
X2-X3	400:5
X3-X4	800:5
X4-X5	550:5
X1-X3	650:5
X2-X4	1200:5
X3-X5	1350:5
X1-X4	1450:5
X2-X5	1750:5
X1-X5	2000:5

SECONDARY CORES

Core	Function	Destination
1	Line protection	L2-21 line relay (Sub B), IA/IB/IC
2	Bus differential	87B-230 zone 1
3	Metering	revenue meter M-L2

Polarity: P1 toward the 230 kV bus (all cores).

Secondary taps: as required by the ratio set in the connected device (protection settings / metering schedule).

Unused taps left open; X-terminal shorting links removed only on the landed pair.

DWG B-E-2215 REV B


230 kV protection, bay L2

Scale: none

SUBSTATION B - 230 kV BAY T1 - CURRENT TRANSFORMER DETAILS

CT 52-T1 (bushing CT, transformer T1 HV) nameplate: 1200:5 MR C400 RF 1.5

secondary winding (multi-ratio), one per core

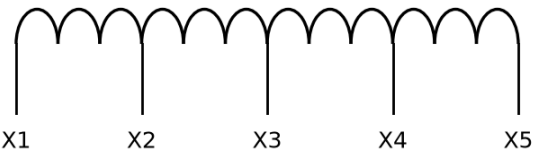

NAMEPLATE TAP CHART

X1-X2	100:5
X2-X3	200:5
X3-X4	300:5
X4-X5	600:5
X1-X3	300:5
X2-X4	500:5
X3-X5	900:5
X1-X4	600:5
X2-X5	1100:5
X1-X5	1200:5

SECONDARY CORES

Core	Function	Destination
1	Transformer differential	87T-T1, HV winding
2	Bus differential	87B-230 zone 1

Polarity: P1 toward the 230 kV bus (all cores).

Secondary taps: as required by the ratio set in the connected device (protection settings / metering schedule).

Unused taps left open; X-terminal shorting links removed only on the landed pair.

DWG B-E-2216 REV A

230 kV protection, bay T1

Scale: none