


SUBSTATION C - 230 kV BAY L2 - CURRENT TRANSFORMER DETAILS

CT 52-L2 (3 x single-phase, outdoor) nameplate: 2000:5 MR C800 RF 2.0

secondary winding (multi-ratio), one per core

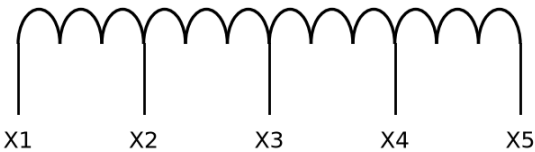

NAMEPLATE TAP CHART

X1-X2	250:5
X2-X3	400:5
X3-X4	800:5
X4-X5	550:5
X1-X3	650:5
X2-X4	1200:5
X3-X5	1350:5
X1-X4	1450:5
X2-X5	1750:5
X1-X5	2000:5

SECONDARY CORES

Core	Function	Destination
1	Line protection	L2-21 line relay (Sub C), IA/IB/IC
2	Bus differential	87B-230
3	Metering	revenue meter M-L2

Polarity: P1 toward the 230 kV bus (all cores).

Secondary taps: as required by the ratio set in the connected device (protection settings / metering schedule).

Unused taps left open; X-terminal shorting links removed only on the landed pair.

DWG C-E-0310 REV A

230 kV protection, bay L2

Scale: none