

# Flatness-Based and Passivity-Based Control with Adaptive Neural Compensation of a Direct-Drive PMSG Wind Energy Conversion System

Said Regani

*L2EI Laboratory*

*Jijel University*

Manal Messadi

*L2EI Laboratory*

*Jijel University*

Kemih Karim

*L2EI Laboratory*

*Jijel University*

BP 98 Ouled Aissa, Jijel 18000, Algeria BP 98 Ouled Aissa, Jijel 18000, Algeria BP 98 Ouled Aissa, Jijel 18000, Algeria

**Abstract**—This paper proposes a control strategy for a grid-connected 2 MW direct-drive permanent magnet synchronous generator (PMSG) wind turbine with a back-to-back converter and an  $L$  filter. The speed and DC-link loops are designed by differential flatness, with the rotor speed and the stored energy as flat outputs; the current loops of both converters use passivity-based control (PBC). An adaptive 6-10-2 neural network with normalized,  $\sigma$ -modified update laws adds a compensation signal to the flat loops without changing the nominal gains. Simulations under turbulent wind, parameter mismatch, a 10 % aerodynamic model error and a 20 % grid voltage dip are compared with PI vector control. The proposed control tracks the MPPT speed 3.8 times more accurately and limits the DC-link deviation during the dip to 3.6 V, against 11.6 V with PI and power feedforward, while PI keeps smaller current errors; the neural compensation reduces the integral absolute speed error by 38 %.

**Index Terms**—PMSG, Wind Energy Conversion Systems, Back-to-Back Converter, Flatness-Based Control, Passivity-Based Control, Adaptive Neural Network, Maximum Power Point Tracking (MPPT).

## I. INTRODUCTION

Wind energy is one of the main sources in the transition towards low-carbon electricity generation [1]; a record 117 GW of new wind capacity was installed worldwide in 2023 [2]. Direct-drive PMSG turbines remove the gearbox, which reduces maintenance and losses, and their full-scale back-to-back converter decouples the generator from the grid [3], [4]; it must extract the maximum power, regulate the DC-link voltage and inject a clean current.

These tasks are usually performed by cascaded PI loops in rotating frames [5], [6]. The PMSG model is nonlinear and coupled, and its parameters vary with temperature and saturation. Nonlinear controllers have therefore been studied for wind turbines and PMSGs, such as backstepping [7], predictive control [8] and passivity-based control [9].

Differential flatness [10] computes the control input directly from a desired trajectory of a flat output; using the stored energy as the flat output gives a simple linear power balance for DC buses [11]. Passivity-based control [12], [13] shapes the energy of the closed loop and keeps the physical structure of the system. Both methods rely on a model, so model errors leave residual tracking errors. Adaptive neural networks can

learn such residual terms online [14]; in [15], an adaptive neural compensation was added to a nominal controller of a DFIG without changing its gains.

This paper combines these tools for the complete chain of a 2 MW direct-drive PMSG turbine. The individual techniques are known; the contributions are their adaptation to this chain and the resulting analysis:

- a DC-link flat output that includes the energy of the  $L$  filter, so that the grid-side law contains the measured generator power as an exact feedforward and the DC-link error dynamics is linear;
- PBC laws for the currents of both converters and a cascade proof that the complete nominal interconnection (flat outer loops and PBC inner loops) is exponentially stable;
- the transfer of this compensation, developed in [15] for the rotor currents of a DFIG, to the two flat loops of a PMSG, with a learning signal taken along their control directions and normalized update laws, for which a direct boundedness proof is given;
- an evaluation against PI vector control with and without power feedforward, over several wind realizations, initial conditions and adaptation settings, and with a switched converter model.

## II. WIND TURBINE MODELING

The aerodynamic power captured by the turbine is [17]

$$P_w = \frac{1}{2} \rho \pi R^2 C_p(\lambda, \beta) v^3 \quad (1)$$

where  $\rho$  is the air density,  $R$  the rotor radius,  $v$  the wind speed,  $\beta$  the pitch angle and  $C_p$  the power coefficient, which depends on the tip-speed ratio

$$\lambda = \frac{\Omega R}{v} \quad (2)$$

with  $\Omega$  the rotor speed. The power coefficient is modeled by

$$C_p = 0.5176 \left( \frac{116}{\lambda_i} - 0.4\beta - 5 \right) e^{-21/\lambda_i} + 0.0068\lambda \quad (3)$$

with  $1/\lambda_i = 1/(\lambda + 0.08\beta) - 0.035/(\beta^3 + 1)$ . For  $\beta = 0$ , its maximum  $C_{p,\max} = 0.48$  is reached at  $\lambda_{opt} = 8.1$ . The

aerodynamic torque is  $T_w = P_w/\Omega$ , and the direct-drive shaft is described by the one-mass model

$$J \frac{d\Omega}{dt} = T_w - T_e - B \Omega \quad (4)$$

where  $J$  is the total inertia,  $T_e$  the electromagnetic torque and  $B$  the viscous friction coefficient. With  $R = 40$  m and  $\Omega_n = 2.23$  rad/s, the rated wind speed is  $v_n = \Omega_n R / \lambda_{opt} \approx 11$  m/s and the captured power at  $v_n$  is about 2 MW.

### III. PMSG AND BACK-TO-BACK CONVERTER MODEL

#### A. PMSG

In the rotor  $dq$  frame, with the  $d$  axis aligned with the magnet flux, generator convention and  $L_d = L_q = L_s$ , the PMSG is described by [4]

$$L_s \frac{di_{sd}}{dt} = -R_s i_{sd} + \omega_e L_s i_{sq} - v_{sd} \quad (5)$$

$$L_s \frac{di_{sq}}{dt} = -R_s i_{sq} - \omega_e L_s i_{sd} + \omega_e \psi_f - v_{sq} \quad (6)$$

where  $\omega_e = p\Omega$ ,  $p$  is the number of pole pairs and  $\psi_f$  the magnet flux. The electromagnetic torque is

$$T_e = \frac{3}{2} p \psi_f i_{sq}. \quad (7)$$

With  $\mathbf{i}_s = [i_{sd} \ i_{sq}]^T$ ,  $\mathbf{v}_s = [v_{sd} \ v_{sq}]^T$ ,  $\mathbf{e}_q = [0 \ 1]^T$  and the skew-symmetric matrix  $\mathbf{J} = \begin{bmatrix} 0 & 1 \\ -1 & 0 \end{bmatrix}$ , the model reads

$$L_s \dot{\mathbf{i}}_s = -R_s \mathbf{i}_s + \omega_e L_s \mathbf{J} \mathbf{i}_s + \omega_e \psi_f \mathbf{e}_q - \mathbf{v}_s. \quad (8)$$

Since  $\mathbf{i}_s^T \mathbf{J} \mathbf{i}_s = 0$ , the coupling term  $\omega_e L_s \mathbf{J} \mathbf{i}_s$  is workless: it exchanges energy between the two axes without producing or dissipating it.

#### B. Back-to-Back Converter, DC Link and Grid

The two-level converters are represented by their average model. The voltages they synthesize are limited by the space-vector modulation range,  $\|\mathbf{v}_s\|, \|\mathbf{v}_i\| \leq V_{dc}/\sqrt{3}$ , and, neglecting losses, the DC-link capacitor obeys

$$CV_{dc} \frac{dV_{dc}}{dt} = P_{msc} - P_{gsc} \quad (9)$$

with  $P_{msc} = \frac{3}{2} \mathbf{v}_s^T \mathbf{i}_s$  and  $P_{gsc} = \frac{3}{2} \mathbf{v}_i^T \mathbf{i}_g$ . In the grid-voltage-oriented frame ( $v_{gd} = V_m$ ,  $v_{gq} = 0$ ), the  $L$  filter gives

$$L_f \dot{\mathbf{i}}_g = -R_f \mathbf{i}_g + \omega_g L_f \mathbf{J} \mathbf{i}_g + \mathbf{v}_i - \mathbf{v}_g \quad (10)$$

and the powers injected into the grid are  $P = \frac{3}{2} v_{gd} i_{gd}$  and  $Q = -\frac{3}{2} v_{gd} i_{gq}$ .

#### C. Complete Model

With the state  $\mathbf{x} = [i_{sd} \ i_{sq} \ \Omega \ V_{dc} \ i_{gd} \ i_{gq}]^T$ , the inputs  $\mathbf{u} = [\mathbf{v}_s^T \ \mathbf{v}_i^T]^T$  and the disturbances  $v$  and  $\mathbf{v}_g$ , (4), (8), (9) and (10) form a sixth-order nonlinear model, denoted  $\dot{\mathbf{x}} = f(\mathbf{x}, \mathbf{u}, v, \mathbf{v}_g)$  in the following. The parameters are listed in Table I. The turbine data correspond to a standard 2 MW turbine; the generator, DC-link, filter and grid data are those of the non-salient PMSG of [16]. The magnet flux is consistent with the grid: at 9.75 Hz, the rated frequency of [16], the back-EMF  $\psi_f \omega_e = 562$  V equals the peak phase voltage of the 690 V grid.

TABLE I  
PARAMETERS OF THE STUDIED SYSTEM

| Parameter                  | Value                               | Parameter  | Value         |
|----------------------------|-------------------------------------|------------|---------------|
| $P_n$                      | 2 MW                                | $p$        | 26            |
| $R$                        | 40 m                                | $R_s$      | 0.78 mΩ       |
| $\Omega_n$                 | 2.23 rad/s                          | $L_s$      | 1.57 mH       |
| $T_n$                      | 0.897 MN·m                          | $\psi_f$   | 9.18 Wb       |
| $\lambda_{opt}, C_{p,max}$ | 8.1, 0.48                           | $C$        | 20 mF         |
| $\rho$                     | 1.225 kg/m <sup>3</sup>             | $V_{dc}^*$ | 1200 V        |
| $J$                        | $2.8 \times 10^6$ kg·m <sup>2</sup> | $L_f, R_f$ | 0.15 mH, 2 mΩ |
| $B$                        | $10^3$ N·m·s/rad                    | Grid       | 690 V, 50 Hz  |

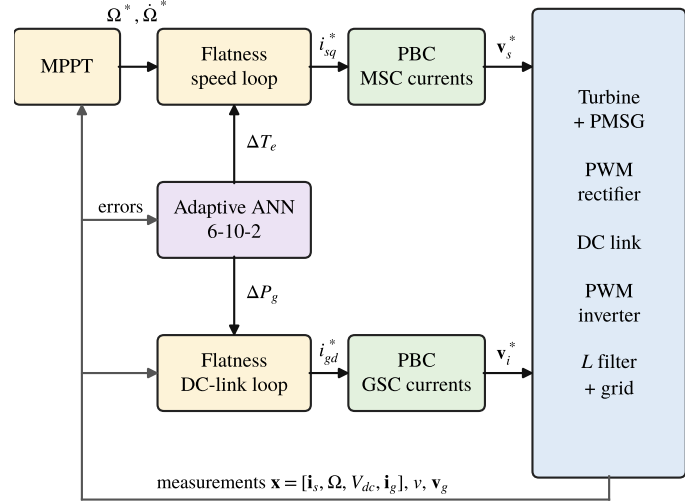


Fig. 1. Proposed control: flat outer loops, PBC current loops and adaptive neural compensation.

### IV. WIND PROFILE AND REFERENCE GENERATION

The wind speed combines a mean value, low-frequency harmonics and a turbulence term [15]:

$$v(t) = V_{mean} + \sum_{k=1}^3 A_k \sin(2\pi f_k t) + v_{turb}(t) \quad (11)$$

with  $V_{mean} = 8$  m/s,  $A = [1.5, 0.2, 0.3]$  m/s,  $f = [0.03, 0.16, 0.17]$  Hz, and  $v_{turb}$  a smoothed Gaussian noise (standard deviation 0.01 m/s, time constant 0.05 s).

The maximum power is extracted at  $\lambda = \lambda_{opt}$ . The measured wind is filtered,  $\tau_v \dot{\hat{v}} = v - \hat{v}$  with  $\tau_v = 0.3$  s, and the speed reference is obtained from the critically damped filter

$$\ddot{\Omega}^* + 2\omega_r \dot{\Omega}^* + \omega_r^2 \Omega^* = \omega_r^2 \frac{\lambda_{opt} \hat{v}}{R} \quad (12)$$

with  $\omega_r = 1.5$  rad/s, which provides  $\Omega^*$  and  $\dot{\Omega}^*$  without numerical differentiation. Since  $T_e$  only depends on  $i_{sq}$ ,  $i_{sd}^* = 0$ ; unity power factor gives  $i_{gq}^* = 0$ ; the DC-link reference is  $V_{dc}^* = 1200$  V.

### V. PROPOSED CONTROL

The control structure is shown in Fig. 1. It is sampled at  $T_s = 100 \mu\text{s}$ .

### A. Flatness-Based Outer Loops

A system is flat if its states and inputs can be written as functions of a flat output and of a finite number of its derivatives [10]. The control is then obtained by inverting the model with a desired dynamics imposed on the flat output. Flatness is used here only for the two outer subsystems, in which the currents are treated as inputs: the shaft equation (4) with input  $i_{sq}$ , and the power balance of the DC link and filter with input  $i_{gd}$ . In both,  $T_w$  (or its estimate),  $P_{msc}$  and  $i_{gq}$  are known exogenous signals. No flatness property is claimed for the complete sixth-order model with the converter voltages as inputs; the coupling between the outer and inner loops is treated by Proposition 2.

*Speed loop.* From (4),  $T_e = T_w - B\Omega - J\dot{\Omega}$ , so  $y_1 = \Omega$  is a flat output. Replacing  $\dot{\Omega}$  by

$$\nu_1 = \dot{\Omega}^* + k_{11}e_\Omega + k_{12} \int e_\Omega dt, \quad e_\Omega = \Omega^* - \Omega \quad (13)$$

gives

$$T_e^* = \hat{T}_w - B\Omega - J\nu_1 + \Delta T_e, \quad i_{sq}^* = \frac{T_e^*}{\frac{3}{2}p\psi_f} \quad (14)$$

where  $\hat{T}_w$  is computed from (1)–(3) with the measured wind and  $\Delta T_e$  is the neural compensation.  $T_e^*$  is limited to  $[0, 1.2T_n]$  and the integral is frozen during saturation. If  $\hat{T}_w = T_w$  and  $\Delta T_e = 0$ , the error obeys  $\dot{e}_\Omega + k_{11}e_\Omega + k_{12} \int e_\Omega dt = 0$ .

*DC-link loop.* The flat output is the energy stored in the DC link and in the filter,

$$y_2 = \frac{1}{2}CV_{dc}^2 + \frac{3}{4}L_f\|\mathbf{i}_g\|^2. \quad (15)$$

From (9) and (10), using  $\mathbf{i}_g^T \mathbf{J} \mathbf{i}_g = 0$ ,

$$\dot{y}_2 = P_{msc} - \frac{3}{2}v_{gd}i_{gd} - \frac{3}{2}R_f\|\mathbf{i}_g\|^2 \quad (16)$$

which is linear in the injected power  $P_g = \frac{3}{2}v_{gd}i_{gd}$ , as in [11]. Taking  $y_2$  as the state of this first-order energy balance with input  $P_g$ , the input is  $P_g = P_{msc} - \frac{3}{2}R_f\|\mathbf{i}_g\|^2 - \dot{y}_2$  and  $V_{dc}$  follows from  $y_2$  and the measured currents, so  $y_2$  is a flat output of the reduced subsystem. With  $e_y = y_2^* - y_2$  and  $\dot{y}_2^* \approx 0$ , imposing  $\dot{e}_y = -\nu_2$ , i.e.  $\dot{y}_2 = \nu_2$ , with  $\nu_2 = k_{21}e_y + k_{22} \int e_y dt$ , yields

$$P_g^* = P_{msc} - \frac{3}{2}R_f\|\mathbf{i}_g\|^2 - \nu_2 + \Delta P_g, \quad i_{gd}^* = \frac{2P_g^*}{3v_{gd}}. \quad (17)$$

Inserting (17) into the expression of  $\dot{y}_2$  with  $i_{gd} = i_{gd}^*$  gives  $\dot{y}_2 = \nu_2 - \Delta P_g$ , hence  $\dot{e}_y + k_{21}e_y + k_{22} \int e_y dt = \Delta P_g$ . The term  $P_{msc}$ , known from the applied voltages and measured currents, anticipates the power coming from the generator. The reference  $y_2^* = \frac{1}{2}CV_{dc}^{*2} + \frac{3}{4}L_f\|\mathbf{i}_g^*\|^2$  varies only through the filter energy (at most 300 J, against 14.4 kJ in the capacitor), and  $\dot{y}_2^* = \frac{3}{2}L_f\mathbf{i}_g^{*T}\dot{\mathbf{i}}_g^*$  is neglected. It enters (26) below as an input, and the impulse response of  $s/(s^2 + k_{21}s + k_{22})$  has an  $L_1$  norm of  $2/(e\omega_v) = 12.3$  ms, so its effect is  $|e_y| \leq 12.3 \text{ ms} \cdot \sup |\dot{y}_2^*|$ . In simulation,  $|\dot{y}_2^*| \leq 2.7$  kW (0.14 % of  $P_n$ ) outside the transients, i.e. less than 34 J or 1.4 V on  $V_{dc}$ .

This bound holds only in steady operation:  $|\dot{y}_2^*|$  reaches 29 kW at start-up and 52 kW during the grid dip, giving conservative bounds of 15 and 27 V, whereas the simulated deviations, which include this effect, are 10.4 and 3.6 V. Adding  $\dot{y}_2^*$  to  $\nu_2$  reduces the ISE of  $V_{dc}$  by 3 % but raises the dip deviation from 3.6 to 5.3 V (numerical differentiation of  $\mathbf{i}_g^*$ ), so it is omitted. The gains are  $k_{11} = 2\zeta_\Omega\omega_\Omega$ ,  $k_{12} = \omega_\Omega^2$ ,  $k_{21} = 2\zeta_v\omega_v$ ,  $k_{22} = \omega_v^2$  (Table II).

### B. Passivity-Based Current Loops

For the machine-side converter, the error  $\mathbf{e}_s = \mathbf{i}_s - \mathbf{i}_s^*$  and its integral  $\mathbf{z}_s$  ( $\dot{\mathbf{z}}_s = \mathbf{e}_s$ ) are used in

$$\mathbf{v}_s^* = -L_s\dot{\mathbf{i}}_s^* - R_s\mathbf{i}_s^* + \omega_e L_s \mathbf{J} \mathbf{i}_s^* + \omega_e \psi_f \mathbf{e}_q + R_a \mathbf{e}_s + K_i \mathbf{z}_s \quad (18)$$

where  $R_a$  is the injected damping. For the grid-side converter, with  $\mathbf{e}_g = \mathbf{i}_g - \mathbf{i}_g^*$  and  $\dot{\mathbf{z}}_g = \mathbf{e}_g$ ,

$$\mathbf{v}_i^* = L_f \dot{\mathbf{i}}_g^* + R_f \mathbf{i}_g^* - \omega_g L_f \mathbf{J} \mathbf{i}_g^* + \mathbf{v}_g - R_b \mathbf{e}_g - K_{ig} \mathbf{z}_g. \quad (19)$$

The reference derivatives are obtained by a first-order filter ( $\tau_d = 2$  ms) and the voltages are limited to  $V_{dc}/\sqrt{3}$ , with the integrals frozen at the limit.

**Proposition 1.** *With (18) applied to (8) and  $R_a, K_i > 0$ , the storage function  $H = \frac{1}{2}L_s\|\mathbf{e}_s\|^2 + \frac{1}{2}K_i\|\mathbf{z}_s\|^2$  satisfies  $\dot{H} = -(R_s + R_a)\|\mathbf{e}_s\|^2 \leq 0$ , and  $\mathbf{e}_s \rightarrow 0$ . The same holds for (19) applied to (10).*

*Proof.* Subtracting  $L_s\dot{\mathbf{i}}_s^*$  from (8) and inserting (18) gives  $L_s\dot{\mathbf{e}}_s = -(R_s + R_a)\mathbf{e}_s + \omega_e L_s \mathbf{J} \mathbf{e}_s - K_i \mathbf{z}_s$ . Hence  $\dot{H} = \mathbf{e}_s^T L_s \dot{\mathbf{e}}_s + K_i \mathbf{z}_s^T \dot{\mathbf{e}}_s = -(R_s + R_a)\|\mathbf{e}_s\|^2 + \omega_e L_s \mathbf{e}_s^T \mathbf{J} \mathbf{e}_s$ , and the last term vanishes because  $\mathbf{J}$  is skew-symmetric.  $H$  is bounded and  $\dot{H}$  is uniformly continuous, so Barbalat's lemma [18] gives  $\mathbf{e}_s \rightarrow 0$ .  $\square$

### C. Adaptive Neural Compensation

As in [15], the network does not replace the nominal control  $u_N$  given by (14)–(17) and does not modify its gains; it adds

$$u = u_N + u_{AI}, \quad u_{AI} = [\Delta T_e \ \Delta P_g]^T. \quad (20)$$

Its six inputs are built from the errors  $\bar{\mathbf{e}} = [e_\Omega/(0.01\Omega_n), e_y/(300 \text{ J}), e_{isq}/(0.01I_n)]^T$ , normalized by 1 % of the rated speed, 300 J (about 1 % of  $V_{dc}^*$ ) and 1 % of the rated current  $I_n = T_n/(\frac{3}{2}p\psi_f)$ , and from their derivatives, filtered with a 5 ms time constant and scaled by  $\boldsymbol{\tau} = [0.5, 0.02, 0.002] \text{ s}$ :  $\mathbf{z}_n = [\bar{\mathbf{e}}^T, (\boldsymbol{\tau} \odot \dot{\bar{\mathbf{e}}})^T]^T$ . With one hidden layer of ten neurons,

$$\mathbf{h} = \tanh(W_1 \mathbf{z}_n + \mathbf{b}_1), \quad \mathbf{y} = W_2 \mathbf{h} + \mathbf{b}_2, \quad (21)$$

$$u_{AI} = K_{AI} \text{diag}(0.1T_n, 0.1P_n) \text{sat}_{\pm 3}(\mathbf{y}) \quad (22)$$

with  $W_1 \in \mathbb{R}^{10 \times 6}$  and  $W_2 \in \mathbb{R}^{2 \times 10}$ .  $T_e$  and  $P_g$  enter  $\dot{e}_\Omega$  and  $\dot{e}_y$  with a positive sign, so the learning signal in the control direction is  $\mathbf{r} = [\dot{e}_1 \ \dot{e}_2]^T$ , set to zero inside a dead zone  $\|\mathbf{r}\| \leq \delta$ . The parameters are updated online by

$$\dot{W}_2 = -\Gamma_n \mathbf{r} \mathbf{h}^T - \sigma W_2, \quad \dot{\mathbf{b}}_2 = -\Gamma_n \mathbf{r} - \sigma \mathbf{b}_2, \quad (23)$$

$$\dot{W}_1 = -\Gamma_n \boldsymbol{\delta}_h \mathbf{z}_n^T - \sigma W_1, \quad \dot{\mathbf{b}}_1 = -\Gamma_n \boldsymbol{\delta}_h - \sigma \mathbf{b}_1, \quad (24)$$

with  $\delta_h = (1 - \mathbf{h}^2) \odot (W_2^T \mathbf{r})$  and the normalized gain  $\Gamma_n = \Gamma/(1 + \|\mathbf{z}_n\|^2)$ . The  $\sigma$ -modification terms [14], [19] prevent parameter drift, and the normalization [19] slows the adaptation when the errors are large, e.g. after a torque saturation; with a constant gain, a start 10 % below the MPPT speed led to an oscillatory adaptation in simulation. Compared with [15], this normalization is the only change to the update laws. The adaptation is frozen when  $T_e^*$  or  $i_{gd}^*$  saturates, and  $u_{AI}$  is applied at the next sample.  $W_2$  and  $\mathbf{b}_2$  start at zero, so the compensation is initially inactive.

**Proposition 2.** *Consider the model of Section III-C with (14)–(19),  $\Delta T_e = \Delta P_g = 0$ , an exact model, no saturation, exact reference derivatives,  $\dot{y}_2^* = 0$  and  $|\omega_e| \leq \bar{\omega}$  on the operating region. Then the origin of the error state  $\xi = (\mathbf{e}_s, \mathbf{z}_s, \mathbf{e}_g, \mathbf{z}_g, e_\Omega, \int e_\Omega, e_y, \int e_y)$  is exponentially stable.*

*Proof. Inner loops.* With  $V_s = H + \varepsilon \mathbf{e}_s^T L_s \mathbf{z}_s$ ,  $\dot{V}_s = -(R_s + R_a)\|\mathbf{e}_s\|^2 + \varepsilon(L_s\|\mathbf{e}_s\|^2 - (R_s + R_a)\mathbf{e}_s^T \mathbf{z}_s - \omega_e L_s \mathbf{e}_s^T \mathbf{J} \mathbf{z}_s - K_i \|\mathbf{z}_s\|^2)$ . Since  $|\omega_e| \leq \bar{\omega}$ , a small  $\varepsilon > 0$  makes  $V_s$  positive definite and  $\dot{V}_s \leq -c(\|\mathbf{e}_s\|^2 + \|\mathbf{z}_s\|^2)$  with  $c > 0$ , so  $(\mathbf{e}_s, \mathbf{z}_s) \rightarrow 0$  exponentially; the same holds for  $(\mathbf{e}_g, \mathbf{z}_g)$  since  $\omega_g$  is constant. *Outer loops.* With the actual currents,  $T_e = T_e^* + \frac{3}{2}p\psi_f e_{sq}$  and  $i_{gd} = i_{gd}^* + e_{gd}$ , so (4) and the  $y_2$  dynamics give

$$\begin{aligned} \dot{e}_\Omega + k_{11}e_\Omega + k_{12}\int e_\Omega &= \frac{3p\psi_f}{2J}e_{sq}, \\ \dot{e}_y + k_{21}e_y + k_{22}\int e_y &= \frac{3}{2}v_{gd}e_{gd}. \end{aligned}$$

These are exponentially stable linear systems ( $k_{ij} > 0$ ) driven by exponentially decaying inputs with bounded gains. The inner error dynamics do not depend on the outer states, so the interconnection is a cascade of exponentially stable systems and is exponentially stable [18].  $\square$

The boundedness proof of [15] uses a Lyapunov function with  $\text{tr}(\tilde{W}^T \Gamma^{-1} \tilde{W})$  and a constant gain; with  $\Gamma_n(t)$  an additional term in  $\Gamma_n$  appears, so it does not apply directly, but the normalization gives a direct bound. The model error  $\Delta = T_w - \hat{T}_w$  and the compensation enter the outer error equations of Proposition 2 as additional inputs:

$$\dot{e}_\Omega + k_{11}e_\Omega + k_{12}\int e_\Omega = \frac{3p\psi_f}{2J}e_{sq} + \frac{1}{J}(\Delta T_e - \Delta), \quad (25)$$

$$\dot{e}_y + k_{21}e_y + k_{22}\int e_y = \frac{3}{2}v_{gd}e_{gd} + \Delta P_g + \dot{y}_2^*. \quad (26)$$

**Proposition 3.** *Let  $\Gamma, \sigma > 0$ . (i) Whatever the tracking errors, the parameters of the network remain bounded: with Frobenius norms,  $\|W_2(t)\| \leq \bar{W}_2 := \max(\|W_2(0)\|, \sqrt{10}\Gamma/(2\sigma))$ ,  $\|\mathbf{b}_2(t)\| \leq \max(\|\mathbf{b}_2(0)\|, \Gamma/(2\sigma))$ ,  $\|W_1(t)\| \leq \max(\|W_1(0)\|, \Gamma\bar{W}_2/\sigma)$  and  $\|\mathbf{b}_1(t)\| \leq \max(\|\mathbf{b}_1(0)\|, \Gamma\bar{W}_2/(2\sigma))$ . (ii) Under the assumptions of Proposition 2, except  $\Delta T_e = \Delta P_g = 0$ , and for bounded  $\Delta$  and  $\dot{y}_2^*$ , the error state  $\xi$  is uniformly ultimately bounded, with an ultimate bound proportional to  $\sup_t(|\Delta T_e - \Delta|/J + |\Delta P_g + \dot{y}_2^*|)$ , as long as the trajectory remains in the operating region of Proposition 2.*

TABLE II  
CONTROLLER AND ADAPTIVE ANN PARAMETERS

| Parameter                        | Value                                                                                      |
|----------------------------------|--------------------------------------------------------------------------------------------|
| Speed loop                       | $\omega_\Omega = 2 \text{ rad/s}$ , $\zeta_\Omega = 0.9$ ( $k_{11} = 3.6$ , $k_{12} = 4$ ) |
| DC-link loop                     | $\omega_v = 60 \text{ rad/s}$ , $\zeta_v = 1$ ( $k_{21} = 120$ , $k_{22} = 3600$ )         |
| PBC (MSC)                        | $R_a = 0.785 \Omega$ , $K_i = 98.1 \Omega/\text{s}$                                        |
| PBC (GSC)                        | $R_b = 0.075 \Omega$ , $K_{ig} = 9.38 \Omega/\text{s}$                                     |
| ANN architecture                 | 6–10–2                                                                                     |
| $\Gamma, \sigma, \delta, K_{AI}$ | 5, 0.01, 0.1, 1                                                                            |
| Output saturation                | $\pm 3 (\pm 0.3T_n, \pm 0.3P_n)$                                                           |

*Proof.* (i) The learning signal  $\mathbf{r}$  is zero or equal to the first two entries of  $\mathbf{z}_n$ , so  $\|\mathbf{r}\| \leq \|\mathbf{z}_n\|$ , and  $\|\mathbf{h}\| \leq \sqrt{10}$ . Hence  $\Gamma_n \|\mathbf{r}\| \|\mathbf{h}\| \leq \sqrt{10} \Gamma \|\mathbf{z}_n\|/(1 + \|\mathbf{z}_n\|^2) \leq \sqrt{10} \Gamma/2$ , and  $\frac{d}{dt} \frac{1}{2} \|W_2\|^2 \leq -\sigma \|W_2\|^2 + \frac{\sqrt{10}}{2} \Gamma \|W_2\|$ , which gives the bound on  $W_2$ ; that on  $\mathbf{b}_2$  follows in the same way. Then  $\|\delta_h\| \leq \bar{W}_2 \|\mathbf{r}\|$  and  $\Gamma_n \|\delta_h\| \|\mathbf{z}_n\| \leq \Gamma \bar{W}_2 \|\mathbf{z}_n\|^2/(1 + \|\mathbf{z}_n\|^2) \leq \Gamma \bar{W}_2$ , which bounds  $W_1$  and  $\mathbf{b}_1$ . Freezing the adaptation keeps the parameters constant. (ii)  $u_{AI}$  is bounded by its saturation ( $\pm 0.3T_n, \pm 0.3P_n$ ). The error system of Proposition 2 is exponentially stable and the inputs of (25)–(26) enter it linearly, so it is locally input-to-state stable [18], which gives the bound.  $\square$

Proposition 3 holds for any  $\Gamma > 0$ , independently of the approximation capability of the network, and does not rely on [15]. It does not prove that  $\Delta T_e$  approaches  $\Delta$ , i.e., that the network reduces the bound; this is assessed in Section VI.

The bounds grow with  $\Gamma/\sigma$ : in simulation,  $\Gamma \geq 20$  saturates the network output and the DC-link loop oscillates with a bounded amplitude;  $\Gamma = 5$  is used. Propositions 2–3 are local guarantees: they assume an exact model of the electrical part, no saturation and trajectories in the operating region. The behavior with saturations (start-up, grid dip,  $\Gamma = 20$ , initial speed errors) and with parameter mismatch is only assessed numerically in Section VI.

## VI. NUMERICAL SIMULATIONS

### A. Setup

The model of Section III-C is integrated with a fourth-order Runge–Kutta scheme at step  $T_s$  over 10 s, starting from the MPPT operating point at  $v = 8 \text{ m/s}$ . Two cases are considered:

- *nominal*: the controller uses the true parameters;
- *robustness*: the controller keeps the nominal values while the plant has  $R_s \times 1.5$ ,  $L_s \times 1.2$ ,  $\psi_f \times 0.92$ ,  $R_f \times 1.5$ ,  $L_f \times 1.25$ ;  $\hat{T}_w$  is 10 % lower than  $T_w$ ; and the grid voltage drops by 20 % between 8 and 8.2 s.

The proposed control, without and with the network, is compared with PI vector control (speed, DC-voltage and  $dq$ -decoupled current loops [5], [6]) tuned on the same poles, with and without the feedforward  $P_{msc}/(\frac{3}{2}v_{gd})$  (PI+FF), using the same reference (12) and limits.

### B. Comparison with PI Vector Control

Table III and Figs. 2–3 summarize the results. *Speed*: since the flat law contains  $J\dot{\Omega}^*$  and  $\hat{T}_w$ , the IAE is 3.8 times

TABLE III  
COMPARISON OF THE CONTROLLERS (10 s)

| Metric                                    | PI     | PI+FF  | Proposed<br>no ANN   | Proposed<br>+ ANN    |
|-------------------------------------------|--------|--------|----------------------|----------------------|
| <i>Nominal</i>                            |        |        |                      |                      |
| IAE of $\Omega$ (rad)                     | 0.0384 | 0.0384 | $2.7 \times 10^{-6}$ | $2.7 \times 10^{-6}$ |
| ISE of $V_{dc}$ ( $V^2s$ )                | 26.4   | 0.095  | 0.085                | 0.085                |
| Max $ V_{dc} - V_{dc}^* $ (V)             | 2.87   | 2.46   | 0.36                 | 0.36                 |
| Energy (kWh)                              | 2.612  | 2.612  | 2.625                | 2.625                |
| <i>Robustness</i>                         |        |        |                      |                      |
| IAE of $\Omega$ (rad)                     | 0.0419 | 0.0419 | 0.0109               | 0.0068               |
| RMS error of $i_{sq}$ (A)                 | 0.84   | 0.84   | 3.05                 | 3.07                 |
| RMS error of $i_{gd}$ (A)                 | 2.15   | 5.98   | 6.88                 | 7.29                 |
| ISE of $V_{dc}$ ( $V^2s$ )                | 255    | 2.69   | 1.30                 | 1.25                 |
| Max $ V_{dc} - V_{dc}^* $ , $t < 1$ s (V) | 4.53   | 3.85   | 10.44                | 10.44                |
| Max $ V_{dc} - V_{dc}^* $ , dip (V)       | 62.3   | 11.6   | 3.35                 | 3.60                 |
| Energy (kWh)                              | 2.599  | 2.599  | 2.615                | 2.614                |

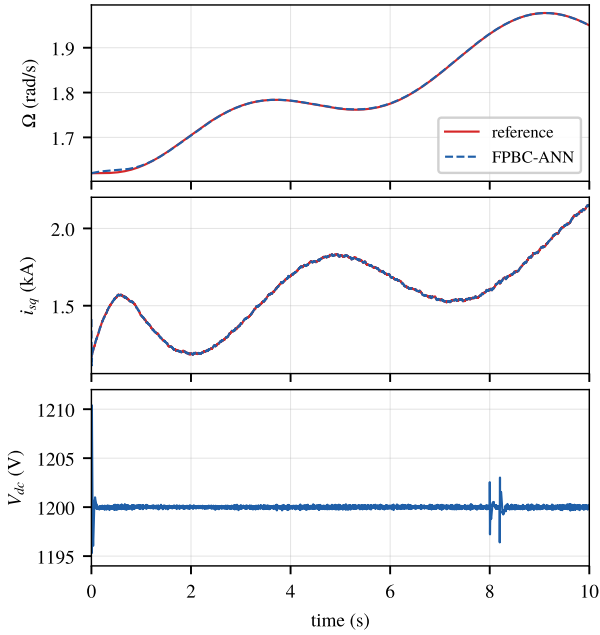


Fig. 2. Robustness case with the proposed control: rotor speed,  $q$ -axis generator current and DC-link voltage.

(robustness) to  $10^4$  times (nominal) smaller than with PI, and the energy is 0.5–0.6% higher. *DC link*: the feedforward of  $P_{m,sc}$  is decisive (PI without it gives a 200–300 times larger ISE); during the dip, the deviation is 3.6 V, against 11.6 V with PI+FF and 62 V with PI. PI+FF keeps a smaller steady ripple (0.03 vs 0.36 V) and start-up deviation (3.9 vs 10.4 V). *Currents*: PI tracks them better (RMS error of  $i_{sq}$  0.84 vs 3.07 A under mismatch), because the PBC feedforward uses nominal parameters; all errors remain below 0.3% of the rated current.

### C. Effect of the Neural Compensation

Fig. 4 shows that, without knowing the 10% model error, the network converges in less than one second to  $\Delta T_e \approx 0.065$  MN·m, close to the mean of the actual error  $T_w - \hat{T}_w$

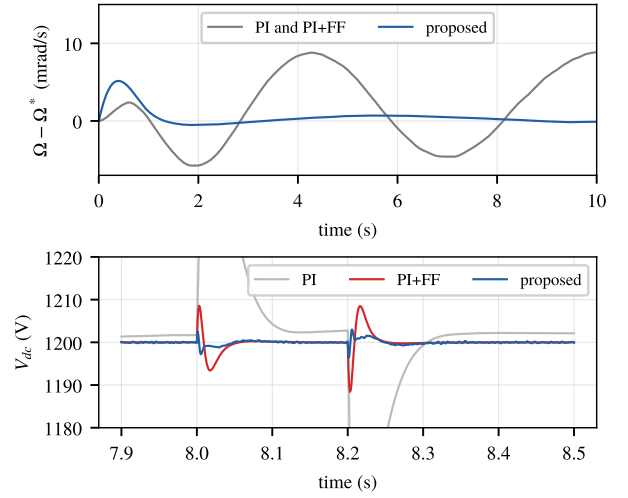


Fig. 3. Robustness case: speed error of the PI controllers and of the proposed control (top), and DC-link voltage during the 20% grid voltage dip (bottom).

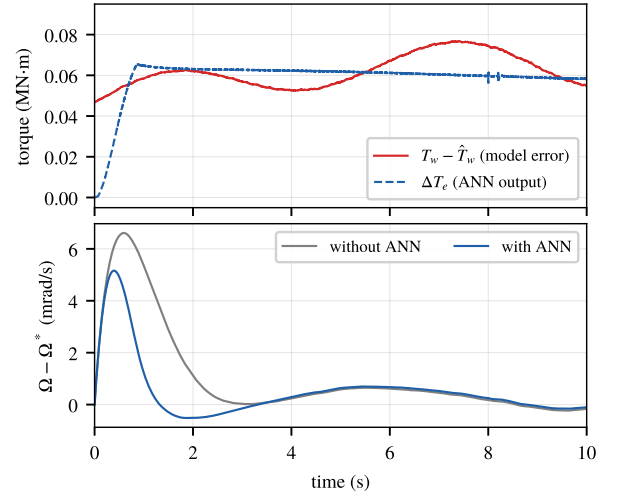


Fig. 4. Robustness case: neural compensation  $\Delta T_e$  compared with the aerodynamic model error, and speed error with and without the network.

(0.047 to 0.077 MN·m); the slowly varying part is handled by the integral action of (14). The speed IAE decreases by 38%, mainly at start-up (peak error 6.6 to 5.2 mrad/s).

In Table IV, over five turbulence realizations, the IAE is reduced by  $38 \pm 0.1\%$  and the ISE of  $V_{dc}$  by 4%; the current errors and the dip deviation increase slightly (Table III). A larger  $\Gamma$  improves the speed tracking at the expense of the current and DC-link errors; a larger dead zone or  $\sigma$  reduces the compensation. Starting 10% below the MPPT speed ( $\Omega_0 = 0.9\Omega^*$ ), the network reduces the IAE by 10% with a well-damped response; starting 10% above, all controllers saturate the grid current and the DC link rises by over 120 V, which requires a braking chopper or pitch control.

### D. Switched Model and Computational Cost

A switched model of the two-level converters (space-vector modulation, 2160 Hz carrier, double update, 1  $\mu s$  step) was

TABLE IV  
TESTS OF THE NEURAL COMPENSATION (ROBUSTNESS CASE; 5 WINDS:  
MEAN, SPREAD <  $10^{-5}$  RAD, 0.01 V<sup>2</sup>s)

| Test                                  | IAE of $\Omega$<br>(rad)               | ISE of $V_{dc}$<br>(V <sup>2</sup> s) | RMS $e_{igd}$<br>(A) |
|---------------------------------------|----------------------------------------|---------------------------------------|----------------------|
| 5 winds, no ANN                       | 0.01093                                | 1.29 $\pm$ 0.01                       | –                    |
| 5 winds, ANN                          | 0.00678                                | 1.24 $\pm$ 0.01                       | –                    |
| $\Gamma = 1$                          | 0.0092                                 | 1.28                                  | 6.96                 |
| $\Gamma = 2$                          | 0.0082                                 | 1.27                                  | 7.04                 |
| $\Gamma = 5$ (used)                   | 0.0068                                 | 1.25                                  | 7.29                 |
| $\Gamma = 10$                         | 0.0061                                 | 1.24                                  | 7.90                 |
| $\Gamma = 20$                         | oscillatory ( $V_{dc}$ deviation 47 V) |                                       |                      |
| $\delta = 0.05 / 0.2$                 | 0.0071 / 0.0073                        | 1.23 / 1.25                           | 7.24 / 7.13          |
| $\sigma = 0.001 / 0.1$                | 0.0067 / 0.0083                        | 1.25 / 1.24                           | 7.36 / 7.01          |
| $\Omega_0 = 0.9\Omega^*$ : no ANN/ANN | 0.0921 / 0.0828                        | 1.15 / 1.34                           | 7.95 / 8.02          |
| $\Omega_0 = 0.9\Omega^*$ : PI+FF      | 0.1142                                 | 23.8                                  | 14.2                 |

simulated at 8, 9 and 10 m/s with nominal parameters. The phase- $a$  grid current is analyzed by FFT over ten periods in steady state; as in IEEE 519 [20], the harmonics  $h = 2, \dots, 50$  are referred to the rated current  $I_L$  at the converter terminals. The total demand distortion (TDD) is 0.12, 0.07 and 0.13 %, and the largest harmonic 0.11 % of  $I_L$ , below the limits (5 % TDD, 0.3 % for  $35 \leq h \leq 50$  in the strictest class). These terminal values of a single unit do not by themselves establish compliance at the point of common coupling, which also depends on the short-circuit ratio, the transformer, the collector network and the other units. Separately, the switching components are not covered by these indices: since  $f_{sw}/f_g = 43.2$ , they are interharmonics, mainly at  $f_{sw} \pm 2f_g$  and  $f_{sw} \pm 4f_g$  (2.2 and 1.6 % of  $I_L$  each) and near  $2f_{sw}$ , about 4.6 % of  $I_L$  in total up to 5 kHz, nearly independent of the load. With a grid-synchronized carrier they would exceed the 0.3 % limit, so, independently of the harmonic indices, an  $LCL$  filter is required at this switching frequency. PI control gives a TDD of 0.09–0.11 % and the same switching components within 0.1 % of  $I_L$ : this ripple is set by the modulation and the filter, not by the control.

Per sample, the network needs about 200 multiply–accumulate operations and ten tanh evaluations, and the flat and PBC laws fewer than 100 operations, i.e., a few MFLOP/s at 10 kHz, within the capability of current digital signal processors.

## VII. CONCLUSION

A complete model of a 2 MW direct-drive PMSG wind energy conversion system was developed with machine data from the literature. Its control combines flatness for the speed and DC-link energy loops, passivity-based current control for both converters, with a cascade stability proof, and a normalized adaptive neural compensation with guaranteed bounded parameters. Compared with PI vector control tuned on the same poles, it tracks the MPPT speed 3.8 times more accurately under model errors and limits the DC-link deviation during a 20 % grid dip to 3.6 V (11.6 V with PI and feedforward). PI, however, gives smaller RMS current errors

(0.84 vs 3.07 A for  $i_{sq}$ ) and, with feedforward, a smaller start-up DC-link deviation (3.9 vs 10.4 V). The network reduces the speed error by 38 %. Future work will address a braking chopper and pitch control, an  $LCL$  filter, saturations in the stability analysis, and experimental validation.

## CONFLICT OF INTEREST

The authors declare there are no conflicts of interest.

## REFERENCES

- [1] International Energy Agency (IEA), *World Energy Outlook 2024*, Paris, France, 2024.
- [2] Global Wind Energy Council (GWEC), *Global Wind Report 2024*, Brussels, Belgium, 2024.
- [3] H. Polinder, J. A. Ferreira, B. B. Jensen, A. B. Abrahamsen, K. Atallah, and R. A. McMahon, “Trends in wind turbine generator systems,” *IEEE J. Emerg. Sel. Topics Power Electron.*, vol. 1, no. 3, pp. 174–185, Sep. 2013.
- [4] B. Wu, Y. Lang, N. Zargari, and S. Kouro, *Power Conversion and Control of Wind Energy Systems*. Hoboken, NJ, USA: Wiley-IEEE Press, 2011.
- [5] M. Chinchilla, S. Arnaltes, and J. C. Burgos, “Control of permanent-magnet generators applied to variable-speed wind-energy systems connected to the grid,” *IEEE Trans. Energy Convers.*, vol. 21, no. 1, pp. 130–135, Mar. 2006.
- [6] A. Yazdani and R. Iravani, *Voltage-Sourced Converters in Power Systems: Modeling, Control, and Applications*. Hoboken, NJ, USA: Wiley-IEEE Press, 2010.
- [7] A. Mechter, K. Kemih, and M. Ghanes, “Backstepping control of a wind turbine for low wind speeds,” *Nonlinear Dynamics*, vol. 84, no. 4, pp. 2435–2445, 2016.
- [8] M. Messadi, A. Mellit, K. Kemih, *et al.*, “Predictive control of a chaotic permanent magnet synchronous generator in a wind turbine system,” *Chinese Physics B*, vol. 24, no. 1, p. 010502, 2015.
- [9] H. Takhi, K. Kemih, L. Moysis, *et al.*, “Passivity based control and synchronization of perturbed uncertain chaotic systems and their micro-controller implementation,” *Int. J. Dyn. Control*, vol. 8, no. 3, pp. 973–990, 2020.
- [10] M. Fliess, J. Lévine, P. Martin, and P. Rouchon, “Flatness and defect of non-linear systems: Introductory theory and examples,” *Int. J. Control*, vol. 61, no. 6, pp. 1327–1361, 1995.
- [11] P. Thounthong, S. Pierfederici, and B. Davat, “Analysis of differential flatness-based control for a fuel cell hybrid power source,” *IEEE Trans. Energy Convers.*, vol. 25, no. 3, pp. 909–920, Sep. 2010.
- [12] R. Ortega, A. Loria, P. J. Nicklasson, and H. Sira-Ramírez, *Passivity-Based Control of Euler-Lagrange Systems*. London, UK: Springer, 1998.
- [13] R. Ortega, A. van der Schaft, B. Maschke, and G. Escobar, “Interconnection and damping assignment passivity-based control of port-controlled Hamiltonian systems,” *Automatica*, vol. 38, no. 4, pp. 585–596, 2002.
- [14] F. L. Lewis, S. Jagannathan, and A. Yeşildirek, *Neural Network Control of Robot Manipulators and Nonlinear Systems*. London, UK: Taylor & Francis, 1999.
- [15] S. Regani, M. Messadi, and K. Kemih, “A novel chaos control approach with adaptive ANN compensation for a DFIG-based wind turbine,” *Mathematics*, under review, 2026.
- [16] S. M. M. Hasan and A. H. M. Shatil, “Design and comparison of grid connected permanent magnet synchronous generator non-salient pole and salient pole rotor wind turbine,” *AIUB J. Sci. Eng.*, vol. 20, no. 2, pp. 40–46, 2021.
- [17] S. Heier, *Grid Integration of Wind Energy: Onshore and Offshore Conversion Systems*, 3rd ed. Chichester, UK: Wiley, 2014.
- [18] H. K. Khalil, *Nonlinear Systems*, 3rd ed. Upper Saddle River, NJ, USA: Prentice Hall, 2002.
- [19] P. A. Ioannou and J. Sun, *Robust Adaptive Control*. Upper Saddle River, NJ, USA: Prentice Hall, 1996.
- [20] *IEEE Standard for Harmonic Control in Electric Power Systems*, IEEE Std 519-2022, 2022.