

# Digital Signal Processing

Samar Singhai  
BM20BTECH11012

## CONTENTS

1	Software Installation	1
2	Digital Filter	1
3	Difference Equation	2
4	Z-transform	2
5	Impulse Response	4
6	DFT and FFT	7
7	FFT	9
8	Exercises	12

**Abstract**—This manual provides a simple introduction to digital signal processing.

## 1 SOFTWARE INSTALLATION

Run the following commands

```
sudo apt-get update
sudo apt-get install libffi-dev libsndfile1 python3
  -scipy python3-numpy python3-matplotlib
sudo pip install cffi pysoundfile
```

## 2 DIGITAL FILTER

### 2.1 Download the sound file from

```
wget https://github.com/samar2605/EE3900/
blob/master/Assignment%201/codes/
Sound_Noise.wav
```

2.2 You will find a spectrogram at <https://academo.org/demos/spectrum-analyzer>. Upload the sound file that you downloaded in Problem 2.1 in the spectrogram and play. Observe the spectrogram. What do you find?

**Solution:** There are a lot of yellow lines between 440 Hz to 5.1 KHz. These represent the synthesizer key tones. Also, the key strokes are audible along with background noise.

2.3 Write the python code for removal of out of band noise and execute the code.

**Solution:**

```
import soundfile as sf
from scipy import signal

#read .wav file
input_signal,fs = sf.read('Sound_Noise.wav')

#sampling frequency of Input signal
sampl_freq=fs

#order of the filter
order=4

#cutoff frequency 4kHz
cutoff_freq=4000.0

#digital frequency
Wn=2*cutoff_freq/sampl_freq

# b and a are numerator and denominator
polynomials respectively
b, a = signal.butter(order,Wn, 'low')

#filter the input signal with butterworth filter
output_signal = signal.filtfilt(b, a,
    input_signal)
#output_signal = signal.lfilter(b, a,
    input_signal)

#write the output signal into .wav file
sf.write('Sound_With_ReducedNoise.wav',
    output_signal, fs)
```

2.4 The output of the python script in Problem 2.3 is the audio file

Sound\_With\_ReducedNoise.wav. Play the file in the spectrogram in Problem 2.2. What do you observe?

**Solution:** The key strokes as well as background noise is subdued in the audio. Also, the signal is blank for frequencies above 5.1 kHz.

### 3 DIFFERENCE EQUATION

3.1 Let

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (3.1)$$

Sketch  $x(n)$ .

3.2 Let

$$y(n) + \frac{1}{2}y(n-1) = x(n) + x(n-2),$$

$$y(n) = 0, n < 0 \quad (3.2)$$

Sketch  $y(n)$ .

**Solution:** The following code yields Fig. 3.2.

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_3.py
```

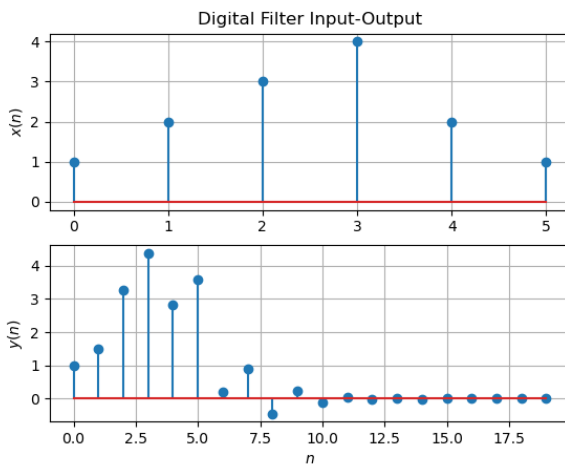


Fig. 3.2

3.3 Repeat the above exercise using a C code.

**Solution:** The following code yields Fig. ??A

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_3.c
```

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_3point3.py
```

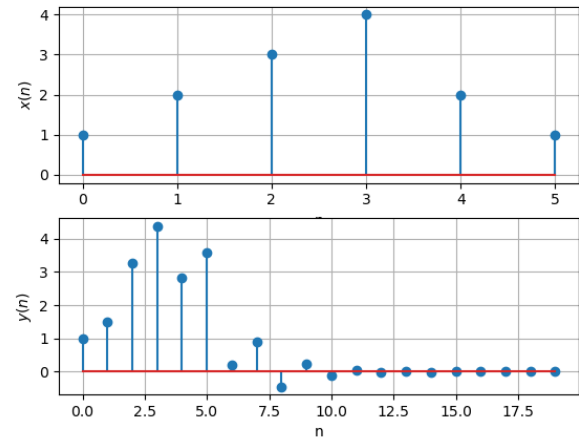


Fig. 3.3

### 4 Z-TRANSFORM

4.1 The Z-transform of  $x(n)$  is defined as

$$X(z) = \mathcal{Z}\{x(n)\} = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.1)$$

Show that

$$\mathcal{Z}\{x(n-1)\} = z^{-1}X(z) \quad (4.2)$$

and find

$$\mathcal{Z}\{x(n-k)\} \quad (4.3)$$

**Solution:** From (4.1),

$$\begin{aligned} \mathcal{Z}\{x(n-k)\} &= \sum_{n=-\infty}^{\infty} x(n-k)z^{-n} \\ &= \sum_{n=-\infty}^{\infty} x(n)z^{-n-1} = z^{-1} \sum_{n=-\infty}^{\infty} x(n)z^{-n} \end{aligned} \quad (4.4)$$

resulting in (4.2). Similarly, it can be shown that

$$\mathcal{Z}\{x(n-k)\} = z^{-k}X(z) \quad (4.6)$$

4.2 Obtain  $X(z)$  for  $x(n)$  defined in problem 3.1.

**Solution:**

$$Z(x(n)) = \sum_{n=-\infty}^{\infty} x(n)z^{-n} \quad (4.7)$$

$$= x(0)z^0 + x(1)z^{-1} + x(2)z^{-2} + x(3)z^{-3} +$$

$$x(4)z^{-4} + x(5)z^{-5} \\ = 1 + 2z^{-1} + 3z^{-2} + 4z^{-3} + 2z^{-4} + z^{-5} \quad (4.9)$$

4.3 Find

$$H(z) = \frac{Y(z)}{X(z)} \quad (4.10)$$

from (3.2) assuming that the Z-transform is a linear operation.

**Solution:** Applying (4.6) in (3.2),

$$Y(z) + \frac{1}{2}z^{-1}Y(z) = X(z) + z^{-2}X(z) \quad (4.11)$$

$$\Rightarrow \frac{Y(z)}{X(z)} = \frac{1 + z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (4.12)$$

4.4 Find the Z transform of

$$\delta(n) = \begin{cases} 1 & n = 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.13)$$

and show that the Z-transform of

$$u(n) = \begin{cases} 1 & n \geq 0 \\ 0 & \text{otherwise} \end{cases} \quad (4.14)$$

is

$$U(z) = \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (4.15)$$

**Solution:** It is easy to show that

$$\delta(n) \stackrel{Z}{=} 1 \quad (4.16)$$

and from (4.14),

$$U(z) = \sum_{n=0}^{\infty} z^{-n} \quad (4.17)$$

$$= \frac{1}{1 - z^{-1}}, \quad |z| > 1 \quad (4.18)$$

using the formula for the sum of an infinite geometric progression.

4.5 Show that

$$a^n u(n) \stackrel{Z}{=} \frac{1}{1 - az^{-1}} \quad |z| > |a| \quad (4.19)$$

**Solution:**

$$Z(a^n u(n)) = \sum_{n=-\infty}^{\infty} a^n u(n) z^{-n} \quad (4.20)$$

$$= \sum_{n=0}^{\infty} a^n z^{-n} \quad (4.21)$$

$$= \frac{1}{1 - az^{-1}}, \quad |az^{-1}| < 1 \quad (4.22)$$

$$= \frac{1}{1 - az^{-1}}, \quad |a| < |z| \quad (4.23)$$

using the formula for the sum of an infinite geometric progression.

4.6 Let

$$H(e^{j\omega}) = H(z = e^{j\omega}). \quad (4.24)$$

Plot  $|H(e^{j\omega})|$ . Comment.  $H(e^{j\omega})$  is known as the *Discrete Time Fourier Transform* (DTFT) of  $x(n)$ .

**Solution:** The graph is symmetric and periodic it is attaining high of value 4 and minimum between (0 - 0.5). It is bounded between (0, 4) and periodic with period  $(2\pi)$  because in the below equation  $\cos(\omega)$  is periodic function having period  $2\pi$

$$H(e^{j\omega}) = \frac{1 + e^{-2j\omega}}{1 + \frac{e^{-j\omega}}{2}} \quad (4.25)$$

$$\Rightarrow |H(e^{j\omega})| = \frac{|1 + e^{-2j\omega}|}{|1 + \frac{e^{-j\omega}}{2}|} \quad (4.26)$$

$$= \frac{|1 + e^{2j\omega}|}{|e^{2j\omega} + \frac{e^{j\omega}}{2}|} \quad (4.27)$$

$$= \frac{|1 + \cos 2\omega + j \sin 2\omega|}{|e^{j\omega} + \frac{1}{2}|} \quad (4.28)$$

$$= \frac{|4 \cos^2(\omega) + 4j \sin(\omega) \cos(\omega)|}{|2e^{j\omega} + 1|} \quad (4.29)$$


$$= \frac{|4 \cos(\omega)| |\cos(\omega) + j \sin(\omega)|}{|2 \cos(\omega) + 1 + 2j \sin(\omega)|} \quad (4.30)$$

$$\therefore |H(e^{j\omega})| = \frac{|4 \cos(\omega)|}{\sqrt{5 + 4 \cos(\omega)}} \quad (4.31)$$

The following code plots Fig. 4.6.

```
wget https://raw.githubusercontent.com/gadepall/EE1310/master/filter/codes/dtft.
```

py

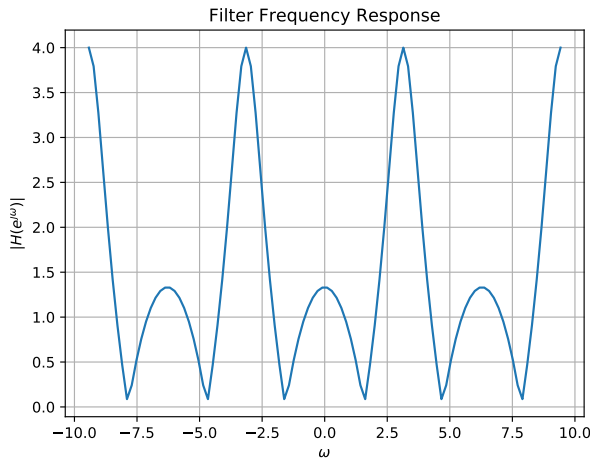Fig. 4.6:  $|H(e^{j\omega})|$ 

4.7 Express  $x(n)$  in terms of  $H(e^{j\omega})$ .

**Solution:**

$$H(e^{j\omega}) = \sum_{k=-\infty}^{\infty} h(k)e^{-j\omega k} \quad (4.32)$$

and

$$h(n) = \frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega n} d\omega \quad (4.33)$$

Now,

$$\frac{1}{2\pi} \int_{-\pi}^{\pi} H(e^{j\omega}) e^{j\omega n} d\omega \quad (4.34)$$

$$= \frac{1}{2\pi} \int_{-\pi}^{\pi} \sum_{k=-\infty}^{\infty} h(k) e^{-j\omega k} e^{j\omega n} d\omega \quad (4.35)$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{\infty} h(k) \int_{-\pi}^{\pi} e^{j\omega(n-k)} d\omega \quad (4.36)$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{\infty} h(k) \int_{-\pi}^{\pi} \cos \omega(n-k) d\omega \quad (4.37)$$

$$d\omega + \int_{-\pi}^{\pi} \sin \omega(n-k) d\omega$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{\infty} h(k) \int_{-\pi}^{\pi} \cos \omega(n-k) d\omega \quad (4.38)$$

$$= \frac{1}{2\pi} \sum_{k=-\infty}^{\infty} h(k) \left. \frac{\sin \omega(n-k)}{n-k} \right|_{-\pi}^{\pi} \quad (4.39)$$

$$= \frac{1}{2\pi} \sum_{k \neq n} h(k) \frac{\sin \pi(n-k)}{n-k} + \sum_{k=n} h(n) \frac{\sin \pi(n-k)}{n-k} \quad (4.40)$$

$$= \frac{0 + 2\pi h(n)}{2\pi} \quad (4.41)$$

$$= h(n) \quad (4.42)$$

## 5 IMPULSE RESPONSE

5.1 Using long division, find

$$h(n), \quad n < 5 \quad (5.1)$$

for  $H(z)$  in (4.12).

**Solution:** We substitute  $x := z^{-1}$ , and perform the long division.

$$\begin{array}{r} 2x - 4 \\ \frac{1}{2}x + 1 \overline{) x^2 + 1} \\ \underline{-x^2 - 2x} \phantom{+ 1} \\ -2x + 1 \phantom{+ 1} \\ \underline{2x + 4} \\ 5 \end{array}$$

$$\Rightarrow (1 + z^{-2}) = \left(\frac{1}{2}z^{-1} + 1\right)(2z^{-1} - 4) + 5 \quad (5.2)$$

$$\Rightarrow \frac{(1 + z^{-2})}{\frac{1}{2}z^{-1} + 1} = (2z^{-1} - 4) + \frac{5}{\frac{1}{2}z^{-1} + 1} \quad (5.3)$$

$$\Rightarrow H(z) = (2z^{-1} - 4) + \frac{5}{\frac{1}{2}z^{-1} + 1} \quad (5.4)$$

Now, consider  $\frac{5}{\frac{1}{2}z^{-1} + 1}$

The denominator  $\frac{1}{2}z^{-1} + 1$  can be expressed as sum of an infinite geometric progression, which as its first term equal to 1 and common ratio  $\frac{-1}{2}z^{-1}$

Therefore, we can write  $\frac{5}{\frac{1}{2}z^{-1} + 1}$  as  $5\left(1 + \left(\frac{-1}{2}z^{-1}\right) + \left(\frac{-1}{2}z^{-1}\right)^2 + \left(\frac{-1}{2}z^{-1}\right)^3 + \left(\frac{-1}{2}z^{-1}\right)^4 + \dots\right)$

Therefore,  $H(z)$  can be given by,

$$H(z) = (2z^{-1} - 4) + \frac{5}{\frac{1}{2}z^{-1} + 1} \quad (5.5)$$

$$(5.6)$$

$$= 2z^{-1} - 4 + 5 + \frac{-5}{2}z^{-1} + \frac{5}{4}z^{-2} + \frac{-5}{8}z^{-3} + \frac{5}{16}z^{-4} \quad (5.7)$$

$$\Rightarrow H(z) = 1z^0 + \frac{-1}{2}z^{-1} + \frac{5}{4}z^{-2} + \frac{-5}{8}z^{-3} + \frac{5}{16}z^{-4} \quad (5.8)$$

Comparing the above expression to (4.1) we get  $h(n)$  for  $n < 5$  as,

$$h(0) = 1 \quad (5.9)$$

$$h(1) = \frac{-1}{2} \quad (5.10)$$

$$h(2) = \frac{5}{4} \quad (5.11)$$

$$h(3) = \frac{-5}{8} \quad (5.12)$$

$$h(4) = \frac{5}{16} \quad (5.13)$$

5.2 Find an expression for  $h(n)$  using  $H(z)$ , given that

$$h(n) \stackrel{Z}{\Leftrightarrow} H(z) \quad (5.14)$$

and there is a one to one relationship between  $h(n)$  and  $H(z)$ .  $h(n)$  is known as the *impulse response* of the system defined by (3.2).

**Solution:** From (4.12),

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (5.15)$$

$$\Rightarrow h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.16)$$

using (4.19) and (4.6).

5.3 Sketch  $h(n)$ . Is it bounded? Justify theoretically.

**Solution:** Yes, it is bounded between and convergent. We can clearly see in the plot it is not tending to infinite and remain finite. The following code plots Fig. 5.3.

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_5_3.py
```

we know that

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.17)$$

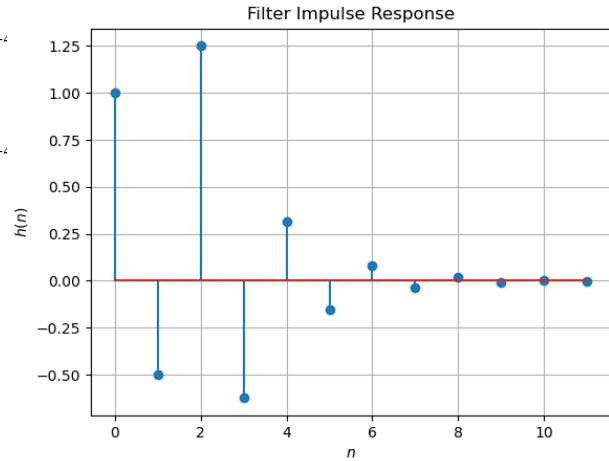


Fig. 5.3:  $h(n)$  as the inverse of  $H(z)$

Implies we can write that

$$h(n) = \begin{cases} 0 & , n < 0 \\ \left(-\frac{1}{2}\right)^n & , 0 \leq n < 2 \\ 5\left(-\frac{1}{2}\right)^n & , n \geq 2 \end{cases} \quad (5.18)$$

A sequence is said to be bounded when

$$|x_n| \leq M, \forall n \in \mathcal{N} \quad (5.19)$$

Now consider (5.18),

For  $n < 0$ ,

$$|h(n)| \leq 0 \quad (5.20)$$

For  $0 \leq n < 2$ ,

$$|h(n)| = \left(\frac{1}{2}\right)^n \quad (5.21)$$

$$\Rightarrow |h(n)| \leq 1 \quad (5.22)$$

For  $n \geq 2$ ,

$$|h(n)| = 5\left(\frac{1}{2}\right)^n \quad (5.23)$$

$$\Rightarrow |h(n)| \leq 5 \quad (5.24)$$

From above we can say that,

$$M = \max\{0, 1, 5\} \quad (5.25)$$

$$= 5 \quad (5.26)$$

Therefore since  $M$  exists and is a real value, we can say that  $h(n)$  is bounded.

5.4 Convergent? Justify using the ratio test.

**Solution:** We see that  $h(n)$  is bounded. For

large  $n$ , we see that

$$h(n) = \left(-\frac{1}{2}\right)^n + \left(-\frac{1}{2}\right)^{n-2} \quad (5.27)$$

$$= \left(-\frac{1}{2}\right)^n (4 + 1) = 5 \left(-\frac{1}{2}\right)^n \quad (5.28)$$

$$\Rightarrow \left| \frac{h(n+1)}{h(n)} \right| = \frac{1}{2} \quad (5.29)$$

and therefore,  $\lim_{n \rightarrow \infty} \left| \frac{h(n+1)}{h(n)} \right| = \frac{1}{2} < 1$ . Hence, we see that  $h(n)$  converges.

5.5 The system with  $h(n)$  is defined to be stable if

$$\sum_{n=-\infty}^{\infty} h(n) < \infty \quad (5.30)$$

Is the system defined by (3.2) stable for the impulse response in (5.14)?

**Solution:** By using  $h(n)$  from 5.3

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.31)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n u(n) + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.32)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n u(n) + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.33)$$

$$= \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^n + \sum_{n=-\infty}^{\infty} \left(-\frac{1}{2}\right)^{n-2} \quad (5.34)$$

$$= \frac{2}{3} + \frac{2}{3} < \infty \quad (5.36)$$

5.6 Verify the above result using a python code.

**Solution:**

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_5_6.py
```

5.7 Compute and sketch  $h(n)$  using

$$h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2), \quad (5.37)$$

This is the definition of  $h(n)$ .

**Solution:** The following code plots Fig. 5.7.

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/
codes/A1_5_7.py
```

Note that this is the same as Fig. 5.3.

$$= h(n) + \frac{1}{2}h(n-1) = \delta(n) + \delta(n-2) \quad (5.38)$$

$$= H(z) + \frac{1}{2}z^{-1}H(z) = 1 + z^{-2} \quad (5.39)$$

$$H(z) = \frac{1}{1 + \frac{1}{2}z^{-1}} + \frac{z^{-2}}{1 + \frac{1}{2}z^{-1}} \quad (5.40)$$

$$h(n) = \left(-\frac{1}{2}\right)^n u(n) + \left(-\frac{1}{2}\right)^{n-2} u(n-2) \quad (5.41)$$

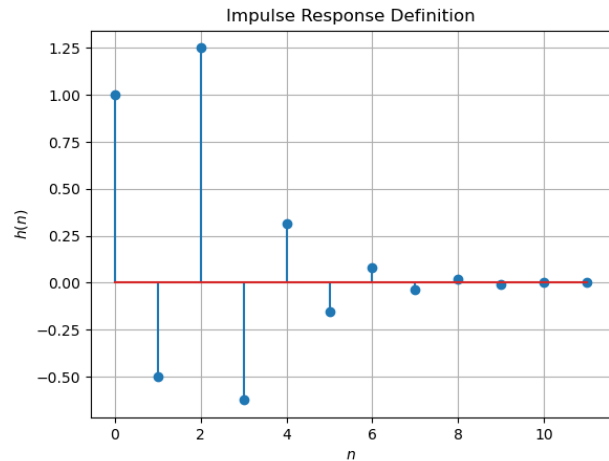


Fig. 5.7:  $h(n)$  from the definition

5.8 Compute

$$y(n) = x(n) * h(n) = \sum_{n=-\infty}^{\infty} x(k)h(n-k) \quad (5.42)$$

Comment. The operation in (5.42) is known as *convolution*.

**Solution:** The following code plots Fig. 5.8. Note that this is the same as  $y(n)$  in Fig. ??.

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_5_8.py
```

5.9 Express the above convolution using a Teoplitz matrix.

**Solution:**

We know that from, (5.42),

$$y(n) = x(n) * h(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (5.43)$$

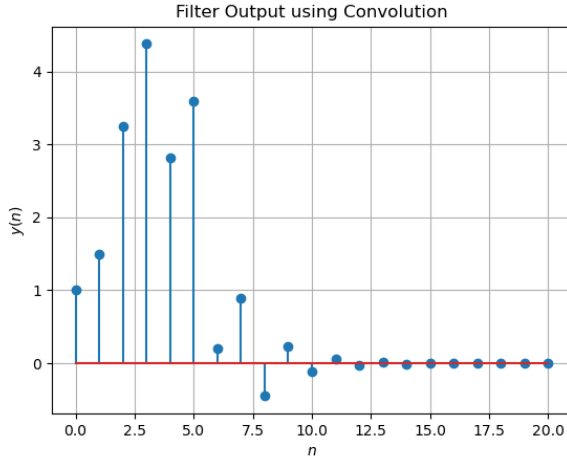


Fig. 5.8:  $y(n)$  from the definition of convolution

This can also be written as a matrix-vector multiplication given by the expression,

$$y = T(h) * x \quad (5.44)$$

In the equation (5.44),  $T(h)$  is a Teoplitz matrix.

The equation (5.44) can be expanded as,

$$y = x \otimes h \quad (5.45)$$

$$y = \begin{pmatrix} h_1 & 0 & \cdot & \cdot & \cdot & 0 \\ h_2 & h_1 & \cdot & \cdot & \cdot & 0 \\ h_3 & h_2 & h_1 & \cdot & \cdot & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ h_{n-1} & h_{n-2} & h_{n-3} & \cdot & \cdot & 0 \\ h_n & h_{n-1} & h_{n-2} & \cdot & \cdot & h_1 \\ 0 & h_n & h_{n-1} & h_{n-2} & \cdot & h_2 \\ \cdot & \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & \cdot & \cdot & \cdot & 0 & h_{n-1} \\ 0 & \cdot & \cdot & \cdot & 0 & h_n \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \\ \cdot \\ \cdot \\ \cdot \\ x_n \end{pmatrix} \quad (5.46)$$

5.10 Show that

$$y(n) = \sum_{n=-\infty}^{\infty} x(n-k)h(k) \quad (5.47)$$

**Solution:** From (5.42), we substitute  $k := n-k$

to get

$$y(n) = \sum_{k=-\infty}^{\infty} x(k)h(n-k) \quad (5.48)$$

$$= \sum_{n-k=-\infty}^{\infty} x(n-k)h(k) \quad (5.49)$$

$$= \sum_{k=-\infty}^{\infty} x(n-k)h(k) \quad (5.50)$$

## 6 DFT AND FFT

### 6.1 Compute

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n)e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (6.1)$$

and  $H(k)$  using  $h(n)$ .

**Solution:**

We know that ,

$$x(n) = \left\{ \underset{\uparrow}{1}, 2, 3, 4, 2, 1 \right\} \quad (6.2)$$

Here, let,  $\omega = e^{-j2\pi k}$ . Then,

$$X(k) = 1 + 2\omega^{\frac{1}{5}} + 3\omega^{\frac{2}{5}} + 4\omega^{\frac{3}{5}} + 2\omega^{\frac{4}{5}} + \omega \quad (6.3)$$

Similarly, we know from (5.18),

$$h(n) = \begin{cases} 0 & , n < 0 \\ \left(\frac{-1}{2}\right)^n & , 0 \leq n < 2 \\ 5\left(\frac{-1}{2}\right)^n & , n \geq 2 \end{cases} \quad (6.4)$$

Now, again let,  $\omega = e^{-j2\pi k}$ . Then,

$$H(k) = 1 + \frac{-1}{2}\omega^{\frac{1}{5}} + \frac{5}{4}\omega^{\frac{2}{5}} + \frac{-5}{8}\omega^{\frac{3}{5}} + \frac{5}{16}\omega^{\frac{4}{5}} + \frac{-5}{32}\omega \quad (6.5)$$

### 6.2 Compute

$$Y(k) = X(k)H(k) \quad (6.6)$$

**Solution:**

Now, from (6.3) and (6.5), we know  $X(k)$  and  $H(k)$ . Now, given that,

$$Y(k) = X(k) * H(k) \quad (6.7)$$

$$Y(k) = (1 + 2\omega^{\frac{1}{5}} + 3\omega^{\frac{2}{5}} + 4\omega^{\frac{3}{5}} + 2\omega^{\frac{4}{5}} + \omega) * (1 + \frac{-1}{2}\omega^{\frac{1}{5}} + \frac{5}{4}\omega^{\frac{2}{5}} + \frac{-5}{8}\omega^{\frac{3}{5}} + \frac{5}{16}\omega^{\frac{4}{5}} + \frac{-5}{32}\omega) \quad (6.8)$$

$$Y(k) = 1 + \frac{3}{2}\omega^{\frac{1}{5}} + \frac{13}{4}\omega^{\frac{2}{5}} + \frac{35}{8}\omega^{\frac{3}{5}} + \frac{45}{16}\omega^{\frac{4}{5}} + \frac{115}{32}\omega^{\frac{5}{5}} + \frac{1}{8}\omega^{\frac{6}{5}} + \frac{25}{32}\omega^{\frac{7}{5}} - \frac{5}{8}\omega^{\frac{8}{5}} - \frac{5}{32}\omega^5 \quad (6.9)$$

where,  $\omega = e^{-j2k\pi}$

### 6.3 Compute

$$y(n) = \frac{1}{N} \sum_{k=0}^{N-1} Y(k) \cdot e^{j2\pi kn/N}, \quad n = 0, 1, \dots, N-1 \quad (6.10)$$

**Solution:** The following code plots Fig. 5.8 and computes  $X(k)$  and  $Y(k)$ . Note that this is the same as  $y(n)$  in Fig. 3.2.

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_6_3.py
```

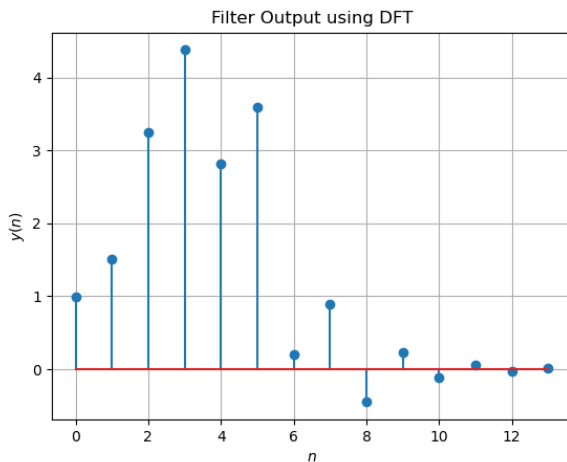


Fig. 6.3:  $y(n)$  from the DFT

6.4 Repeat the previous exercise by computing  $X(k)$ ,  $H(k)$  and  $y(n)$  through FFT and IFFT.

**Solution:** Download the code from

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_6_4.py
```

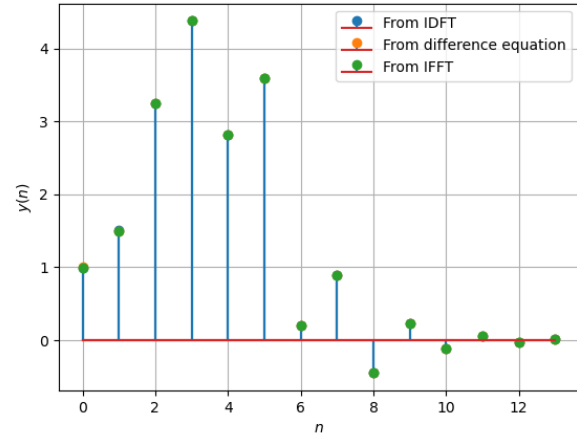


Fig. 6.4:  $y(n)$  using FFT and IFFT

Observe that Fig. (6.4) is the same as  $y(n)$  in Fig. (3.2).

6.5 Wherever possible, express all the above equations as matrix equations.

**Solution:** We use the DFT Matrix, where  $\omega = e^{-j\frac{2k\pi}{N}}$ , which is given by

$$\mathbf{W} = \begin{pmatrix} \omega^0 & \omega^0 & \dots & \omega^0 \\ \omega^0 & \omega^1 & \dots & \omega^{N-1} \\ \vdots & \vdots & \ddots & \vdots \\ \omega^0 & \omega^{N-1} & \dots & \omega^{(N-1)(N-1)} \end{pmatrix} \quad (6.11)$$

i.e.  $W_{jk} = \omega^{jk}$ ,  $0 \leq j, k < N$ . Hence, we can write any DFT equation as

$$\mathbf{X} = \mathbf{W}\mathbf{x} = \mathbf{x}\mathbf{W} \quad (6.12)$$

where

$$\mathbf{x} = \begin{pmatrix} x(0) \\ x(1) \\ \vdots \\ x(n-1) \end{pmatrix} \quad (6.13)$$

Using (6.10), the inverse Fourier Transform is given by

$$\mathbf{x} = \mathcal{F}^{-1}(\mathbf{X}) = \mathbf{W}^{-1}\mathbf{X} = \frac{1}{N}\mathbf{W}^H\mathbf{X} = \frac{1}{N}\mathbf{X}\mathbf{W}^H \quad (6.14)$$

$$\Rightarrow \mathbf{W}^{-1} = \frac{1}{N}\mathbf{W}^H \quad (6.15)$$

where  $H$  denotes hermitian operator. We can rewrite (6.7) using the element-wise multipli-



cation operator as

$$\mathbf{Y} = \mathbf{H} \cdot \mathbf{X} = (\mathbf{W}\mathbf{h}) \cdot (\mathbf{W}\mathbf{x}) \quad (6.16)$$

The plot of  $y(n)$  using the DFT matrix in Fig. (6.5) is the same as  $y(n)$  in Fig. (3.2). Download the code using

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/A1_6_5.py
```

and run it using

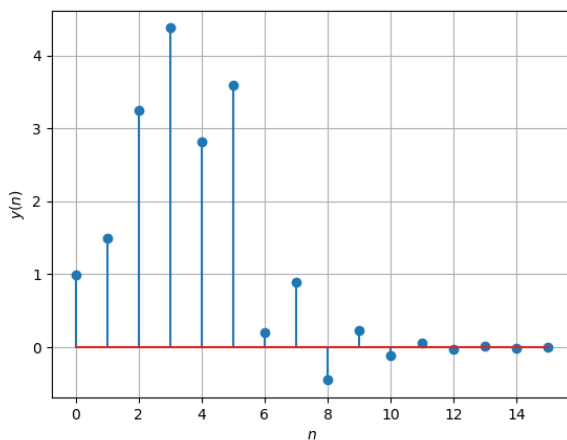


Fig. 6.5:  $y(n)$  using the DFT matrix

6.6 Find the time complexities of computing  $y(n)$  using FFT/IFFT and convolution.

**Solution:** The C code for finding the running times of these three algorithms can be downloaded from

```
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/6_7.c
```

This code generates three text files that are used to plot the runtimes of the algorithms in the following Python codes

```
wget https://github.com/samar2605/EE3900/blob/master/filter/codes/6_7_1.py
wget https://raw.githubusercontent.com/samar2605/EE3900/master/filter/codes/6_7_2.py
```

Figs. (6.6) and (6.6) are generated by executing the codes.

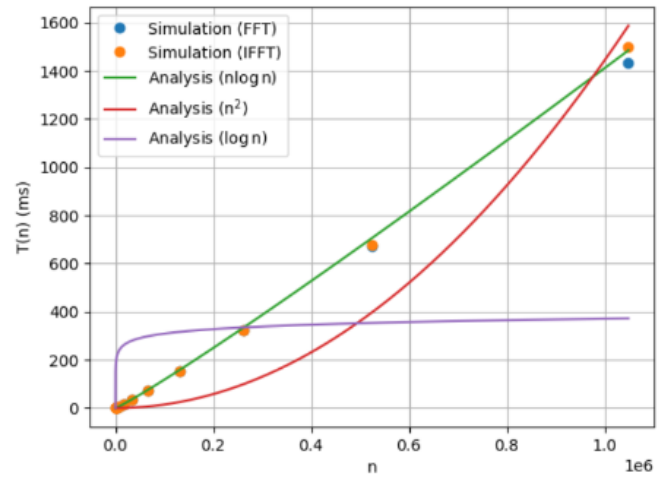


Fig. 6.6: The worst-case complexity of FFT/IFFT is  $O(n \log n)$

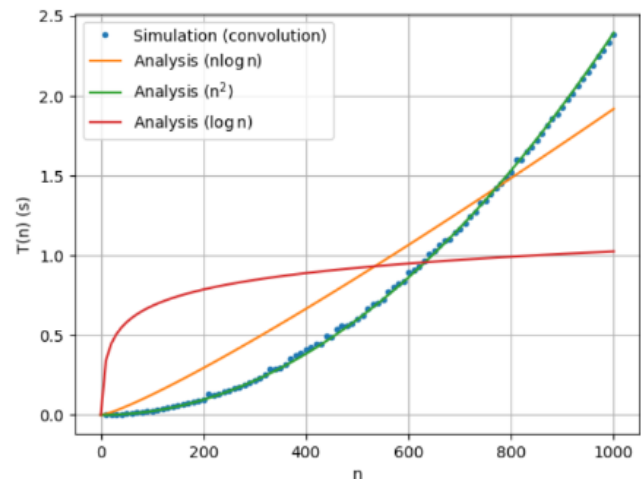


Fig. 6.6: The worst case complexity of convolution is  $O(n^2)$

## 7 FFT

1. The DFT of  $x(n)$  is given by

$$X(k) \triangleq \sum_{n=0}^{N-1} x(n)e^{-j2\pi kn/N}, \quad k = 0, 1, \dots, N-1 \quad (7.1)$$

2. Let

$$W_N = e^{-j2\pi/N} \quad (7.2)$$

Then the  $N$ -point DFT matrix is defined as

$$\mathbf{F}_N = [W_N^{mn}], \quad 0 \leq m, n \leq N-1 \quad (7.3)$$

where  $W_N^{mn}$  are the elements of  $\mathbf{F}_N$ .

3. Let

$$\mathbf{I}_4 = \begin{pmatrix} \mathbf{e}_4^1 & \mathbf{e}_4^2 & \mathbf{e}_4^3 & \mathbf{e}_4^4 \end{pmatrix} \quad (7.4)$$

be the  $4 \times 4$  identity matrix. Then the 4 point DFT permutation matrix is defined as

$$\mathbf{P}_4 = \begin{pmatrix} \mathbf{e}_4^1 & \mathbf{e}_4^3 & \mathbf{e}_4^2 & \mathbf{e}_4^4 \end{pmatrix} \quad (7.5)$$

4. The 4 point DFT diagonal matrix is defined as

$$\mathbf{D}_4 = \text{diag}(W_4^0 \quad W_4^1 \quad W_4^2 \quad W_4^3) \quad (7.6)$$

5. Show that

$$W_N^2 = W_{N/2} \quad (7.7)$$

**Solution:** We write

$$W_N^2 = \left(e^{-\frac{j2\pi}{N}}\right)^2 = e^{-\frac{j2\pi}{N/2}} = W_{N/2} \quad (7.8)$$

6. Show that

$$\mathbf{F}_4 = \begin{bmatrix} \mathbf{I}_2 & \mathbf{D}_2 \\ \mathbf{I}_2 & -\mathbf{D}_2 \end{bmatrix} \begin{bmatrix} \mathbf{F}_2 & 0 \\ 0 & \mathbf{F}_2 \end{bmatrix} \mathbf{P}_4 \quad (7.9)$$

**Solution:** Observe that for  $n \in \mathbb{N}$ ,  $W_4^{4n} = 1$  and  $W_4^{4n+2} = -1$ . Using (??),

$$\mathbf{D}_2 \mathbf{F}_2 = \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} W_2^0 & W_2^1 \\ W_2^2 & W_2^3 \end{bmatrix} \quad (7.10)$$

$$= \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} W_4^0 & W_4^1 \\ W_4^2 & W_4^3 \end{bmatrix} \quad (7.11)$$

$$= \begin{bmatrix} W_4^0 & W_4^0 \\ W_4^1 & W_4^3 \end{bmatrix} \quad (7.12)$$

$$\Rightarrow -\mathbf{D}_2 \mathbf{F}_2 = \begin{bmatrix} W_4^2 & W_4^6 \\ W_4^3 & W_4^9 \end{bmatrix} \quad (7.13)$$

and

$$\mathbf{F}_2 = \begin{pmatrix} W_2^0 & W_2^1 \\ W_2^2 & W_2^3 \end{pmatrix} \quad (7.14)$$

$$= \begin{pmatrix} W_4^0 & W_4^0 \\ W_4^1 & W_4^2 \end{pmatrix} \quad (7.15)$$

Hence,

$$\mathbf{W}_4 = \begin{pmatrix} W_4^0 & W_4^1 & W_4^2 & W_4^3 \\ W_4^4 & W_4^5 & W_4^6 & W_4^7 \\ W_4^8 & W_4^9 & W_4^{10} & W_4^{11} \\ W_4^{12} & W_4^{13} & W_4^{14} & W_4^{15} \end{pmatrix} \quad (7.16)$$

$$= \begin{bmatrix} \mathbf{I}_2 \mathbf{F}_2 & \mathbf{D}_2 \mathbf{F}_2 \\ \mathbf{I}_2 \mathbf{F}_2 & -\mathbf{D}_2 \mathbf{F}_2 \end{bmatrix} \quad (7.17)$$

$$= \begin{bmatrix} \mathbf{I}_2 & \mathbf{D}_2 \\ \mathbf{I}_2 & \mathbf{D}_2 \end{bmatrix} \begin{bmatrix} \mathbf{F}_2 & 0 \\ 0 & \mathbf{F}_2 \end{bmatrix} \quad (7.18)$$

Multiplying (7.18) by  $\mathbf{P}_4$  on both sides, and noting that  $\mathbf{W}_4 \mathbf{P}_4 = \mathbf{F}_4$  gives us.

7. Show that

$$\mathbf{F}_N = \begin{bmatrix} \mathbf{I}_{N/2} & \mathbf{D}_{N/2} \\ \mathbf{I}_{N/2} & -\mathbf{D}_{N/2} \end{bmatrix} \begin{bmatrix} \mathbf{F}_{N/2} & 0 \\ 0 & \mathbf{F}_{N/2} \end{bmatrix} \mathbf{P}_N \quad (7.19)$$

**Solution:** Observe that for even  $N$  and letting  $\mathbf{f}_N^i$  denote the  $i^{\text{th}}$  column of  $\mathbf{F}_N$ , from (7.12) and (7.13),

$$\begin{pmatrix} \mathbf{D}_{N/2} \mathbf{F}_{N/2} \\ -\mathbf{D}_{N/2} \mathbf{F}_{N/2} \end{pmatrix} = \begin{pmatrix} \mathbf{f}_N^2 & \mathbf{f}_N^4 & \dots & \mathbf{f}_N^N \end{pmatrix} \quad (7.20)$$

and

$$\begin{pmatrix} \mathbf{I}_{N/2} \mathbf{F}_{N/2} \\ \mathbf{I}_{N/2} \mathbf{F}_{N/2} \end{pmatrix} = \begin{pmatrix} \mathbf{f}_N^1 & \mathbf{f}_N^3 & \dots & \mathbf{f}_N^{N-1} \end{pmatrix} \quad (7.21)$$

Thus,

$$\begin{bmatrix} \mathbf{I}_2 \mathbf{F}_2 & \mathbf{D}_2 \mathbf{F}_2 \\ \mathbf{I}_2 \mathbf{F}_2 & -\mathbf{D}_2 \mathbf{F}_2 \end{bmatrix} = \begin{bmatrix} \mathbf{I}_{N/2} & \mathbf{D}_{N/2} \\ \mathbf{I}_{N/2} & -\mathbf{D}_{N/2} \end{bmatrix} \begin{bmatrix} \mathbf{F}_{N/2} & 0 \\ 0 & \mathbf{F}_{N/2} \end{bmatrix} \\ = \begin{pmatrix} \mathbf{f}_N^1 & \dots & \mathbf{f}_N^{N-1} & \mathbf{f}_N^2 & \dots & \mathbf{f}_N^N \end{pmatrix} \quad (7.22)$$

and so,

$$\begin{bmatrix} \mathbf{I}_{N/2} & \mathbf{D}_{N/2} \\ \mathbf{I}_{N/2} & -\mathbf{D}_{N/2} \end{bmatrix} \begin{bmatrix} \mathbf{F}_{N/2} & 0 \\ 0 & \mathbf{F}_{N/2} \end{bmatrix} \mathbf{P}_N \\ = \begin{pmatrix} \mathbf{f}_N^1 & \mathbf{f}_N^2 & \dots & \mathbf{f}_N^N \end{pmatrix} = \mathbf{F}_N \quad (7.23)$$

8. Find

$$\mathbf{P}_4 \mathbf{x} \quad (7.24)$$

**Solution:** We have,

$$\mathbf{P}_4 \mathbf{x} = \begin{pmatrix} \mathbf{e}_4^1 & \mathbf{e}_4^3 & \mathbf{e}_4^2 & \mathbf{e}_4^4 \end{pmatrix} \begin{pmatrix} x(0) \\ x(1) \\ x(2) \\ x(3) \end{pmatrix} = \begin{pmatrix} x(0) \\ x(2) \\ x(1) \\ x(3) \end{pmatrix} \quad (7.25)$$

9. Show that

$$\mathbf{X} = \mathbf{F}_N \mathbf{x} \quad (7.26)$$

where  $\mathbf{x}, \mathbf{X}$  are the vector representations of  $x(n), X(k)$  respectively.

**Solution:** Writing the terms of  $X$ ,

$$X(0) = x(0) + x(1) + \dots + x(N-1) \quad (7.27)$$

$$X(1) = x(0) + x(1)e^{-\frac{j2\pi}{N}} + \dots + x(N-1)e^{-\frac{j2(N-1)\pi}{N}} \quad (7.28)$$

$\vdots$

$$X(N-1) = x(0) + x(1)e^{-\frac{j2(N-1)\pi}{N}} + \dots + x(N-1)e^{-\frac{j2(N-1)(N-1)\pi}{N}} \quad (7.29)$$

Clearly, the term in the  $m^{\text{th}}$  row and  $n^{\text{th}}$  column is given by  $(0 \leq m \leq N-1 \text{ and } 0 \leq n \leq N-1)$

$$T_{mn} = x(n)e^{-\frac{j2mn\pi}{N}} \quad (7.30)$$

and so, we can represent each of these terms as a matrix product

$$\mathbf{X} = \mathbf{F}_N \mathbf{x} \quad (7.31)$$

where  $\mathbf{F}_N = \left[ e^{-\frac{j2mn\pi}{N}} \right]_{mn}$  for  $0 \leq m \leq N-1$  and  $0 \leq n \leq N-1$ .

10. Derive the following Step-by-step visualisation of 8-point FFTs into 4-point FFTs and so on

$$\begin{bmatrix} X(0) \\ X(1) \\ X(2) \\ X(3) \end{bmatrix} = \begin{bmatrix} X_1(0) \\ X_1(1) \\ X_1(2) \\ X_1(3) \end{bmatrix} + \begin{bmatrix} W_8^0 & 0 & 0 & 0 \\ 0 & W_8^1 & 0 & 0 \\ 0 & 0 & W_8^2 & 0 \\ 0 & 0 & 0 & W_8^3 \end{bmatrix} \begin{bmatrix} X_2(0) \\ X_2(1) \\ X_2(2) \\ X_2(3) \end{bmatrix} \quad (7.32)$$

$$\begin{bmatrix} X(4) \\ X(5) \\ X(6) \\ X(7) \end{bmatrix} = \begin{bmatrix} X_1(0) \\ X_1(1) \\ X_1(2) \\ X_1(3) \end{bmatrix} - \begin{bmatrix} W_8^0 & 0 & 0 & 0 \\ 0 & W_8^1 & 0 & 0 \\ 0 & 0 & W_8^2 & 0 \\ 0 & 0 & 0 & W_8^3 \end{bmatrix} \begin{bmatrix} X_2(0) \\ X_2(1) \\ X_2(2) \\ X_2(3) \end{bmatrix} \quad (7.33)$$

4-point FFTs into 2-point FFTs

$$\begin{bmatrix} X_1(0) \\ X_1(1) \end{bmatrix} = \begin{bmatrix} X_3(0) \\ X_3(1) \end{bmatrix} + \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} X_4(0) \\ X_4(1) \end{bmatrix} \quad (7.34)$$

$$\begin{bmatrix} X_1(2) \\ X_1(3) \end{bmatrix} = \begin{bmatrix} X_3(0) \\ X_3(1) \end{bmatrix} - \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} X_4(0) \\ X_4(1) \end{bmatrix} \quad (7.35)$$

$$\begin{bmatrix} X_2(0) \\ X_2(1) \end{bmatrix} = \begin{bmatrix} X_5(0) \\ X_5(1) \end{bmatrix} + \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} X_6(0) \\ X_6(1) \end{bmatrix} \quad (7.36)$$

$$\begin{bmatrix} X_2(2) \\ X_2(3) \end{bmatrix} = \begin{bmatrix} X_5(0) \\ X_5(1) \end{bmatrix} - \begin{bmatrix} W_4^0 & 0 \\ 0 & W_4^1 \end{bmatrix} \begin{bmatrix} X_6(0) \\ X_6(1) \end{bmatrix} \quad (7.37)$$

$$P_8 \begin{bmatrix} x(0) \\ x(1) \\ x(2) \\ x(3) \\ x(4) \\ x(5) \\ x(6) \\ x(7) \end{bmatrix} = \begin{bmatrix} x(0) \\ x(2) \\ x(4) \\ x(6) \\ x(1) \\ x(3) \\ x(5) \\ x(7) \end{bmatrix} \quad (7.38)$$

$$P_4 \begin{bmatrix} x(0) \\ x(2) \\ x(4) \\ x(6) \end{bmatrix} = \begin{bmatrix} x(0) \\ x(4) \\ x(2) \\ x(6) \end{bmatrix} \quad (7.39)$$

$$P_4 \begin{bmatrix} x(1) \\ x(3) \\ x(5) \\ x(7) \end{bmatrix} = \begin{bmatrix} x(1) \\ x(5) \\ x(3) \\ x(7) \end{bmatrix} \quad (7.40)$$

Therefore,

$$\begin{bmatrix} X_3(0) \\ X_3(1) \end{bmatrix} = F_2 \begin{bmatrix} x(0) \\ x(4) \end{bmatrix} \quad (7.41)$$

$$\begin{bmatrix} X_4(0) \\ X_4(1) \end{bmatrix} = F_2 \begin{bmatrix} x(2) \\ x(6) \end{bmatrix} \quad (7.42)$$

$$\begin{bmatrix} X_5(0) \\ X_5(1) \end{bmatrix} = F_2 \begin{bmatrix} x(1) \\ x(5) \end{bmatrix} \quad (7.43)$$

$$\begin{bmatrix} X_6(0) \\ X_6(1) \end{bmatrix} = F_2 \begin{bmatrix} x(3) \\ x(7) \end{bmatrix} \quad (7.44)$$

**Solution:** We write out the values of performing an 8-point FFT on  $\mathbf{x}$  as follows.

$$X(k) = \sum_{n=0}^7 x(n)e^{-\frac{j2kn\pi}{8}} \quad (7.45)$$

$$= \sum_{n=0}^3 \left( x(2n)e^{-\frac{j2kn\pi}{4}} + e^{-\frac{j2k\pi}{8}} x(2n+1)e^{-\frac{j2kn\pi}{4}} \right) \quad (7.46)$$

$$= X_1(k) + e^{-\frac{j2k\pi}{8}} X_2(k) \quad (7.47)$$

where  $\mathbf{X}_1$  is the 4-point FFT of the even-numbered terms and  $\mathbf{X}_2$  is the 4-point FFT of the odd numbered terms. Noticing that for  $k \geq 4$ ,

$$X_1(k) = X_1(k-4) \quad (7.48)$$

$$e^{-\frac{j2k\pi}{8}} = -e^{-\frac{j2(k-4)\pi}{8}} \quad (7.49)$$

we can now write out  $X(k)$  in matrix form as in (??) and (??). We also need to solve the two

4-point FFT terms so formed.

$$X_1(k) = \sum_{n=0}^3 x_1(n) e^{-\frac{j2k\pi n}{8}} \quad (7.50)$$

$$= \sum_{n=0}^1 \left( x_1(2n) e^{-\frac{j2k\pi n}{4}} + e^{-\frac{j2k\pi}{8}} x_2(2n+1) e^{-\frac{j2k\pi n}{4}} \right) \quad (7.51)$$

$$= X_3(k) + e^{-\frac{j2k\pi}{4}} X_4(k) \quad (7.52)$$

using  $x_1(n) = x(2n)$  and  $x_2(n) = x(2n+1)$ . Thus we can write the 2-point FFTs

$$\begin{bmatrix} X_3(0) \\ X_3(1) \end{bmatrix} = F_2 \begin{bmatrix} x(0) \\ x(4) \end{bmatrix} \quad (7.53)$$

$$\begin{bmatrix} X_4(0) \\ X_4(1) \end{bmatrix} = F_2 \begin{bmatrix} x(2) \\ x(6) \end{bmatrix} \quad (7.54)$$

Using a similar idea for the terms  $X_2$ ,

$$\begin{bmatrix} X_5(0) \\ X_5(1) \end{bmatrix} = F_2 \begin{bmatrix} x(1) \\ x(5) \end{bmatrix} \quad (7.55)$$

$$\begin{bmatrix} X_6(0) \\ X_6(1) \end{bmatrix} = F_2 \begin{bmatrix} x(3) \\ x(7) \end{bmatrix} \quad (7.56)$$

But observe that from (7.25),

$$\mathbf{P}_8 \mathbf{x} = \begin{pmatrix} \mathbf{x}_1 \\ \mathbf{x}_2 \end{pmatrix} \quad (7.57)$$

$$\mathbf{P}_4 \mathbf{x}_1 = \begin{pmatrix} \mathbf{x}_3 \\ \mathbf{x}_4 \end{pmatrix} \quad (7.58)$$

$$\mathbf{P}_4 \mathbf{x}_2 = \begin{pmatrix} \mathbf{x}_5 \\ \mathbf{x}_6 \end{pmatrix} \quad (7.59)$$

where we define  $x_3(k) = x(4k)$ ,  $x_4(k) = x(4k+2)$ ,  $x_5(k) = x(4k+1)$ , and  $x_6(k) = x(4k+3)$  for  $k = 0, 1$ .

11. For

$$\mathbf{x} = \begin{pmatrix} 1 \\ 2 \\ 3 \\ 4 \\ 2 \\ 1 \end{pmatrix} \quad (7.60)$$

compute the DFT using (7.26)

**Solution:** Download the Python code from

```
$ wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_7_11.py
```

12. Write a C program to compute the 8-point FFT.

**Solution:** The C code for the above two problems can be downloaded from

```
$ wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_7_13.c
```

## 8 EXERCISES

Answer the following questions by looking at the python code in Problem 2.3.

8.1 The command

```
output_signal = signal.lfilter(b,a,input_signal
)
```

in Problem 2.3 is executed through the following difference equation

$$\sum_{m=0}^M a(m) y(n-m) = \sum_{k=0}^N b(k) x(n-k) \quad (8.1)$$

where the input signal is  $x(n)$  and the output signal is  $y(n)$  with initial values all 0. Replace **signal.filtfilt** with your own routine and verify.

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_8_1.py
```

8.2 Repeat all the exercises in the previous sections for the above  $a$  and  $b$ .

**Solution:** For the given values, the difference equation is

$$\begin{aligned} & y(n) - (4.44) y(n-1) + (8.78) y(n-2) \\ & - (9.93) y(n-3) + (6.90) y(n-4) \\ & - (2.93) y(n-5) + (0.70) y(n-6) \\ & - (0.07) y(n-7) = (5.02 \times 10^{-5}) x(n) \\ & + (3.52 \times 10^{-4}) x(n-1) + (1.05 \times 10^{-3}) x(n-2) \\ & + (1.76 \times 10^{-3}) x(n-3) + (1.76 \times 10^{-3}) x(n-4) \\ & + (1.05 \times 10^{-3}) x(n-5) + (3.52 \times 10^{-4}) x(n-6) \\ & + (5.02 \times 10^{-5}) x(n-7) \end{aligned} \quad (8.2)$$

From (8.1), we see that the transfer function can be written as follows

$$H(z) = \frac{\sum_{k=0}^N b(k)z^{-k}}{\sum_{k=0}^M a(k)z^{-k}} \quad (8.3)$$

$$= \sum_i \frac{r(i)}{1 - p(i)z^{-1}} + \sum_j k(j)z^{-j} \quad (8.4)$$

where  $r(i)$ ,  $p(i)$ , are called residues and poles respectively of the partial fraction expansion of  $H(z)$ .  $k(i)$  are the coefficients of the direct polynomial terms that might be left over. We can now take the inverse  $z$ -transform of (8.4) and get using (4.19),

$$h(n) = \sum_i r(i)[p(i)]^n u(n) + \sum_j k(j)\delta(n - j) \quad (8.5)$$

Substituting the values,

$$\begin{aligned} h(n) = & [(2.76)(0.55)^n \\ & + (-1.05 - 1.84j)(0.57 + 0.16j)^n \\ & + (-1.05 + 1.84j)(0.57 - 0.16j)^n \\ & + (-0.53 + 0.08j)(0.63 + 0.32j)^n \\ & + (-0.53 - 0.08j)(0.63 - 0.32j)^n \\ & + (0.20 + 0.004j)(0.75 + 0.47j)^n \\ & + (0.20 - 0.004j)(0.75 - 0.47j)^n]u(n) \\ & + (-6.81 \times 10^{-4})\delta(n) \end{aligned} \quad (8.6)$$

The values  $r(i)$ ,  $p(i)$ ,  $k(i)$  and thus the impulse response function are computed and plotted at

```
wget https://github.com/samar2605/EE3900/
blob/master/filter/codes/A1_8_2_1.py
```

The filter frequency response is plotted at

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_8_2_2.py
```

Observe that for a series  $t_n = r^n$ ,  $\frac{t_{n+1}}{t_n} = r$ . By the ratio test,  $t_n$  converges if  $|r| < 1$ . We note that observe that  $|p(i)| < 1$  and so, as  $h(n)$  is the sum of convergent series, we see that  $h(n)$  converges. From Fig. (8.2), it is clear that  $h(n)$  is bounded. From (4.1),

$$\sum_{n=0}^{\infty} h(n) = H(1) = 1 < \infty \quad (8.7)$$

Therefore, the system is stable. From  $h(n)$  is negligible after  $n \geq 64$ , and we can apply a 64-bit FFT to get  $y(n)$ . The following code uses the DFT matrix to generate  $y(n)$ .

```
wget https://raw.githubusercontent.com/
samar2605/EE3900/master/filter/codes/
A1_8_2_3.py
```

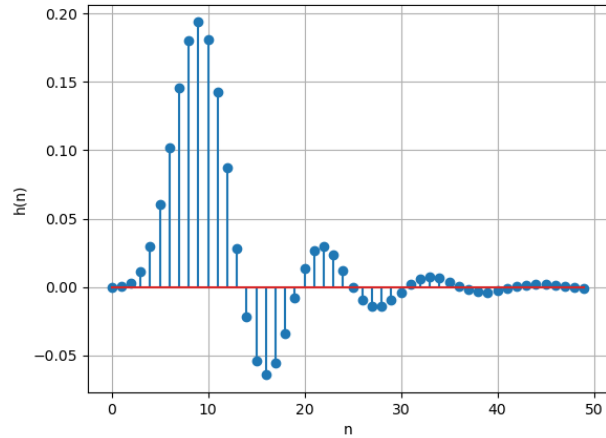


Fig. 8.2: Plot of  $h(n)$

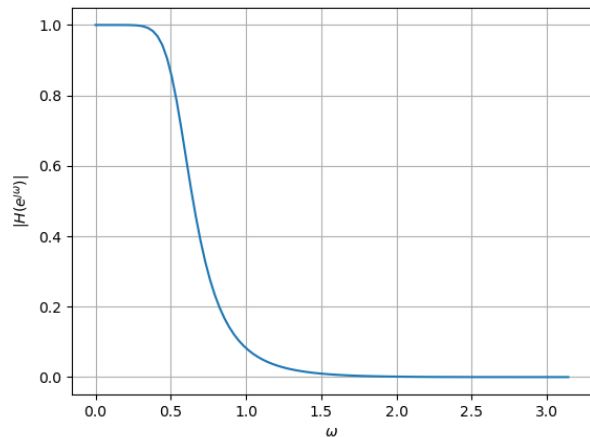


Fig. 8.2: Filter frequency response

8.3 What is the sampling frequency of the input signal?

**Solution:** Sampling frequency(fs)=44.1kHz.

8.4 What is type, order and cutoff-frequency of the above butterworth filter

**Solution:** The given butterworth filter is low pass with order=4 and cutoff-frequency=4kHz.

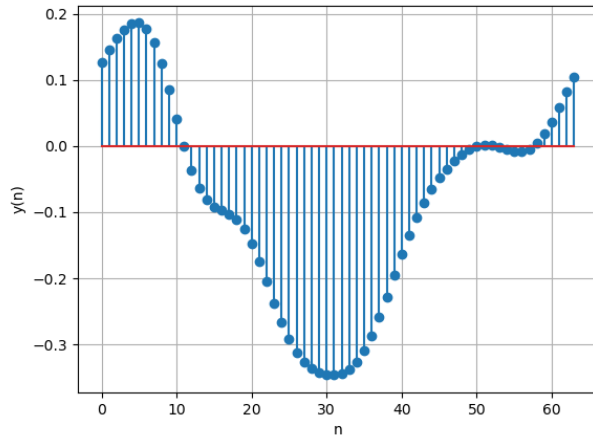


Fig. 8.2: Plot of  $y(n)$

8.5 Modifying the code with different input parameters and to get the best possible output.

**Solution:** A better filtering was found on setting the order of the filter to be 7.