MOXA

NPort IA5150/5250 Series Quick Installation Guide

1. Overview

NPort IA device servers deliver easy and reliable serial-to-Ethernet connectivity for the industrial automation market. The servers support several operation modes—TCP Server, TCP Client, UDP, Real COM, Pair Connection, and Ethernet Modem—ensuring the compatibility of network software, and are an ideal choice for connecting RS-232/422/485 serial devices, such as PLCs, sensors, meters, motors, drives, barcode readers, and operator displays. NPort IA device servers come with a compact and rugged DIN-Rail mountable casing.

2. Package Checklist

Before installing NPort IA device servers, verify that the package contains the following items:

- 1 NPort IA Serial Device Server
- Documentation & Software CD
- NPort IA Series Quick Installation Guide

Optional Accessories

- DR-4524   45W/2A DIN-Rail 24 VDC Power Supply with universal 85 to 264 VAC input
- DR-75-24   75W/3.2A DIN-Rail 24 VDC Power Supply with universal 85 to 264 VAC input
- DR-120-24   120W/5A DIN-Rail 24 VDC Power Supply with 88 to 132 VAC/176 to 264 VAC input by switch
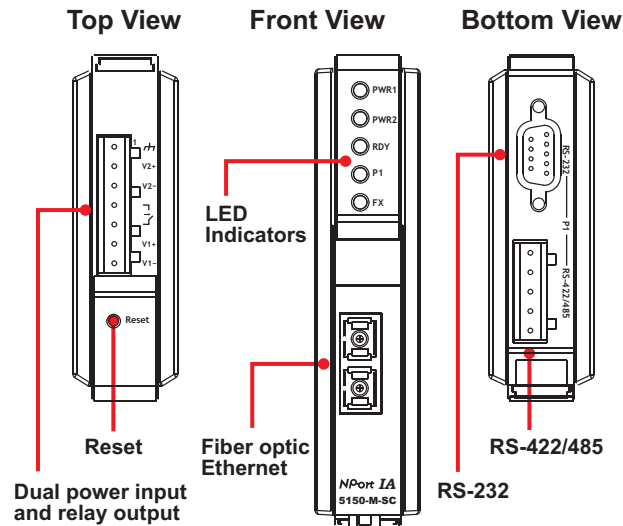
Notify your sales representative if any of the above items is missing or damaged.
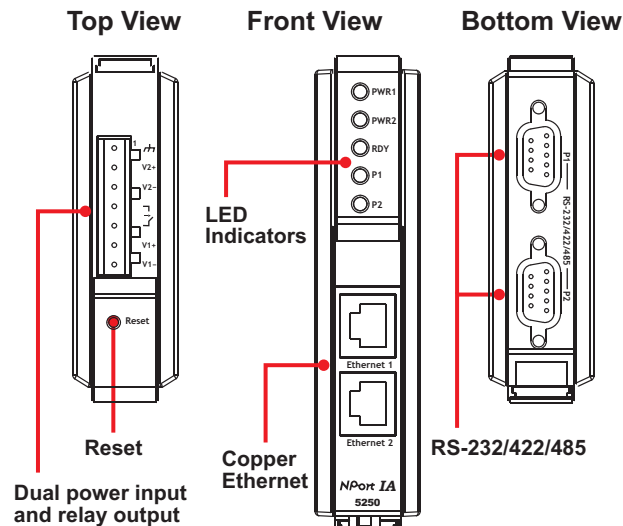
3. Hardware Introduction

NPort IA device servers are used to control RS-232/422/485 devices for industrial automation environments. Six of the models have 1 RS-232/422/485 serial port. NPort IA5150, NPort IA5150I, NPort IA5150-M-SC, NPort IA5150I-M-SC, NPort IA5150-S-SC, and NPort IA5150I-S-SC have 1 male DB9 port for the RS-232 interface, and a 5-pin terminal block for the RS-422/485 interface (only one port can be used at a time). One model has 2 RS-232/422/485 serial ports. NPort IA5250 has two male DB9 ports for all interfaces.

NPort IA5150 Series Appearance

Top View   Front View   Bottom View

LED Indicators

Reset

Fiber optic Ethernet

Dual power input and relay output

NPort IA 5150-M-SC

RS-422/485

RS-232

NPort IA5250 Appearance

Top View   Front View   Bottom View

LED Indicators

Reset

Copper Ethernet

Ethernet 1

Ethernet 2

Dual power input and relay output

NPort IA 5250

RS-232/422/485

Reset Button—Press the *Reset button* continuously for *5 sec to load factory defaults*: Use a pointed object, such as a straightened paper clip or toothpick, to press the reset button. This will cause the Ready LED to blink on and off. The factory defaults will be loaded once the Ready LED stops blinking (after about 5 seconds). At this point, you should release the reset button.

NPort IA LED Indicators (front panel)

| LED Name	LED Color	LED Function	
PWR1, PWR2	red	Power is being supplied to power input PWR1, PWR2.	
RDY	red	Steady on:	Power is on and NPort IA is booting up.
		Blinking:	Indicates an IP conflict, the DHCP or BOOTP server did not respond properly, or a relay output occurred.
	green	Steady on:	Power is on and NPort IA is functioning normally.
		Blinking:	The device server has been located by Administrator's Location function
	off	Power is off, or power error condition exists.	
Ethernet	orange	10 Mbps Ethernet connection.	
	green	100 Mbps Ethernet connection.	
	off	Ethernet cable is disconnected, or has a short.	
P1, P2	orange	Serial port is receiving data.	
	green	Serial port is transmitting data.	
	off	No data is being transmitted or received through the serial port.	
FX	orange	Steady on:	Ethernet fiber connection, but port is idle.
		Blinking:	Fiber port is transmitting or receiving data.

4. Hardware Installation Procedure

STEP 1: After removing NPort IA from the box, the first thing you should do is connect the power adaptor. Connect the 12-48 VDC power line with NPort IA's terminal block, or connect the DIN-Rail power supply with NPort IA's terminal block.

STEP 2: Connect NPort IA to a network. Use a standard straight-through Ethernet cable to connect to a Hub or Switch. When setting up or testing NPort IA, you might find it convenient to connect directly to your computer's Ethernet port. In this case, use a cross-over Ethernet cable.

STEP 3: Connect NPort IA's serial port to a serial device.

STEP 4: NPort IA is designed to be attached to a DIN-Rail or mounted on a wall. The two sliders on NPort IA's rear panel serve a dual purpose. For wall mounting, both sliders should be extended. For DIN-Rail mounting, start with one slider pushed in, and the other slider extended. After placing the NPort IA on the DIN-Rail, push the extended slider in to lock the device server to the rail. The two placement options are illustrated in the accompanying figures.

Wall Mount

**DIN-Rail**

**Push here to lock
to the DIN-Rail**
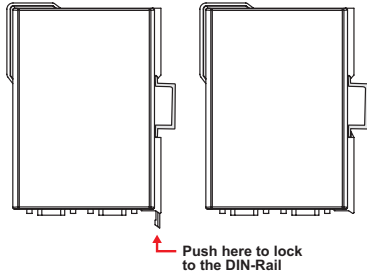
5. Software Installation Information

To install **NPort Administration Suite**, insert the **Document &
Software CD** into your computer's CD-ROM drive. Once the installation
window opens, click on the **Installation Administration Suite** button,
and then follow the instructions on the screen. To view detailed
information about **NPort IA Administration Suite**, click on the
Documents button, and then select NPort IA5150/5250 Series User's
Manual to open the pdf version of this user's manual.

6. Pin Assignments and Cable Wiring

RS-232/422/485 (Male DB9) Pinouts

1 2 3 4 5

6 7 8 9

PIN	RS-232	RS-422/ RS-485 (4W)	RS-485 (2W)
1	DCD	TxD-(A)	---
2	RXD	TxD+(B)	---
3	TXD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	---	---
7	RTS	---	---
8	CTS	---	---
9	---	---	---

4W/2W RS-485/RS-422 (Terminal Block) Pinouts

5 4 3 2 1

PIN	2W	4W
1	---	TxD+(B)
2	---	TxD-(A)
3	Data+(B)	RxD+(B)
4	Data-(A)	RxD-(A)
5	---	GND

Four cables are available as optional accessories that can be used to
connect NPort IA to RS-232 serial devices. For your convenience, we
show precise cable wiring diagrams for each of the two cables.

Female DB9 to Male DB9

Male DB9 : Female DB9

Male DB9 : Female DB9

NPort IA

RS-232
Device

9 pins

Cable Wiring

9 pins

DCD	1	←	1	DCD
RxD	2	←	2	TxD
TxD	3	→	3	RxD
DTR	4	→	4	DSR
GND	5		5	GND
DSR	6	←	6	DTR
RTS	7		7	CTS
CTS	8	←	8	RTS

Female DB9 to Male DB25

Male DB9 : Female DB9

Male DB25 : Female DB25

NPort IA

RS-232
Device

9 pins

Cable Wiring

25 pins

DCD	1	←	8	DCD
RxD	2	←	3	TxD
TxD	3	→	2	RxD
DTR	4	→	20	DSR
GND	5		7	GND
DSR	6	←	6	DTR
RTS	7		4	CTS
CTS	8	←	5	RTS
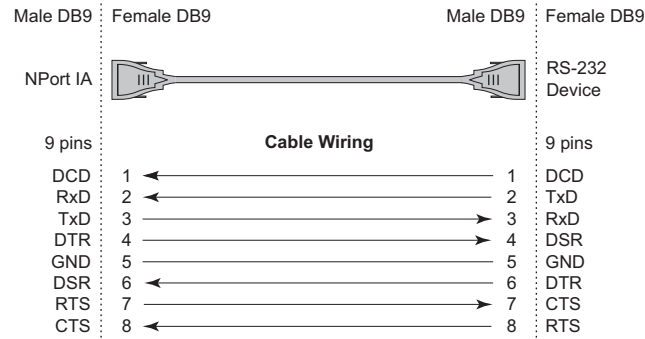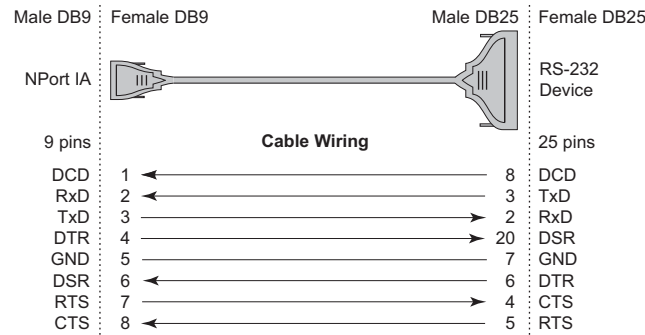
7. Specifications

Power requirements	NPort IA5150:	12 to 48 VDC, 360 mA at 12V (max.)
	NPort IA5150I:	12 to 48 VDC, 420 mA at 12V (max.)
	NPort IA5150-S-SC:	12 to 48 VDC, 470 mA at 12 V (max.)
	NPort IA5150I-S-SC:	12 to 48 VDC, 490 mA at 12V (max.)
	NPort IA5150-M-SC:	12 to 48 VDC, 500 mA at 12 V (max.)
	NPort IA5150I-M-SC:	12 to 48 VDC, 510 mA at 12V (max.)
	NPort IA5250:	12 to 48 VDC, 440 mA at 12 V (max.)
Operating temp.	0 to 55°C (32 to 131°F)	
Operating humidity	5 to 95% RH	
Dimensions (W×D×H)	29 × 89.2 × 118.5 mm 1.14 × 3.51 × 4.67 in	
Surge protection	15 KV ESD for all signals	
Magnetic isolation	1.5 KV for Ethernet	
Power line protection	4 KV Burst (EFT), EN61000-4-4	
	2 KV Surge, EN61000-4-5	
Regulatory approvals	FCC Class A, CE Class A, UL, CUL, TÜV	