
Receiver "Hutschiene"
40 MHz or 433 MHz

- 12-24V DC
- 230V AC
- relay-output
- (throw)antenna or
- coaxial-connection



Programming the transmitter

The receiver is supplied with the manufacturer´s code 1, 2, 3, 8, 9, 10 ON. After the mounting this code should be changed in any case as follows: Press the programming button for approximately 10 seconds. The processor will now be cleared completely. It signals this by a briefly flashing of the LED. Change the code on your transmitter. Now briefly press the programming button on the receiver and within 5 seconds the command button of the transmitter to which you would like to assign the output. The receiver signals the successful programming by activating the relay.
Following this procedure it is possible to program 64 different transmitters. Clearing transmitters seperately is not possible. By pressing the programming button for approx. 10 seconds, all codes are cleared. This is againg signalled by the LED flashing briefly. Now you have the possibility, as set out above, to program the transmitter again.

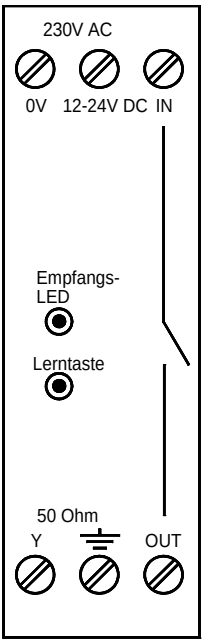

Connections

Technical Data:

frequency in MHz	40.685	433.920
type of modulation	AM	FM
sensitivity	0,5µV or better	2µV or better
closed circuit current consumption	appr. 25 mA	appr. 39 mA
voltage supply	12-24 V DC or 230V AC	
control output	relay, shutter 8 A	
dimensions	T 73 x H 78 x B 25 mm	
articlenumber	43640H 12-24V 43650H 230V	43840H 12-24V 43850H 230V

Declaration of Conformity: (you may receive a copy of our original conformity declaration upon request)

We herewith declare that the product: receiver-module with model designation of LW27/40EB,
receiver-module with model designation of LW433/868E,

satisfies all of the technical regulations of the Council relevant to the product in the areas where the directives 73/23/EWG, 89/336/EWG and 99/5/EG are applied:

EN 300 220-1
ETS 300 683
EN 60950

Manufacturer: SMD-Funksteuerungs GmbH