


Практическая работа 23 – Динамический NAT

1. Строю сеть

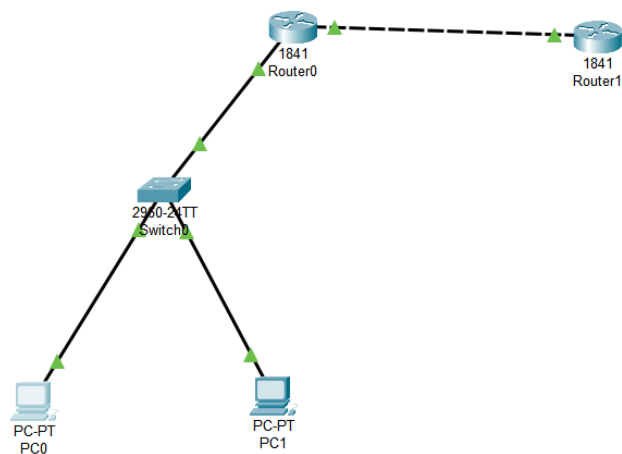

2. Настройки роутеров

FastEthernet0/0	
Port Status	<input checked="" type="checkbox"/> On
Bandwidth	<input checked="" type="radio"/> 100 Mbps <input type="radio"/> 10 Mbps <input checked="" type="checkbox"/> Auto
Duplex	<input type="radio"/> Half Duplex <input checked="" type="radio"/> Full Duplex <input checked="" type="checkbox"/> Auto
MAC Address	0000.0C49.D301
IP Configuration	
IPv4 Address	192.168.0.100
Subnet Mask	255.255.255.0

FastEthernet0/1	
Port Status	<input checked="" type="checkbox"/> On
Bandwidth	<input checked="" type="radio"/> 100 Mbps <input type="radio"/> 10 Mbps <input checked="" type="checkbox"/> Auto
Duplex	<input type="radio"/> Half Duplex <input checked="" type="radio"/> Full Duplex <input checked="" type="checkbox"/> Auto
MAC Address	0000.0C49.D302
IP Configuration	
IPv4 Address	100.10.10.1
Subnet Mask	255.0.0.0

FastEthernet0/0	
Port Status	<input checked="" type="checkbox"/> On
Bandwidth	<input checked="" type="radio"/> 100 Mbps <input type="radio"/> 10 Mbps <input checked="" type="checkbox"/> Auto
Duplex	<input type="radio"/> Half Duplex <input checked="" type="radio"/> Full Duplex <input checked="" type="checkbox"/> Auto
MAC Address	0002.17D8.2001
IP Configuration	
IPv4 Address	100.10.10.2
Subnet Mask	255.0.0.0

3. Настройки в терминале

```
Router(config)#access-list 1 permit 192.168.0.0 0.0.0.255
Router(config)#ip nat pool white-address 100.10.11.77 100.10.11.99 netmask 255.255.255.0
Router(config)#ip nat inside source list 1 pool white-address
Router(config)#int fa0/0
Router(config-if)#ip nat inside
Router(config-if)#int fa0/1
Router(config-if)#ip nat outside
Router(config-if)#exit
```

4. Пингую с pc 0

```
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.
Request timed out.
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

5. Пингую с pc 1

```
C:\>ping 100.10.10.2

Pinging 100.10.10.2 with 32 bytes of data:

Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254
Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```