



How to install ESP32-MiniWebRadio-V4


- 1) Install **Visual Studio Code** on your PC
- 2) Add extension **piaoarduino IDE** and **ESP Crash Decoder**

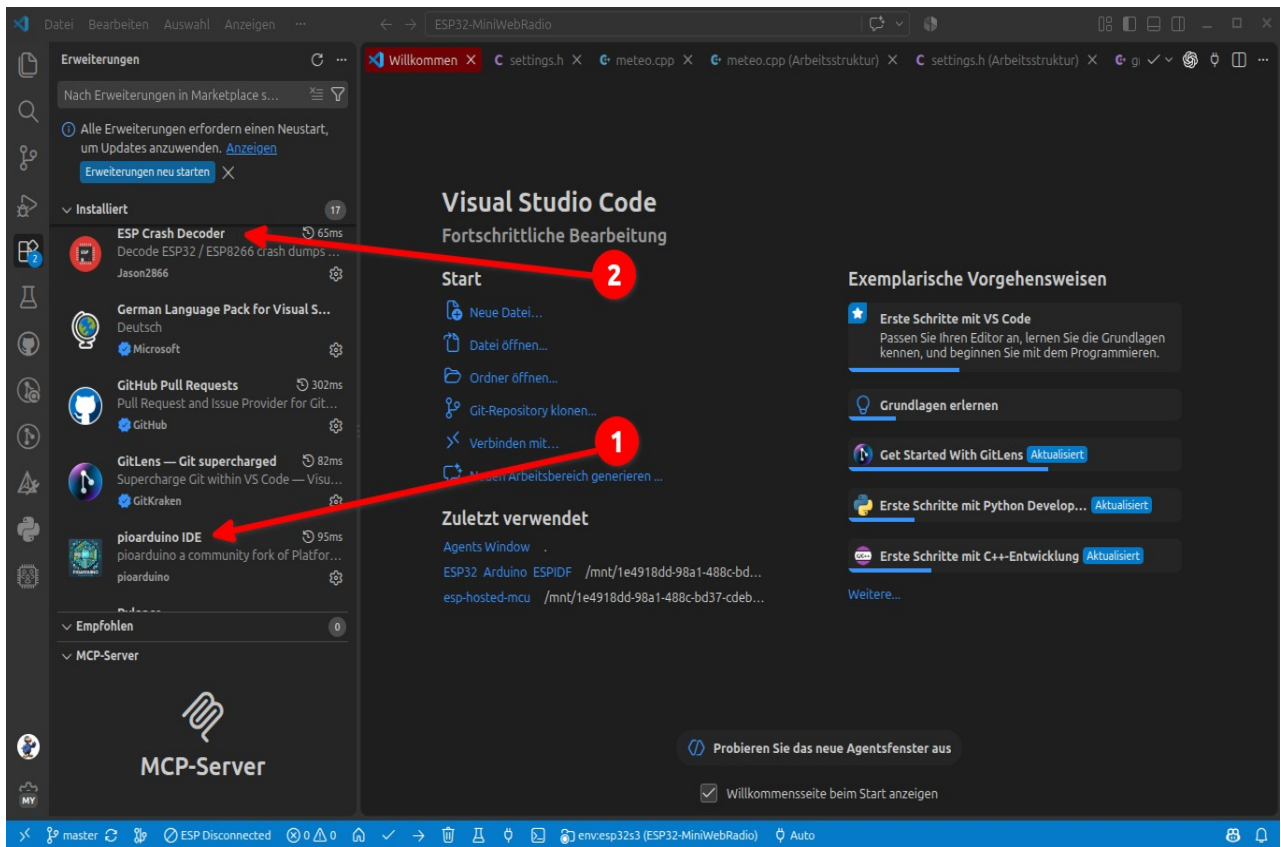


- 3) select **Clone Git Project**

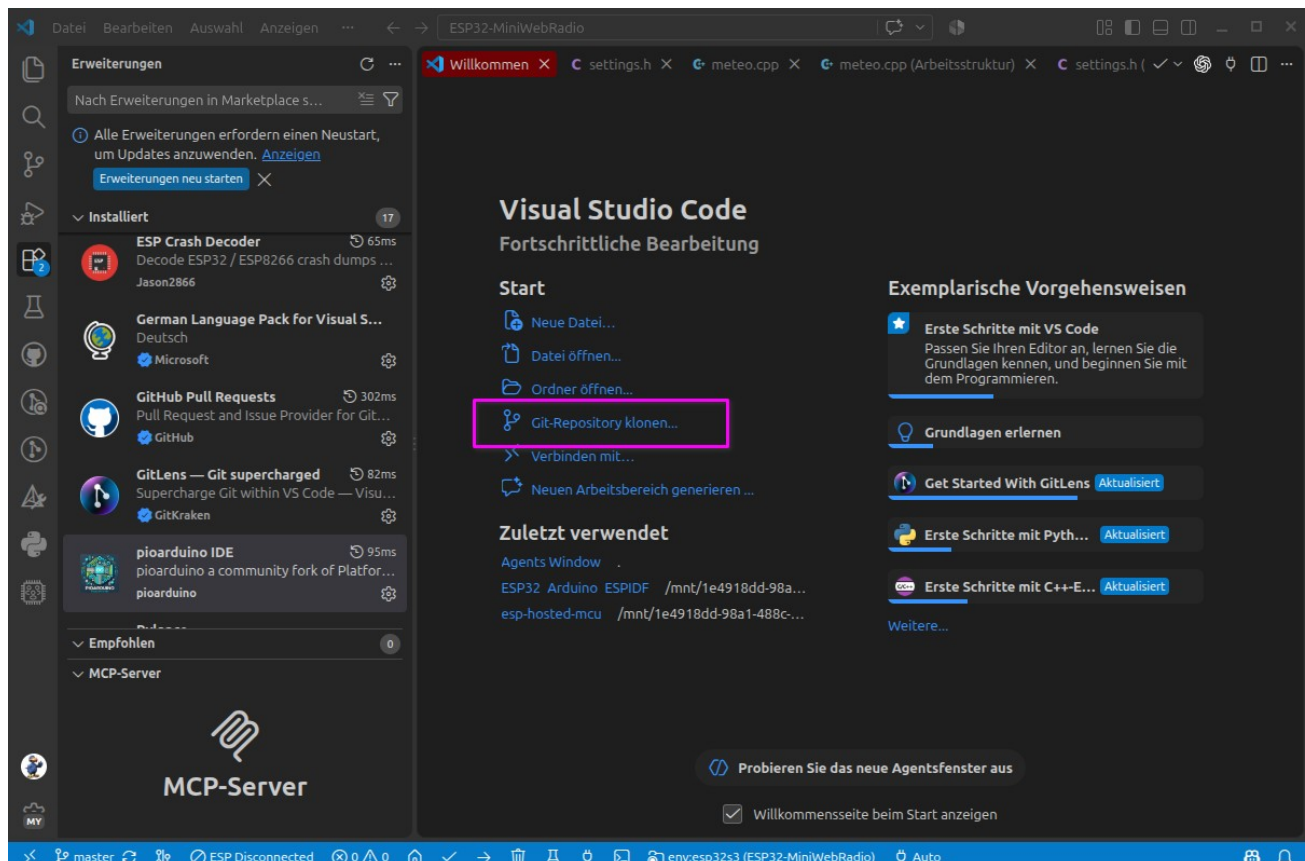


4) goto Github, press **Code** and copy the URL

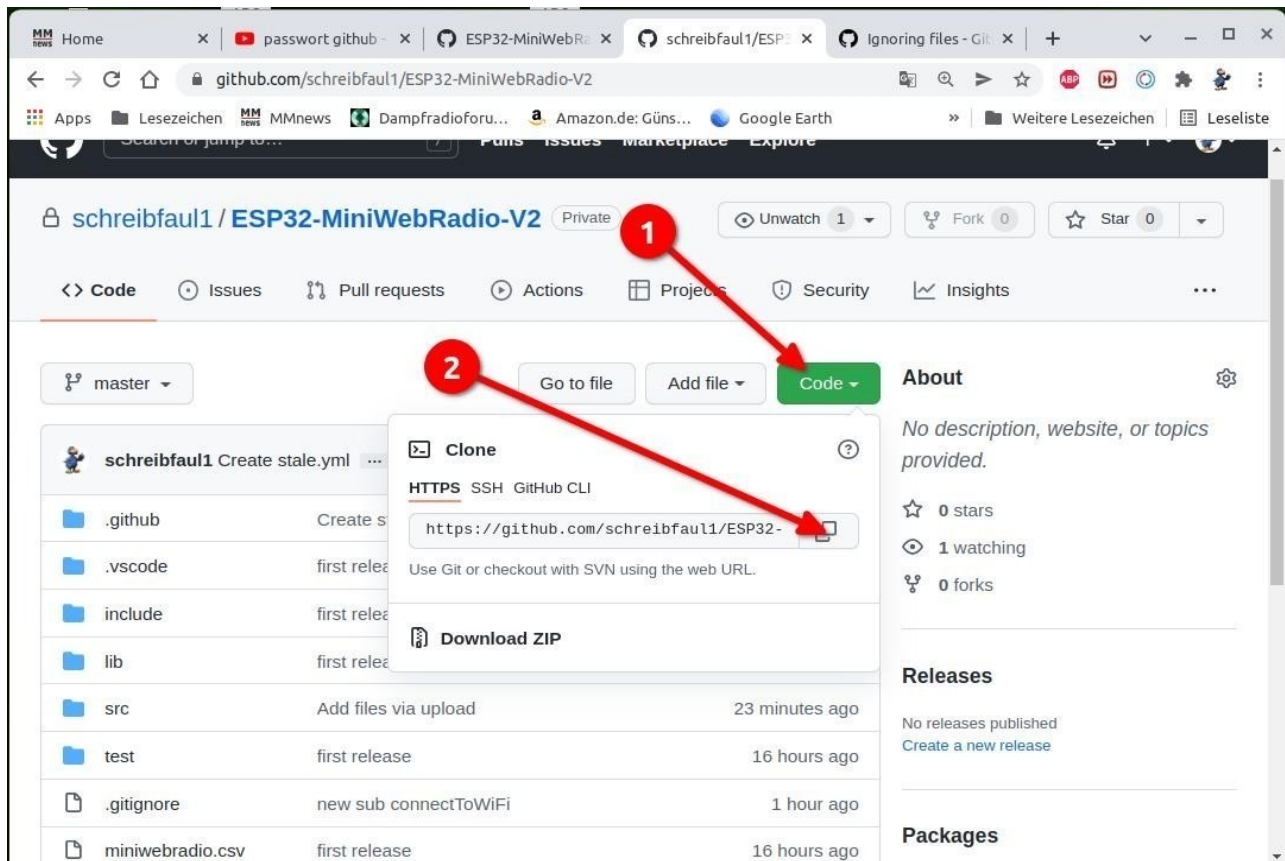


5) paste the URL in PlatformIO, press ENTER and choose a folder on your PC

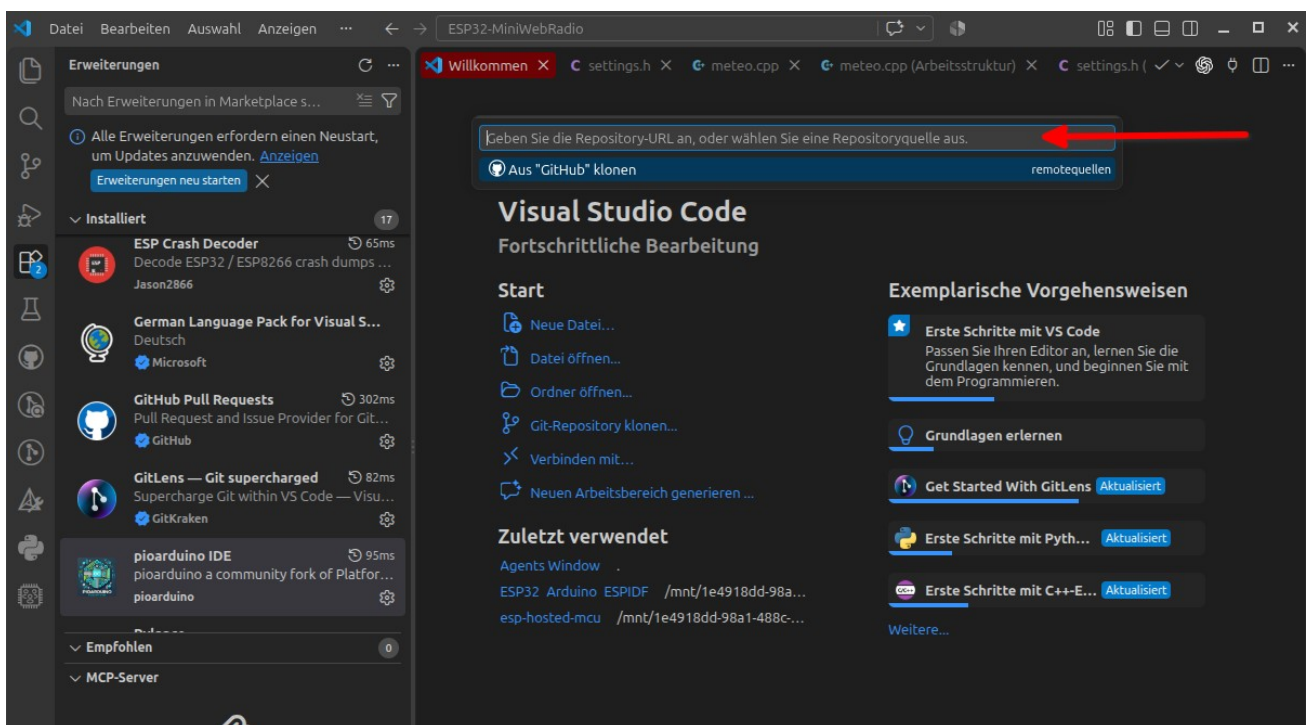


6) select the used chip model, ESP32-S3 or ESP32-P4

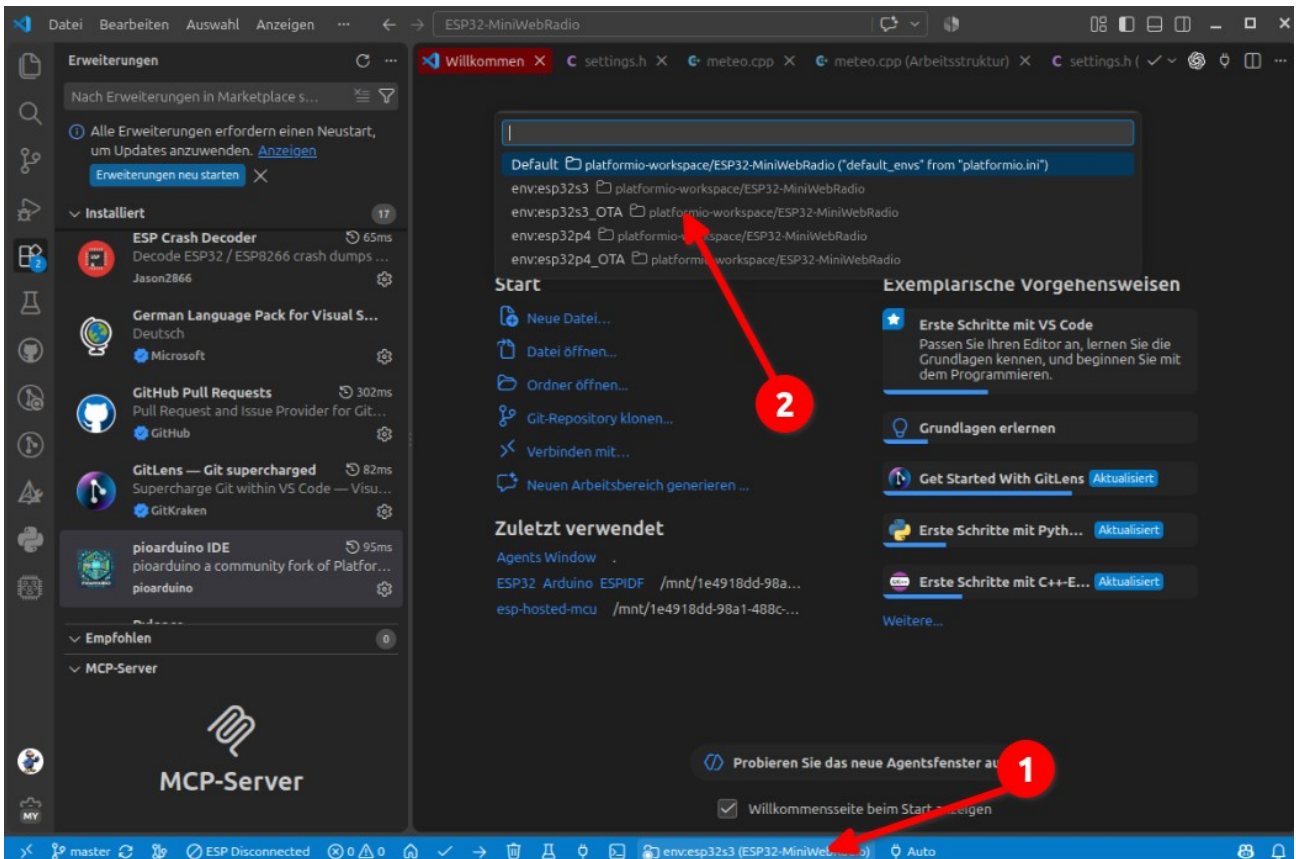

7) select the appropriate board and partition in platform.ini, either for the ESP32-S3 or ESP32-P4

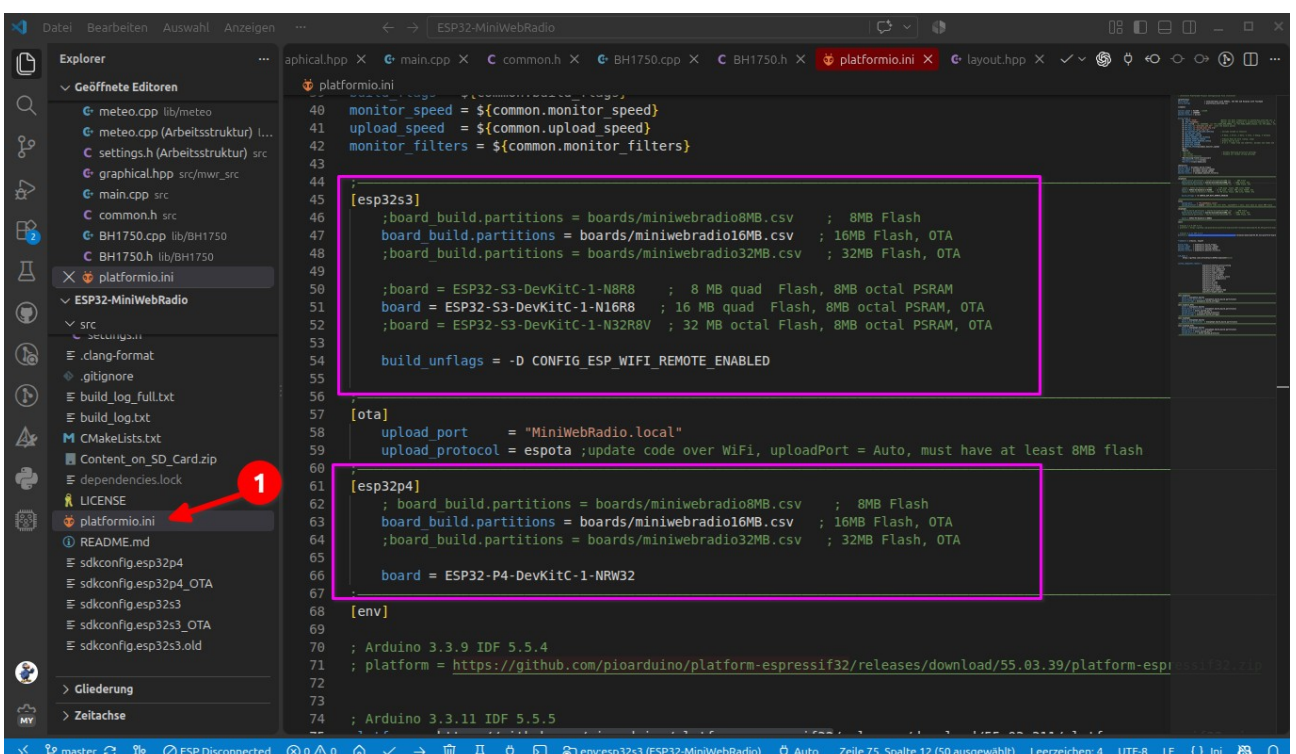


8) In settings.h, predefined boards can be selected. Alternatively, you can create your own.

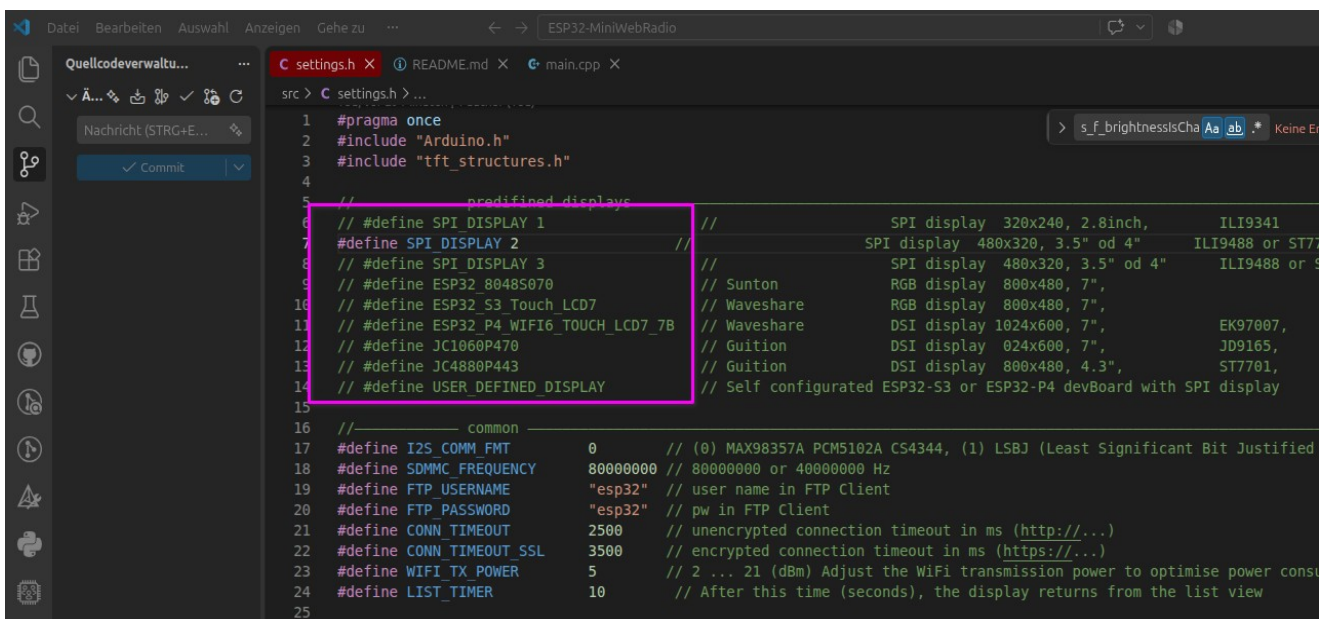

The screenshot shows a code editor with the file `settings.h` open. The code defines various hardware configurations for an ESP32. A section titled `// predefined displays` is highlighted with a pink box. This section contains several `#define` statements for different display modules and their pin configurations. Below this, there is a `// common` section with definitions for I2S, SDMMC, FTP, and connection timeouts.

```
1  #pragma once
2  #include "Arduino.h"
3  #include "tft_structures.h"
4
5  // predefined displays
6  // #define SPI_DISPLAY 1 // SPI display 320x240, 2.8inch, ILI9341
7  #define SPI_DISPLAY 2 // SPI display 480x320, 3.5" od 4" ILI9488 or ST7789
8  // #define SPI_DISPLAY 3 // SPI display 480x320, 3.5" od 4" ILI9488 or ST7789
9  // #define ESP32_8048S070 // Sunton RGB display 800x480, 7",
10 // #define ESP32_S3_Touch_LCD7 // Waveshare RGB display 800x480, 7",
11 // #define ESP32_P4_WIFI6_TOUCH_LCD7_7B // Waveshare DSI display 1024x600, 7", EK97007,
12 // #define JC1060P470 // Guition DSI display 024x600, 7", JD9165,
13 // #define JC4880P443 // Guition DSI display 800x480, 4.3", ST7701,
14 // #define USER_DEFINED_DISPLAY // Self configured ESP32-S3 or ESP32-P4 devBoard with SPI display
15
16 // common
17 #define I2S_COMM_FMT 0 // (0) MAX98357A PCM5102A CS4344, (1) LSBJ (Least Significant Bit Justified)
18 #define SDMMC_FREQUENCY 80000000 // 80000000 or 40000000 Hz
19 #define FTP_USERNAME "esp32" // user name in FTP Client
20 #define FTP_PASSWORD "esp32" // pw in FTP Client
21 #define CONN_TIMEOUT 2500 // unencrypted connection timeout in ms (http://...)
22 #define CONN_TIMEOUT_SSL 3500 // encrypted connection timeout in ms (https://...)
23 #define WIFI_TX_POWER 5 // 2 ... 21 (dBm) Adjust the WiFi transmission power to optimise power consumption
24 #define LIST_TIMER 10 // After this time (seconds), the display returns from the list view
25
```

9) back to Github download the Content_On_SD_Card.zip file and extract to SD

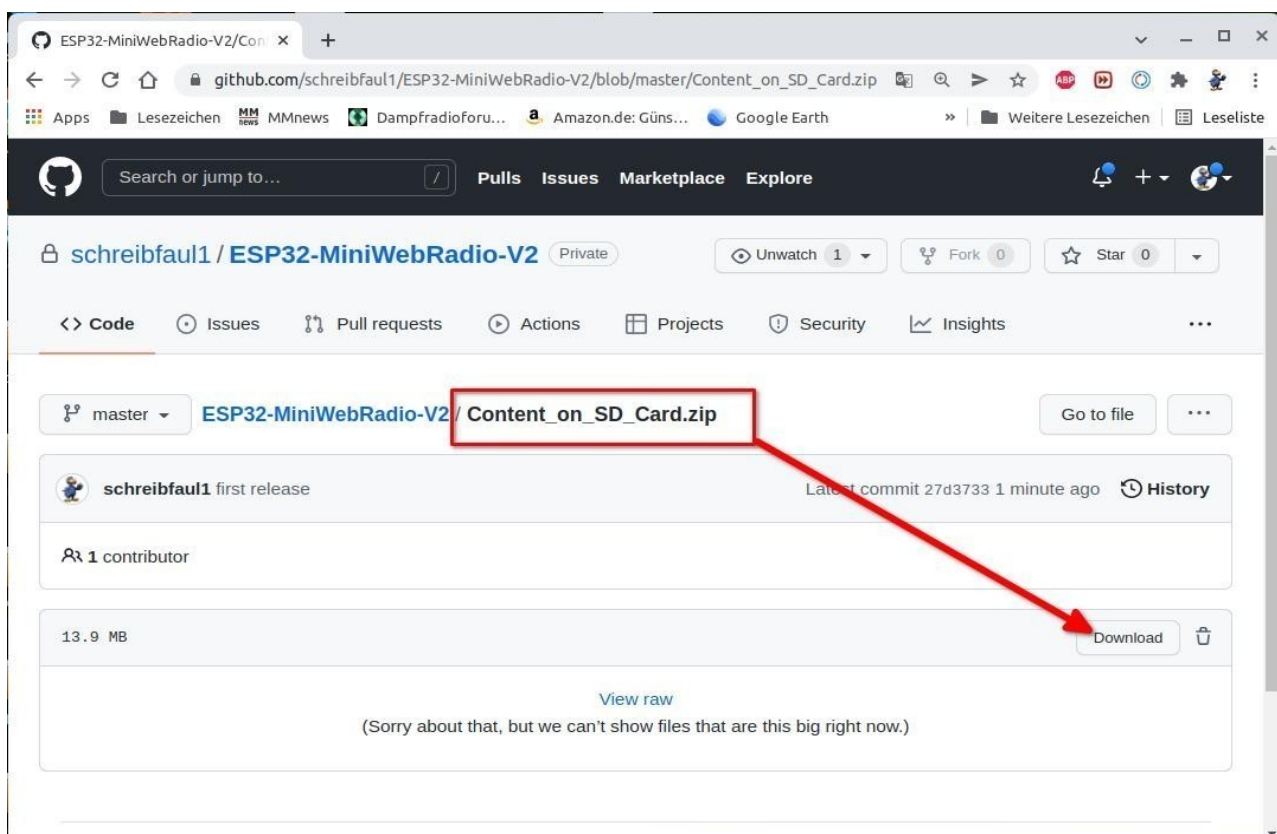

10) Connect the ESP32 to USB, press build and then upload, That's all.

