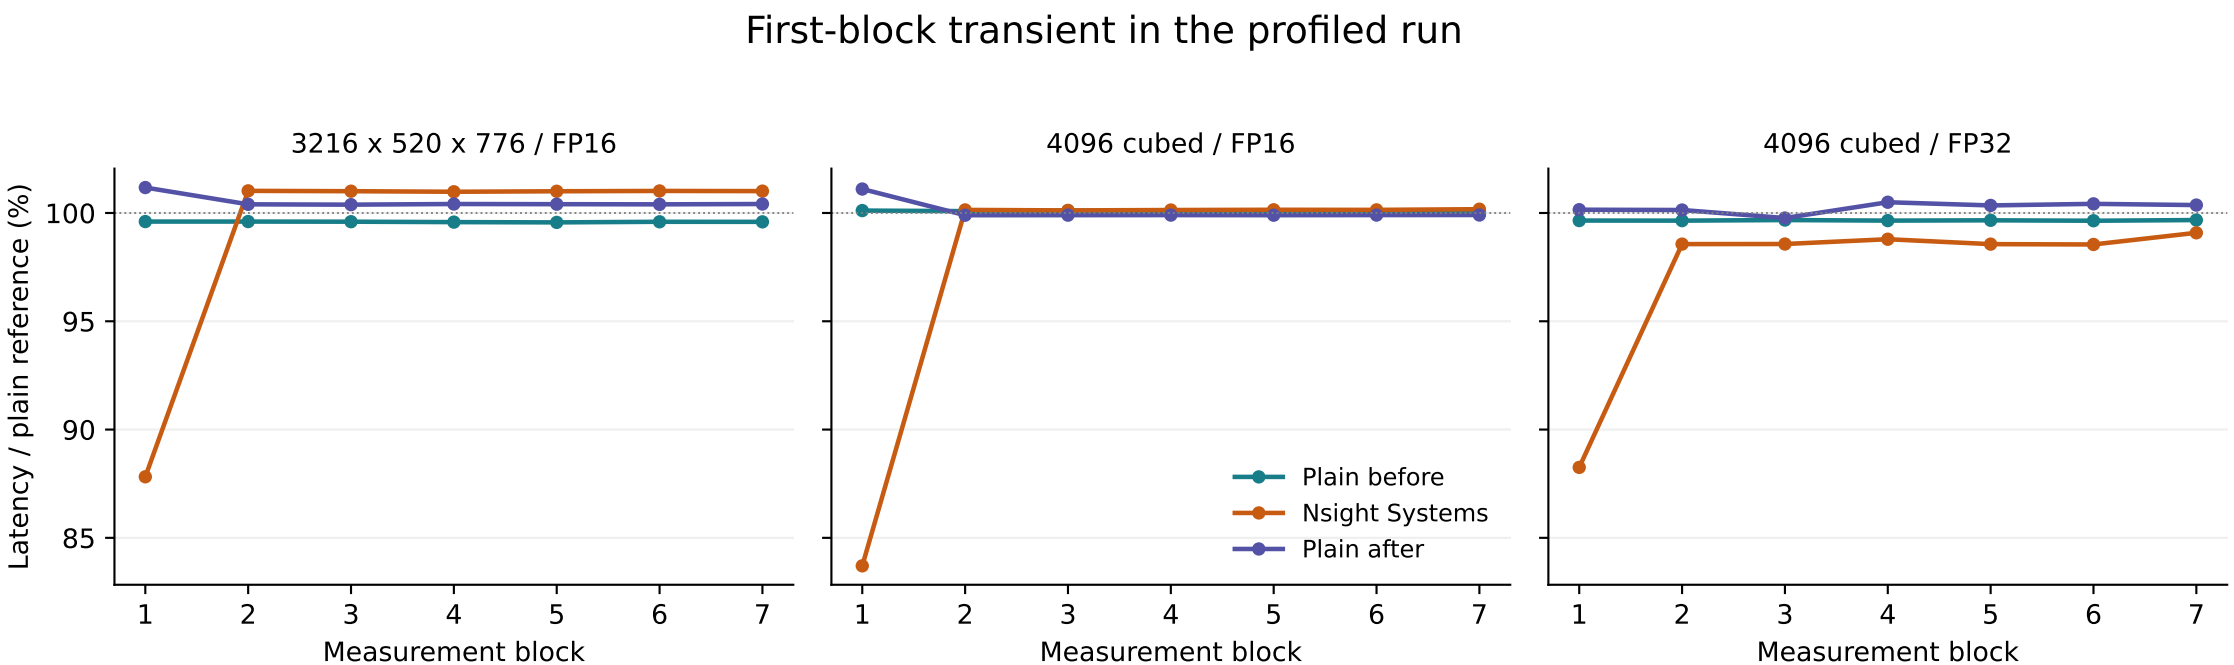
First-block transient in the profiled run
3216 x 520 x 776 / FP16
4096 cubed / FP16
4096 cubed / FP32
Latency / plain reference (%)
100
95
90
85
1
2
3
4
5
6
7
Measurement block
Plain before
Nsight Systems
Plain after
Reference: mean of the two plain-run medians. All blocks retained; three separate sessions.