

正点原子STM32MP2 buildroot

支持正点原子硬件

- ☒ STM32MP257 1 + 8版本
- ☐ STM32MP257 2 + 16版本

下载源代码

```
git clone -b st/2025.02.5 https://github.com/bootlin/buildroot.git

git clone https://github.com/AcSully/buildroot-external-st.git

cd buildroot


BR2_DL_DIR="/home/niuke/Downloads/buildroot_d1"

make BR2_EXTERNAL=../buildroot-external-st stm32mp257DAK_core_defconfig

make -j4
```

烧录镜像

打开STM32CubeMX，选择output/images/flash_full.tsv，烧录完成后，启动方式修改成EMMC启动。

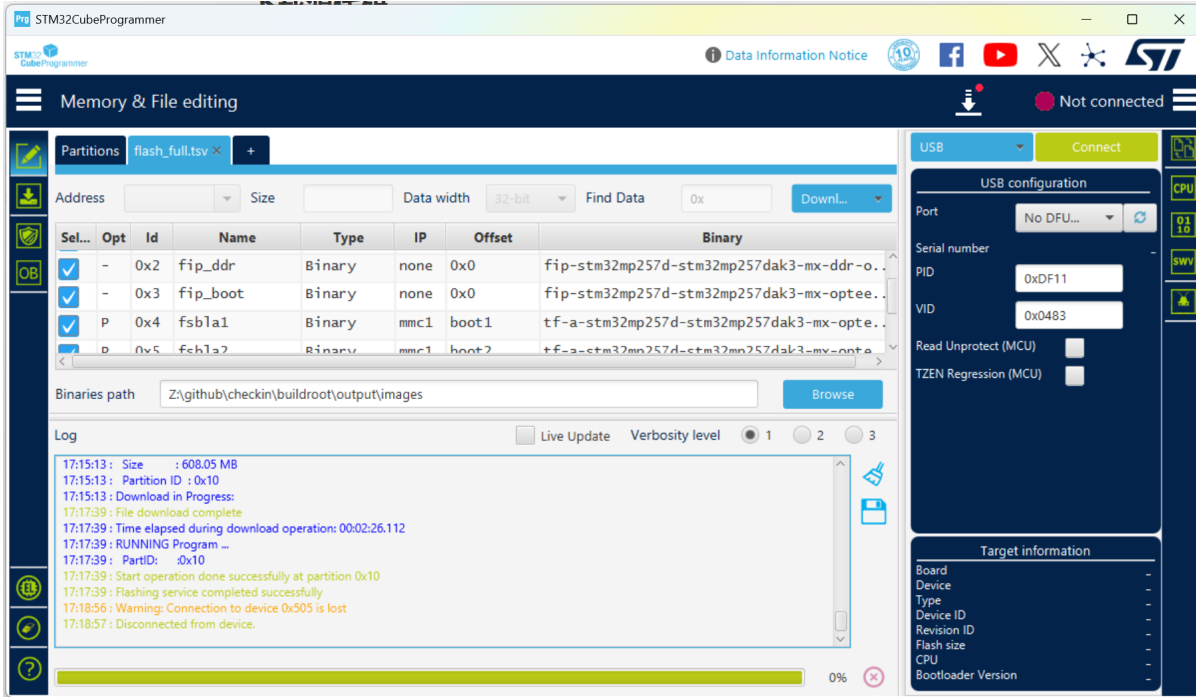

验证

接串口后输入进入系统

username: root

password: root

```
[ 6.280896] stm32-dwmac 482d0000.eth2: DWMAC4/5
[ 6.285571] stm32-dwmac 482d0000.eth2: DMA HW capability register supported
[ 6.294284] stm32-dwmac 482d0000.eth2: RX Checksum Offload Engine supported
[ 6.301426] stm32-dwmac 482d0000.eth2: TX Checksum insertion supported
[ 6.308094] stm32-dwmac 482d0000.eth2: Wake-Up On Lan supported
[ 6.312955] stm32-dwmac 482d0000.eth2: TSO supported
[ 6.320945] stm32-dwmac 482d0000.eth2: Enable RX Mitigation via HW Watchdog Timer
[ 6.330364] stm32-dwmac 482d0000.eth2: device MAC address e2:cc:80:18:1e:1a
[ 6.336573] stm32-dwmac 482d0000.eth2: Enabled L3L4 Flow TC (entries=2)
[ 6.338457] stm32-dwmac 482d0000.eth2: Enabled RFS Flow TC (entries=10)
[ 6.348041] stm32-dwmac 482d0000.eth2: TSO feature enabled
[ 6.350563] stm32-dwmac 482d0000.eth2: Using 32/32 bits DMA host/device width
[ 6.606651] [drm] Initialized stm 1.0.0 20170330 for 48010000.display-controller on minor 0
[ 6.945635] Bluetooth: Core ver 2.22
[ 6.946068] NET: Registered PF_BLUETOOTH protocol family
[ 6.949100] Bluetooth: HCI device and connection manager initialized
[ 6.955456] Bluetooth: HCI socket layer initialized
[ 6.960254] Bluetooth: L2CAP socket layer initialized
[ 6.965279] Bluetooth: SCO socket layer initialized
[ 7.007488] usbcore: registered new interface driver btusb
[ 7.016618] Bluetooth: hci0: RTL: examining hci_ver=0b hci_rev=000f lmp_ver=0b lmp_subver=8723
done
Starting system message bus: done
Starting tee-supplciant: Using device /dev/teepriv0.
OK
Starting network: [ 7.227636] Bluetooth: hci0: RTL: examining hci_ver=0b hci_rev=000f lmp_ver=0b lmp_subv
[ 7.230928] Bluetooth: hci0: RTL: unknown IC info, lmp subver 8723, hci rev 000f, hci ver 000b
[ 7.239497] Bluetooth: hci0: RTL: assuming no firmware upload needed
OK
[ 7.328581] Bluetooth: hci0: Failed to read codec capabilities (-22)
Starting crond: OK
No persistent location to store SSH host keys. New keys will be
generated at each boot. Are you sure this is what you want to do?
Starting dropbear sshd: [ 7.499487] NET: Registered PF_INET6 protocol family
[ 7.502416] Segment Routing with IPv6
[ 7.502634] In-situ OAM (IOAM) with IPv6
OK
[ 8.353971] fusb302 1-0022: PD disabled
rauc status: marked slot fip.0 as good

Welcome to Buildroot
buildroot login:
Welcome to Buildroot
buildroot login: root
Password:
# [ 17.126654] platform 1.mailbox-client: deferred probe pending
```

QT测试

```
/usr/lib/qt/examples/opengl/hello12/hello12
```

rauc status: marked slot fip.0 as good

Welcome to Buildroot

buildroot login:

Welcome to Buildroot

buildroot login: root

Password:

[17.126654] platform 1.mailbox-client: deferred probe pending

[33.764372] vddio3: disabling

[33.764527] vddio4: disabling

[33.764822] vdda18adc: disabling

/usr/lib/qt/examples/opengl/helloogl2/helloogl2

Failed to move cursor on screen DSI1: -14

Failed to move cursor on screen DSI1: -14

qt.qpa.input: xkbcommon not available, not performing key mapping

  ST account  ST password  tf-a  optee  U-boot  linux  set ip  tftp Image.gz  tftp dtb  booti  booti_new

