

Autonomous Ship Collision Avoidance Navigation Concepts, Technologies and Techniques

Thomas Statheros¹, Gareth Howells¹ and Klaus McDonald-Maier²

¹(*University of Kent, Department of Electronics*)

²(*University of Essex, Department of Computing and Electronic Systems*)
(Email: t.statheros@kent.ac.uk)

This study provides both a spherical understanding about autonomous ship navigation for collision avoidance (CA) and a theoretical background of the reviewed work. Additionally, the human cognitive abilities and the collision avoidance regulations (COLREGs) for ship navigation are examined together with water based collision avoidance algorithms. The requirements for autonomous ship navigation are addressed in conjunction with the factors influencing ship collision avoidance. Humans are able to appreciate these factors and also perform ship navigation at a satisfactory level, but their critical decisions are highly subjective and can lead to error and potentially, to ship collision. The research for autonomous ship navigation may be grouped into the classical and soft computing based categories. Classical techniques are based on mathematical models and algorithms while soft-computing techniques are based on Artificial Intelligence (AI). The areas of AI for autonomous ship collision avoidance are examined in this paper are evolutionary algorithms, fuzzy logic, expert systems, and neural networks (NN), as well as a combination of them (hybrid system).

KEY WORDS

1. Autonomous Ship. 2. Collision avoidance. 3. Navigation factors. 4. COLREGs.

1. INTRODUCTION. Over the centuries, ship navigation has traditionally been performed entirely by human endeavour. Today, however, maritime technology comes to the aid of the ship piloting crew in minimising navigational errors. In the near future, these technologies will form an intelligent navigation system. Such a system will be able to guide its operator in determining the near-optimum trajectory for ship collision avoidance. In the long run, humans will design trustworthy “intelligent” machines to navigate ships within waterways and ports without human supervision.

Autonomous ship navigation can be divided into two major areas of research: collision avoidance (CA) and track-keeping (TK). This study focuses on the former, collision avoidance. Nevertheless, it also compares the human’s cognitive abilities for CA with different techniques for autonomous CA algorithms. Humans perform navigation to a satisfactory level, but their critical decisions are highly subjective.

This can lead to error and potentially, to collision. To limit the human subjective factor, the International Marine Organization (IMO) has defined the international rules for collision avoidance (COLREGs) (Wilson et al., 2003, Lee and Kim, 2004, Salinas, 2002, Kemp, 2002, Belcher, 2002). The effectiveness of COLREGs in human ship navigation is also investigated within this study. In summary therefore, the intention of this study is to provide both a spherical understanding regarding autonomous ship navigation for CA and a theoretical background of the reviewed work. As a result, both researchers and practitioners may broaden their views in this area.

The work of most researchers in the area of autonomous navigation (water or land based) can be grouped into the following three categories:

- *Mathematical models and algorithms.* The mathematical models refer to the precise mathematical description of a ships' dynamics and its neighbouring environment. The mathematical algorithms use a sequence of strict definitions to solve the collision problem. In other words, these mathematical algorithms are not intelligent algorithms but they can be described as measuring algorithms to solve the collision avoidance problem in autonomous ship navigation.
- *Soft computing – Evolutionary algorithms, neural networks and fuzzy logic.* The part of artificial intelligence that consists mainly of neural networks (NN) (Braspenning et al., 1995, Anderson, 1995, Patterson, 1996), fuzzy logic (Zadeh, 1965, Lee et al., 2004), evolutionary algorithms (Back, 1996, Lin et al., 1994, Jing et al., 1997) and expert-systems (Efstathiou, 1988). Neural networks are famous for their unique learning capabilities. Fuzzy logic can simplify complex computations due to its high mathematical abstraction. Evolutionary algorithms approach the CA problem by exploiting their optimisation capabilities. These properties can aid ship CA.
- *Hybrid autonomous navigation systems.* Hybrid autonomous navigation systems (Chohra et al., 1999, Hwang et al., 2001) propose a possible optimal combination of all, or a subset of the above methods for collision free ship navigation.

It is worth noting that COLREGs have been applied in most reviewed research work. Further, most of the papers commonly use the following terminology:

- *Own-ship:* the ship to be navigated,
- *Target-ship or strange-ship:* the ship to be avoided.

2. CONTRASTING HUMAN COGNITIVE ABILITIES AND INTELLIGENT ALGORITHMS FOR SHIP COLLISION AVOIDANCE. Collision avoidance is one of the major issues that mariners face. Therefore, it is not surprising that autonomous ship navigation success depends on the development of efficient real-time intelligent algorithms for collision avoidance. Most of these algorithms attempt to imitate human piloting cognitive abilities (Robert et al., 2003). To understand better the cognitive abilities of the “captain” within the ship, and their similarities or differences to the intelligent navigation algorithms, we must take into consideration all the human operations that are performed for collision avoidance purposes. These operations can be understood

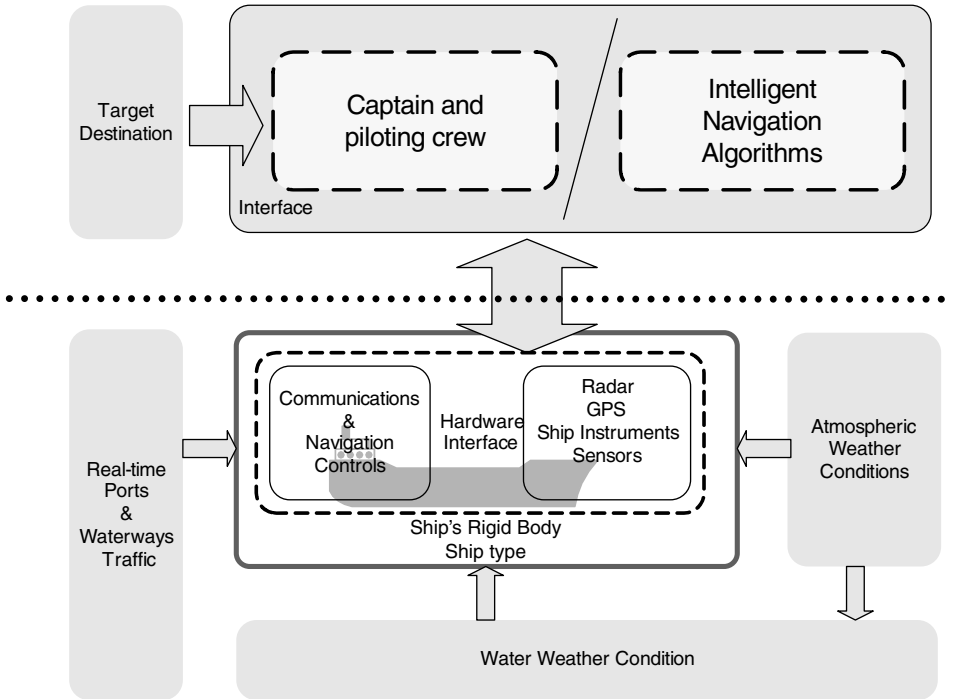


Figure 1. Ship navigation factors influence collision avoidance.

better by observing the factors that influence ship collision avoidance. These factors illustrated in Figure 1 are now introduced and discussed.

- *Ship Type*. The ship type (e.g. sail boat, speed boat, commercial ship, passenger ship etc.) defines the properties of the transport (e.g. manoeuvrability, speed, pay-load, weather conditions tolerance etc.) within the water medium. Each type of ship employs different kinds of evasive manoeuvres for collision avoidance, since speed and agility can differ significantly from one ship type to another. For each ship type, the captain and crew have special training. Then again, the CA autonomous navigation algorithms “understand” ship type as “ship dynamic” or “ship mathematical model” (e.g. (Lisowski, 1985, Browning, 1991, Yavin et al., 1997, Abril et al., 1997)). These models provide a prediction of ship behaviour (based on inertial and fluid mechanics rules) but sometimes are very simplistic producing erroneous predictions, or very complex to operate in real-time.
- *Traffic Categories*. All forms of sea traffic, (e.g. a vessel, during its journey from the port to the target destination) can collide with another vessel or an obstacle. We can divide the types of traffic into two main categories: 1) traffic within confined environment (e.g. ports or canals) (El-Kader et al., 2003) and 2) traffic in open sea waterways. In both traffic categories, we have to take into consideration the additional traffic complexity caused by the under surface environment (seabed level, wrecks and other underwater obstacles), as well as the random dynamic and static sea obstacles. Ship collision avoidance in a confined

environment is based on guidance via the communication between the local traffic control station (port or canal traffic control) and the piloting crew of the ship. On the other hand, open sea collision-free navigation is based on the communication of the captain and the encountered ship or ships, as well as the COLREGs guidelines. It is important to note that most of the intelligent algorithms for ship navigation do not communicate among themselves or with the traffic control station. Therefore, these algorithms calculate the safe and optimal trajectory for collision avoidance (Lisowski and Smierzchalski, 1994, Lisowski and Smierzchalski, 1995, Graczyk et al., 1995, Smierzchalski and Michalewicz, 2000, Smierzchalski and Michalewicz, 1998, Hong et al., 1999) relying on first, the current state (speed, direction) of each encounter vessel or ship and second, the COLREGs (Wilson et al., 2003, Lee and Kim, 2004).

- *Weather.* The weather conditions in the water and atmosphere influence every aspect of the ship navigation. The weather manipulates each type of ship differently (e.g. sailing boat or engine powered vessels). Collision avoidance in different weather conditions requires different evasive manoeuvres from the piloting crew. For example, in severe weather conditions, the ship manoeuvres have to combine safety (avoid capsizing or sinking) and collision avoidance concurrently. In most autonomous navigation algorithms, the sea weather conditions are rarely considered (Zeng, 2003).
- *Navigation Technology.* Last but not least, on-board technologies assist the ship-crew to navigate safely and efficiently. Nowadays, maritime aid technologies include Global Positioning System (GPS), Radar, Automatic Radar Plotting Aid (ARPA) (Zeng, 2003, Pedersen, 1999) and atmospheric and water weather monitoring instruments. A considerable number of the algorithms for ship autonomous collision avoidance consider that the ships are equipped with GPS and ARPA (Zeng et al., 2000, Xiao-Ming and Ito, 2001). But none of these algorithms take into consideration all the instrumentation, navigational data and communication for collision avoidance that most of the modern ships have available.

Each of the above factors and any combination of them require human operation for ship collision free navigation. These operations are subjective to each individual captain and his or her training and cognitive abilities. The clarification of the human cognitive abilities for collision avoidance is the key point of the design, of any nature of the CA intelligent algorithms. Consequently, the investigation of human cognitive demands for collision avoidance (Robert et al., 2003) is useful. Part of this investigation shows that mariners' preference of collision avoidance manoeuvres varies quite significantly (Curtis, 1978). In real-life tasks, piloting crews frequently make course changes up to 30 degrees to minimise uncertainty but there is also a significant number of occasions when piloting crews are reluctant to make large course or speed changes (Cahill, 1983), since there is a trade-off between collision avoidance and track-keeping. It is worth noting that one of the reasons for the Titanic tragedy (Lord, 1955) was the unwillingness of the piloting crew to change the ship's speed.

Ship navigators have the ability to cope with CA by planning ahead a sequence of possible evasive manoeuvres, which are updated in real-time to sustain a safe path for the ship. The sequence of these manoeuvres assembles the evasive trajectory of the

ship that can be considered as knowledge-based (Rasmussen, 1983, Stefik, 1995) and have a degree of uncertainty. This degree of uncertainty can be minimised by COLREGs. However, COLREGs define vessels' actions for collision avoidance between two ships. Therefore, even if COLREGs are in place to dictate the decisions of evasive actions, the analysis and performance of these guidelines are highly subjective (especially in many-ship encounters that incorporate uncertainty and unpredictability). These can lead to marine accidents (James, 1994, Wagenaar and Groeneweg, 1987).

Marine accidents can also be reduced by ship navigation aid technologies used by an experienced officer. Nowadays, the majority of commercial and transportation ships are equipped with Automated Radar Plotting Aid (ARPA). ARPA replaces the radar handmade plots for the graphical representation of navigational status of the tracking objects. Then again, it has been observed that mariners are more likely to overlook the COLREGs when performing "get away" manoeuvres with the support of ARPA (Lee, 1996). Subsequently, the use of ARPA can have negative results when operated by inexperienced officers, since reported data shows that 56% of major maritime collision includes violation of "the rules of the road" (COLREGs) (Cockroft, 1984, Perrow, 1984).

In addition to the above, radar navigation has its risk for collision, since the probability of the target ship reaching the future position varies (Imazu et al., 1979). To minimise this problem, and further to improve the collision avoidance of a ship, an electronic-mapping intelligent support for ship navigator system is proposed by (Dmitriev et al., 2003). A further study of how mariners have to cross alleys safely is detailed in (Gung, 1990).

Another technique to reduce the violation of collision avoidance rules by the piloting crew is by knowledge acquisition (Hammer A., and K., 1990). Knowledge acquisition refers mainly to the information of the near future (1 sec-1 min) trajectory of possible encounter to the own-ship surface vehicles. Furthermore, a quantitative risk assessment of the possible collision avoidance manoeuvre can be automatically produced by the obtained marine data (Jones, 1978). A similar study of how to provide suitable navigation information for the mariners and a risk analysis of evasive manoeuvres is proposed (Colley et al., 1984, Lamb, 1985).

In conclusion, the lawful collision free guidance of a ship requires a highly trained and experienced officer in charge (Zhao, 1996) who will minimise the human error in ship navigation by utilising appropriately ARPA, knowledge acquisition and safety domain processing intelligent support systems. On the other hand, intelligent algorithms for CA may possibly suppress the navigational error to zero, since they approach the collision avoidance problem in a more objective way than humans. Nevertheless, the real-time demands of the collision avoidance navigation, the vastly poor (compared to humans) pattern recognition performance and the one-dimensional or non-existing communication operations among these algorithms place them far below the average piloting crew collision avoidance abilities.

3. SHIP COLLISION AVOIDANCE MATHEMATICAL MODELS AND ALGORITHMS. Currently, collision avoidance problems at sea have also been addressed by mathematical models and algorithms. These models and algorithms simulate a variety of factors that influence water based collision

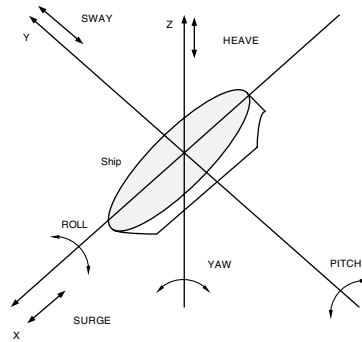


Figure 2. Six degrees of freedom.

avoidance, such as, ship's dynamics, ship's vector of motion (map location, speed and direction), ship's manoeuvres and trajectories, etc. Most of the ship's dynamics mathematical models (Browning, 1991) consider the ship to have six degrees of freedom as shown in Figure 2.

$$\begin{bmatrix} \dot{u} \\ \dot{v} \\ \dot{w} \\ \dot{p} \\ \dot{q} \\ \dot{r} \end{bmatrix} = \begin{bmatrix} 6 \times 6 \\ \text{Mass} \\ \text{Matrix} \end{bmatrix}^{-1} \times \begin{bmatrix} \text{Heave} \\ \text{Surge} \\ \text{Sway} \\ \text{Roll} \\ \text{Pitch} \\ \text{Yaw} \end{bmatrix} \quad (1)$$

Equation 1 expresses the six degrees of freedom of a ship based on Newton's second law of motion. The mathematical algorithms that generate a sequence of real-time manoeuvres can be based on static, kinetic, dynamic and matrix models (Lisowski, 1985), and various methods for solving them (Lisowski and Smierzchalski, 1995). On the other hand, some other models that are focused on the safe path obtain the safe path trajectory with different methods but with almost the same assumptions. In particular, these assumptions are: first, the potential collision occurs in the open sea (no land or water depth). Second, the target ships do not change their velocity (speed and course). Finally, the encountered ships do not communicate amongst themselves.

(Graczyk et al., 1995) proposes the use of a Potential Collision Threat Area (PCTA). This algorithm is founded on a single change of course AND/OR the speed of the own-ship. The principle of the PCTA is that the vector of the own-ship is outside the dangerous area that is defined. The above model forms a general guideline for a ship to follow the safe path but not the optimal trajectory. An optimal trajectory method proposed by (Lisowski and Smierzchalski, 1995) dictates that a series of delicate evasive manoeuvres of the own-ship has to be performed. The problem of evasive manoeuvres is modelled as a non-linear programming task. The non-linearity of the tasks depends on the kinetics of the own-ship. The overall approach of the model is that the safe course deviation is based on the nonlinear admittance restrictions. A more specific own-ship course optimisation model for a predefined marine environment can be achieved by point-mass models for ship motion (Skjong and Mjelde, 1982). An alternative model for ship get away manoeuvres in confined waters

is also the rigid-body dynamic model for ship motion (Yavin et al., 1994, Yavin et al., 1995) based on stochastic optimum control (Lewis, 1986). On the other hand, a specialised model for collision free overtaking is proposed (Curtis, 1986).

More general methods for collision avoidance include the modelling of the own-ship and its immediate environment (Burns et al., 1988). For example, (Yavin et al., 1997) proposes a tanker realistic model for collision avoidance manoeuvres between strange-ships and other offshore installations and obstacles. The collision avoidance problem can be seen from a different angle, like the Line of Sight Counteraction Navigation (LOSCAN) algorithm (Wilson et al., 2003) in which the problem of two ship encounters is solved by reversing the idea of a traditional missile proportional navigation, recognising that the target is to avoid the strange-ship. The main concept of the algorithm is to generate acceleration commands in order to increase the misalignment between the ships relative velocity and the line-of-sight.

From the above, we can categorise the mathematical models and algorithms for collision avoidance into three main categories:

- Firstly, the mathematical models that simulate ship dynamics.
- Secondly, the multi-ship collision avoidance algorithms that optimise the ships trajectory for CA.
- Finally, the real-time collision avoidance algorithms.

The last category is not based on a predefined trajectory generation as happens in the second category. Both the second and third categories can use the first (ship dynamics) to obtain more accurate collision avoidance results.

4. SOFT COMPUTING TECHNIQUES FOR SHIP COLLISION AVOIDANCE.

4.1. *Hybrid Systems.* Ships form a non-linear and ill-defined system. This means that ships and their immediate environments constitute an extremely complex system to be described in terms of precise mathematical models. Even if we have precise mathematical models for an autonomous system, the time for the decision making of the system will potentially not be reasonable for a real-time application under, for example, severe weather and navigation conditions. For the above reasons, a fuzzy approach (Zadeh, 1965) to navigational systems has been considered. However, sometimes fuzzy logic itself is insufficient, so neuro-fuzzy or fuzzy hybrid expert-systems come to complete the picture of the autonomous ship navigation challenge. A general explanation of fuzzy logic expert-systems and rule-based control is presented in (Efsthathiou, 1988).

Neural networks (Khanna, 1990, Anderson, 1995) have succeeded in many applications (Patterson, 1996), including 2 dimensional robot navigation (Xianyi, 1999), with their distinct ability to learn. In addition, NN with the aid of fuzzy logic can form neuro-fuzzy systems. This combination of neural networks and fuzzy systems is proposed by (Harris et al., 1999). This intelligent guidance system is based on the introduction of neuro-fuzzy networks multi-step ahead predictor for ship obstacle avoidance. The approach is generic, includes the line of sight concept and its use can be extended to aircraft and missile guidance problems where the dynamics change significantly and unpredictably. After all, a data-fusion algorithm generates the desired waypoints of the own-ship route.

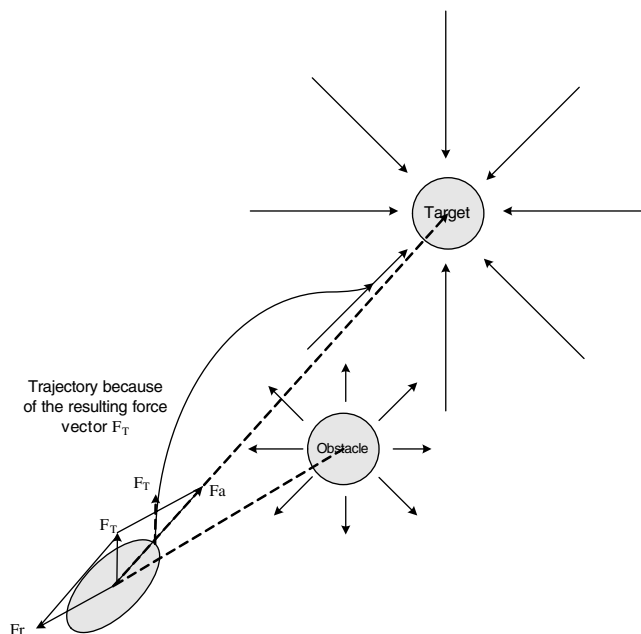


Figure 3. VFF general concept illustration.

Going further to more complex hybrid systems for ship autonomous navigation, it is necessary to introduce the term Virtual Field Force (VFF) that originates from mobile robots research (Borenstein and Koren, 1989) and is based on the concept of “artificial potential field” (Khatib, 1985). The general concept of the VFF is illustrated in Figure 3 where VFF related forces are illustrated. \vec{F}_a is the vector of the force between the ship and the desired waypoint. \vec{F}_r is the vector of the force between the obstacle and the ship. The resultant force \vec{F}_T from the above two forces is the direction of the ship for obstacle avoidance. An example of VFF utilisation in conjunction with evolutionary programming and neural networks for mobile robots is proposed by (Im and Oh, 2000). In ship autonomous navigation, (Lee et al., 2004) introduces a fuzzy logic autonomous navigation algorithm based on VFF, which satisfies COLREGs. For the purpose of autonomous ship navigation, a Modified VFF is used. This method is suitable for both track-keeping and collision avoidance. Furthermore, the algorithm has the ability to handle an immediate static and dynamic environment. From Figure 3, we can see the VFF concept of two forces at any given point in time. It is apparent that the VFF concept cannot provide a track-keeping capability. The modified algorithm provides true track-keeping as well as collision avoidance in static and dynamic ship environment within COLREGs guideline. This is achieved by the addition of a perpendicular force \vec{F}_p to the desired course as shown in Figure 4.

Another category of hybrid systems for collision avoidance is proposed by (Lee and Kim, 2004). This technique is based on heuristic search reinforced by fuzzy relational products (Bandler and Kohout, 1980) and COLREGs. Generally, COLREGs define a guideline for collision avoidance between two encounter ships. On the other hand, the applications utilising the heuristic search technique can

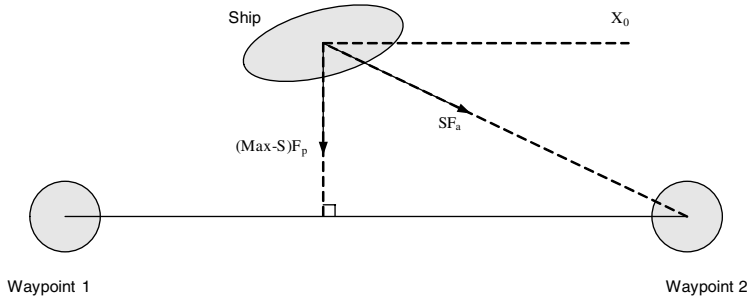


Figure 4. Modified VFF with the addition of \vec{F}_p force vector.

cope with many-ship encounters, but at the same time they introduce an inclination to violate COLREGs. The inclination of COLREGs to be violated in a multi-ship environment can be minimised by the method of (Lee and Kim, 2004).

Finally, a hybrid system for collision avoidance and track-keeping is proposed by (Hwang et al., 2001). These systems combine fuzzy logic, expert systems and state space H_∞ (Hwang et al., 2001). The collision avoidance is carried out by the fuzzy expert system. The system utilises a knowledge-base of facts and rules with the aid of an inference engine. The inference engine is also responsible for the simulation of the expert system decisions for ship collision avoidance. Finally, a robust state space H_∞ controller guides the autopilot safely on the route that is predetermined by the fuzzy-expert system. The main purpose of the state space H_∞ control is to keep the closed-loop system stable by the use of an optimal control law. This control law can be defined by a transfer function involving exogenous inputs (weather, seaways traffic) with endogenous ship control actions maintaining the control actions minimal. At the end of the algorithm's routines, the H_∞ autopilot system materialises the avoidance action dictated by the fuzzy collision avoidance expert system under the worst exogenous systems inputs.

4.2. Evolutionary Algorithms. An alternative technique for collision avoidance involves the utilisation of evolutionary techniques in the framework of *evolutionary computation* (Vonk et al., 1997), which are a collection of stochastic optimisation algorithms loosely based on the biological evolutionary theory of Charles Darwin (Glick and Kohn, 1996). Evolutionary computation is in general an optimisation tool. More specifically, it is a search strategy for an infeasible large search space. In addition to the above, evolutionary algorithms have proved their potential for solving complex real world (Back, 1996, Zeng, 2003) problems. The underlying generic principle of these techniques is based upon the "survival of the fittest". For instance, in collision avoidance, they maintain a population of assign paths, and through a process of variation and selection, find a near-optimum solution. Finally, they also constitute an interesting category of heuristic search (Stewart et al., 1994), which is also to aid the autonomous ship navigation. We define heuristic search as the technique that does not follow a strict algorithmic solution to a problem. More specifically, heuristics are a group of effective rules guiding a system to perform searches in a problem space.

The category of GAs has been widely employed successfully in mobile robots (Lin et al., 1994) where ship collision free navigation is analogous to the similar problem of

safe navigation of a mobile robot. Therefore, the evolutionary method named evolutionary planner navigator (EP/N) system originally designed for mobile robot evasive steering and path generation in predefined environment presented in (Jing et al., 1997) is potentially useful for ship navigation and it has been further modified for ship encounter free navigation in (Smierzchalski and Michalewicz, 2000). This study is named θ EP/N++ and it adds the concept of time to the system. The element of time allows for evaluation of the system's behaviour and performance under real-time constraints (e.g. moving obstacles). Finally, it introduces own-ship variable speed, so a safe-path of a ship can be tracked in dynamic or static environment. All of the above variables can be controlled and optimised by the aid of evolutionary theory by using genes to form chromosomes. Each gene contains information such as the ship coordinates. In the above study, each chromosome has a variable-length sequence of genes. These genes specify coordinates (x_i, y_i) of the turning points, speed of the ship and interconnections between the genes within the same chromosome. A more simplistic model of collision avoidance based on a single gene approach is proposed by (Ito et al., 1999). This gene contains only the geographical position of the ship (latitude, longitude). On the other hand, a more realistic genetic algorithm for ship collision avoidance is proposed by (Zeng, 2003). This genetic algorithm coding introduces a gene with additional information to that in the conventional coding. These genes include, additionally to the position and speed of own-ship described in the above, the weather conditions, which are defined as "noise" (wind, wave and sea current). The mathematical representation of every chromosome is shown in equation 2.

$$x^n = (s_1^n, s_2^n, \dots, s_m^n), \quad 1 < m \leq k \quad (2)$$

Where: x is the chromosome, s is the gene, and k is the length of the chromosome (number of genes in one chromosome). In this system, the chromosome length is also a variable quantity and it is strongly dependant on the navigation conditions, (weather or traffic density). In other words, when no ship or obstacle is in the own-ship vicinity, the chromosome for the ship's safe trajectory contains only two genes, which is a straight line between the planned route waypoints. On the other hand, when additional obstacles that pose a potential threat of collision are added to the ship's neighbourhood, the enhanced system is modelled by the introduction of two genes in the variable length chromosome. A representation of the chromosomes of the study (Zeng, 2003) is shown in Figure 5. The black genes represent the current and the target ship location. They are parts of the planned route. The white genes are randomly selected within the boundaries between the two black ones.

5. CONCLUSIONS. Ship collision avoidance is a complex multi-task problem. The degree of complexity depends on the state of exogenous (weather and waterways traffic density) and endogenous (ship type, onboard technologies, etc.) navigation influencing factors. In comparison to "intelligent" machines, humans navigate ships satisfactorily. The degree of human navigation ability depends on both the level of experience and the psychological status of each individual. On the other hand, human beings are highly subjective, and this can lead to accidents. The subjective nature of humans is sometimes reinforced by the ship intelligent support systems (GPS, Radars, ARPA, etc.) They provide the piloting crew with additional

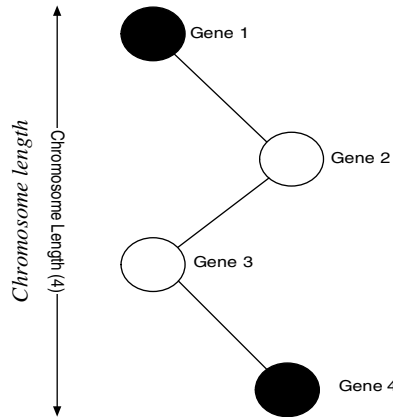


Figure 5. Chromosome structure of Zheng study.

navigation information that can reduce the sense of collision danger and lead to COLREGs violation. The international rules for collision avoidance at sea (COLREGs) have been laid down to minimise the subjective nature of humans. Even if COLREGs are fully defined, the human interpretation of them is still subjective since ship navigation manoeuvres are performed in real-time, and sometimes, under demanding exogenous inputs.

The subjective nature of humans can only be removed from ship navigation when humans are no longer responsible for ship navigation. A variety of experimental intelligent ship navigation systems have been briefly explained in this paper.

- Ship collision avoidance mathematical models are effective when the exogenous inputs are not extreme. In case of extreme exogenous input the ship dynamics introduce non-linearity, which also introduces computation complexity. This complexity eliminates the real-time capability of the ship autonomous navigation system.
- The effectiveness of evolutionary algorithms for ship autonomous navigation depends on the optimisation method that is followed. The optimisation method depends on the fitness function (Back, 1996). The fitness function is fixed for the whole algorithm and sometimes is not sufficient for ship navigation under all different exogenous conditions. This can also lead to inefficient or random system performance.
- A combination of technologies such as neural networks, fuzzy logic, expert-system and mathematical algorithm can form a ship autonomous navigation system. These systems aim to use the advantages inherent within each component technology.
- Hybrid systems look very promising. But, they require a high level of intelligence to harmonically merge the different AI technologies together. On the other hand, machine intelligence is not absolutely proven up against human intelligences.

In conclusion, autonomous navigation systems will be utilised in ship navigation when the machines “intelligences” have less uncertainty than that of human based navigators.

ACKNOWLEDGEMENTS

The research of the authors T. Statheros, W. G. J. Howells and K. D. McDonald-Maier is supported though the European Union ERDF Interreg IIIA initiative under the ACOS grants.

REFERENCES

- Abril, J., Salom, J. & Calvo, O. (1997) Fuzzy control of a sailboat. *International Journal Of Approximate Reasoning*, 16, 359–375.
- Anderson, J. A. (1995) *An Introduction to Neural Networks*, Cambridge, MIT Press.
- Back, T. (1996) *Evolutionary Algorithms in Theory and Practice: Evolution Strategies, Evolutionary Programming, Genetic Algorithms*, Oxford University Press.
- Bandler, W. & Kohout, L. J. (1980) Semantics Of Implication Operators And Fuzzy Relational Products. *International Journal Of Man-Machine Studies*, 12, 89–116.
- Belcher, P. (2002) A sociological interpretation of the COLREGS. *Journal Of Navigation*, 55, 213–224.
- Borenstein, J. & Koren, Y. (1989) Real-time obstacle avoidance for fast mobile robots. *Systems, Man and Cybernetics, IEEE Transactions on*, 19, 1179.
- Braspenning, P. J., Thuijsman, F. & Weijters, A. J. M. M. (1995) *Artificial Neural Networks: An introduction to ANN Theory and Practice*, Berlin, Springer.
- Browning, A. W. (1991) A Mathematical-Model To Simulate Small Boat Behavior. *Simulation*, 56, 329–336.
- Burns, R. S., Blackwell, G. & Calvert, S. (1988) An automatic guidance, navigation and collision avoidance system for ships at sea. *IEE Colloquium on Control in Marine Industry*, 3/1-3/3.
- Cahill, R. A. (1983) *Collision and their causes*, London: Fairplay.
- Chohra, A., Farah, A. & Belloucif, M. (1999) Neuro-fuzzy expert system E_S_CO_V for the obstacle avoidance behavior of intelligent autonomous vehicles. *Advanced Robotics*, 12, 629–649.
- Cockroft, A. N. (1984) Collision at Sea. *Safety at Sea*, 17–19.
- Colley, B. A., Curtis, R. G. & Stockel, C. T. (1984) A Marine Traffic Flow And Collision Avoidance Computer-Simulation. *Journal Of Navigation*, 37, 232–250.
- Curtis, R. G. (1978) Determination of mariners' reaction times. *Journal Of Navigation*, 31, 408–417.
- Curtis, R. G. (1986) A Ship Collision Model For Overtaking. *Journal Of The Operational Research Society*, 37, 397–406.
- Dmitriev, S. P., Kolesov, N. V., Osipov, A. V. & Romanycheva, G. N. (2003) System of intelligent support of a ship navigator for collision avoidance. *Journal Of Computer And Systems Sciences International*, 42, 256–263.
- EFstathiou, J. (1988) Expert systems, fuzzy logic and rule-based control explained at last. *transactions Of The Institute Of Measurement And Control? (Trans Inst MC)*, 4, 198–206.
- El-Kader, F. A., El-Soud, M. S. A., El-Serafy, K. & Hassan, E. A. (2003) An integrated navigation system for Suez Canal (SCINS). *Journal Of Navigation*, 56, 241–255.
- Glick, T. F. & Kohn, D. (1996) *Darwin on Evolution*, Indianapolis, Indiana, USA, Hackett Publishing Company, Inc.
- Graczyk, T., Jarzebski, C. A., Brebbia, C. A. & Burns, R. S. (1995) Methods to assign the safe maneuver and trajectory avoiding collision at sea. *Proc. 1st Int. Conf. Marine Technol.*, 495–502.
- Gung, W. S. (1990) The Research of Safely Coursing and Collision Avoidance between Ships in Traffic Separation Schemes under the Situation of Crossing and Overtaking. Taiwan, National Taiwan Marine University.
- Hammer, A. & K., H. (1990) Knowledge Acquisition for Collision Avoidance Maneuver by Ship handling Simulator. *International Conference on Marine Simulation and Ship Maneuverability*, 245–252.
- Harris, C. J., Hong, X. & Wilson, P. A. (1999) An intelligent guidance and control system for ship obstacle avoidance. *Proceedings Of The Institution Of Mechanical Engineers Part I- Journal Of Systems And Control Engineering*, 213, 311–320.
- Hong, X., Harris, C. J. & Wilson, P. A. (1999) Autonomous ship collision free trajectory navigation and control algorithms. 2, 923.
- Hwang, C. N., Yang, J. M. & Chiang, C. Y. (2001) The Design of Fuzzy Collision Avoidance Expert System Implemented by H-Infinity autopilot. *Journal of Marine Science and Technology*, 9, 25–37.

- Im, K.-Y. & Oh, S.-Y. (2000) An extended virtual force field based behavioral fusion with neural networks and evolutionary programming for mobile robot navigation. *Proc. of the 2000 Congress on Evolutionary Computations*, 2, 1238–1244.
- Imazu, H., Sugisaki, A. M. & Min, Q. (1979) The Possible Collision Risk in Radar Navigation. *Journal of Navigation in Japan*, 65, 75–81.
- Ito, M., Zhang, F. & Yoshida, N. (1999) Collision avoidance control of ship with genetic algorithm. *Proceedings of the IEEE International Conference on Control Applications*, 2, 1791–1796.
- James, M. K. (1994) The Timing Of Collision-Avoidance Maneuvers – Descriptive Mathematical-Models. *Journal Of Navigation*, 47, 259–272.
- Jing, X., Michalewicz, Z., Lixin, Z. & Trojanowski, K. (1997) Adaptive evolutionary planner/navigator for mobile robots. *Evolutionary Computation, IEEE Transactions*, 1, 18–28.
- Jones, K. D. (1978) Decision making when using collision avoidance system. *Journal of Navigation*, 31, 173–180.
- Kemp, J. (2002) Collision regulations – Discussion. *Journal Of Navigation*, 55, 145–146.
- Khanna, T. (1990) *Foundations of neural networks*, New York, Addison-Wesley.
- Khatib, O. (1985) Real-time obstacle avoidance for manipulators and mobile robots. 2, 500.
- Lamb, W. G. P. (1985) The Calculation Of Marine Collision Risks. *Journal Of Navigation*, 38, 365–374.
- Lee, J. D., & Sanquist, T. F. (1996) Maritime Automation. *Automation and human performance: Theory and applications*, 365–384.
- Lee, S. M., Kwon, K. Y. & Joh, J. (2004) A fuzzy logic for autonomous navigation of marine vehicles satisfying COLREG guidelines. *International Journal Of Control Automation And Systems*, 2, 171–181.
- Lee, Y. I. & Kim, Y. G. (2004) A collision avoidance system for autonomous ship using fuzzy relational products and COLREGs. *Intelligent Data Engineering And Automated Learning Ideal 2004, Proceedings*. Berlin, Springer-Verlag Berlin.
- Lewis, F. L. (1986) *Optimal Estimation: With an Introduction to Stochastic Control Theory*, John Wiley & Sons.
- Lin, H. S., J. X. & Michalewicz, Z. (1994) Evolutionary algorithm for path planning in mobile robot environment. *IEEE World Congress on Computational Intelligence., Proceedings of the First IEEE Conference*, 211–216.
- Lisowski, J. (1985) A simulation study of various approximate models of ship dynamics in collision avoidance problem. *Found. Contr. Eng.*, 10, 176–183.
- Lisowski, J. & Smierzchalski, R. (1994) Computer simulation of safe path maneuver and trajectory avoiding collision at sea. *In Joint Proceedings, Gdynia Maritime Academy Housechule Bremerhaven*.
- Lisowski, J. & Smierzchalski, R. (1995) Assigning of safe and optimal trajectory avoiding collision at sea. *in Proc. 3rd IFAC Workshop Contr. Appl. Marine Syst.*, 346–350.
- Lord, W. (1955) *A Night to Remember*, New York: Holt, Rinehart & Winston.
- Patterson, D. W. (1996) *Artificial Neural Networks: Theory and Applications*, Singapore, Prentice Hall.
- Pedersen, E. (1999) On the effect of plotting performance by the errors of pointing targets in the ARPA system. *Journal Of Navigation*, 52, 119–125.
- Perrow, C. (1984) *Normal accidents*, Basic Books.
- Rasmussen, J. (1983) Skills, Rules, And Knowledge – Signals, Signs, And Symbols, And Other Distinctions In Human-Performance Models. *Ieee Transactions On Systems Man And Cybernetics*, 13, 257–266.
- Robert, G., Hockey, J., Healey, A., Crawshaw, M., Wastell, D. G. & Sauer, J. (2003) Cognitive demands of collision avoidance in simulated ship control. *Human Factors*, 45, 252–265.
- Salinas, C. F. (2002) Collision regulations discussions. *Journal Of Navigation*, 55, 501–505.
- Skjong, R. & Mjelde, K. M. (1982) Optimal evasive manoeuvre for ship in an environment of fixed installations and other ships. *Identification and Control*, 3, 211–222.
- Smierzchalski, R. & Michalewicz, Z. (1998) Adaptive modeling of a ship trajectory in collision situations at sea. 342.
- Smierzchalski, R. & Michalewicz, Z. (2000) Modeling of ship trajectory in collision situations by an evolutionary algorithm. *Ieee Transactions On Evolutionary Computation*, 4, 227–241.
- Stefik, M. (1995) *Introduction to Knowledge Systems*, San Francisco, Morgan Kaufmann Publishers, Inc.
- Stewart, B. S., Liaw, C. F. & White, C. C. (1994) A Bibliography Of Heuristic-Search Research Through 1992. *Ieee Transactions On Systems Man And Cybernetics*, 24, 268–293.
- Vonk, E., Jain, L. C. & Johnson, R. P. (1997) *Automatic Generation of Neural Network Architecture Using Evolutionary Computation*, World Scientific.

- Wagenaar, W. A. & Groeneweg, J. (1987) Accidents At Sea – Multiple Causes And Impossible Consequences. *International Journal Of Man-Machine Studies*, 27, 587–598.
- Wilson, P. A., Harris, C. J. & Hong, X. (2003) A line of sight counteraction navigation algorithm for ship encounter collision avoidance. *Journal Of Navigation*, 56, 111–121.
- Xianyi, Y. (1999) A Neural Network Approach to Real-Time Collision-Free Navigation of 3-D.O.F. Robots in 2D. *ICRA*, 23–28.
- Xiao-Ming, Z. & Ito, M. (2001) Planning a collision avoidance model for ship using genetic algorithm. 4, 2355.
- Yavin, Y., Frangos, C., Miloh, T. & Zilman, G. (1997) Collision avoidance by a ship with a moving obstacle: Computation of feasible command strategies. *Journal Of Optimization Theory And Applications*, 93, 53–66.
- Yavin, Y., Miloh, T. & Zilman, G. (1995) Parametric Study Of Ship Maneuverability In Laterally Restricted Waters – Stochastic-Control Approach. *Journal Of Optimization Theory And Applications*, 85, 59–74.
- Yavin, Y., Zilman, G. & Miloh, T. (1994) A Feasibility Study Of Ship Maneuverability In The Vicinity Of An Obstacle – A Stochastic-Control Approach. *Computers & Mathematics With Applications*, 28, 63–76.
- Zadeh, L. A. (1965) Fuzzy Sets. *Information and Control*, 8, 338–353.
- Zeng, X. M. (2003) Evolution of the safe path for ship navigation. *Applied Artificial Intelligence*, 17, 87–104.
- Zeng, X. M., Ito, M. & Shimizu, E. (2000) Collision avoidance of moving obstacles for ship with genetic algorithm. 513.
- Zhao, J. (1996) Maritime Collision and Liability. *Dept of Ship Science*. University of Southampton.