

A Novel Class-F 2.45/5.8 GHz Dual-Band Rectifier for Wireless Power Transmission

Siyi Xiao¹, Graduate Student Member, IEEE, Changjun Liu¹, Senior Member, IEEE, Haoming He¹, Graduate Student Member, IEEE, Yuhao Feng², and Wenquan Che¹, Fellow, IEEE

Abstract—This letter proposes a high-efficiency dual-band class-F rectifier for wireless power transmission (WPT). The rectifier comprises a dual-band harmonic termination network, a dual-band matching network, a single Schottky diode, and a dc pass filter. A theoretical analysis of the harmonic termination network is performed to improve the rectifying efficiency. The network exhibits good class-F operation by controlling the second and third harmonics in dual bands. A rectifier operating at 2.45 and 5.8 GHz was designed, fabricated, and measured for validation. The measurements show maximum RF-dc conversion efficiencies of 74.9% and 61.9% with 200 and 500 Ω loads at 2.45 and 5.8 GHz, respectively. The proposed rectifier achieves dual-band harmonic control with high efficiency.

Index Terms—Class-F, dual-band, rectifier, wireless power transmission (WPT).

I. INTRODUCTION

WITH the development of wireless electronic devices, wireless power transmission (WPT) has become more prevalent [1], [2], [3]. Microwave rectifiers, which convert radio frequency (RF) power into dc power [4], [5], are essential components in WPT systems. A dual-band rectifier that can harvest microwave energy in two bands is more versatile than a single-band rectifier [6], [7], [8], [9], [10], [11], [12]. However, designing a high-efficiency dual-band rectifier is challenging since a rectifying diode's input impedance varies nonlinearly with the operating frequencies and input power levels [13], [14], [15].

Recently, research groups have developed several rectifiers with dual-band matching networks to solve those issues, such as L-type [7], [16], T-type [9], [17], multistub [18], [19], [20], LC networks, and so on. In [18], a dual-band impedance compression network was successfully proposed for the first time to reduce the variation of the input impedance of rectifiers with input power. Two sub-rectifiers with four diodes and two dc loads were used in the dual-band rectifier.

Manuscript received 18 July 2023; revised 29 August 2023 and 15 October 2023; accepted 29 October 2023. Date of publication 15 November 2023; date of current version 9 January 2024. This work was supported in part by NSFC under Grant U22A2015, Grant 62071316, and Grant 61931009. (Corresponding authors: Changjun Liu; Wenquan Che.)

Siyi Xiao, Changjun Liu, and Haoming He are with the School of Electronic and Information Engineering, Sichuan University, Chengdu 610064, China, and also with the Yibin Industrial Technology Research Institute, Sichuan University, Yibin 644001, China (e-mail: cjliu@ieee.org).

Yuhao Feng is with the School of Electronic Science and Engineering, University of Electronic Science and Technology, Chengdu 611731, China.

Wenquan Che is with the School of Electronic and Information Engineering, South China University of Technology, Guangzhou 510641, China (e-mail: eewqche@scut.edu.cn).

Color versions of one or more figures in this letter are available at <https://doi.org/10.1109/LMWT.2023.3330322>.

Digital Object Identifier 10.1109/LMWT.2023.3330322

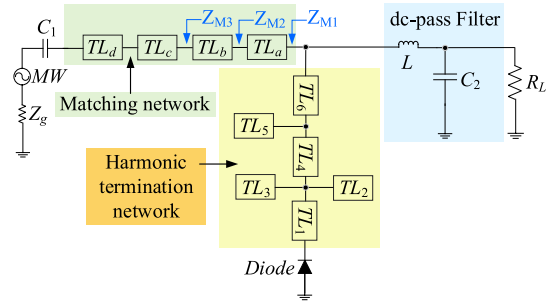


Fig. 1. Schematic of the proposed dual-band rectifier.

Moreover, several research groups successfully applied novel harmonic controlling networks to improve rectifying efficiency [21], [22]. Liu [21] used a series band-stop structure to achieve harmonic recycling, resulting in 80.9% efficiency at 2.45 GHz, which is also applied to a voltage-doubling rectifier in [22] as well. A few rectifiers, such as class-C, class-F, and class-F⁻¹ rectifiers, are equipped with typical harmonic controlling methods reported in [23], [24], [25], and [26], respectively. In [23], an analytical model was derived to calculate rectifying efficiency in class-F rectifiers based on the diode voltage and current waveforms in the time domain. Therefore, those studies focus more on single-band rectifiers and have limitations in dual-band applications.

This letter proposes a high-efficiency dual-band rectifier based on a novel class-F load. The harmonic termination network controlling the second and third harmonics of dual bands, which shapes the voltage and current waveforms into a square and half sine waves, respectively, improves the dual-band rectifying efficiency. In addition, a theoretical analysis of the network is performed, playing a crucial role in rectifier design. Using the proposed design method, a high-efficiency facilitated and compact dual-band rectifier is achieved with rectifying efficiencies of 74.9% and 61.9% at 2.45 and 5.8 GHz, respectively.

II. PRINCIPLE AND DESIGN METHOD

A schematic of the proposed dual-band rectifier is illustrated in Fig. 1. The rectifier comprises a dual-band harmonic termination network, a dual-band impedance matching network, a Schottky diode (HSM286F), a dc-pass filter, and a dc load (R_L).

The second and third harmonics usually are stronger than high-order harmonics, which should be recycled and converted into dc again to improve the rectifying efficiency.

Fig. 2 depicts the design of the harmonic termination network. The lines TL₁, TL₂, and TL₃ are designed to control the third harmonics, and the lines, TL₁, TL₂, TL₃, TL₄, TL₅, and TL₆ are designed to control the second harmonics, which

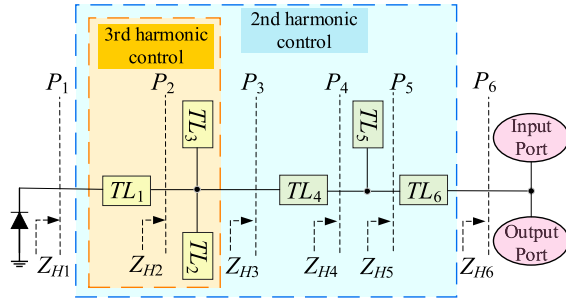


Fig. 2. Schematic of the proposed harmonic termination network.

present with zero impedance at second harmonics and infinite impedance at third harmonics to the diode at plane P_1 .

The ratio of two fundamental frequencies is defined as follows:

$$f_2/f_1 = k. \quad (1)$$

The ratios of the different fundamental and harmonic frequencies f_i ($i = 1, 2, 3, 4, 5, 6$) to the fundamental frequency f_1 are defined as follows:

$$k_i = \begin{cases} 1, & i = 1@f_1 \\ k, & i = 2@f_2 \\ 2, & i = 3@f_3 = 2f_1 \\ 2k, & i = 4@f_4 = 2f_2 \\ 3, & i = 5@f_5 = 3f_1 \\ 3k, & i = 6@f_6 = 3f_2. \end{cases} \quad (2)$$

First, the electrical lengths of TL_2 and TL_3 are known as follows:

$$\theta_{TL2}@3f_1 = 90^\circ, \quad \theta_{TL3}@3f_2 = 90^\circ. \quad (3)$$

When the short circuit conditions are satisfied at plane P_2 in Fig. 2, the transmission line TL_1 is used to control the input impedances at $3f_1$ and $3f_2$, and the impedances $Z_{H1}(3f_1)$, $Z_{H1}(3f_2)$ are as follows:

$$\begin{aligned} Z_{H1}(3f_1) &= jZ_{TL1} \tan(3\theta_{TL1}) \\ Z_{H1}(3f_2) &= jZ_{TL1} \tan(3k\theta_{TL1}). \end{aligned} \quad (4)$$

From (3) and (4), the electrical lengths θ_{TL1} , θ_{TL2} , and θ_{TL3} are calculated. The characteristic impedances Z_{TL1} , Z_{TL2} , and Z_{TL3} are free parameters whose values will affect the impedance Z_{H2} at plane P_2 .

According to the transmission line input impedance formula, the impedance $Z_{H1}(f_i)$ ($i = 1, 2, 3, 4$) at plane P_1 is calculated by the following equation:

$$Z_{H1}(f_i) = Z_{TL1} \times \frac{Z_{H2}(f_i) + jZ_{TL1} \tan(k_i\theta_{TL1})}{Z_{TL1} + jZ_{H2}(f_i) \tan(k_i\theta_{TL1})}. \quad (5)$$

By rearranging (5), the impedance $Z_{H2}(f_i)$ ($i = 1, 2, 3, 4$) at plane P_2 is easily expressed as follows:

$$Z_{H2}(f_i) = Z_{TL1} \times \frac{Z_{H1}(f_i) - jZ_{TL1} \tan(k_i\theta_{TL1})}{Z_{TL1} - jZ_{H1}(f_i) \tan(k_i\theta_{TL1})}. \quad (6)$$

The impedance $Z_{H2}(f_i)$ ($i = 1, 2, 3, 4$) can also be obtained by the following equation:

$$\begin{aligned} Z_{H2}(f_i) &= Z_{H3}(f_i) \parallel (-jZ_{TL2} \cot(k_i\theta_{TL2})) \parallel (-jZ_{TL3} \cot(k_i\theta_{TL3})). \end{aligned} \quad (7)$$

TABLE I
PARAMETERS OF HARMONIC TERMINATION NETWORK

$Z_{TL1}(\Omega)$	$Z_{TL2}(\Omega)$	$Z_{TL3}(\Omega)$	$Z_{TL4}(\Omega)$	$Z_{TL5}(\Omega)$	$Z_{TL6}(\Omega)$
52	68	64	70	70	90
$\theta_{TL1}(\text{deg})$	$\theta_{TL2}(\text{deg})$	$\theta_{TL3}(\text{deg})$	$\theta_{TL4}(\text{deg})$	$\theta_{TL5}(\text{deg})$	$\theta_{TL6}(\text{deg})$
20	30	12.7	53	45	9

The impedances $Z_{H3}(f_i)$ ($i = 1, 2, 3, 4$) at plane P_3 are obtained by combining (6) and (7).

Furthermore, the electrical length of TL_5 is expressed as follows:

$$\theta_{TL5}@2f_1 = 90^\circ. \quad (8)$$

Since the short circuit condition at $2f_1$ is satisfied at plane P_4 , when the characteristic impedance Z_{TL4} is a free parameter, the electrical length θ_{TL4} is calculated by the following equation:

$$\theta_{TL4} = 0.5 \times \arctan(Z_{H3}(2f_1)/jZ_{TL4}). \quad (9)$$

Similarly, the impedance $Z_{H4}(2f_2)$ at plane P_4 is obtained by the following equation:

$$\begin{aligned} Z_{H4}(2f_2) &= Z_{TL4} \frac{Z_{H3}(2f_2) - jZ_{TL4} \tan(2k\theta_{TL4})}{Z_{TL4} - jZ_{H3}(2f_2) \tan(2k\theta_{TL4})} \\ Z_{H4}(2f_2) &= Z_{H5}(2f_2) \parallel (-jZ_{TL5} \cot(2k\theta_{TL5})). \end{aligned} \quad (10)$$

From (10), the impedances $Z_{H5}(2f_2)$ at plane P_5 are calculated. The transmission line TL_6 is used to control $2f_2$. The TL_6 is followed by a fundamental frequency matching network and a dc filter, and the impedance of harmonics at plane P_6 does not affect the design of the matching network and dc filter.

Then, when the second harmonic impedance of f_2 at plane P_6 is infinite, the impedance $Z_{H5}(2f_2)$ at plane P_5 is as follows:

$$Z_{H5}(2f_2) = -jZ_{TL6} \cot(2k\theta_{TL6}). \quad (11)$$

The characteristic impedance Z_{TL6} is a free parameter. The electrical length θ_{TL6} is calculated according to (11), once Z_{TL6} is chosen. Since $Z_{H5}(2f_2)$ is a fixed value and is not affected by the line TL_6 , this assumption does not affect the class-F mechanism. Therefore, as long as (11) has a solution, the assumption is true.

As a result, all electrical lengths are calculated and all the impedances are free design parameters, giving more design space for impedance matching at dual fundamental frequencies. The parameters are given in Table I.

In particular, when $k = 1$, it is a single-band rectifier, and the electrical lengths of TL_1 , TL_2 , TL_3 , TL_4 , and TL_5 , are as follows:

$$\begin{aligned} \theta_{TL1} &= 90^\circ, \quad \theta_{TL2} = \theta_{TL3} = 30^\circ \\ \theta_{TL4} &= 180^\circ, \quad \theta_{TL5} = 45^\circ. \end{aligned} \quad (12)$$

Therefore, when $k = 1$, the proposed harmonic termination network can be simplified to the single-band class-F harmonic termination network in literature [23], which extends its application to the dual-band rectifier.

Moreover, the rectifying efficiencies of ideal rectifiers with and without harmonic termination networks are both simulated. The rectifying efficiencies are improved by about 10% in dual bands with the harmonic termination networks in Fig. 3.

REFERENCES

- [1] W. C. Brown, "The history of power transmission by radio waves," *IEEE Trans. Microw. Theory Techn.*, vol. MTT-32, no. 9, pp. 1230–1242, Sep. 1984.
- [2] C. Liu, H. Lin, Z. He, and Z. Chen, "Compact patch rectennas without impedance matching network for wireless power transmission," *IEEE Trans. Microw. Theory Techn.*, vol. 70, no. 5, pp. 2882–2890, May 2022.
- [3] K. Miwatashi, T. Hirakawa, N. Shinohara, and T. Mitani, "Development of high-power charge pump rectifier for microwave wireless power transmission," *IEEE J. Microw.*, vol. 2, no. 4, pp. 711–719, Oct. 2022.
- [4] P. Wu et al., "Compact high-efficiency broadband rectifier with multi-stage-transmission-line matching," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 66, no. 8, pp. 1316–1320, Aug. 2019.
- [5] Z. He and C. Liu, "A compact high-efficiency broadband rectifier with a wide dynamic range of input power for energy harvesting," *IEEE Microw. Wireless Compon. Lett.*, vol. 30, no. 4, pp. 433–436, Apr. 2020.
- [6] J. Liu, X. Y. Zhang, and Q. Xue, "Dual-band transmission-line resistance compression network and its application to rectifiers," *IEEE Trans. Circuits Syst. I, Reg. Papers*, vol. 66, no. 1, pp. 119–132, Jan. 2019.
- [7] K. Hamano, A. Suzuki, K. Nishikawa, and S. Kawasaki, "2.4/5.8 GHz dual-band rectifiers for aerospace wireless sensor and RF energy harvester system," in *Proc. IEEE Radio Wireless Symp. (RWS)*, Jan. 2019, pp. 1–4.
- [8] Z. He, H. Lin, and C. Liu, "Codesign of a Schottky diode's and loop antenna's impedances for dual-band wireless power transmission," *IEEE Antennas Wireless Propag. Lett.*, vol. 19, no. 10, pp. 1813–1817, Oct. 2020.
- [9] D.-A. Nguyen and C. Seo, "A compact and high-efficiency design of 0.915/2.45 GHz dual-band shunt-diode rectifier for wireless power transfer," *IEEE Microw. Wireless Compon. Lett.*, vol. 32, no. 7, pp. 915–918, Jul. 2022.
- [10] M. Huang et al., "Single- and dual-band RF rectifiers with extended input power range using automatic impedance transforming," *IEEE Trans. Microw. Theory Techn.*, vol. 67, no. 5, pp. 1974–1984, May 2019.
- [11] Z. Liu, Z. Zhong, and Y.-X. Guo, "Enhanced dual-band ambient RF energy harvesting with ultra-wide power range," *IEEE Microw. Wireless Compon. Lett.*, vol. 25, no. 9, pp. 630–632, Sep. 2015.
- [12] Md. A. Halimi, T. Khan, S. K. Koul, and S. R. Rengarajan, "A dual-band rectifier using half-wave transmission line matching for 5G and Wi-Fi bands RFEH/MPT applications," *IEEE Microw. Wireless Technol. Lett.*, vol. 33, no. 1, pp. 74–77, Jan. 2023.
- [13] H. He, H. Lin, P. Wu, Q. Li, and C. Liu, "Compact high-efficiency broadband rectifier based on coupled transmission line," *IEEE Trans. Circuits Syst. II, Exp. Briefs*, vol. 69, no. 11, pp. 4404–4408, Nov. 2022.
- [14] Z. Yue, X. Xu, S. Li, Y. H. Zhu, and X. Q. Lin, "Efficient and compact tri-band rectifier with large frequency ratio for WPT," *IEEE Microw. Wireless Compon. Lett.*, vol. 32, no. 11, pp. 1355–1358, Nov. 2022.
- [15] Z. He, J. Lan, and C. Liu, "Compact rectifiers with ultra-wide input power range based on nonlinear impedance characteristics of Schottky diodes," *IEEE Trans. Power Electron.*, vol. 36, no. 7, pp. 7407–7411, Jul. 2021.
- [16] D. Lee and J. Oh, "Broad dual-band rectifier with wide input power ranges for wireless power transfer and energy harvesting," *IEEE Microw. Wireless Compon. Lett.*, vol. 32, no. 6, pp. 599–602, Jun. 2022.
- [17] J. Liu, M. Huang, and Z. Du, "Design of compact dual-band RF rectifiers for wireless power transfer and energy harvesting," *IEEE Access*, vol. 8, pp. 184901–184908, 2020.
- [18] Z.-X. Du and X. Y. Zhang, "High-efficiency single- and dual-band rectifiers using a complex impedance compression network for wireless power transfer," *IEEE Trans. Ind. Electron.*, vol. 65, no. 6, pp. 5012–5022, Jun. 2018.
- [19] K. Hamano, R. Tanaka, S. Yoshida, A. Miyachi, K. Nishikawa, and S. Kawasaki, "Design of dual-band rectifier using microstrip spurline notch filter," in *Proc. IEEE Int. Symp. Radio-Frequency Integr. Technol. (RFIT)*, Aug. 2016, pp. 1–3.
- [20] X.-B. Huang, J.-J. Wang, X.-Y. Wu, and M.-X. Liu, "A dual-band rectifier for low-power wireless power transmission system," in *Proc. Asia-Pacific Microw. Conf. (APMC)*, vol. 2, Dec. 2015, pp. 1–3.
- [21] C. Liu, F. Tan, H. Zhang, and Q. He, "A novel single-diode microwave rectifier with a series band-stop structure," *IEEE Trans. Microw. Theory Techn.*, vol. 65, no. 2, pp. 600–606, Feb. 2017.
- [22] Z. He, H. Lin, H. Zhu, and C. Liu, "A compact high-efficiency rectifier with a simple harmonic suppression structure," *IEEE Microw. Wireless Compon. Lett.*, vol. 30, no. 12, pp. 1177–1180, Dec. 2020.
- [23] J. Guo, H. Zhang, and X. Zhu, "Theoretical analysis of RF-DC conversion efficiency for Class-F rectifiers," *IEEE Trans. Microw. Theory Techn.*, vol. 62, no. 4, pp. 977–985, Apr. 2014.
- [24] Z. He, H. Lin, and C. Liu, "A novel Class-C rectifier with high efficiency for wireless power transmission," *IEEE Microw. Wireless Compon. Lett.*, vol. 30, no. 12, pp. 1197–1200, Dec. 2020.
- [25] F. Zhao, Z. Li, G. Wen, J. Li, D. Inserra, and Y. Huang, "A compact high-efficiency watt-level microwave rectifier with a novel harmonic termination network," *IEEE Microw. Wireless Compon. Lett.*, vol. 29, no. 6, pp. 418–420, Jun. 2019.
- [26] F. Zhao, D. Inserra, G. Wen, J. Li, and Y. Huang, "A high-efficiency inverse Class-F microwave rectifier for wireless power transmission," *IEEE Microw. Wireless Compon. Lett.*, vol. 29, no. 11, pp. 725–728, Nov. 2019.
- [27] X. Liu, Y. Liu, S. Li, F. Wu, and Y. Wu, "A three-section dual-band transformer for frequency-dependent complex load impedance," *IEEE Microw. Wireless Compon. Lett.*, vol. 19, no. 10, pp. 611–613, Oct. 2009.
- [28] H.-R. Ahn, "Complex impedance transformers consisting of only transmission-line sections," *IEEE Trans. Microw. Theory Techn.*, vol. 60, no. 7, pp. 2073–2084, Jul. 2012.