



RTL Design Sherpa

RTL AMBA AXI5 Module Reference — Rev 0.90

July 2026

Table of Contents

1 AXI5 (Advanced eXtensible Interface - AMBA 5) Modules.....	26
1.1 Overview.....	26
1.1.1 Scope of This Implementation.....	26
1.2 AXI5 Features Implemented.....	27
1.3 AXI5 Features Not Implemented.....	28
1.4 AXI4 vs AXI5.....	29
1.5 Module Categories.....	30
1.5.1 Master Components.....	30
1.5.2 Slave Components.....	30
1.5.3 Monitor Components.....	31
1.6 Key Features.....	31
1.6.1 AXI5 Channel Support.....	31
1.6.2 Advanced Features.....	32
1.6.3 Power Management.....	32
1.6.4 Monitoring and Debug.....	32
1.7 Protocol Details.....	32
1.7.1 AXI5 Channel Overview.....	32
1.7.2 AXI5 Sideband Signals Carried by These Modules.....	33
1.7.3 Burst Types.....	34
1.8 Usage Example.....	34
1.8.1 Using AXI5 Read Master.....	34
1.8.2 Using AXI5 Write Master.....	35

1.8.3 Using Integrated Monitor Modules.....	36
1.9 Design Notes.....	37
1.9.1 FUB Interface Pattern.....	37
1.9.2 Migration from AXI4.....	37
1.9.3 Monitor Integration.....	37
1.9.4 Performance Characteristics.....	37
1.10 Related Modules.....	38
1.11 Testing.....	38
1.12 References.....	38
1.12.1 Specifications.....	38
1.12.2 Source Code.....	38
1.13 Navigation.....	39
2 AXI5 Atomic Filter.....	39
2.1 Overview.....	39
2.1.1 Key Features.....	39
2.2 Parameters.....	40
2.2.1 Derived Parameters (do not override).....	40
2.3 Ports.....	40
2.4 Functional Description.....	41
2.5 Timing Characteristics.....	41
2.6 Usage Examples.....	41
2.6.1 Integration.....	42
2.6.2 Design Notes and Constraints.....	42
2.7 Testing.....	43

2.8 Related Modules.....	43
2.9 Navigation.....	43
3 AXI5 Atomic Read-Return Tracker.....	44
3.1 Overview.....	44
3.1.1 Key Features.....	44
3.2 Parameters.....	45
3.2.1 Derived Parameters (do not override).....	45
3.3 Ports.....	45
3.4 Functional Description.....	46
3.5 Timing Characteristics.....	46
3.6 Usage Examples.....	46
3.7 Verification.....	47
3.8 Related.....	47
4 AXI5 Master Read.....	47
4.1 Overview.....	47
4.1.1 Key Features.....	48
4.2 Parameters.....	48
4.2.1 Derived Parameters.....	49
4.3 Ports.....	50
4.3.1 Clock and Reset.....	50
4.3.2 FUB AXI5 Interface (Slave Side - Input).....	50
4.3.3 Master AXI5 Interface (Output Side).....	52
4.3.4 Status Outputs.....	52
4.4 Functional Description.....	53

4.4.1 Architecture.....	53
4.4.2 AXI5 Enhancements Over AXI4.....	53
4.4.3 Signal Packing Logic.....	54
4.5 Timing Characteristics.....	54
4.5.1 Basic Read Transaction.....	54
4.5.2 Chunked Read Transaction.....	55
4.5.3 Memory Tagging Extension (MTE).....	55
4.6 Usage Examples.....	55
4.7 Design Notes.....	57
4.7.1 AXI5 vs AXI4 Differences.....	57
4.7.2 Memory Tagging Extension (MTE).....	57
4.7.3 Chunking Support.....	57
4.7.4 Feature Enable Strategy.....	57
4.8 Related Modules.....	58
4.9 Testing.....	58
4.10 Navigation.....	58
5 AXI5 Master Read with Clock Gating.....	58
5.1 Overview.....	58
5.1.1 Key Features.....	59
5.2 Parameters.....	59
5.2.1 Derived Parameters.....	61
5.3 Ports.....	61
5.3.1 Clock and Reset.....	61
5.3.2 Clock Gating Configuration.....	61

5.3.3 FUB AXI5 Interface (Slave Side - Input).....	62
5.3.4 Master AXI5 Interface (Output Side).....	64
5.3.5 Clock Gating Status Outputs.....	64
5.4 Functional Description.....	65
5.4.1 Clock Gating Operation.....	65
5.4.2 Ready Deassertion and Wake Behavior.....	65
5.4.3 Integration Caveat: fub_axi_rready in the Activity Term.....	66
5.4.4 Idle Counter Configuration.....	66
5.4.5 Power Savings Analysis.....	67
5.5 Timing Characteristics.....	67
5.5.1 Clock Gating Activation.....	67
5.5.2 Clock Gating Wake-up.....	67
5.6 Usage Examples.....	68
5.7 Design Notes.....	70
5.7.1 Clock Gating vs. Always-On.....	70
5.7.2 Configuration Strategies.....	70
5.7.3 Integration with System Power Management.....	70
5.7.4 Verification Considerations.....	71
5.8 Related Modules.....	71
5.9 Testing.....	71
5.10 Navigation.....	71
6 AXI5 Master Read with Monitor.....	71
6.1 Overview.....	72
6.1.1 Key Features.....	72

6.2 Parameters.....	73
6.2.1 Derived Parameters (do not override).....	77
6.3 Ports.....	77
6.3.1 Clock and Reset.....	77
6.3.2 FUB AXI5 Interface (Slave Side - Input).....	77
6.3.3 Master AXI5 Interface (Output Side).....	77
6.3.4 Monitor Configuration.....	77
6.3.5 AXI Protocol Filtering Configuration.....	79
6.3.6 Monitor Bus Output.....	80
6.3.7 Status Outputs.....	80
6.3.8 Packet filters.....	81
6.4 Functional Description.....	83
6.4.1 Monitor Backpressure (block_ready).....	83
6.4.2 Address-Range Checker.....	84
6.4.3 Monitor Bus Packet Format.....	85
6.4.4 Filtering Hierarchy (two active levels, one reserved).....	85
6.4.5 Error Detection Events.....	86
6.4.6 Configuration Conflict Detection.....	87
6.4.7 Performance Monitoring.....	87
6.5 Timing Characteristics.....	89
6.5.1 Monitored Read Transaction with Error.....	89
6.5.2 Timeout Detection.....	90
6.5.3 Performance Monitoring.....	90
6.6 Usage Examples.....	90

6.7 Design Notes.....	93
6.7.1 Configuration Best Practices.....	93
6.7.2 Transaction Table Sizing.....	94
6.7.3 Filtering Strategy.....	94
6.7.4 Monitor Bus Backpressure.....	94
6.8 Related Modules.....	94
6.9 Testing.....	95
6.10 Navigation.....	95
7 AXI5 Master Read with Monitor and Clock Gating.....	95
7.1 Overview.....	95
7.1.1 Key Features.....	95
7.2 Parameters.....	96
7.2.1 Filter configuration (forwarded).....	100
7.2.2 Derived Parameters (do not override).....	101
7.3 Ports.....	101
7.3.1 Clock and Reset.....	101
7.3.2 Clock Gating Configuration.....	101
7.3.3 FUB AXI5 Interface (Slave Side - Input).....	102
7.3.4 Master AXI5 Interface (Output Side).....	102
7.3.5 Monitor Configuration.....	102
7.3.6 Monitor Bus Output.....	102
7.3.7 Status Outputs.....	102
7.4 Functional Description.....	104
7.4.1 Combined Monitoring and Power Management.....	104

7.4.2 Clock Gating with Monitor Active.....	105
7.4.3 Ready Signal Control During Gating.....	105
7.4.4 Performance Monitoring.....	105
7.5 Timing Characteristics.....	106
7.5.1 Clock Gating with Monitor Activity.....	106
7.5.2 Wake-up with Immediate Monitoring.....	106
7.6 Usage Examples.....	107
7.7 Design Notes.....	110
7.7.1 When to Use This Module.....	110
7.7.2 Configuration Strategy Matrix.....	110
7.7.3 Monitor + Clock Gating Interaction.....	110
7.7.4 Verification Recommendations.....	111
7.8 Related Modules.....	112
7.9 Testing.....	112
7.10 Navigation.....	112
8 AXI5 Master Read with Lite Monitor.....	112
8.1 Overview.....	112
8.1.1 What is not here.....	113
8.1.2 Key Features.....	113
8.2 Parameters.....	113
8.2.1 Monitor Parameters.....	113
8.2.2 Core Parameters (passed through to axi5_master_rd).....	114
8.3 Ports.....	116
8.3.1 Monitor Control, Bus and Status.....	116

8.3.2 Core Ports (as on axi5_master_rd).....	118
8.4 Functional Description.....	121
8.5 Timing Characteristics.....	122
8.6 Usage Examples.....	122
8.7 Design Notes.....	123
8.8 Related Modules.....	123
8.9 Testing.....	123
8.10 Navigation.....	123
9 AXI5 Master Write.....	123
9.1 Overview.....	124
9.1.1 Key Features.....	124
9.2 Parameters.....	125
9.2.1 Derived Parameters.....	126
9.3 Ports.....	126
9.3.1 Clock and Reset.....	126
9.3.2 FUB AXI5 Interface (Slave Side - Input).....	127
9.3.3 Master AXI5 Interface (Output Side).....	129
9.3.4 Status Outputs.....	129
9.4 Functional Description.....	130
9.4.1 AXI5 Enhancements Over AXI4.....	131
9.4.2 Atomic Transactions.....	131
9.5 Timing Characteristics.....	132
9.5.1 Basic Write Transaction.....	132
9.5.2 Atomic Operation.....	133

9.5.3 Memory Tagging Extension (MTE).....	133
9.6 Usage Examples.....	133
9.7 Design Notes.....	135
9.7.1 Atomic Operation Support.....	135
9.7.2 Memory Tagging Extension (MTE).....	135
9.7.3 Poison Support.....	135
9.7.4 Feature Enable Strategy.....	135
9.8 Related Modules.....	136
9.9 Testing.....	136
9.10 Navigation.....	136
10 AXI5 Master Write with Clock Gating.....	136
10.1 Overview.....	137
10.1.1 Key Features.....	137
10.2 Parameters.....	138
10.2.1 Derived Parameters.....	139
10.3 Ports.....	139
10.3.1 Clock and Reset.....	139
10.3.2 Clock Gating Configuration.....	140
10.3.3 FUB AXI5 Interface (Slave Side - Input).....	140
10.3.4 Master AXI5 Interface (Output Side).....	142
10.3.5 Clock Gating Status Outputs.....	143
10.4 Functional Description.....	143
10.4.1 Clock Gating Operation.....	143
10.4.2 Ready Deassertion and Wake Behavior.....	144

10.4.3 Integration Caveat: fub_axi_bready in the Activity Term.....	144
10.4.4 AXI5 Write-Specific Features.....	144
10.4.5 Idle Counter Configuration.....	145
10.5 Timing Characteristics.....	145
10.5.1 Clock Gating with Write Burst.....	145
10.5.2 Atomic Operation with Clock Gating.....	145
10.6 Usage Examples.....	146
10.7 Design Notes.....	148
10.7.1 Write vs. Read Clock Gating.....	148
10.7.2 Write-Specific Gating Considerations.....	148
10.8 Related Modules.....	149
10.9 Testing.....	149
10.10 Navigation.....	149
11 AXI5 Master Write with Monitor.....	149
11.1 Overview.....	149
11.1.1 Key Features.....	150
11.2 Parameters.....	151
11.2.1 Derived Parameters (do not override).....	155
11.3 Ports.....	156
11.3.1 Clock and Reset.....	156
11.3.2 FUB AXI5 Interface (Slave Side).....	156
11.3.3 Master AXI5 Interface (Output Side).....	156
11.3.4 Monitor Configuration.....	156
11.3.5 Monitor Bus Output.....	156

11.3.6 Status Outputs.....	157
11.3.7 Packet filters.....	158
11.4 Functional Description.....	159
11.4.1 Monitor Bus Packet Format.....	159
11.4.2 Write-Specific Monitoring Events.....	159
11.4.3 Atomic Operation Monitoring.....	160
11.4.4 Filtering Hierarchy (two active levels, one reserved).....	160
11.4.5 Monitor Backpressure (block_ready).....	160
11.4.6 Address-Range Checker.....	161
11.4.7 Performance Monitoring.....	162
11.5 Timing Characteristics.....	164
11.5.1 Monitored Write Burst with Error.....	164
11.5.2 Atomic Operation Monitoring.....	164
11.5.3 Write Timeout Detection.....	165
11.6 Usage Examples.....	165
11.7 Design Notes.....	168
11.7.1 W-Channel Wiring into the Monitor Core.....	168
11.7.2 Write vs. Read Monitoring Differences.....	168
11.7.3 Write Transaction Table Management.....	169
11.7.4 Write Latency Measurement.....	169
11.7.5 Configuration Best Practices.....	169
11.8 Related Modules.....	169
11.9 Testing.....	169
11.10 Navigation.....	170

12 AXI5 Master Write with Monitor and Clock Gating.....	170
12.1 Overview.....	170
12.1.1 Key Features.....	170
12.2 Parameters.....	172
12.2.1 Derived Parameters (do not override).....	176
12.3 Ports.....	176
12.3.1 Filter configuration (forwarded).....	176
12.3.2 Clock and Reset.....	177
12.3.3 Clock Gating Configuration.....	177
12.3.4 FUB AXI5 Interface (Slave Side).....	177
12.3.5 Master AXI5 Interface (Output Side).....	177
12.3.6 Monitor Configuration.....	177
12.3.7 Monitor Bus Output.....	177
12.3.8 Status Outputs.....	178
12.4 Functional Description.....	178
12.4.1 Combined Write Monitoring and Power Management.....	178
12.4.2 Clock Gating with Write Monitor Active.....	179
12.4.3 Ready Signal Control During Gating.....	179
12.4.4 Performance Monitoring.....	179
12.5 Timing Characteristics.....	180
12.5.1 Clock Gating with Write Burst and Monitoring.....	180
12.5.2 Atomic Operation with Monitor + Clock Gating.....	181
12.6 Usage Examples.....	181
12.7 Design Notes.....	184

12.7.1 When to Use This Module.....	184
12.7.2 Write-Specific Configuration Strategy.....	184
12.7.3 Monitor + Clock Gating Interaction for Writes.....	185
12.7.4 Performance Analysis with Write Monitoring.....	185
12.8 Related Modules.....	186
12.9 Testing.....	186
12.9.1 Verification Recommendations for Write Path.....	186
12.10 Navigation.....	187
13 AXI5 Master Write with Lite Monitor.....	187
13.1 Overview.....	187
13.1.1 What is not here.....	187
13.1.2 Key Features.....	187
13.2 Parameters.....	188
13.2.1 Monitor Parameters.....	188
13.2.2 Core Parameters (passed through to axi5_master_wr).....	189
13.3 Ports.....	191
13.3.1 Monitor Control, Bus and Status.....	191
13.3.2 Core Ports (as on axi5_master_wr).....	192
13.4 Functional Description.....	196
13.5 Timing Characteristics.....	196
13.6 Usage Examples.....	197
13.7 Design Notes.....	197
13.8 Related Modules.....	198
13.9 Testing.....	198

13.10 Navigation.....	198
14 AXI5 Slave Read.....	198
14.1 Overview.....	199
14.1.1 Key Features.....	199
14.2 Parameters.....	200
14.2.1 Derived Parameters.....	201
14.3 Ports.....	202
14.3.1 Clock and Reset.....	202
14.3.2 Slave AXI5 Interface (External Master Input).....	202
14.3.3 FUB Interface (Backend Memory/Logic Output).....	204
14.3.4 Status Outputs.....	204
14.4 Functional Description.....	205
14.5 Timing Characteristics.....	205
14.5.1 Basic Read Transaction.....	205
14.6 Usage Examples.....	205
14.7 Design Notes.....	206
14.8 Related Modules.....	206
14.9 Testing.....	207
14.10 Navigation.....	207
15 AXI5 Slave Read with Clock Gating.....	207
15.1 Overview.....	207
15.1.1 Key Features.....	207
15.2 Parameters.....	209
15.2.1 Derived Parameters.....	210

15.2.2 Derived Parameters (do not override).....	211
15.3 Ports.....	211
15.3.1 Clock and Reset.....	211
15.3.2 Clock Gating Configuration.....	211
15.3.3 Slave AXI5 Interface.....	212
15.3.4 FUB Interface.....	212
15.3.5 Clock Gating Status.....	212
15.4 Functional Description.....	212
15.4.1 Clock Gating Behavior.....	212
15.4.2 Ready Deassertion and Wake Behavior.....	213
15.4.3 Integration Caveat: s_axi_rready in the Activity Term.....	213
15.4.4 Clock Gating Configuration.....	213
15.5 Timing Characteristics.....	214
15.5.1 Clock Gating Sequence.....	214
15.6 Usage Examples.....	214
15.7 Design Notes.....	216
15.7.1 Power Savings Estimation.....	216
15.7.2 Clock Gating Overhead.....	216
15.7.3 When to Use Clock Gating.....	216
15.7.4 Integration with Power Management.....	216
15.8 Related Modules.....	217
15.9 Testing.....	217
15.10 Navigation.....	217
16 AXI5 Slave Read Monitor.....	217

16.1 Overview.....	218
16.1.1 Key Features.....	218
16.2 Parameters.....	220
16.2.1 Derived Parameters (do not override).....	224
16.3 Ports.....	224
16.3.1 Clock and Reset.....	224
16.3.2 Slave AXI5 Interface.....	224
16.3.3 FUB Interface.....	224
16.3.4 Monitor Configuration.....	224
16.3.5 Monitor Bus Output.....	227
16.3.6 Status Outputs.....	227
16.3.7 Packet filters.....	228
16.4 Functional Description.....	229
16.4.1 Monitor Packet Format.....	229
16.4.2 Event Types.....	229
16.4.3 Monitor Backpressure (block_ready).....	231
16.4.4 Address-Range Checker.....	231
16.4.5 Performance Monitoring.....	232
16.5 Timing Characteristics.....	235
16.6 Usage Examples.....	235
16.7 Design Notes.....	238
16.8 Related Modules.....	238
16.9 Testing.....	239
16.10 Navigation.....	239

17 AXI5 Slave Read Monitor with Clock Gating.....	239
17.1 Overview.....	239
17.1.1 Key Features.....	239
17.2 Parameters.....	240
17.2.1 Derived Parameters (do not override).....	244
17.3 Ports.....	245
17.3.1 Filter configuration (forwarded).....	245
17.3.2 Clock and Reset.....	245
17.3.3 Clock Gating Configuration.....	246
17.3.4 Slave AXI5 Interface.....	246
17.3.5 FUB Interface.....	246
17.3.6 Monitor Configuration.....	246
17.3.7 Monitor Bus Output.....	246
17.3.8 Status Outputs.....	247
17.4 Functional Description.....	247
17.4.1 Clock Gating Behavior.....	247
17.4.2 Performance Monitoring.....	247
17.5 Timing Characteristics.....	248
17.6 Usage Examples.....	249
17.7 Design Notes.....	252
17.7.1 Power Optimization.....	252
17.7.2 Observability.....	252
17.7.3 When to Use This Module.....	252
17.7.4 Configuration Recommendations.....	252

17.7.5 Area and Timing Impact.....	252
17.8 Related Modules.....	253
17.9 Testing.....	253
17.10 Navigation.....	253
18 AXI5 Slave Read with Lite Monitor.....	253
18.1 Overview.....	254
18.1.1 What is not here.....	254
18.1.2 Key Features.....	254
18.2 Parameters.....	254
18.2.1 Monitor Parameters.....	254
18.2.2 Core Parameters (passed through to axi5_slave_rd).....	255
18.3 Ports.....	257
18.3.1 Monitor Control, Bus and Status.....	257
18.3.2 Core Ports (as on axi5_slave_rd).....	259
18.4 Functional Description.....	262
18.5 Timing Characteristics.....	263
18.6 Usage Examples.....	263
18.7 Design Notes.....	264
18.8 Related Modules.....	264
18.9 Testing.....	264
18.10 Navigation.....	264
19 AXI5 Slave Write.....	264
19.1 Overview.....	265
19.1.1 Key Features.....	265

19.2 Parameters.....	267
19.2.1 Derived Parameters.....	268
19.3 Ports.....	268
19.3.1 Clock and Reset.....	268
19.3.2 Slave AXI5 Interface (External Master Input).....	269
19.3.3 FUB Interface (Backend Memory/Logic Output).....	271
19.3.4 Status Outputs.....	271
19.4 Functional Description.....	271
19.5 Timing Characteristics.....	272
19.5.1 Basic Write Transaction.....	272
19.5.2 Write with Poison Indicator.....	272
19.6 Usage Examples.....	272
19.7 Design Notes.....	273
19.8 Related Modules.....	274
19.9 Testing.....	274
19.10 Navigation.....	274
20 AXI5 Slave Write with Clock Gating.....	274
20.1 Overview.....	274
20.1.1 Key Features.....	275
20.2 Parameters.....	276
20.2.1 Derived Parameters.....	278
20.2.2 Derived Parameters (do not override).....	278
20.3 Ports.....	279
20.3.1 Clock and Reset.....	279

20.3.2 Clock Gating Configuration.....	279
20.3.3 Slave AXI5 Interface.....	279
20.3.4 FUB Interface.....	279
20.3.5 Clock Gating Status.....	279
20.4 Functional Description.....	280
20.4.1 Clock Gating Behavior.....	280
20.4.2 Ready Deassertion and Wake Behavior.....	280
20.4.3 Integration Caveat: s_axi_bready in the Activity Term.....	281
20.4.4 Clock Gating Configuration.....	281
20.5 Timing Characteristics.....	282
20.5.1 Clock Gating During Write Burst.....	282
20.6 Usage Examples.....	282
20.7 Design Notes.....	283
20.7.1 Power Savings Estimation.....	283
20.7.2 Write-Specific Considerations.....	284
20.7.3 Clock Gating Overhead.....	284
20.7.4 When to Use Clock Gating.....	284
20.8 Related Modules.....	284
20.9 Testing.....	284
20.10 Navigation.....	285
21 AXI5 Slave Write Monitor.....	285
21.1 Overview.....	285
21.1.1 Key Features.....	285
21.2 Parameters.....	288

21.2.1 Derived Parameters (do not override).....	292
21.3 Ports.....	292
21.3.1 Clock and Reset.....	292
21.3.2 Slave AXI5 Interface.....	292
21.3.3 FUB Interface.....	292
21.3.4 Monitor Configuration.....	292
21.3.5 Monitor Bus Output.....	295
21.3.6 Status Outputs.....	295
21.3.7 Packet filters.....	296
21.4 Functional Description.....	297
21.4.1 Monitor Backpressure (block_ready).....	297
21.4.2 Address-Range Checker.....	298
21.4.3 Monitor Packet Format.....	298
21.4.4 Event Types.....	299
21.4.5 Performance Monitoring.....	300
21.5 Timing Characteristics.....	303
21.6 Usage Examples.....	303
21.7 Design Notes.....	306
21.7.1 W-Channel Wiring into the Monitor Core.....	306
21.7.2 Write-Specific Monitoring.....	306
21.7.3 Best Practices.....	307
21.8 Related Modules.....	307
21.9 Testing.....	307
21.10 Navigation.....	307

22 AXI5 Slave Write Monitor with Clock Gating.....	308
22.1 Overview.....	308
22.1.1 Key Features.....	308
22.2 Parameters.....	309
22.2.1 Derived Parameters (do not override).....	313
22.3 Ports.....	313
22.3.1 Filter configuration (forwarded).....	313
22.3.2 Clock and Reset.....	314
22.3.3 Clock Gating Configuration.....	314
22.3.4 Slave AXI5 Interface.....	315
22.3.5 FUB Interface.....	315
22.3.6 Monitor Configuration.....	315
22.3.7 Monitor Bus Output.....	315
22.3.8 Status Outputs.....	315
22.4 Functional Description.....	316
22.4.1 Clock Gating Behavior.....	316
22.4.2 Performance Monitoring.....	317
22.5 Timing Characteristics.....	317
22.6 Usage Examples.....	318
22.7 Design Notes.....	321
22.7.1 When to Use This Module.....	321
22.7.2 Configuration Recommendations.....	321
22.7.3 Area and Timing Impact.....	322
22.7.4 Power Optimization.....	322

22.7.5 Observability.....	322
22.7.6 Write-Specific Considerations.....	323
22.8 Related Modules.....	323
22.9 Testing.....	323
22.10 Navigation.....	323
23 AXI5 Slave Write with Lite Monitor.....	323
23.1 Overview.....	324
23.1.1 What is not here.....	324
23.1.2 Key Features.....	324
23.2 Parameters.....	324
23.2.1 Monitor Parameters.....	324
23.2.2 Core Parameters (passed through to axi5_slave_wr).....	325
23.3 Ports.....	327
23.3.1 Monitor Control, Bus and Status.....	327
23.3.2 Core Ports (as on axi5_slave_wr).....	329
23.4 Functional Description.....	333
23.5 Timing Characteristics.....	333
23.6 Usage Examples.....	333
23.7 Design Notes.....	334
23.8 Related Modules.....	334
23.9 Testing.....	334
23.10 Navigation.....	335

1 AXI5 (Advanced eXtensible Interface - AMBA 5) Modules

Location: rtl/amba/axi5/ **Test Location:** val/amba/ **Status:** Production Ready

1.1 Overview

The AXI5 subsystem provides read/write master and slave channel modules for the ARM AMBA 5 AXI (Advanced eXtensible Interface) protocol, plus clock-gated variants and combined module+monitor variants for efficient system integration. Read *Scope of This Implementation* below before you treat these as a full AXI5 protocol stack — they aren't one, and that distinction will save you a redesign.

AXI5 extends AXI4 with significant enhancements for modern high-performance SoC designs: atomic transactions, memory tagging, memory partitioning, and data poisoning.

1.1.1 Scope of This Implementation

These modules are **channel-transport blocks**: they carry a full AXI5 signal set across configurable SKID buffers between a FUB (Functional Unit Block) interface and an external AXI5 interface. They're the AXI5 equivalents of the `axi4_master_*` / `axi4_slave_*` modules — same job, wider signal set.

What the RTL does:

- Transports every implemented AXI5 sideband signal end-to-end without modification.
- Packs and unpacks channel payloads conditionally, so disabled features cost zero area.
- Provides a busy status output for clock gating and power management.

What the RTL does not do:

- It does not *execute* AXI5 semantics. `AWATOP` is transported, but no atomic read-modify-write is performed; `AxTAGOP`/`RTAG`/`WTAG` are transported, but no tag checking or `RTAGMATCH` generation is performed; chunk fields are transported, but no chunk reassembly is performed. Those behaviors belong to the endpoint (memory controller, interconnect, or FUB logic) on either side.
- It does not track or limit outstanding transactions. Depth is bounded by the endpoints, not by these modules.

Consult the per-module pages for the exact signal set each module carries.

1.2 AXI5 Features Implemented

AXI5 feature	Signals	Status in rtl/amba/axi5/
Non-secure access identifier	ARNSAID / AWNSAID	Transported (ENABLE_NSAID)
Trace	ARTRACE / AWTRACE / RTRACE / BTRACE	Transported (ENABLE_TRACE)
Memory partitioning and monitoring (MPAM)	ARMPAM / AWMPAM	Transported (ENABLE_MPAM)
Memory encryption context	ARMECID / AWMECID	Transported (ENABLE_MECID)
Unique access indicator	ARUNIQUE / AWUNIQUE	Transported (ENABLE_UNIQUE)
Read data chunking	ARCHUNKEN / RCHUNKV / RCHUNKNUM / RCHUNKSTB	Transported (ENABLE_CHUNKING, read path only)
Memory Tagging Extension (MTE)	ARTAGOP / AWTAGOP / AWTAG / WTAG / WTAGUPDATA / RTAG / BTAG / RTAGMATC / H / BTAGMATC	Transported (ENABLE_MTE)

AXI5 feature	Signals	Status in rtl/amba/axi5/
	H	
Data poison	RPOISON / WPOISON	Transported (ENABLE_POISON)
Atomic transactions	AWATOP	Signal transported (ENABLE_ATOMIC); atomic execution is the endpoint's responsibility

1.3 AXI5 Features Not Implemented

AXI5 feature	Signals	Notes
Loopback signalling	ARLOOP / AWLOOP	No ports; not carried
QoS acceptance	ARQOSACCEPT / AWQOSACCEPT	No ports; not carried
Untranslated transactions (SMMU)	AxMMUSID / AxMMUSSID / AxMMUSSIDV / AxMMUATST / AxMMUFLOW	No ports; not carried
Cache stash and CMO transactions	AWSTASHNID / AWSTASHLPID, CMO opcodes	Not implemented
Region identifier	ARREGION / AWREGION	Not implemented. AxREGION is still a valid optional AXI5 signal; it is simply omitted here. Route or decode by address instead

1.4 AXI4 vs AXI5

Feature	AXI4	AXI5
Outstanding transactions	No architectural limit; bounded by implementation	Unchanged; no architectural limit
Atomic transactions	Not supported	AWATOP: AtomicStore, AtomicLoad, AtomicSwap, AtomicCompare
Memory tagging	Not supported	MTE: AxTAGOP, AxTAG, WTAGUPDATE, RTAG/BTAG, xTAGMATCH
Security identification	ARPROT/AWPROT[1] non-secure bit	AxPROT retained, plus AxNSAID for finer-grained security domains
QoS	ARQOS/AWQOS	AxQOS retained, plus optional AxQOSACCEPT
Memory partitioning	Not supported	MPAM (PartID + PMG)
Encryption context	Not supported	MECID
Trace	Not supported	AxTRACE / RTRACE / BTRACE
Read data chunking	Not supported	ARCHUNKEN, RCHUNKV, RCHUNKNUM, RCHUNKSTRB
Data poison	Not supported	RPOISON, WPOISON
Region identifier	ARREGION/ AWREGION (optional)	ARREGION/ AWREGION retained (optional)

1.5 Module Categories

1.5.1 Master Components

Module	Description	Documentation	Status
axi5_master_rd	AXI5 read master with skid buffers and burst support	axi5_master_rd.md	Documented
axi5_master_rd_cg	Clock-gated AXI5 read master	axi5_master_rd_cg.md	Documented
axi5_atomic_filter	Read-return atomic termination (store-class passes, load-class DECERRs)	axi5_atomic_filter.md	Documented
axi5_atomic_rr_tracker	Per-ID R routing for read-return atomics where a read path exists	axi5_atomic_rr_tracker.md	Documented
axi5_master_wr	AXI5 write master with address/data coordination	axi5_master_wr.md	Documented
axi5_master_wr_cg	Clock-gated AXI5 write master	axi5_master_wr_cg.md	Documented

1.5.2 Slave Components

Module	Description	Documentation	Status
axi5_slave_rd	AXI5 read slave with configurable response handling	axi5_slave_rd.md	Documented
axi5_slave_rd_cg	Clock-gated AXI5 read slave	axi5_slave_rd_cg.md	Documented
axi5_slave_wr	AXI5 write slave with write response generation	axi5_slave_wr.md	Documented
axi5_slave_wr_cg	Clock-gated AXI5	axi5_slave_wr_cg.md	Documented

Module	Description	Documentation	Status
wr_cg	write slave		

1.5.3 Monitor Components

Module	Description	Documentation	Status
axi5_master_rd_mon	AXI5 read master with integrated transaction monitor	axi5_master_rd_mon.md	Documented
axi5_master_rd_mon_cg	Clock-gated read master with monitor	axi5_master_rd_mon_cg.md	Documented
axi5_master_wr_mon	AXI5 write master with integrated transaction monitor	axi5_master_wr_mon.md	Documented
axi5_master_wr_mon_cg	Clock-gated write master with monitor	axi5_master_wr_mon_cg.md	Documented
axi5_slave_rd_mon	AXI5 read slave with integrated transaction monitor	axi5_slave_rd_mon.md	Documented
axi5_slave_rd_mon_cg	Clock-gated read slave with monitor	axi5_slave_rd_mon_cg.md	Documented
axi5_slave_wr_mon	AXI5 write slave with integrated transaction monitor	axi5_slave_wr_mon.md	Documented
axi5_slave_wr_mon_cg	Clock-gated write slave with monitor	axi5_slave_wr_mon_cg.md	Documented

1.6 Key Features

1.6.1 AXI5 Channel Support

- **Full AXI5 signal set** for the features listed in *AXI5 Features Implemented* above
- **Burst types:** INCR, FIXED, and WRAP transported unmodified
- **ID transport:** Full AXI_ID_WIDTH transaction IDs; ordering and reordering are left to the endpoints

- **Transaction depth:** Not limited by these modules; set by the endpoints
- **Atomic transactions:** AWATOP transported for AtomicStore, AtomicLoad, AtomicSwap, and AtomicCompare

1.6.2 Advanced Features

- **Memory Tagging (MTE):** AxTAGOP, AxTAG, WTAGUPDATE, RTAG/BTAG, xTAGMATCH
- **Memory partitioning:** MPAM (PartID + PMG) and MECID encryption context
- **Poison support:** RPOISON/WPOISON for error propagation
- **Chunking:** ARCHUNKEN and the RCHUNK* response fields on the read path

1.6.3 Power Management

- **Clock Gating:** Per-module clock gating for power reduction
- **Idle Detection:** Automatic clock gate when interface is idle
- **Low-Power Modes:** Support for system low-power state integration

1.6.4 Monitoring and Debug

- **Integrated Monitors:** Combined master/slave + monitor modules
- **Transaction Tracking:** Complete transaction lifecycle monitoring
- **Performance Metrics:** Bandwidth, latency, and utilization
- **128-bit Monitor Bus:** Standardized packet format (+ 64-bit side-band timestamp)

1.7 Protocol Details

1.7.1 AXI5 Channel Overview

AXI5 maintains the five-channel architecture from AXI4:

Channel	Direction	Purpose
AR (Address Read)	Master to Slave	Read address and control
R (Read Data)	Slave to Master	Read data and response
AW (Address Write)	Master to Slave	Write address and

Channel	Direction	Purpose
		control
W (Write Data)	Master to Slave	Write data
B (Write Response)	Slave to Master	Write response

1.7.2 AXI5 Sideband Signals Carried by These Modules

Signal	Channel	Description
AWATOP	AW	Atomic transaction type (see <code>axi5_master_wr.md</code> for the encoding)
ARNSAID / AWNSAID	AR / AW	Non-secure access identifier
ARTRACE / AWTRACE	AR / AW	Request trace marker
ARMPAM / AWMPAM	AR / AW	Memory partitioning and monitoring (PartID + PMG)
ARMECID / AWMECID	AR / AW	Memory encryption context identifier
ARUNIQUE / AWUNIQUE	AR / AW	Unique access indicator
ARCHUNKEN	AR	Read data chunking enable
ARTAGOP / AWTAGOP	AR / AW	MTE tag operation
AWTAG	AW	MTE address tags
WPOISON	W	Write data poisoned indicator
WTAG / WTAGUPDATE	W	MTE write data tags and update mask
RPOISON	R	Read data poisoned indicator
RTRACE / BTRACE	R / B	Response trace marker
RCHUNKV / RCHUNKNUM / RCHUNKSTRB	R	Read chunk valid, number, and strobe
RTAG / BTAG	R / B	MTE response tags
RTAGMATCH /	R / B	MTE tag match result

Signal	Channel	Description
BTAGMATCH		

Signals absent from this list (ARLOOP/AWLOOP, ARQOSACCEPT/AWQOSACCEPT, ARREGION/AWREGION, the SMMU A_xMMU* group, and stash/CMO encodings) have no ports on these modules. See *AXI5 Features Not Implemented* above.

1.7.3 Burst Types

ARBURST/AWBURST	Type	Description
2'b00	FIXED	Fixed address for FIFO access
2'b01	INCR	Incrementing address burst
2'b10	WRAP	Wrapping burst for cache line
2'b11	Reserved	Not used

1.8 Usage Example

The examples below are abbreviated: `.m_axi_ar*` style wildcards stand in for the full port list, and the AXI5 sideband ports are omitted for brevity. All AXI5 sideband ports exist on the module unconditionally — the `ENABLE_*` parameters control whether a signal is packed through the SKID buffer, not whether the port is present — so a real instantiation must connect or explicitly tie off every one of them. See the per-module pages for complete, connect-every-port examples.

1.8.1 Using AXI5 Read Master

```
axi5_master_rd #(
    .SKID_DEPTH_AR(2),
    .SKID_DEPTH_R(4),
    .AXI_ID_WIDTH(8),
    .AXI_ADDR_WIDTH(64),
    .AXI_DATA_WIDTH(128),
    .AXI_USER_WIDTH(4)
) u_axi5_rd_master (
    .aclk          (clk),
    .aresetn       (resetn),

    // FUB (Functional Unit Block) interface
    .fub_axi_arid   (fub_arid),
    .fub_axi_araddr (fub_araddr),
    .fub_axi_arlen  (fub_arlen),
```

```

.fub_axi_arsize      (fub_arsize),
.fub_axi_arburst     (fub_arburst),
.fub_axi_arlock      (fub_arlock),
.fub_axi_arcache     (fub_arcache),
.fub_axi_arprot      (fub_arprot),
.fub_axi_arqos       (fub_arqos),
.fub_axi_aruser      (fub_aruser),
.fub_axi_arvalid     (fub_arvalid),
.fub_axi_arready     (fub_arready),

.fub_axi_rid         (fub_rid),
.fub_axi_rdata       (fub_rdata),
.fub_axi_rresp       (fub_rresp),
.fub_axi_rlast       (fub_rlast),
.fub_axi_ruser       (fub_ruser),
.fub_axi_rvalid      (fub_rvalid),
.fub_axi_rready      (fub_rready),

// AXI5 master interface
.m_axi_ar*           (mem_ar*),
.m_axi_r*            (mem_r*)
);

```

1.8.2 Using AXI5 Write Master

```

axi5_master_wr #(
    .SKID_DEPTH_AW(2),
    .SKID_DEPTH_W(4),
    .SKID_DEPTH_B(2),
    .AXI_ID_WIDTH(8),
    .AXI_ADDR_WIDTH(64),
    .AXI_DATA_WIDTH(128),
    .AXI_USER_WIDTH(4)
) u_axi5_wr_master (
    .aclk              (clk),
    .aresetn           (resetn),

    // FUB interface
    .fub_axi_awid      (fub_awid),
    .fub_axi_awaddr     (fub_awaddr),
    .fub_axi_awlen      (fub_awlen),
    .fub_axi_awsiz     (fub_awsiz),
    .fub_axi_awburst    (fub_awburst),
    .fub_axi_awlock     (fub_awlock),
    .fub_axi_awcache    (fub_awcache),
    .fub_axi_awprot     (fub_awprot),
    .fub_axi_awqos      (fub_awqos),
    .fub_axi_awuser     (fub_awuser),

```

```

.fub_axi_awvalid      (fub_awvalid),
.fub_axi_awready      (fub_awready),

.fub_axi_wdata        (fub_wdata),
.fub_axi_wstrb        (fub_wstrb),
.fub_axi_wlast        (fub_wlast),
.fub_axi_wuser        (fub_wuser),
.fub_axi_wvalid       (fub_wvalid),
.fub_axi_wready       (fub_wready),

.fub_axi_bid          (fub_bid),
.fub_axi_bresp        (fub_bresp),
.fub_axi_buser        (fub_buser),
.fub_axi_bvalid       (fub_bvalid),
.fub_axi_bready       (fub_bready),

// AXI5 master interface
.m_axi_aw*            (mem_aw*),
.m_axi_w*             (mem_w*),
.m_axi_b*             (mem_b*)
);

```

1.8.3 Using Integrated Monitor Modules

```

// AXI5 master with built-in transaction monitoring
axi5_master_rd_mon #(
    .AXI_ID_WIDTH(8),
    .AXI_ADDR_WIDTH(64),
    .AXI_DATA_WIDTH(128)
) u_axi5_rd_master_mon (
    .aclk              (clk),
    .aresetn           (resetn),

    // FUB and AXI interfaces (same as non-monitor version)
    .fub_axi_ar*       (...),
    .fub_axi_r*        (...),
    .m_axi_ar*         (...),
    .m_axi_r*          (...),

    // Monitor bus output
    .monbus_valid      (rd_mon_valid),
    .monbus_ready      (rd_mon_ready),
    .monbus_packet     (rd_mon_data)
);

```

1.9 Design Notes

1.9.1 FUB Interface Pattern

All AXI5 modules use the FUB (Functional Unit Block) interface pattern: - **fub_axi_*** signals connect to internal logic - **m_axi_*** or **s_axi_*** signals connect to external AXI bus - Skid buffers between FUB and external interfaces for timing closure

1.9.2 Migration from AXI4

These modules carry an AXI4-compatible core signal set, so an AXI4 agent can drive them: - Core protocol unchanged (5-channel architecture) - Every AXI5 sideband port can be tied off to its default value, and the matching **ENABLE_*** parameter set to 0 so the field costs no SKID buffer area - AWATOP tied to 6'b000000 (NonAtomic) makes every write a normal AXI4 write - User signal widths can match AXI4 configurations - **Exception:** AXI4's ARREGION/AWREGION have no port here. An AXI4 agent that relies on AxREGION must decode by address instead, or use the **axi4_master_*** / **axi4_slave_*** modules

1.9.3 Monitor Integration

The *_mon variants combine master/slave with integrated monitor: - Single instantiation for both data path and monitoring - Shared clock and reset - Monitor bus output for transaction visibility - Reduced resource usage vs. separate monitor instantiation

1.9.4 Performance Characteristics

These modules are SKID-buffer pipelines, so their cost is a small, fixed latency adder and their throughput ceiling is simply the bus bandwidth. No synthesis has been run against a specific ASIC node; the frequency figure below is an FPGA-oriented design target, not a signed-off characterization result.

Metric	Value
Maximum frequency	Design target; not characterized against a specific technology node
Added latency (per channel)	1 clock cycle per SKID stage
Throughput	One beat per clock, sustained (AXI_DATA_WIDTH bits/cycle)
Peak bandwidth, 128-bit bus at 500 MHz	8 GB/s per direction
Outstanding transactions	Not limited by these modules; bounded by the endpoints

1.10 Related Modules

- [AXI4 Modules](#) - AXI4 protocol components
 - [APB5 Modules](#) - APB5 protocol components
 - [AXI5 Modules](#) - AXI5-Stream components
 - [GAXI Modules](#) - Generic AXI utilities
 - [Shared Infrastructure](#) - Common components
-

1.11 Testing

All AXI5 modules are verified using CocoTB-based testbenches located in `val/amba/`:

Run all AXI5 tests

```
pytest val/amba/test_axi5*.py -v
```

Run specific module tests

```
pytest val/amba/test_axi5_master_rd.py -v
```

```
pytest val/amba/test_axi5_master_wr.py -v
```

```
pytest val/amba/test_axi5_slave_rd.py -v
```

```
pytest val/amba/test_axi5_slave_wr.py -v
```

1.12 References

1.12.1 Specifications

- ARM AMBA 5 AXI Protocol Specification
- ARM AMBA AXI and ACE Protocol Specification (AXI4)

1.12.2 Source Code

- RTL: `rtl/amba/axi5/`
 - Tests: `val/amba/test_axi5*.py`
 - Framework: `bin/TBClasses/components/axi4/`
-

Last Updated: 2026-07-19

1.13 Navigation

- [Back to rtl-amba Index](#)
- [Back to Main Documentation Index](#)

2 AXI5 Atomic Filter

Module: `axi5_atomic_filter.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready

2.1 Overview

The AXI5 Atomic Filter terminates **read-return atomic transactions** at a boundary whose downstream fabric can transport store-class atomics but cannot route the read data that load-class atomics return. It sits on the AW/W/B **control path** only — address and data payload buses route around it.

AXI5 AWATOP[5:0] encodes four transaction classes:

AWATOP	Class	Response	Filter action
6'b000000	Non-atomic write	B	Forward
6'b01xxxx	AtomicStore	B only	Forward
6'b10xxxx	AtomicLoad	B + original data on R	Swallow + local DECERR
6'b11000x	AtomicSwap / AtomicCompare	B + original data on R	Swallow + local DECERR

The load-class R response uses the AW's ID on the **read** channel. A fabric that splits write and read paths (such as the bridge crossbar, where every R-return tracker learns only about ARs) would never route that response — the transaction would hang. The filter guarantees it never reaches the fabric: the AW is accepted upstream but not forwarded, its W burst is consumed and discarded, and a local DECERR B response returns with the AW's ID.

2.1.1 Key Features

- Discriminates purely on AWATOP[5] — one wire, no decode table
- Route queue (push per AW, pop at WLAST) steers or sinks each W burst, so forwarded and swallowed bursts interleave correctly in AW order
- Response queue drains local DECERRs whenever the downstream B channel is idle. Downstream takes priority only when the filter is free to switch: once a beat is presented on `s_bvalid`, the chosen source is **held**

until the master accepts it, and `m_bready` is qualified by that choice. Without the hold, a downstream B arriving under a stalled `s_bvalid` would swap `s_bid/s_bresp` mid-beat, which AXI forbids

- Control-plane only: `id`, `atop`, `wlast`, and the six handshake pairs (`s_aw/s_w/s_b` and `m_aw/m_w/m_b` – the filter sits on the write path only). All other AW/W payload passes around the filter; the B payload (`bid/bresp`) is the filter’s output mux
- Single clock domain, no protocol state machine — two small FIFOs and combinational routing

2.2 Parameters

Parameter	Default	Description
<code>AXI_ID_WIDTH</code>	4	Width of <code>s_awid / s_bid / m_bid</code>
<code>AXI_ATOP_WIDTH</code>	6	AWATOP width (the spec value; only bit [5] is examined)
<code>DEPTH_LG2</code>	3	log2 of the route/response queue depth (default 8 entries)

2.2.1 Derived Parameters (do not override)

These are declared as `parameter` so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
<code>IW</code>	<code>AXI_ID_WIDTH</code>
<code>DEPTH</code>	<code>1 << DEPTH_LG2</code>

2.3 Ports

Upstream (`s_*`) faces the boundary wrapper’s FUB side; downstream (`m_*`) faces the fabric. Only control signals pass through:

Group	Signals
AW	<code>s_awvalid/awready/awid/awatop</code> → <code>m_awvalid/awready</code>

Group	Signals
W	s_wvalid/wready/wlast → m_wvalid/wready
B	m_bvalid/bready/bid/bresp → s_bvalid/bready/bid/bresp
Clock/reset	aclk, aresetn (active-low async) – single domain, shared with both sides

2.4 Functional Description

The filter sits on the write path and decides, per AW, whether the burst is forwarded downstream or swallowed. An unsupported atomic (AWATOP naming a load, swap or compare) is swallowed: its W beats are discarded and a local DECERR is returned with the AW's ID. Everything else passes through.

A route queue pushed per AW and popped at WLAST steers each W burst, so forwarded and swallowed bursts interleave correctly in AW order. A response queue holds the locally generated DECERRs, and the B output selects between that queue and the downstream response.

There is no protocol state machine: two small FIFOs and combinational routing.

2.5 Timing Characteristics

This module is **sequential**: it contains 2 always_ff block(s), clocked on aclk with active-low asynchronous reset aresetn. Outputs derived in those blocks are registered and therefore appear one clock after the inputs that produced them.

Per-path cycle counts are not enumerated here; read the block that drives the signal you care about. No synthesis frequency or area figures are quoted – none have been measured against a target device.

2.6 Usage Examples

Every parameter and port below is taken from the module declaration.

```
axi5_atomic_filter #(
    .AXI_ID_WIDTH      (4),
    .AXI_ATOP_WIDTH    (6),
    .DEPTH_LG2         (3),
    .IW                 (AXI_ID_WIDTH),
    .DEPTH              (1 << DEPTH_LG2)
```

```

) u_axi5_atomic_filter (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .s_awvalid           (s_awvalid),
    .s_awready           (s_awready),
    .s_awid              (s_awid),
    .s_awatop            (s_awatop),
    .s_wvalid            (s_wvalid),
    .s_wready            (s_wready),
    .s_wlast             (s_wlast),
    .s_bvalid            (s_bvalid),
    .s_bready            (s_bready),
    .s_bid               (s_bid),
    .s_bresp              (s_bresp),
    .m_awvalid           (m_awvalid),
    .m_awready           (m_awready),
    .m_wvalid            (m_wvalid),
    .m_wready            (m_wready),
    .m_bvalid            (m_bvalid),
    .m_bready            (m_bready),
    .m_bid               (m_bid),
    .m_bresp              (m_bresp)
);

```

2.6.1 Integration

The bridge generator (BRIDGE-002 A5-3a) inserts this filter automatically in the master adapter of any AXI5 master port with `atomic` in its `axi5_features`, between the `axi5_slave_wr` boundary wrapper (`pref_axi_*`) and the fabric-facing `fub_axi_*` namespace. Handshakes and the B payload go through the filter; every other signal gets a `pref → fub` pass-through assign. Swallowed transactions never assert `m_awvalid`, so stale pass-through payload is inert.

Standalone integrations follow the same recipe: route payload around, handshakes through.

2.6.2 Design Notes and Constraints

- **W stalls until its AW is queued.** `s_wready` is held low while the route queue is empty. AW acceptance never depends on W, so this cannot deadlock; it simply serializes W-before-AW masters at this boundary.
- **Same-ID B ordering.** A local DECERR can pass an in-flight forwarded write's B response. The AXI atomic rules already require atomics not to share an ID with outstanding transactions, so a compliant master never observes the reorder.

- **DECERR, not SLVERR.** An unsupported atomic at this boundary is “no such capability at this address path” — the decode-class error.
- The filter is intentionally not parameterized to pass load-class atomics through: a fabric that CAN route read returns (A5-3b’s shared per-ID tracker) simply omits the filter. ## Design Notes

The B selection must be HELD once presented. AXI requires BID and BRESP to be stable from BVALID until the handshake. Selecting combinationally between the downstream response and a queued DECERR lets a downstream B arriving under a stalled `s_bvalid` change the payload mid-beat; the module latches which source is presented and releases only on accept, and qualifies `m_bready` by that choice so a downstream response is not consumed while the master is still looking at a DECERR.

DECERR, not SLVERR. An unsupported atomic at this boundary is “no such capability here”, which is a decode error.

Write path only. The filter has six handshake pairs – `s_aw/s_w/s_b` and `m_aw/m_w/m_b`; the read channels do not pass through it.

2.7 Testing

`val/amba/test_axi5_atomic_filter.py` — direct cocotb driving: mixed forward/swallow traffic, a multi-beat swallowed burst, DECERR ID/order checks, and forwarded-set assertions.

Most phases use an always-ready downstream model, which cannot exercise the B selection hold: with `s_bready` high throughout, no beat is ever presented and unaccepted, so the stability window never opens. A dedicated phase therefore stalls the master, queues a local DECERR, then raises `m_bvalid` underneath it and asserts `s_bid/s_bresp` hold for eight cycles. Removing the hold from the RTL fails that phase at cycle 0; nothing else in the suite notices. End-to-end behavior (real ATOP values through a generated bridge, memory side-effect checks) is covered by `projects/components/bridge/dv/tests/test_bridge_1x2_wr_axi5a_atomics.py`.

2.8 Related Modules

- [axi5_slave_wr](#) — the boundary wrapper upstream of the filter in bridge master adapters
 - [AXI5 index](#) — scope statement for the AXI5 family
-

2.9 Navigation

- [← Back to axi5 index](#)

- [← Back to rtl-amba index](#)

3 AXI5 Atomic Read-Return Tracker

Module: `axi5_atomic_rr_tracker.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready

3.1 Overview

The AXI5 Atomic Read-Return Tracker gives a fabric the one piece of state it is missing when a **read-return atomic** passes through it: which read data channel, and which requester, an R beat belongs to when no AR was ever issued for it.

AXI5 AWATOP[5:0] splits atomics into two classes by bit 5:

AWATOP	Class	Response
6'b01xxxx	AtomicStore	B only
6'b10xxxx	AtomicLoad	B, plus the location's original data on R
6'b11000x	AtomicSwap / AtomicCompare	B, plus the original data on R

The read-return classes answer on the **read** data channel using the **AW's ID**. A fabric that splits its write and read paths (the bridge crossbar is one) routes R beats with trackers that learn only from AR handshakes, so the atomic's R beat matches nothing and is never delivered.

`axi5_atomic_filter` solves that at a boundary with no read path by refusing the classes. This block solves it where a read path exists: it records the atomic at its AW handshake and answers the R beat's routing question from its ID.

3.1.1 Key Features

- Keyed on ID alone. AXI5 forbids an atomic from sharing its ID with any transaction outstanding from the same Manager, so within one requester's traffic a live ID is unambiguous
- Combinational lookup from the presented RID: hit says the beat is a tracked atomic's, hit_data says where it goes
- Allocate and release may land in the same cycle; they can never target the same slot, because release needs a live entry and allocate needs a free one
- full is a registered view. The caller must not allocate while it is set; in the bridge the slave adapter holds the atomic AW's awready on it

- No protocol state machine: a valid vector, two small arrays and two priority encoders

3.2 Parameters

Parameter	Default	Description
AXI_ID_WIDTH	4	Width of alloc_id / lookup_id
DATA_WIDTH	1	Width of the routing tag stored per entry (the bridge stores its master index)
DEPTH	4	Number of read-return atomics that may be outstanding at once

3.2.1 Derived Parameters (do not override)

Derived parameter	Default expression
IW	AXI_ID_WIDTH
DW	DATA_WIDTH

3.3 Ports

Group	Signals	Direction	Meaning
Allocate	alloc, alloc_id, alloc_data	in	An accepted read-return atomic AW: its ID and routing tag
	full	out	Every slot live; do not allocate
Lookup	lookup_id	in	The RID being presented
	hit, hit_data	out	This beat belongs to a tracked atomic, and its routing tag
Release	release_beat	in	The R

Group	Signals	Direction	Meaning
			handshake's last beat; frees the matching entry when hit is set, ignored otherwise
Clock/reset	aclk, aresetn	in	Single domain, active-low asynchronous reset

3.4 Functional Description

At a slave-side boundary the adapter connects alloc to the AW handshake qualified by AWATOP[5], alloc_id to AWID, and alloc_data to the bridge's requester index for that AW. On the read side it presents RID on lookup_id. When hit is set the adapter routes the beat by hit_data and does **not** advance its in-order AR tracker; every other beat is routed by that tracker exactly as before. release_beat is the R handshake on its last beat, and the tracker frees the entry only if the beat was one of its own.

Two requesters may present the same ID at one Subordinate. That aliasing is a property of the surrounding fabric, not of this block: the generated bridge adapter reports it in simulation when an R beat matches both a tracked atomic and the head of the in-order tracker.

3.5 Timing Characteristics

This module is **sequential**: one always_ff block clocked on aclk with active-low asynchronous reset aresetn. hit and hit_data are combinational from lookup_id and the stored entries, so a beat is routable in the cycle it is presented. An allocation is visible to lookup on the cycle after its handshake.

3.6 Usage Examples

Every parameter and port below is taken from the module declaration. This is how the bridge's slave adapter instantiates it beside its in-order read FIFO:

```
axi5_atomic_rr_tracker #(
    .AXI_ID_WIDTH (ID_WIDTH),
    .DATA_WIDTH   (BRIDGE_ID_WIDTH),
```

```

        .DEPTH          (8)
    ) u_atom_rd (
        .aclk            (aclk),
        .aresetn         (aresetn),
        .alloc           (xbar_awvalid && xbar_awready && xbar_awatop[5]),
        .alloc_id        (xbar_awid),
        .alloc_data       (xbar_bridge_id_aw),
        .full            (atom_full),
        .lookup_id        (xbar_rid),
        .hit              (atom_hit),
        .hit_data         (atom_bridge_id),
        .release_beat     (xbar_rvalid && xbar_rready && xbar_rlast)
    );

```

```

assign rid_bridge_id = atom_hit ? atom_bridge_id : rd_fifo_head;
assign rid_valid      = atom_hit || rd_fifo_nonempty;

```

3.7 Verification

val/amba/test_axi5_atomic_rr_tracker.py: directed allocate / lookup / release / fill-to-full / same-cycle allocate-and-release, then a random phase against a dictionary model checked on every round, scaled by TEST_LEVEL. The end-to-end path is exercised by the bridge fixture bridge_1x2_rw_axi5a and its hand-written test_bridge_1x2_rw_axi5a_atomics.py.

3.8 Related

- axi5_atomic_filter: the other half of the story, for a boundary that has no read path and must refuse the classes instead
- Bridge MAS, AMBA5 boundary chapter (BRIDGE-002 A5-3b)

4 AXI5 Master Read

Module: axi5_master_rd.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready

4.1 Overview

The AXI5 Master Read module is the master-side AR/R channel transport block. It carries a full AXI5 read signal set — including the AXI5 sideband extensions — between a FUB (Functional Unit Block) interface and an external AXI5 master interface, with a configurable SKID buffer on each channel for timing closure and flow control.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison

generation, and no outstanding-transaction tracking. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

4.1.1 Key Features

- Carries the full AXI5 signal set listed below, unmodified, across the SKID buffers
 - **ARNSAID**: Non-secure access identifier for security domains
 - **ARTRACE**: Trace signal for debug and performance monitoring
 - **ARMPAM**: Memory Partitioning and Monitoring (PartID + PMG)
 - **ARMECID**: Memory Encryption Context ID for secure memory
 - **ARUNIQUE**: Unique ID indicator for cache operations
 - **ARCHUNKEN**: Read data chunking enable for partial data transfers
 - **ARTAGOP**: Memory tag operation (MTE - Memory Tagging Extension)
 - **RTRACE**: Read data trace signal
 - **RPOISON**: Data poison indicator for corrupted data detection
 - **RCHUNKV/RCHUNKNUM/RCHUNKSTRB**: Chunking control signals
 - **RTAG/RTAGMATCH**: Memory tags and tag match response (MTE)
 - Configurable SKID buffer depths for AR and R channels
 - Busy signal for power management and clock gating
 - ARREGION not implemented (see *Design Notes*)
-

4.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_R	int	4	R channel SKID buffer depth (legal range 2..8 inclusive, any integer)
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width

Parameter	Type	Default	Description
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator

4.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)

Parameter	Expression	Description
TW	AXI_TAG_WIDTH * NUM_TAGS	Total width of the rtag field
CHUNK_STRB_WIDTH	max(AXI_DATA_WIDTH / 128, 1)	Width of rchunkstrb, one bit per 128-bit granule
ARSize	Sum of the enabled AR fields	AR SKID buffer payload width
RSize	Sum of the enabled R fields	R SKID buffer payload width

Note on AXI_WSTRB_WIDTH: this module declares AXI_WSTRB_WIDTH (default AXI_DATA_WIDTH/8) and its short alias SW, but neither is used. A read module has no W channel and therefore no write strobes. The parameter is retained only so the read and write module parameter lists line up; overriding it has no effect.

4.3 Ports

4.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

4.3.2 FUB AXI5 Interface (Slave Side - Input)

4.3.2.1 AR Channel

Port	Width	Direction	Description
fub_axi_arid	IW	Input	Read address ID
fub_axi_araddr	AW	Input	Read address
fub_axi_arlen	8	Input	Burst length
fub_axi_arsize	3	Input	Burst size
fub_axi_arburst	2	Input	Burst type
fub_axi_arlock	1	Input	Lock type

Port	Width	Direction	Description
fub_axi_arcache	4	Input	Cache attributes
fub_axi_arprot	3	Input	Protection attributes
fub_axi_argos	4	Input	Quality of Service
fub_axi_aruser	UW	Input	User-defined signal
fub_axi_arvalid	1	Input	Read address valid
fub_axi_arready	1	Output	Read address ready

4.3.2.2 AXI5 AR Extensions

Port	Width	Direction	Description
fub_axi_arnsaid	AXI_NSAID_WIDTH	Input	Non-secure access ID
fub_axi_artrace	1	Input	Trace signal
fub_axi_armpam	AXI_MPAM_WIDTH	Input	Memory partitioning/monitoring
fub_axi_armecid	AXI_MECID_WIDTH	Input	Memory encryption context ID
fub_axi_arunique	1	Input	Unique ID indicator
fub_axi_archunken	1	Input	Chunking enable
fub_axi_artagop	AXI_TAGOP_WIDTH	Input	Tag operation (MTE)

4.3.2.3 R Channel

Port	Width	Direction	Description
fub_axi_rid	IW	Output	Read data ID
fub_axi_rdata	DW	Output	Read data

Port	Width	Direction	Description
fub_axi_rresp	2	Output	Read response
fub_axi_rlast	1	Output	Last transfer in burst
fub_axi_ruser	UW	Output	User-defined signal
fub_axi_rvalid	1	Output	Read data valid
fub_axi_rready	1	Input	Read data ready

4.3.2.4 AXI5 R Extensions

Port	Width	Direction	Description
fub_axi_rtr ace	1	Output	Trace signal
fub_axi_rp oison	1	Output	Data poison indicator
fub_axi_rc hunkv	1	Output	Chunk valid
fub_axi_rc hunknum	AXI_CHUNK NUM_WIDTH	Output	Chunk number
fub_axi_rc hunkstrb	CHUNK_STR B_WIDTH	Output	Chunk strobe (128-bit granules)
fub_axi_rta g	TW	Output	Memory tags (NUM_TAGS × TAG_WIDTH)
fub_axi_rta gmatch	1	Output	Tag match response

4.3.3 Master AXI5 Interface (Output Side)

Same port list as FUB interface but with `m_axi_*` prefix and reversed directions.

4.3.4 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator for

Port	Width	Direction	Description
			clock gating

4.4 Functional Description

4.4.1 Architecture

Two channels, two SKID buffers, conditional packing in between:

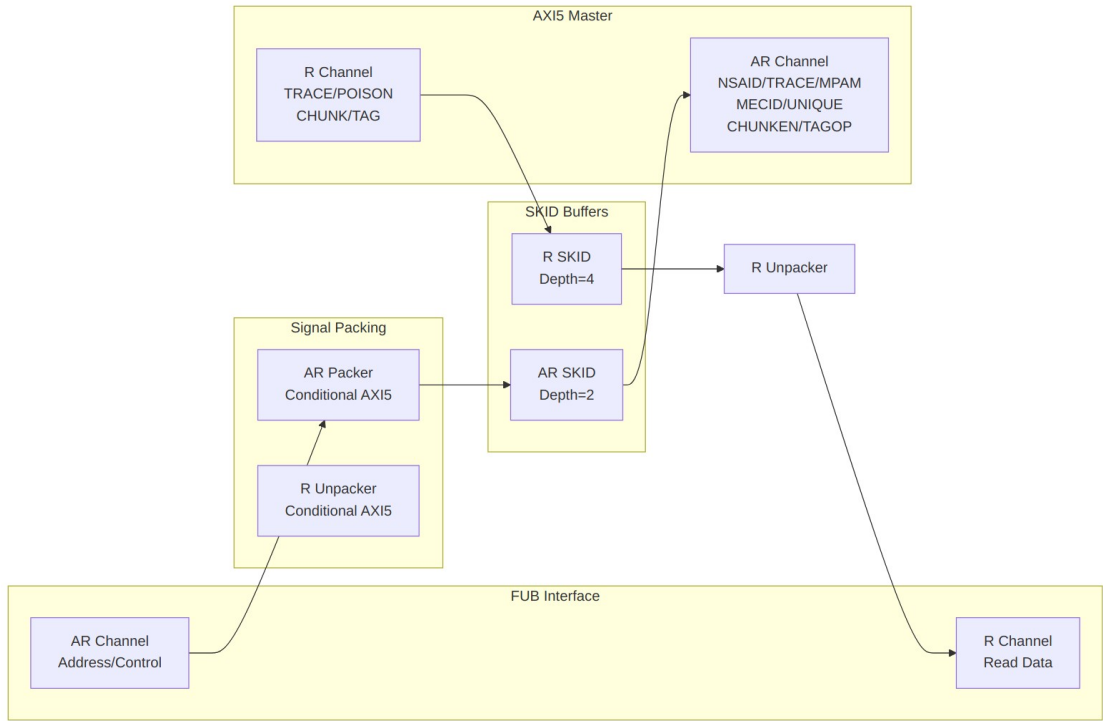


Diagram 1

4.4.2 AXI5 Enhancements Over AXI4

Security and Isolation: - **ARNSAID:** Identifies security domain for non-secure accesses - **ARMECID:** Provides encryption context for secure memory regions

Performance and Monitoring: - **ARTRACE:** Enables performance trace and debug capabilities - **ARMPAM:** Supports memory bandwidth partitioning and QoS

Advanced Features: - **ARUNIQUE:** Indicates unique cache line access (no sharing) - **ARCHUNKEN:** Enables partial data transfer (chunking) - **ARTAGOP/RTAG/RTAGMATCH:** Memory Tagging Extension for security

Data Integrity: - **RPOISON:** Flags corrupted or invalid data -
RCHUNKV/RCHUNKNUM/RCHUNKSTRB: Controls chunked data transfers

Not implemented: - **ARREGION:** No port on this module. AxREGION is not deprecated by AXI5; it remains a valid optional signal and is simply omitted here. Decode or route by address instead, or use axi4_master_rd

4.4.3 Signal Packing Logic

Packing is dynamic, driven by the feature enables:

```
// AR channel packed conditionally
if (ENABLE_NSAID)    → pack ARNSAID
if (ENABLE_TRACE)    → pack ARTRACE
if (ENABLE_MPAM)     → pack ARMPAM
if (ENABLE_MECID)    → pack ARMECID
if (ENABLE_UNIQUE)   → pack ARUNIQUE
if (ENABLE_CHUNKING) → pack ARCHUNKEN
if (ENABLE_MTE)      → pack ARTAGOP

// R channel unpacked conditionally
if (ENABLE_TRACE)    → unpack RTRACE
if (ENABLE_POISON)   → unpack RPOISON
if (ENABLE_CHUNKING) → unpack RCHUNKV/RCHUNKNUM/RCHUNKSTRB
if (ENABLE_MTE)      → unpack RTAG/RTAGMATCH
```

Disabled signals default to 0.

4.5 Timing Characteristics

4.5.1 Basic Read Transaction

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- ARID, ARADDR, ARLEN, ARSIZE
- ARVALID, ARREADY
- ARNSAID, ARTRACE, ARMPAM (AXI5 extensions)
- RID, RDATA, RRESP, RLAST
- RVALID, RREADY
- RTRACE, RPOISON (AXI5 extensions)

4.5.2 Chunked Read Transaction

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- ARCHUNKEN assertion
- RCHUNKV, RCHUNKNUM, RCHUNKSTRB
- Partial data transfer pattern

4.5.3 Memory Tagging Extension (MTE)

Timing diagram pending. The signals and sequence this scenario exercises:

- ARTAGOP encoding
 - RTAG delivery with data
 - RTAGMATCH response
-

4.6 Usage Examples

A full-featured instantiation with every AXI5 extension enabled:

```
axi5_master_rd #(
    .AXI_ID_WIDTH          (8),
    .AXI_ADDR_WIDTH        (32),
    .AXI_DATA_WIDTH        (64),
    .AXI_USER_WIDTH        (4),
    .SKID_DEPTH_AR         (2),
    .SKID_DEPTH_R          (4),
    // Enable AXI5 features
    .ENABLE_NSAID          (1),
    .ENABLE_TRACE          (1),
    .ENABLE_MPAM           (1),
    .ENABLE_MECID          (1),
    .ENABLE_UNIQUE         (1),
    .ENABLE_CHUNKING       (1),
    .ENABLE_MTE            (1),
    .ENABLE_POISON         (1)
) u_axi5_master_rd (
    .aclk                   (axi_clk),
    .aresetn                (axi_rst_n),

    // FUB interface (slave side)
    .fub_axi_arid           (fub_arid),
```

```

.fub_axi_araddr      (fub_araddr),
.fub_axi_arlen       (fub_arlen),
.fub_axi_arsize      (fub_arsize),
.fub_axi_arburst     (fub_arburst),
.fub_axi_arlock      (fub_arlock),
.fub_axi_arcache     (fub_arcache),
.fub_axi_arprot      (fub_arprot),
.fub_axi_arqos       (fub_arqos),
.fub_axi_aruser      (fub_aruser),
.fub_axi_arvalid     (fub_arvalid),
.fub_axi_arready     (fub_arready),

// AXI5 AR extensions
.fub_axi_arnsaid     (fub_arnsaid),
.fub_axi_artrace     (fub_artrace),
.fub_axi_arpam       (fub_arpam),
.fub_axi_armecid     (fub_armecid),
.fub_axi_arunique    (fub_arunique),
.fub_axi_archunken   (fub_archunken),
.fub_axi_artagop     (fub_artagop),

// R channel
.fub_axi_rid         (fub_rid),
.fub_axi_rdata       (fub_rdata),
.fub_axi_rresp       (fub_rresp),
.fub_axi_rlast       (fub_rlast),
.fub_axi_ruser       (fub_ruser),
.fub_axi_rvalid      (fub_rvalid),
.fub_axi_rready      (fub_rready),

// AXI5 R extensions
.fub_axi_rtrace      (fub_rtrace),
.fub_axi_rpoison     (fub_rpoison),
.fub_axi_rchunkv     (fub_rchunkv),
.fub_axi_rchunknum   (fub_rchunknum),
.fub_axi_rchunkstrb  (fub_rchunkstrb),
.fub_axi_rtag        (fub_rtag),
.fub_axi_rtagmatch   (fub_rtagmatch),

// Master interface (output side)
.m_axi_arid          (m_axi_arid),
.m_axi_araddr        (m_axi_araddr),
// Every remaining m_axi_* port mirrors the fub_axi_* list above,
// same names and widths, opposite directions. All must be
connected.

// Status

```

```

        .busy                (master_rd_busy)
    );

```

4.7 Design Notes

4.7.1 AXI5 vs AXI4 Differences

Feature	AXI4	AXI5
Security domains	None	NSAID
Trace support	None	TRACE signals
Memory partitioning	None	MPAM
Encryption context	None	MECID
Unique access	None	UNIQUE
Data chunking	None	CHUNKING
Memory tagging	None	MTE (TAG/TAGOP)
Poison indication	None	POISON
Region field	ARREGION (optional)	ARREGION retained by the spec; no port on this module

4.7.2 Memory Tagging Extension (MTE)

When `ENABLE_MTE=1`: - **ARTAGOP**: Specifies tag operation (Match/Insert/Fetch) - **RTAG**: Delivers memory tags (1 tag per 16 bytes of data) - **RTAGMATCH**: Indicates tag match result - **NUM_TAGS**: Calculated as $(DATA_WIDTH / 128)$, minimum 1

Example for 128-bit data bus: - $NUM_TAGS = 1 - TW = AXI_TAG_WIDTH \times 1 = 4$ bits

4.7.3 Chunking Support

When `ENABLE_CHUNKING=1`: - **ARCHUNKEN**: Master requests chunked response - **RCHUNKV**: Indicates chunk is valid - **RCHUNKNUM**: Identifies chunk within transaction - **RCHUNKSTRB**: Byte strobes at 128-bit granularity

4.7.4 Feature Enable Strategy

Disable unused features to reduce area:

```

.ENABLE_NSAID    (0), // No security domains
.ENABLE_TRACE    (0), // No trace capability
.ENABLE_MPAM     (0), // No memory partitioning

```

```
.ENABLE_MECID      (0), // No encryption
.ENABLE_UNIQUE     (0), // No unique access
.ENABLE_CHUNKING   (0), // No chunking
.ENABLE_MTE        (0), // No memory tagging
.ENABLE_POISON     (0)  // No poison detection
```

4.8 Related Modules

- [AXI5 Master Write](#) - Master write interface
 - [AXI5 Slave Read](#) - Slave read interface
 - [AXI5 Master Read CG](#) - Clock-gated variant
 - [AXI5 Master Read Monitor](#) - With integrated monitoring
 - [AXI4 Master Read](#) - AXI4 version for comparison
-

4.9 Testing

val/amba/test_axi5_master_rd.py exercises this module. It collects 8 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_master_rd.py -v
```

4.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

5 AXI5 Master Read with Clock Gating

Module: axi5_master_rd_cg.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready

5.1 Overview

The AXI5 Master Read with Clock Gating module wraps the standard axi5_master_rd core with intelligent clock gating for power optimization. When no AXI activity is detected for a

configurable number of idle cycles, the clock gates off automatically — no software involvement, no protocol changes.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no outstanding-transaction tracking. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

5.1.1 Key Features

- Carries the same AXI5 signal set as `axi5_master_rd`, which it wraps
- **ARNSAID:** Non-secure access identifier for security domains
- **ARTRACE:** Trace signal for debug and performance monitoring
- **ARMPAM:** Memory Partitioning and Monitoring (PartID + PMG)
- **ARMECID:** Memory Encryption Context ID for secure memory
- **ARUNIQUE:** Unique ID indicator for cache operations
- **ARCHUNKEN:** Read data chunking enable for partial data transfers
- **ARTAGOP:** Memory tag operation (MTE - Memory Tagging Extension)
- **RTRACE:** Read data trace signal
- **RPOISON:** Data poison indicator for corrupted data detection
- **RCHUNKV/RCHUNKNUM/RCHUNKSTRB:** Chunking control signals
- **RTAG/RTAGMATCH:** Memory tags and tag match response (MTE)
- **Automatic clock gating** based on activity detection
- **Configurable idle count** before clock gating activates
- **Power savings** during idle periods
- **Transparent operation** - no protocol changes
- **Status outputs** for clock gating state monitoring
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

5.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer

Parameter	Type	Default	Description
			depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
CG_IDLE_COUNT_WIDTH	int	4	Width of idle counter

Parameter	Type	Default	Description
DTH			(max 2^N-1 cycles)

5.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	Total width of the rtag field
CHUNK_STRB_WIDTH	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	Width of rchunkstrb, one bit per 128-bit granule
ARSize	Sum of the enabled AR fields	AR SKID buffer payload width
RSize	Sum of the enabled R fields	R SKID buffer payload width

Note on AXI_WSTRB_WIDTH: this module declares AXI_WSTRB_WIDTH (default AXI_DATA_WIDTH/8) and its short alias SW, but neither is used. A read module has no W channel and therefore no write strobes. The parameter is retained only so the read and write module parameter lists line up; overriding it has no effect.

5.3 Ports

5.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

5.3.2 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Clock gating enable (1=enable, 0=always)

Port	Width	Direction	Description
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	active) Idle cycles before gating activates

5.3.3 FUB AXI5 Interface (Slave Side - Input)

5.3.3.1 AR Channel

Port	Width	Direction	Description
fub_axi_arid	IW	Input	Read address ID
fub_axi_araddr	AW	Input	Read address
fub_axi_arlen	8	Input	Burst length
fub_axi_arsize	3	Input	Burst size
fub_axi_arburst	2	Input	Burst type
fub_axi_arlock	1	Input	Lock type
fub_axi_arcache	4	Input	Cache attributes
fub_axi_arprot	3	Input	Protection attributes
fub_axi_arqos	4	Input	Quality of Service
fub_axi_aruser	UW	Input	User-defined signal
fub_axi_arvalid	1	Input	Read address valid
fub_axi_arready	1	Output	Read address ready (forced 0 when gating)

5.3.3.2 AXI5 AR Extensions

Port	Width	Direction	Description
fub_axi_ar nsaid	AXI_NSAID_ WIDTH	Input	Non-secure access ID
fub_axi_art race	1	Input	Trace signal
fub_axi_ar mpam	AXI_MPAM_ WIDTH	Input	Memory partitioning/monitoring
fub_axi_ar mecid	AXI_MECID_ WIDTH	Input	Memory encryption context ID
fub_axi_ar unique	1	Input	Unique ID indicator
fub_axi_ar chunken	1	Input	Chunking enable
fub_axi_art agop	AXI_TAGOP_ WIDTH	Input	Tag operation (MTE)

5.3.3.3 R Channel

Port	Width	Direction	Description
fub_axi_rid	IW	Output	Read data ID
fub_axi_rdata	DW	Output	Read data
fub_axi_rresp	2	Output	Read response
fub_axi_rlast	1	Output	Last transfer in burst
fub_axi_ruser	UW	Output	User-defined signal
fub_axi_rvalid	1	Output	Read data valid
fub_axi_rready	1	Input	Read data ready

5.3.3.4 AXI5 R Extensions

Port	Width	Direction	Description
fub_axi_rtr ace	1	Output	Trace signal

Port	Width	Direction	Description
fub_axi_rpoison	1	Output	Data poison indicator
fub_axi_rchunkv	1	Output	Chunk valid
fub_axi_rchunknum	AXI_CHUNK NUM_WIDTH	Output	Chunk number
fub_axi_rchunkstrb	CHUNK_STR B_WIDTH	Output	Chunk strobe (128-bit granules)
fub_axi_rtags	TW	Output	Memory tags (NUM_TAGS × TAG_WIDTH)
fub_axi_rtagmatch	1	Output	Tag match response


5.3.4 Master AXI5 Interface (Output Side)

Same port list as FUB interface but with `m_axi_*` prefix and reversed directions.

5.3.5 Clock Gating Status Outputs

Port	Width	Direction	Description
cg_gating	1	Output	Clock gating active (1=clock gated, 0=clock running)
cg_idle	1	Output	Interface idle (1=no activity detected)

5.4 Functional Description

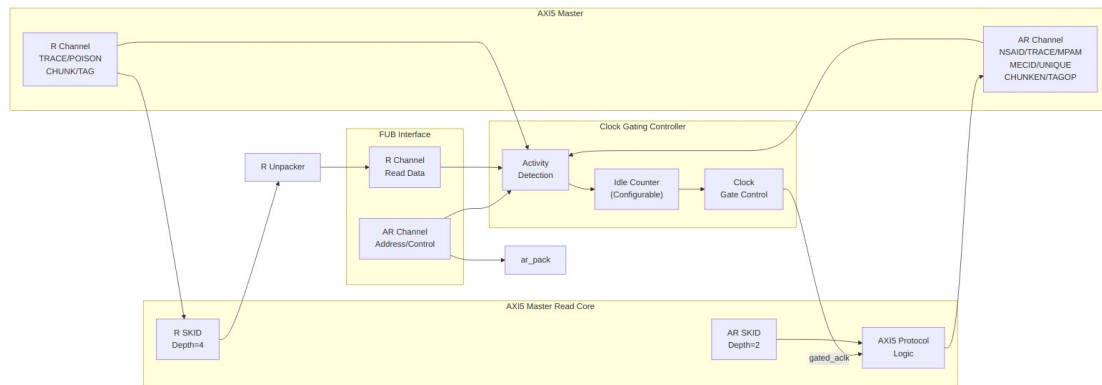

Architecture

5.4.1 Clock Gating Operation

The clock gating controller monitors activity on both user and AXI sides:

User-side activity detection:

```
user_valid = fub_axi_arvalid || fub_axi_rvalid || int_busy // peer
VALID (post-fix)
```

AXI-side activity detection:

```
axi_valid = m_axi_arvalid || m_axi_rvalid
```

Clock gating state machine: 1. **ACTIVE:** Clock running, transactions in progress 2. **IDLE:** No activity detected, idle counter incrementing 3. **GATING:** Idle count reached, clock gated (power saving) 4. **WAKE:** Activity detected, clock ungating

Ready signal control during gating:

```
fub_axi_arready = cg_gating ? 1'b0 : int_arready;
m_axi_rready = cg_gating ? 1'b0 : int_rready;
```

5.4.2 Ready Deassertion and Wake Behavior

While `cg_gating` is asserted, the ready outputs listed above are forced low.

This is legal AXI. A READY output may be deasserted for any number of cycles, and neither side may assume READY asserts within a bounded time, so holding it low is ordinary backpressure rather than a protocol violation. It cannot deadlock either: the same VALID being held off also feeds the activity detector, so gating releases and READY returns to the core's value.

Two consequences are worth designing around:

- **Wake latency adds to first-transfer latency.** Activity is registered once (AXI4, AXI5, AXI4-Lite, AXI4-Stream) or twice (APB, APB5, AXI5-Stream – with one exception: `apb4_slave_cdc_cg` drives `amba_clock_gate_ctrl` combinatorially and so registers once, not twice) before reaching the ICG enable, which is combinatorial. The AXI5 `_cg` wrappers drive the activity terms combinatorially, so there is 1 register stage and the first usable gated-clock edge arrives 2 cycles after activity asserts. Size `cfg_cg_idle_count` so that cost is amortized over the traffic burst that follows.
- **READY is a combinational function of `cg_gating`.** The path from the idle counter to the `fub_axi_arready` output may need attention during timing closure, particularly at high frequency.

5.4.3 Integration Caveat: `fub_axi_rready` in the Activity Term

The activity detector uses the corresponding VALID (`fub_axi_rvalid`), never the peer's READY. (Historically this term was `fub_axi_rready`, which meant a peer parking its ready high – a common and entirely correct style – pinned the block permanently awake and defeated gating; that defect was fixed family-wide, matching the rule the `mon_cg` wrappers always carried.)

An always-ready consumer no longer prevents gating.

5.4.4 Idle Counter Configuration

The `cfg_cg_idle_count` parameter sets how many consecutive idle cycles are required before clock gating activates. Gating engages `cfg_cg_idle_count + 1` clocks after the internal wakeup deasserts, which is `cfg_cg_idle_count + 2` clocks after the last bus activity on AXI5 (one extra for the `r_wakeup` flop). The “Idle Cycles” column below counts from the internal wakeup deassertion:

<code>cfg_cg_idle_count</code>	Idle Cycles	Use Case
0	1 cycle	Aggressive power saving
1-3	2-4 cycles	Balanced (typical)
4-7	5-8 cycles	Low-latency systems
8-15	9-16 cycles	Minimize gating overhead

Recommendation: Start with `cfg_cg_idle_count = 3` (4 idle cycles) for most applications.

5.4.5 Power Savings Analysis

Clock gating effectiveness: - Dynamic power of the gated logic falls roughly in proportion to the gated fraction of time - Order-of-magnitude expectation: tens of percent of this module's dynamic power under bursty traffic; most of it in a mostly-idle system

Trade-offs: - Wake latency: 1 register stage; first usable gated-clock edge 2 clock cycles after activity - Area increase: a few percent (clock gate cell plus idle counter) - Best suited for: Intermittent traffic patterns

All power figures on this page are first-order estimates derived from duty cycle, not measured results. No power analysis (gate-level or otherwise) has been run against these modules. Actual savings depend on the gated logic's share of total design power, the technology library's clock-gate cell, and leakage, which clock gating does not reduce at all. Treat these numbers as a sizing aid and characterize your own instance before quoting a savings figure.

5.5 Timing Characteristics

5.5.1 Clock Gating Activation

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK (ungated)
- GATED_ACLK (gated clock)
- user_valid, axi_valid activity
- Idle counter incrementing
- cg_idle assertion
- cg_gating activation
- Clock stops after idle count

5.5.2 Clock Gating Wake-up

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK (ungated)
- GATED_ACLK resuming
- Activity detection (arvalid assertion)
- cg_gating deactivation
- arready response after wake
- Normal AXI transaction proceeds

5.6 Usage Examples

```
axi5_master_rd_cg #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
    .AXI_DATA_WIDTH     (64),
    .AXI_USER_WIDTH     (4),
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    // Enable AXI5 features
    .ENABLE_NSaid       (1),
    .ENABLE_TRACE       (1),
    .ENABLE_MPAM         (1),
    .ENABLE_MECID       (1),
    .ENABLE_UNIQUE      (1),
    .ENABLE_CHUNKING     (1),
    .ENABLE_MTE          (1),
    .ENABLE_POISON       (1),
    // Clock gating configuration
    .CG_IDLE_COUNT_WIDTH (4)
) u_axi5_master_rd_cg (
    .aclk                (axi_clk),
    .aresetn              (axi_rst_n),

    // Clock gating configuration
    .cfg_cg_enable        (power_save_enable),
    .cfg_cg_idle_count    (4'd3), // Gate after 4 idle cycles

    // FUB interface (slave side)
    .fub_axi_arid         (fub_arid),
    .fub_axi_araddr       (fub_araddr),
    .fub_axi_arlen        (fub_arlen),
    .fub_axi_arsize       (fub_arsize),
    .fub_axi_arburst      (fub_arburst),
    .fub_axi_arlock       (fub_arlock),
    .fub_axi_arcache      (fub_arcache),
    .fub_axi_arprot       (fub_arprot),
    .fub_axi_arqos        (fub_arqos),
    .fub_axi_aruser       (fub_aruser),
    .fub_axi_arvalid      (fub_arvalid),
    .fub_axi_arready      (fub_arready),

    // AXI5 AR extensions
    .fub_axi_arnsaid      (fub_arnsaid),
    .fub_axi_artrace      (fub_artrace),
```



```

.fub_axi_arpam      (fub_arpam),
.fub_axi_armecid    (fub_armecid),
.fub_axi_arunique    (fub_arunique),
.fub_axi_archunken  (fub_archunken),
.fub_axi_artagop     (fub_artagop),

// R channel
.fub_axi_rid        (fub_rid),
.fub_axi_rdata       (fub_rdata),
.fub_axi_rresp       (fub_rresp),
.fub_axi_rlast       (fub_rlast),
.fub_axi_ruser       (fub_ruser),
.fub_axi_rvalid      (fub_rvalid),
.fub_axi_rready      (fub_rready),

// AXI5 R extensions
.fub_axi_rtrace      (fub_rtrace),
.fub_axi_rpoison     (fub_rpoison),
.fub_axi_rchunkv     (fub_rchunkv),
.fub_axi_rchunknum   (fub_rchunknum),
.fub_axi_rchunkstrb  (fub_rchunkstrb),
.fub_axi_rtag        (fub_rtag),
.fub_axi_rtagmatch   (fub_rtagmatch),

// Master interface (output side)
.m_axi_arid          (m_axi_arid),
.m_axi_araddr        (m_axi_araddr),
// Every remaining m_axi_* port mirrors the fub_axi_* list above,
// same names and widths, opposite directions. All must be
connected.

// Clock gating status
.cg_gating           (clock_gated),
.cg_idle             (interface_idle)
);

// Use status signals for power monitoring
always_ff @(posedge axi_clk or negedge axi_rst_n) begin
    if (!axi_rst_n)
        power_cycles_saved <= '0;
    else if (clock_gated)
        power_cycles_saved <= power_cycles_saved + 1;
end

```

5.7 Design Notes

5.7.1 Clock Gating vs. Always-On

Aspect	Always-On	Clock Gated
Power (idle)	100%	10-30%
Wake latency	0 cycles	1 register stage; first usable edge 2 cycles after activity
Area overhead	0%	~5%
Best for	Continuous traffic	Bursty traffic

5.7.2 Configuration Strategies

Aggressive Power Saving:

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd0)  // Gate immediately after idle
```

Balanced (Recommended):

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd3)  // Gate after 4 idle cycles
```

Low-Latency:

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd7)  // Gate after 8 idle cycles (count+1; a  
LITERAL count)
```

Disabled (Always-On):

```
.cfg_cg_enable      (1'b0),  
.cfg_cg_idle_count  (4'd0)  // Ignored when disabled
```

5.7.3 Integration with System Power Management

The clock gating status outputs can integrate with broader system power management:

```
// Aggregate clock gating status  
assign system_power_state = {  
    axi_rd_cg.cg_gating,  
    axi_wr_cg.cg_gating,  
    apb_cg.cg_gating  
    // ... other clock-gated modules  
};  
  
// Enter deep sleep when all interfaces gated  
assign deep_sleep_ok = &system_power_state;
```

5.7.4 Verification Considerations

When verifying clock-gated designs: 1. Test with `cfg_cg_enable = 0` first (baseline) 2. Enable clock gating and verify identical functional behavior 3. Check wake latency meets timing requirements 4. Verify no protocol violations during gating/ungating 5. Measure power savings in representative traffic scenarios

5.8 Related Modules

- [AXI5 Master Read](#) - Non-gated base module
 - [AXI5 Master Write CG](#) - Write with clock gating
 - [AXI5 Master Read Monitor CG](#) - With monitoring + clock gating
 - [AMBA Clock Gate Controller](#) - Clock gating controller spec
-

5.9 Testing

`val/amba/test_axi5_master_rd_cg.py` exercises this module. It collects 3 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_master_rd_cg.py -v
```

5.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

6 AXI5 Master Read with Monitor

Module: `axi5_master_rd_mon.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready

6.1 Overview

The AXI5 Master Read with Monitor module combines the standard `axi5_master_rd` core with an integrated `axi_monitor_filtered` for comprehensive transaction monitoring and error detection. You get real-time visibility into AXI5 read operations, with configurable packet filtering so the monitor bus only carries what you actually care about.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

6.1.1 Key Features

- Carries the full AXI5 signal set unmodified (wraps `axi5_master_rd`) – transport, not semantics; see Scope above
 - **ARNSAID:** Non-secure access identifier for security domains
 - **ARTRACE:** Trace signal for debug and performance monitoring
 - **ARMPAM:** Memory Partitioning and Monitoring (PartID + PMG)
 - **ARMECID:** Memory Encryption Context ID for secure memory
 - **ARUNIQUE:** Unique ID indicator for cache operations
 - **ARCHUNKEN:** Read data chunking enable for partial data transfers
 - **ARTAGOP:** Memory tag operation (MTE - Memory Tagging Extension)
 - **RTRACE:** Read data trace signal
 - **RPOISON:** Data poison indicator for corrupted data detection
 - **RCHUNKV/RCHUNKNUM/RCHUNKSTRB:** Chunking control signals
 - **RTAG/RTAGMATCH:** Memory tags and tag match response (MTE)
 - **Integrated AXI monitor** with 2-Level Filtering: packet-type drop masks + per-event masks (`err_select` is reserved – no routing)
 - **Error detection:** Protocol violations, SLVERR, DECERR
 - **Timeout monitoring:** Stuck transactions, stalled channels
 - **Performance metrics:** Latency, throughput, outstanding transactions
 - **MonBus output:** Standardized 128-bit monitor packet format paired with 64-bit side-band timestamp
 - **Configuration validation:** Detects filter conflicts
-

6.2 Parameters

A lite-monitor version of this wrapper exists as `axi5_master_rd_monlite`: the same core and taps with `axi_monitor_lite` instead of `axi_monitor_filtered`, about a fifth of the monitor gates, error/timeout/completion/threshold packets only. Selected in generated bridges by `mon_preset = "lite"`.

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning

Parameter	Type	Default	Description
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitor unit identifier
AGENT_ID	int	10	Monitor agent identifier
MAX_TRANSACTION S	int	16	Transaction table size
ACTIVE_TRANS_THR ESHOLD	int	MAX_TRANSACT IONS/2	Active-transaction count that trips a threshold packet when <code>cfg_threshold_enable=1</code> . Replaces the former hardwired 8/4; threshold packets now scale with the table sizing
USE_WDATA_ORDER _Q	bit	0	Write-data ordering queue
NUM_BANKS	int	1	Banked transaction tables. >1 on a WRITE monitor requires <code>USE_WDATA_ORDER_Q=1</code> – <code>axi_monitor_trans_mgr</code> fails elaboration otherwise
ID_FILTER_ENABLE	bit	0	Synthesises the per-instance ID-slice filter
ID_MATCH_BASE	int	0	First ID this instance owns
ID_MATCH_COUNT	int	0	How many; 0 means

Parameter	Type	Default	Description
ACLK_MHZ	int	100	ALL, so a zeroed register block does not silently filter everything away Clock frequency in MHz – keeps the 1 us tick exact off-100MHz
CFI_MIN_FREQ_MHZ / CFI_MAX_FREQ_MHZ	int	= ACLK_MHZ	Freq-invariant counter LUT bounds (cfg_freq_sel indexes within them)
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage in monitor (latency vs. timing)
USE_MONITOR	bit	1	Synthesis-time monitor enable. 0 = omit monitor and tie outputs to safe non-blocking defaults; 1 = full monitor functionality.
N_ADDR_RANGES	int	0	Number of address-range comparators. 0 = checker omitted (zero area). >0 = N independent [low, high] ranges; feeds the shared allowlist checker: a debug-range hit -> AddrMatch, an error-allowlist miss -> Error/ADDR_RANGE (see

Parameter	Type	Default	Description
			axi_monitor_addr_check. md).
ENABLE_ERROR_LO GIC	bit	1	Compile-in the error- detection cone (0 drops it for area).
ENABLE_TIMEOUT_ LOGIC	bit	1	Compile-in the timeout cone and the axi_monitor_timeout instance.
ENABLE_COMPL_LO GIC	bit	1	Compile-in the completion cone.
ENABLE_THRESHOL D_LOGIC	bit	1	Compile-in the threshold cone.
ENABLE_PERF_LOGI C	bit	1	Compile-in the REPORTER's legacy perf- packet cone and the two lifetime counters (error_count / transaction_count). The window FSM and the bucket/beat/byte/burst counters are UNCONDITIONAL module-level logic – always compiled, always live.
ENABLE_DEBUG_LO GIC	bit	0	Compile-in the debug cone (off by default).

Synthesis-cone note: the six ENABLE_*_LOGIC parameters gate each detection cone at synthesis via generate-if, so unused logic drops to zero area (classic cones default on, debug off). Inside the wrapper's axi_monitor_filtered instance the perf/debug master switches are fixed (ENABLE_PERF_PACKETS = 1, ENABLE_DEBUG_MODULE = 0). The former CAM_PIPELINE / TRANS_CAM_PIPELINE parameters were removed — the transaction CAM is now always pipelined.

6.2.1 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AW	AXI_ADDR_WIDTH
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$
CHUNK_STRB_WIDTH	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$

6.3 Ports

6.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

6.3.2 FUB AXI5 Interface (Slave Side - Input)

Same as axi5_master_rd - see [AXI5 Master Read](#) for complete port listing.

6.3.3 Master AXI5 Interface (Output Side)

Same as axi5_master_rd - see [AXI5 Master Read](#) for complete port listing.

6.3.4 Monitor Configuration

Port	Width	Direction	Description
cfg_monito r_enable	1	Input	Master runtime gate. 0 = monitor inert: no

Port	Width	Direction	Description
			allocation, transaction CAM held clear, and the upstream ready is never stalled (a disabled monitor cannot block the datapath). 1 = normal operation
cam_clear	1	Input	Synchronous clear of the monitor transaction CAM (driven from the harness clear control bit, e.g. CTRL[4])
cfg_error_enable	1	Input	Enable error packet generation
cfg_timeout_enable	1	Input	Enable timeout packet generation
cfg_perf_enable	1	Input	Enable performance packet generation (see Performance Monitoring)
cfg_completion_enable	1	Input	Enable transaction-completion packets
cfg_threshold_enable	1	Input	Enable threshold-crossed packets
cfg_debug_enable	1	Input	Enable debug/trace packets (gates the debug cone — the 6th reporter sub-block)
cfg_timeout_cycles	16	Input	Unified coarse timeout control, a MICROSECOND count passed through at FULL 16-bit width: 1..65535 us per phase; 0 = 16'hFFFF (~65 ms, effectively never). One value drives all three

Port	Width	Direction	Description
			phase counts (addr/data/resp). The old 4-bit squash that saturated ≥ 16 at 15 us is retired
cfg_latency_threshold	32	Input	Latency threshold for performance alerts
cfg_freq_sel	4	Input	counter_freq_invariant LUT index scaling the 1 us timer tick

Detection-cone enables: `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` turn on the completion, threshold, and debug reporter sub-blocks respectively. `cfg_debug_enable` gates the **debug cone** — the 6th reporter sub-block (`axi_monitor_reporter_debug`). In this wrapper the debug module's `cfg_debug_level` (4) and `cfg_debug_mask` (16) inputs are tied to `4'h0` / `16'h0`; `cfg_active_trans_threshold` is driven from the `ACTIVE_TRANS_THRESHOLD` parameter (default `MAX_TRANSACTIONS/2`).

None are wrapper ports.

6.3.5 AXI Protocol Filtering Configuration

Port	Width	Direction	Description
cfg_axi_pkt_mask	16	Input	Packet type filter (Level 1)
cfg_axi_err_select	16	Input	Error routing configuration (Level 2)
cfg_axi_err_or_mask	16	Input	Error event filter (Level 3)
cfg_axi_timeout_mask	16	Input	Timeout event filter (Level 3)
cfg_axi_completion_mask	16	Input	Completion event filter (Level 3)
cfg_axi_threshold_mask	16	Input	Threshold event filter (Level 3)
cfg_axi_performance_mask	16	Input	Performance event filter (Level 3)

Port	Width	Direction	Description
cfg_axi_ad dr_mask	16	Input	Address event filter (Level 3)
cfg_axi_de bug_mask	16	Input	Debug event filter (Level 3)

6.3.6 Monitor Bus Output

Port	Width	Direction	Description
monbus_v alid	1	Output	Monitor packet valid
monbus_re ady	1	Input	Monitor packet ready (backpressure)
monbus_p acket	128	Output	monitor_packet_t (see format below)
monbus_ti mestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
debug_bloc k_ready	1	Output	Observability tap for the block_ready gating net (drives nothing internally; leave unconnected if unused)
i_mon_tim e	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

6.3.7 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Core busy indicator
active_tran sactions	8	Output	Number of outstanding transactions
error_coun t	16	Output	Lifetime count of error+timeout packets actually emitted (reporter perf counter; reads 0)

Port	Width	Direction	Description
transaction_count	32	Output	when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0) Lifetime count of completion packets actually emitted (zero- extended 16-bit reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
cfg_conflict_error	1	Output	Configuration conflict detected

6.3.8 Packet filters

Two independent runtime filters cut monbus traffic without touching the datapath. Both are inert until driven, which is the failure to watch for: the build-time parameter only decides whether the logic is SYNTHESISED, and a design that sets the parameter but leaves the `cfg_*` ports tied low filters nothing and looks like the feature is broken.

Address-range filter — ADDR_FILTER_ENABLE (bit, default 0) builds it.

Port	Width	Description
cfg_addr_filter_enable	1	High: suppress packets for transactions outside the window. Low: inert, whatever the parameter says
cfg_addr_filter_low	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	ADDR_WIDTH	Window limit, inclusive


The verdict is latched per table entry at ALLOCATION, from the command address, and held for that entry's life. Widening the window mid-flight does not un-filter entries already admitted — which is exactly what makes it safe to reprogram live, since an entry's fate is decided when it is admitted and the retire accounting cannot be corrupted afterwards. Contrast the address-range CHECKER (N_ADDR_RANGES), which re-evaluates per command.

Runtime ID filter — overrides the ID_MATCH_BASE/ID_MATCH_COUNT elaboration constants so an instance can be retargeted at a different master without a rebuild.

Port	Width	Description
cfg_id_filter_enable	1	High: use the window below. Low: use the parameters, bit-identical to a build without this feature
cfg_id_match_base	ID_WIDTH	First ID owned
cfg_id_match_count	ID_WIDTH+1	How many; 0 means ALL, matching the parameter rule so a zeroed register block does not silently filter everything away

The window is half-open: [base, base + count).

6.4 Functional Description

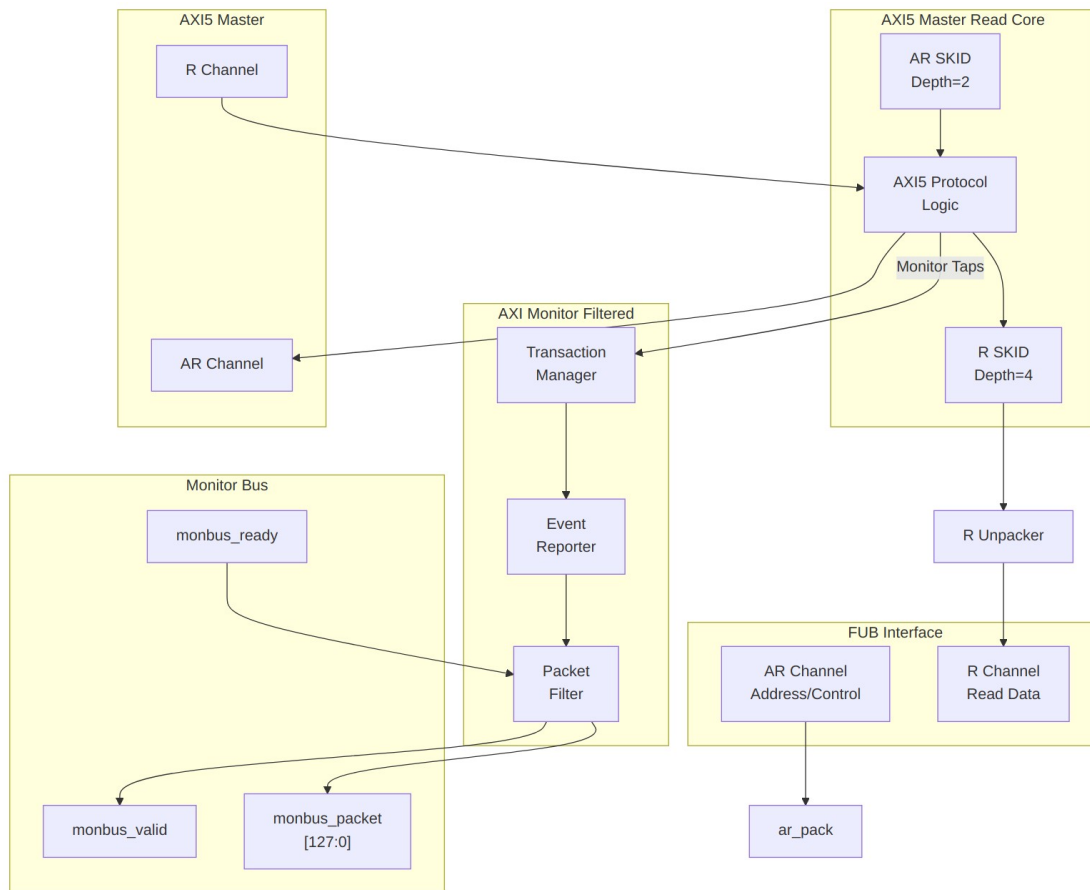

Architecture

6.4.1 Monitor Backpressure (block_ready)

`block_ready` is exported as the `debug_block_ready` output port – the wrapper deliberately makes the gating contract observable (the `_mon_cg` wrapper ties it off rather than forwarding it). It goes low when the monitor's transaction-table occupancy reaches its blocking threshold (a function of `MAX_TRANSACTIONS`; the reporter FIFO depth `INTR_FIFO_DEPTH` has no path to it). The wrapper ANDs it into the upstream-facing `fub_axi_arready` so a saturated monitor throttles new transactions at the handshake instead of dropping events.

- **Where the stall lands:** the upstream `fub_axi_arready` is forced low until the monitor drains.
- **When `USE_MONITOR=0`:** `block_ready` is internally tied high, so the wrapper imposes no stall and runs at full bandwidth.
- **When `cfg_monitor_enable=0`:** the wrapper gate forces the upstream ready open, so a runtime-disabled monitor can never stall the datapath (the AXI4

monitors assert this as an in-RTL formal property, `ap_disabled_never_stalls`; this module has no `ifdef FORMAL` block of its own, so here the guarantee rests on the gate expression above, not a proof).

- **For axi5 slave variants** (only applies to `axi5_slave_rd_mon`): the monitor watches the FUB-side handshake, so there is a `SKID_DEPTH_AR` cycle lag between `block_ready` going low and new events ceasing. `MAX_TRANSACTIONS` should be sized to cover this margin.

Recovery is guaranteed by the **saturation-recovery contract**: command-originated table entries are capped at `MAX_TRANSACTIONS - cmd_entry_reserve(MAX_TRANSACTIONS)` (reserve = 4 for tables of 16 or more, 0 below; the function lives in `monitor_common_pkg`), and `block_ready` re-asserts at occupancy < `MAX_TRANSACTIONS - (reserve - 1)` – a threshold strictly ABOVE the command cap – so a saturated table always drains back below the reopen point. Blocking throttles; it never deadlocks. Tables smaller than 16 keep full legacy allocation (small tables cannot spare slots) and trade the recovery guarantee for tracking capacity. The contract is verified by in-RTL formal properties (mutation-checked) and a 100-seed deliberately-undersized-table stream sweep; see [axi_monitor_base](#) for the canonical description.

Sizing note: a monitor on a bus shared by several channels/requesters must size `MAX_TRANSACTIONS` to cover `NUM_CHANNELS × per-channel outstanding` plus margin – the per-channel limit alone makes the monitor throttle the shared master. Tables deeper than 64 also need Verilator's `--unroll-count` raised (default 64) in sim builds.

6.4.2 Address-Range Checker

With `N_ADDR_RANGES > 0` the wrapper instantiates the shared allowlist checker (`axi_monitor_addr_check`). Each range carries a DEBUG/ERROR flavor:

- **DEBUG range** — a hit emits a `PktTypeAddrMatch` (4'h8) packet with event code `AXI_ADDR_RANGE_MATCH` (8'h01), gated by `cfg_debug_enable`.
- **ERROR range** — the enabled ERROR ranges form an allowlist; an address in NONE of them emits a `PktTypeError` (4'h0) packet with event code `AXI_ERR_ADDR_RANGE` (8'h0D), gated by `cfg_error_enable`.

This wrapper does not expose `ADDR_RANGE_IS_ERROR`; all ranges default to the DEBUG (match) flavor.

Config inputs (active only when `N_ADDR_RANGES > 0`): - `cfg_addr_check_enable` — master on/off for the checker. - `cfg_addr_range_enable[N-1:0]` — per-range enable bit. - `cfg_addr_range_low/high[N-1:0][AXI_ADDR_WIDTH-1:0]` — inclusive bounds.

Event encoding: `event_data[63:60] = range_index` (matching DEBUG range, or 4'hF sentinel on an ERROR miss); `event_data[59:0] = full address`. **Filtering:** `AddrMatch` is dropped by `cfg_axi_addr_mask[1]`, the `ADDR_RANGE` error by `cfg_axi_error_mask[13]`. See the checker page for coalescing + formal properties.

6.4.3 Monitor Bus Packet Format

The 128-bit monbus_packet (paired with the 64-bit monbus_timestamp side-band signal) follows the standardized AMBA monitor bus format:

Bits [127:124] - Packet Type:

0x0	= ERROR	Error events (SLVERR, DECERR, protocol violations)
0x1	= COMPL	Completion events (transaction finished)
0x2	= THRESH	Threshold events
0x3	= TIMEOUT	Timeout events
0x4	= PERF	Performance metrics
0x8	= ADDR_MATCH	Address match events
0x9	= APB	APB-specific events
0xF	= DEBUG	Debug events

Bits [123:109] - Reserved (15 bits, forward-compat slack)

Bits [108:105] - Protocol (4 bits): 0x0=AXI, 0x1=AXIS, 0x2=APB, 0x3=ARB, 0x4=CORE

Bits [104:97] - Event Code (8 bits, protocol-specific)

Bits [96:88] - Channel ID (9 bits – AXI ID or channel index)

Bits [87:72] - Agent ID (16 bits, from AGENT_ID parameter)

Bits [71:64] - Unit ID (8 bits, from UNIT_ID parameter)

Bits [63:0] - Event Data (64 bits – full address, latency, etc.)

6.4.4 Filtering Hierarchy (two active levels, one reserved)

Level 1: Packet Type Mask (cfg_axi_pkt_mask)

```
// SET BIT = DROP that packet type (pkt_drop =  
cfg_axi_pkt_mask[pkt_type]),  
// and bits index the NUMERIC packet type from the format table:  
cfg_axi_pkt_mask[0] = 1 → DROP ERROR packets (type 0x0)  
cfg_axi_pkt_mask[1] = 1 → DROP COMPL packets (type 0x1)  
cfg_axi_pkt_mask[2] = 1 → DROP THRESH packets (type 0x2)  
cfg_axi_pkt_mask[3] = 1 → DROP TIMEOUT packets (type 0x3)  
cfg_axi_pkt_mask[4] = 1 → DROP PERF packets (type 0x4)  
cfg_axi_pkt_mask[8] = 1 → DROP ADDR_MATCH packets (type 0x8)  
cfg_axi_pkt_mask[15] = 1 → DROP DEBUG packets (type 0xF)  
// e.g. 16'hFFF4 passes only ERROR|COMPL|TIMEOUT -- matching this  
page's examples
```

Level 2: cfg_axi_err_select (reserved – no routing)

Its ONLY use is the conflict check `cfg_conflict_error = \|(cfg_axi_pkt_mask & cfg_axi_err_select)`; no error-routing logic exists anywhere in the monitor chain. Setting it to “reroute errors into completions” changes nothing except possibly tripping `cfg_conflict_error`.

****Level 3: Event Masks (cfg_axi_*_mask)****

Fine-grained control over specific events within each packet type: - `cfg_axi_error_mask`: SLVERR, DECERR, orphan detection, etc. - `cfg_axi_timeout_mask`: AR timeout

(EVT_CMD_TIMEOUT), R timeout (EVT_DATA_TIMEOUT). The response-timeout bit exists in the mask but cannot fire on a read: EVT_RESP_TIMEOUT needs data_completed && ! resp_received, and on a read data_last sets data_completed and TRANS_COMPLETE in the same cycle (or TRANS_ERROR on a bad RRESP) – both states are excluded from the timeout block. -
 cfg_axi_compl_mask: Normal completion, error completion - cfg_axi_thresh_mask: Outstanding transaction count, latency threshold - cfg_axi_perf_mask: Average latency, peak bandwidth, utilization - cfg_axi_addr_mask: Address range tracking - cfg_axi_debug_mask: Internal state, debug events

6.4.5 Error Detection Events

The monitor detects and reports:

Protocol Errors: none on a read monitor.

axi_monitor_trans_mgr emits EVT_PROTOCOL (response-before-data ordering) and EVT_RESP_ORPHAN (response with no tracked transaction) only from inside its if (!IS_READ && resp_valid && resp_ready) block. A read monitor elaborates with IS_READ = 1, so neither event can be produced here – both describe the write B channel, which this module does not observe.

(Handshake-stability, ID-width, burst-length and address-alignment checks are NOT implemented either – nothing in the monitor chain inspects those.)

Response Errors: - SLVERR (slave error response) - DECERR (decode error response) - Orphaned read data (no matching AR) – an R beat whose ID matches no live entry

There is no RID-versus-ARID comparison. axi_monitor_trans_mgr attributes an R beat to the OLDEST live entry sharing that ID, so a slave returning the RID of a *different* outstanding read is silently mis-attributed with no error. An RID matching nothing is the orphan case above.

Timeout Errors – per phase, measured as DURATION not stall: - AR phase outstanding too long – EVT_CMD_TIMEOUT - R phase outstanding too long – EVT_DATA_TIMEOUT

(EVT_RESP_TIMEOUT is write-only; see Protocol Errors above.)

axi_monitor_timeout runs three per-phase timers (addr, data, resp) and there is no whole-transaction timer. Each timer is zeroed only while its phase is **not pending** (if (!w_data_pending[idx]) r_data_timer[idx] <= '0;) – it is NOT reset by a beat handshake. So these are phase-duration limits, not stall detectors: a long multi-beat read burst that is making steady progress still trips EVT_DATA_TIMEOUT once the R phase as a whole exceeds cfg_timeout_cycles. Size the threshold for your longest legitimate burst, not for your worst tolerable inter-beat gap.

Threshold Violations: - Outstanding transaction count > threshold - Transaction latency > cfg_latency_threshold

6.4.6 Configuration Conflict Detection

The `cfg_conflict_error` output flags invalid configurations:

```
// A packet type dropped by cfg_axi_pkt_mask must not also be selected
// for error routing by cfg_axi_err_select:
assign cfg_conflict_error = |(cfg_axi_pkt_mask & cfg_axi_err_select);
```

Recommended: enable only ONE high-traffic packet type (completions or perf) at a time; the monitor bus sustains at most one packet per two cycles.

6.4.7 Performance Monitoring

When performance tracking is compiled in (`ENABLE_PERF_LOGIC` = 1, the wrapper default, with `ENABLE_PERF_PACKETS` fixed to 1 inside the monitor instance) and `cfg_perf_enable` is asserted at runtime, the monitor runs a **measurement-window state machine** plus a bank of data-channel utilization counters. All counters accumulate **only while a window is open** (`window_active` = 1) and hold their values between windows so the host can read a completed window's totals.

6.4.7.1 The measurement window

A window is opened by a **start event** and closed by an **end event**. The event sources are selected by `cfg_start_event_sel` / `cfg_end_event_sel` (3-bit; e.g. 3'b010 selects the `cfg_perf_enable` edge) and can also be fired directly by the `cfg_start_trigger` / `cfg_end_trigger` pulses (from an engine or CSR write). `cfg_window_force_close` is a software override that closes the window immediately. While the window is open:

- `window_active` is high.
- `window_cycles` free-runs, counting every clock elapsed inside the window.

6.4.7.2 Utilization buckets (R data channel)

Every cycle inside the window is classified by the **R** data channel's valid/ready handshake into exactly one of four buckets:

Output	Width	Condition	Meaning
<code>perf_prod_cycles</code>	32	<code>rvalid && rready</code>	productive beat transferred
<code>perf_bp_cycles</code>	32	<code>rvalid && !rready</code>	back-pressure (data offered, sink not ready)
<code>perf_starv_cycles</code>	32	<code>!rvalid && rready</code>	starvation (sink ready, no data)

Output	Width	Condition	Meaning
perf_idle_cycles	32	!rvalid && !rready	idle

The four buckets sum to `window_cycles - 1` (the start cycle seeds `window_cycles` to 1 while the buckets reset to 0); the one-count skew is negligible for long windows.

6.4.7.3 Throughput counters

Output	Width	Meaning
perf_beat_count	32	R data beats transferred (= <code>perf_prod_cycles</code> , 1 beat/cycle)
perf_byte_count	64	bytes transferred = beats x (1 << latched ARSIZE), using the ARSIZE captured at the most recent AR address phase
perf_burst_count	32	AR address-phase handshakes

Average burst length is `perf_beat_count / perf_burst_count`.

6.4.7.4 Performance Monitoring Ports

Port	Width	Direction	Description
cfg_perf_enable	1	Input	Enable performance-metric packet generation (also listed under Monitor Configuration)
cfg_start_event_sel	3	Input	Window start event source select
cfg_end_event_sel	3	Input	Window end event source select
cfg_start_trigger	1	Input	Pulse: open the measurement window
cfg_end_trigger	1	Input	Pulse: close the measurement window
cfg_window_force_close	1	Input	Software override: force the window closed

Port	Width	Direction	Description
ose			
window_active	1	Output	High while a measurement window is open
window_cycles	32	Output	Cycles elapsed in the current window
perf_prod_cycles	32	Output	rvalid && rready cycles
perf_bp_cycles	32	Output	rvalid && !rready cycles (back-pressure)
perf_starv_cycles	32	Output	!rvalid && rready cycles (starvation)
perf_idle_cycles	32	Output	!rvalid && !rready cycles
perf_beat_count	32	Output	R data beats transferred
perf_byte_count	64	Output	bytes transferred
perf_burst_count	32	Output	AR address-phase handshakes

When `USE_MONITOR = 0` all perfmon outputs are tied to 0. With `USE_MONITOR = 1` and `ENABLE_PERF_LOGIC = 0`, only `error_count` / `transaction_count` read 0 – `window_active`, `window_cycles` and all bucket/throughput outputs remain LIVE.

6.5 Timing Characteristics

6.5.1 Monitored Read Transaction with Error

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- AR channel: ARID, ARADDR, ARVALID, ARREADY
- R channel: RID, RDATA, RRESP (SLVERR), RVALID, RREADY

- Monitor bus: monbus_valid, monbus_packet showing ERROR packet
- Event sequence: AR → R error → ERROR packet generated

6.5.2 Timeout Detection

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- AR channel: ARVALID asserted, ARREADY stuck low
- Timeout counter incrementing
- cfg_timeout_cycles threshold
- Monitor bus: monbus_valid, monbus_packet showing TIMEOUT packet

6.5.3 Performance Monitoring

Timing diagram pending. The signals and sequence this scenario exercises:

- Multiple read transactions
 - Latency measurement (AR to RLAST)
 - Monitor bus: PERF packets with latency data
 - Threshold comparison with cfg_latency_threshold
-

6.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_master_rd_mon #(
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    .AXI_ID_WIDTH        (8),
    .AXI_ADDR_WIDTH      (32),
    .AXI_DATA_WIDTH      (32),
    .AXI_USER_WIDTH      (1),
    .AXI_NSAID_WIDTH     (4),
    .AXI_MPAM_WIDTH      (11),
    .AXI_MECID_WIDTH     (16),
    .AXI_TAG_WIDTH       (4)
) u_axi5_master_rd_mon (
    .aclk                (aclk),
    .aresetn              (aresetn),
    .cam_clear            (cam_clear),
    .fub_axi_arid         (fub_axi_arid),
```

.fub_axi_araddr	(fub_axi_araddr),
.fub_axi_arlen	(fub_axi_arlen),
.fub_axi_arsize	(fub_axi_arsize),
.fub_axi_arburst	(fub_axi_arburst),
.fub_axi_arlock	(fub_axi_arlock),
.fub_axi_arcache	(fub_axi_arcache),
.fub_axi_arprot	(fub_axi_arprot),
.fub_axi_arqos	(fub_axi_arqos),
.fub_axi_aruser	(fub_axi_aruser),
.fub_axi_arvalid	(fub_axi_arvalid),
.fub_axi_arready	(fub_axi_arready),
.fub_axi_arnsaid	(fub_axi_arnsaid),
.fub_axi_artrace	(fub_axi_artrace),
.fub_axi_arpam	(fub_axi_arpam),
.fub_axi_armecid	(fub_axi_armecid),
.fub_axi_arunique	(fub_axi_arunique),
.fub_axi_archunken	(fub_axi_archunken),
.fub_axi_artagop	(fub_axi_artagop),
.fub_axi_rid	(fub_axi_rid),
.fub_axi_rdata	(fub_axi_rdata),
.fub_axi_rresp	(fub_axi_rresp),
.fub_axi_rlast	(fub_axi_rlast),
.fub_axi_ruser	(fub_axi_ruser),
.fub_axi_rvalid	(fub_axi_rvalid),
.fub_axi_rready	(fub_axi_rready),
.fub_axi_rtrace	(fub_axi_rtrace),
.fub_axi_rpoison	(fub_axi_rpoison),
.fub_axi_rchunkv	(fub_axi_rchunkv),
.fub_axi_rchunknum	(fub_axi_rchunknum),
.fub_axi_rchunkstrb	(fub_axi_rchunkstrb),
.fub_axi_rtag	(fub_axi_rtag),
.fub_axi_rtagmatch	(fub_axi_rtagmatch),
.m_axi_arid	(m_axi_arid),
.m_axi_araddr	(m_axi_araddr),
.m_axi_arlen	(m_axi_arlen),
.m_axi_arsize	(m_axi_arsize),
.m_axi_arburst	(m_axi_arburst),
.m_axi_arlock	(m_axi_arlock),
.m_axi_arcache	(m_axi_arcache),
.m_axi_arprot	(m_axi_arprot),
.m_axi_arqos	(m_axi_arqos),
.m_axi_aruser	(m_axi_aruser),
.m_axi_arvalid	(m_axi_arvalid),
.m_axi_arready	(m_axi_arready),
.m_axi_arnsaid	(m_axi_arnsaid),
.m_axi_artrace	(m_axi_artrace),
.m_axi_arpam	(m_axi_arpam),
.m_axi_armecid	(m_axi_armecid),

.m_axi_arunique	(m_axi_arunique),
.m_axi_archunken	(m_axi_archunken),
.m_axi_artagop	(m_axi_artagop),
.m_axi_rid	(m_axi_rid),
.m_axi_rdata	(m_axi_rdata),
.m_axi_rresp	(m_axi_rresp),
.m_axi_rlast	(m_axi_rlast),
.m_axi_ruser	(m_axi_ruser),
.m_axi_rvalid	(m_axi_rvalid),
.m_axi_rready	(m_axi_rready),
.m_axi_rtrace	(m_axi_rtrace),
.m_axi_rpoison	(m_axi_rpoison),
.m_axi_rchunkv	(m_axi_rchunkv),
.m_axi_rchunknum	(m_axi_rchunknum),
.m_axi_rchunkstrb	(m_axi_rchunkstrb),
.m_axi_rtag	(m_axi_rtag),
.m_axi_rtagmatch	(m_axi_rtagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.i_mon_time	(i_mon_time),
.monbus_valid	(monbus_valid),


```

.monbus_ready      (monbus_ready),
.monbus_packet     (monbus_packet),
.monbus_timestamp  (monbus_timestamp),
.busy              (busy),
.active_transactions (active_transactions),
.error_count       (error_count),
.transaction_count (transaction_count),
.debug_block_ready (debug_block_ready),
.cfg_conflict_error (cfg_conflict_error),
.cfg_start_event_sel (cfg_start_event_sel),
.cfg_end_event_sel  (cfg_end_event_sel),
.cfg_start_trigger  (cfg_start_trigger),
.cfg_end_trigger    (cfg_end_trigger),
.cfg_window_force_close (cfg_window_force_close),
.window_active     (window_active),
.window_cycles     (window_cycles),
.perf_prod_cycles  (perf_prod_cycles),
.perf_bp_cycles    (perf_bp_cycles),
.perf_starv_cycles (perf_starv_cycles),
.perf_idle_cycles  (perf_idle_cycles),
.perf_beat_count   (perf_beat_count),
.perf_byte_count   (perf_byte_count),
.perf_burst_count  (perf_burst_count)
);

```

6.7 Design Notes

6.7.1 Configuration Best Practices

CRITICAL: Never enable COMPL + PERF simultaneously!

High packet volume can overwhelm monitor bus and cause backpressure.

Recommended Configurations:

Use Case	Enabled Packet Types	Notes
Functional debug	ERROR + COMPL + TIMEOUT	Catches bugs, monitors correctness
Performance tuning	ERROR + PERF	Latency, throughput metrics
Protocol compliance	ERROR + TIMEOUT	Minimal overhead

Use Case	Enabled Packet Types	Notes
Deep debug	ERROR + DEBUG	Internal state visibility

6.7.2 Transaction Table Sizing

MAX_TRANSACTION must accommodate maximum outstanding reads:

AXI Configuration	Recommended MAX_TRANSACTION
Single outstanding	4
Moderate pipelining	16
Deep pipelining	32-64
High-performance	128+

6.7.3 Filtering Strategy

Start broad, then narrow: 1. Enable all packet types initially 2. Identify high-traffic events 3. Mask low-value events with Level 3 filters 4. Separate configurations for different test phases

6.7.4 Monitor Bus Backpressure

The monitor respects monbus_ready backpressure: - Packets buffered internally when monbus_ready = 0 - A full internal FIFO RETRIES: the event stays unmarked in the transaction table and re-presents every cycle until space frees – nothing is dropped (upstream throttling via block_ready is the relief valve, exactly as the backpressure section describes) - **Always add downstream FIFO** for latency absorption

6.8 Related Modules

- [AXI5 Master Read](#) - Base module without monitoring
- [AXI5 Master Read CG](#) - With clock gating only
- [AXI5 Master Read Monitor CG](#) - Monitor + clock gating
- [AXI Monitor Filtered](#) - Monitor core specification
- [Monitor Package Spec](#) - Packet format details
- [AXI Monitor Configuration Guide](#) - Complete configuration reference

6.9 Testing

val/amba/test_axi5_master_rd_mon.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_master_rd_mon.py -v
```

6.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

7 AXI5 Master Read with Monitor and Clock Gating

Module: axi5_master_rd_mon_cg.sv **Location:** rtl/amba/axi5/ (protocol monitors live with their protocol; only the monitor CORE pieces are in rtl/amba/monitor/) **Status:** Production Ready

7.1 Overview

The AXI5 Master Read with Monitor and Clock Gating module combines axi5_master_rd_mon (AXI5 master with integrated monitoring) with intelligent clock gating for power optimization. This is the everything variant: comprehensive transaction monitoring, error detection, and automatic power management in one instantiation.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

7.1.1 Key Features

- Carries the full AXI5 signal set unmodified – transport, not semantics; see Scope above
- **All AXI5 extensions:** NSAIID, TRACE, MPAM, MECID, UNIQUE, CHUNKING, MTE, POISON

- **Integrated AXI monitor** with 2-Level Filtering: packet-type drop masks + per-event masks (err_select is reserved – no routing)
 - **Error detection:** SLVERR, DECERR, orphaned read data (protocol-violation events are write-monitor only)
 - **Timeout monitoring:** Stuck transactions, stalled channels
 - **Performance metrics:** Latency, throughput, outstanding transactions
 - **MonBus output:** Standardized 128-bit monitor packet format paired with 64-bit side-band timestamp
 - **Automatic clock gating** based on activity detection
 - **Configurable idle threshold** before clock gating activates
 - **Power savings** during idle periods
 - **Transparent operation** - no protocol changes
 - **Dual status outputs:** Monitor status + clock gating status
 - **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized
-

7.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16

Parameter	Type	Default	Description
			bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitor unit identifier
AGENT_ID	int	10	Monitor agent identifier
MAX_TRANSACTION_SIZE	int	16	Transaction table size
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage in monitor
USE_MONITOR	bit	1	Synthesis-time monitor enable (forwarded to inner monitor).
N_ADDR_RANGES	int	0	Number of address-range comparators

Parameter	Type	Default	Description
			(forwarded to base module).
ENABLE_ERROR_LO GIC	bit	1	Synthesis-cone enable for error detection (forwarded to base module)
ENABLE_TIMEOUT_ LOGIC	bit	1	Synthesis-cone enable for timeout detection (forwarded to base module)
ENABLE_COMPL_LO GIC	bit	1	Synthesis-cone enable for completion tracking (forwarded to base module)
ENABLE_THRESHOL D_LOGIC	bit	1	Synthesis-cone enable for threshold detection (forwarded to base module)
ENABLE_PERF_LOGI C	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and bucket/beat/byte/burst counters are unconditional (always compiled, always live)
ENABLE_DEBUG_LO GIC	bit	0	Synthesis-cone enable for the debug/trace cone (forwarded to base module)
ACLK_MHZ	int	100	Clock frequency in MHz. Builds the microsecond tick LUT in

Parameter	Type	Default	Description
			counter_freq_invariant. Leave this at 100 on a 90 MHz part and every us-denominated timeout is wrong, silently – it was unreachable through this wrapper until 2026-09-01.
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Lowest frequency the tick LUT must cover (dynamic-frequency builds).
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Highest frequency the tick LUT must cover.
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue. Required (=1) whenever NUM_BANKS > 1.
NUM_BANKS	int	1	Transaction-table banking. The USE_WDATA_ORDER_Q pairing rule applies to WRITE monitors only – axi_monitor_trans_mgr guards on (NUM_BANKS > 1) && !IS_READ && !USE_WDATA_ORDER_Q, so a read monitor may bank freely.
ADDR_FILTER_ENABLE	bit	0	Synthesises the address-range report filter. The parameter only decides whether the logic EXISTS – a build that sets it and leaves

Parameter	Type	Default	Description
			cfg_addr_filter_enable low filters nothing and looks broken.
ID_FILTER_ENABLE	bit	0	Synthesises the ID report filter (see cfg_id_* for the runtime override).
ID_MATCH_BASE	int	0	First ID this instance owns.
ID_MATCH_COUNT	int	0	How many IDs; 0 means ALL, so a zeroed register block does not silently filter everything away.
CG_IDLE_COUNT_WIDTH	int	4	Width of idle counter (max 2^N-1 cycles)

7.2.1 Filter configuration (forwarded)

These reach the inner monitor through this wrapper; before 2026-09-01 they did not.

Port	Direction	Width	Description
cfg_addr_filter_enable	Input	1	High: suppress packets for transactions outside the window. Low: inert, whatever ADDR_FILTER_ENABLE says
cfg_addr_filter_low	Input	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	Input	ADDR_WIDTH	Window limit, inclusive
cfg_id_filter_enable	Input	1	High: use the runtime window below instead of the ID_MATCH_* parameters
cfg_id_match_base	Input	ID_WIDTH	First ID to accept
cfg_id_match_count	Input	ID_WIDTH+1	How many; 0 means ALL

Port	Direction	Width	Description
tch_count			

7.2.2 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	AXI_DATA_WIDTH / 8
AW	AXI_ADDR_WIDTH
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1
TW	AXI_TAG_WIDTH * NUM_TAGS
CHUNK_STRB_WIDTH	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1

7.3 Ports

7.3.1 Clock and Reset

Port	Width	Direction	Description
acclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

7.3.2 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Clock gating enable (1=enable, 0=always active)
cfg_cg_idle	CG_IDLE_CO	Input	Idle cycles before gating

Port	Width	Direction	Description
_count	UNT_WIDTH		activates

7.3.3 FUB AXI5 Interface (Slave Side - Input)

Same as axi5_master_rd_mon - see [AXI5 Master Read Monitor](#).

7.3.4 Master AXI5 Interface (Output Side)

Same as axi5_master_rd_mon - see [AXI5 Master Read Monitor](#).

7.3.5 Monitor Configuration

Same as axi5_master_rd_mon - see [AXI5 Master Read Monitor](#).

7.3.6 Monitor Bus Output


Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready (backpressure)
monbus_packet	128	Output	monitor_packet_t (128-bit format)
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

7.3.7 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Core busy indicator
active_transactions	8	Output	Number of outstanding transactions
error_count	16	Output	Cumulative error count (live – driven from the reporter's lifetime)

Port	Width	Direction	Description
			counter)
transaction_count	32	Output	Total transaction count (live – reporter lifetime counter, zero-extended)
cfg_conflict_error	1	Output	Configuration conflict detected
cg_gating	1	Output	Clock gating active (1=gated, 0=running)
cg_idle	1	Output	Interface idle (1=no activity)

7.4 Functional Description

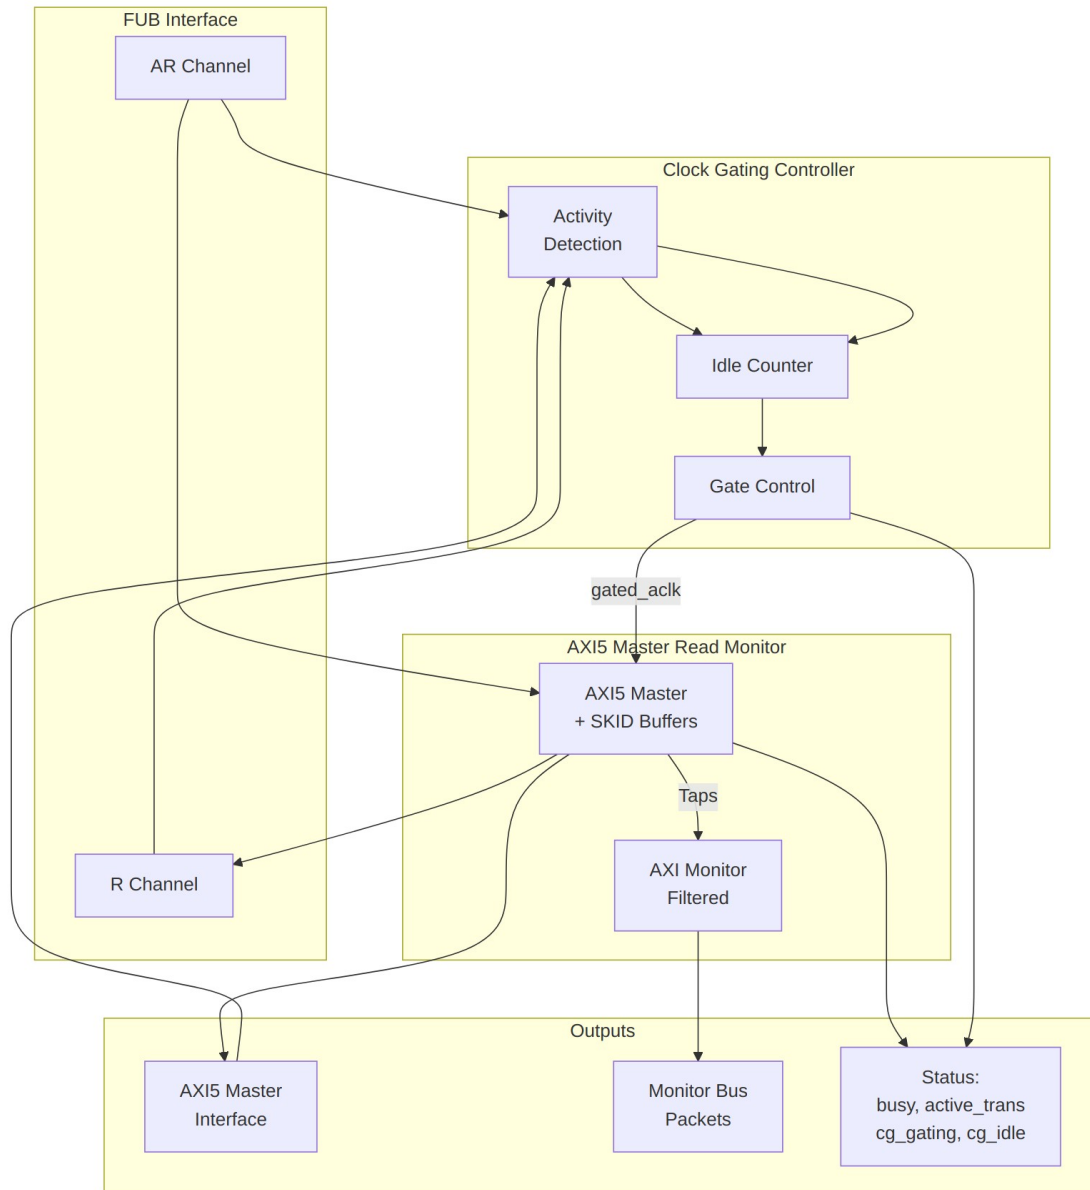

Architecture

7.4.1 Combined Monitoring and Power Management

This module provides the best of both worlds:

Monitoring (from `axi5_master_rd_mon`): - Real-time transaction monitoring - Error and timeout detection - Performance metrics collection - Configurable packet filtering - MonBus output for system integration

Power Management (from axi5_master_rd_cg): - Automatic clock gating during idle periods - Configurable idle threshold - Activity-based wake-up - Status outputs for power monitoring

7.4.2 Clock Gating with Monitor Active

The clock gating logic considers monitor activity:

```
user_valid = fub_axi_arvalid || fub_axi_rvalid || int_busy ||  
             w_monbus_valid || (!active_transactions); // peer VALID,  
never peer READY  
axi_valid = m_axi_arvalid || m_axi_rvalid;  
  
// Clock remains active if:  
// - User interface active (AR or R channels)  
// - AXI interface active  
// - CORE busy (transactions in flight in the datapath)  
// - A monitor packet is pending on the monitor bus (w_monbus_valid)  
// - The monitor CAM still holds entries (!active_transactions) --  
covers  
// the reporter's retire -> FIFO -> output emission window
```

Monitor-bus delivery is exactly-once across gating, at any idle count. A packet pending on the monitor bus is a wake term: the block stays awake (or re-wakes within a cycle) until the consumer accepts it, and the external monbus_valid is masked with !cg_gating so a consumer can never sample a valid that the reporter's stopped clock could not retire. The monitor CAM's occupancy (active_transactions) is a wake term too: a tracked entry stays in the CAM until its packet is marked into the reporter FIFO, and the registered count lags one cycle past that, meeting monbus_valid's assertion – so the clock cannot stop inside the reporter's few-cycle emission window and strand a trailing packet, even at cfg_cg_idle_count = 0.

val/amba/test_mon_cg_gating.py phase 6 asserts exactly-once delivery of exactly the packets generated.

7.4.3 Ready Signal Control During Gating

When clock gating is active, ready signals are forced low to prevent new transactions:

```
fub_axi_arready = cg_gating ? 1'b0 : int_arready;  
m_axi_rready = cg_gating ? 1'b0 : int_rready;
```

This ensures protocol compliance during power management.

7.4.4 Performance Monitoring

The clock-gated wrapper exposes the full perfmon interface of the base module and **forwards every port unchanged** to the inner axi5_master_rd_mon. The measurement-window state machine, the four R-channel utilization buckets (productive / back-pressure / starvation / idle), and the beat/byte/burst throughput counters behave exactly as documented in the base module —

see [Performance Monitoring in axi5_master_rd_mon](#) for the full narrative and per-bit semantics.

Forwarded perfmon ports (identical width and direction to the base module):

- **Inputs:** `cfg_perf_enable`, `cfg_start_event_sel` (3), `cfg_end_event_sel` (3), `cfg_start_trigger`, `cfg_end_trigger`, `cfg_window_force_close`
- **Outputs:** `window_active`, `window_cycles` (32), `perf_prod_cycles` (32), `perf_bp_cycles` (32), `perf_starv_cycles` (32), `perf_idle_cycles` (32), `perf_beat_count` (32), `perf_byte_count` (64), `perf_burst_count` (32)

The `perf_burst_count` output tracks AR (read address) handshakes. **WARNING:** an open measurement window is NOT a wake term – the window FSM and all counters run on the gated clock, so if the bus idles past `cfg_cg_idle_count` mid-window, `window_cycles` and the four buckets FREEZE while wall-clock time passes. For exact wall-clock windows hold `cfg_cg_enable` low around the measurement, or use the base module.

Alongside perfmon, the wrapper forwards the `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` control inputs, plus the six `ENABLE_*_LOGIC` synthesis-cone parameters (see [Parameters](#)), straight through to the base monitor.

7.5 Timing Characteristics

7.5.1 Clock Gating with Monitor Activity

Timing diagram pending. The signals and sequence this scenario exercises:

- `ACLK` (ungated)
- `GATED_ACLK` (gated clock)
- AXI transaction sequence
- Monitor packet generation
- Idle period detection
- `cg_gating` activation
- Monitor quiescent before clock stops

7.5.2 Wake-up with Immediate Monitoring

Timing diagram pending. The signals and sequence this scenario exercises:

- `ACLK` (ungated)

- GATED_ACLK resuming
 - ARVALID assertion (wake trigger)
 - cg_gating deactivation
 - AXI transaction proceeds
 - Monitor packets generated immediately
-

7.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_master_rd_mon_cg #(
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    .AXI_ID_WIDTH        (8),
    .AXI_ADDR_WIDTH      (32),
    .AXI_DATA_WIDTH      (32),
    .AXI_USER_WIDTH      (1),
    .AXI_NSAID_WIDTH     (4),
    .AXI_MPAM_WIDTH      (11),
    .AXI_MECID_WIDTH     (16),
    .AXI_TAG_WIDTH       (4)
) u_axi5_master_rd_mon_cg (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .cfg_cg_enable       (cfg_cg_enable),
    .cfg_cg_idle_count   (cfg_cg_idle_count),
    .fub_axi_arid        (fub_axi_arid),
    .fub_axi_araddr      (fub_axi_araddr),
    .fub_axi_arlen       (fub_axi_arlen),
    .fub_axi_arsize      (fub_axi_arsize),
    .fub_axi_arburst     (fub_axi_arburst),
    .fub_axi_arlock      (fub_axi_arlock),
    .fub_axi_arcache     (fub_axi_arcache),
    .fub_axi_arprot      (fub_axi_arprot),
    .fub_axi_arqos       (fub_axi_arqos),
    .fub_axi_aruser      (fub_axi_aruser),
    .fub_axi_arvalid     (fub_axi_arvalid),
    .fub_axi_arready     (fub_axi_arready),
    .fub_axi_arnsaid     (fub_axi_arnsaid),
    .fub_axi_artrace     (fub_axi_artrace),
    .fub_axi_armpam      (fub_axi_armpam),
    .fub_axi_armecid     (fub_axi_armecid),
    .fub_axi_arunique    (fub_axi_arunique),
    .fub_axi_archunken   (fub_axi_archunken),
```

.fub_axi_artagop	(fub_axi_artagop),
.fub_axi_rid	(fub_axi_rid),
.fub_axi_rdata	(fub_axi_rdata),
.fub_axi_rresp	(fub_axi_rresp),
.fub_axi_rlast	(fub_axi_rlast),
.fub_axi_ruser	(fub_axi_ruser),
.fub_axi_rvalid	(fub_axi_rvalid),
.fub_axi_rready	(fub_axi_rready),
.fub_axi_rtrace	(fub_axi_rtrace),
.fub_axi_rpoison	(fub_axi_rpoison),
.fub_axi_rchunkv	(fub_axi_rchunkv),
.fub_axi_rchunknum	(fub_axi_rchunknum),
.fub_axi_rchunkstrb	(fub_axi_rchunkstrb),
.fub_axi_rtag	(fub_axi_rtag),
.fub_axi_rtagmatch	(fub_axi_rtagmatch),
.m_axi_arid	(m_axi_arid),
.m_axi_araddr	(m_axi_araddr),
.m_axi_arlen	(m_axi_arlen),
.m_axi_arsize	(m_axi_arsize),
.m_axi_arburst	(m_axi_arburst),
.m_axi_arlock	(m_axi_arlock),
.m_axi_arcache	(m_axi_arcache),
.m_axi_arprot	(m_axi_arprot),
.m_axi_arqos	(m_axi_arqos),
.m_axi_aruser	(m_axi_aruser),
.m_axi_arvalid	(m_axi_arvalid),
.m_axi_arready	(m_axi_arready),
.m_axi_arnsaid	(m_axi_arnsaid),
.m_axi_artrace	(m_axi_artrace),
.m_axi_arpam	(m_axi_arpam),
.m_axi_armecid	(m_axi_armecid),
.m_axi_arunique	(m_axi_arunique),
.m_axi_archunken	(m_axi_archunken),
.m_axi_artagop	(m_axi_artagop),
.m_axi_rid	(m_axi_rid),
.m_axi_rdata	(m_axi_rdata),
.m_axi_rresp	(m_axi_rresp),
.m_axi_rlast	(m_axi_rlast),
.m_axi_ruser	(m_axi_ruser),
.m_axi_rvalid	(m_axi_rvalid),
.m_axi_rready	(m_axi_rready),
.m_axi_rtrace	(m_axi_rtrace),
.m_axi_rpoison	(m_axi_rpoison),
.m_axi_rchunkv	(m_axi_rchunkv),
.m_axi_rchunknum	(m_axi_rchunknum),
.m_axi_rchunkstrb	(m_axi_rchunkstrb),
.m_axi_rtag	(m_axi_rtag),
.m_axi_rtagmatch	(m_axi_rtagmatch),


```

.cfg_monitor_enable      (cfg_monitor_enable),
.cfg_error_enable        (cfg_error_enable),
.cfg_timeout_enable      (cfg_timeout_enable),
.cfg_perf_enable         (cfg_perf_enable),
.cfg_compl_enable        (cfg_compl_enable),
.cfg_threshold_enable    (cfg_threshold_enable),
.cfg_debug_enable        (cfg_debug_enable),
.cfg_timeout_cycles      (cfg_timeout_cycles),
.cfg_freq_sel            (cfg_freq_sel),
.cfg_latency_threshold   (cfg_latency_threshold),
.cfg_axi_pkt_mask        (cfg_axi_pkt_mask),
.cfg_axi_err_select      (cfg_axi_err_select),
.cfg_axi_error_mask      (cfg_axi_error_mask),
.cfg_axi_timeout_mask    (cfg_axi_timeout_mask),
.cfg_axi_compl_mask      (cfg_axi_compl_mask),
.cfg_axi_thresh_mask     (cfg_axi_thresh_mask),
.cfg_axi_perf_mask       (cfg_axi_perf_mask),
.cfg_axi_addr_mask       (cfg_axi_addr_mask),
.cfg_axi_debug_mask      (cfg_axi_debug_mask),
.cfg_addr_check_enable   (cfg_addr_check_enable),
.cfg_addr_range_enable   (cfg_addr_range_enable),
.cfg_addr_range_low      (cfg_addr_range_low),
.cfg_addr_range_high     (cfg_addr_range_high),
.cfg_addr_filter_enable  (cfg_addr_filter_enable),
.cfg_addr_filter_low     (cfg_addr_filter_low),
.cfg_addr_filter_high    (cfg_addr_filter_high),
.cfg_id_filter_enable    (cfg_id_filter_enable),
.cfg_id_match_base       (cfg_id_match_base),
.cfg_id_match_count      (cfg_id_match_count),
.i_mon_time              (i_mon_time),
.monbus_valid            (monbus_valid),
.monbus_ready            (monbus_ready),
.monbus_packet           (monbus_packet),
.monbus_timestamp        (monbus_timestamp),
.busy                    (busy),
.active_transactions     (active_transactions),
.error_count             (error_count),
.transaction_count       (transaction_count),
.cfg_conflict_error      (cfg_conflict_error),
.cg_gating               (cg_gating),
.cg_idle                 (cg_idle),
.cfg_start_event_sel     (cfg_start_event_sel),
.cfg_end_event_sel       (cfg_end_event_sel),
.cfg_start_trigger       (cfg_start_trigger),
.cfg_end_trigger         (cfg_end_trigger),
.cfg_window_force_close  (cfg_window_force_close),
.window_active           (window_active),
.window_cycles           (window_cycles),

```

```

        .perf_prod_cycles      (perf_prod_cycles),
        .perf_bp_cycles       (perf_bp_cycles),
        .perf_starv_cycles    (perf_starv_cycles),
        .perf_idle_cycles     (perf_idle_cycles),
        .perf_beat_count       (perf_beat_count),
        .perf_byte_count       (perf_byte_count),
        .perf_burst_count      (perf_burst_count)
    );

```

7.7 Design Notes

7.7.1 When to Use This Module

Ideal for: - Battery-powered or power-sensitive systems - Bursty traffic patterns with significant idle periods - Systems requiring comprehensive debug visibility - Production systems needing runtime monitoring + power optimization

Consider alternatives if: - Continuous, high-throughput traffic (clock gating ineffective) - Ultra-low latency requirements (avoid gating overhead) - Area-constrained designs (monitor + CG adds ~10% area)

7.7.2 Configuration Strategy Matrix

Scenario	Monitor Config	Clock Gating Config	Expected Benefit
Development/Debug	ERROR + COMPL + TIMEOUT	Disabled	Full visibility, no wake latency
Performance Tuning	ERROR + PERF	Disabled	Metrics without power interference
Power Testing	ERROR only	Aggressive (count=0)	Maximum power savings
Production	ERROR + TIMEOUT	Balanced (count=3)	Error detection + power savings

7.7.3 Monitor + Clock Gating Interaction

Key Considerations:

- Monitor packets generated before gating:**
 - Monitor processes all events before idle state
 - MonBus packets FREEZE when the clock stops (see the WARNING above – nothing flushes them)
 - No events lost during gating transition

2. Wake latency includes monitor initialization:

- 1 wake-up register stage; first usable gated-clock edge 2 cycles after activity
- Monitor ready immediately (no reset needed)
- First transaction monitored correctly

3. Power savings account for monitor overhead:

- Monitor adds ~10% dynamic power when active
- Clock gating saves ~80-90% when idle (first-order estimate – no power analysis has been run; same disclaimer as the sibling _cg page)
- Net savings: 70-80% during idle periods

7.7.4 Verification Recommendations

1. Test monitor + CG independently first:

```
// Phase 1: Monitor only (CG disabled)  
.cfg_cg_enable (1'b0)  
// Verify all monitor features
```

```
// Phase 2: CG only (monitor minimal)  
.cfg_monitor_enable (1'b0)  
.cfg_error_enable   (1'b0)  
.cfg_cg_enable      (1'b1)  
// Verify clock gating behavior
```

```
// Phase 3: Combined  
// Both enabled, verify interaction
```

2. Check monitor packet integrity across gating:

- No packets lost during gating transitions
- No duplicate packets
- Timestamps/latencies accurate

3. Measure actual power savings:

- Instrument with power counters
 - Compare vs. always-on baseline
 - Verify efficiency in target traffic patterns
-

7.8 Related Modules

- [AXI5 Master Read](#) - Base module
 - [AXI5 Master Read CG](#) - Clock gating only
 - [AXI5 Master Read Monitor](#) - Monitor only
 - [AXI5 Master Write Monitor CG](#) - Write variant
 - [AXI Monitor Configuration Guide](#) - Monitor setup
 - [AMBA Clock Gate Controller](#) - Clock gating details
-

7.9 Testing

`val/amba/test_axi5_master_rd_mon_cg.py` exercises this module. It collects 3 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_master_rd_mon_cg.py -v
```

7.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

8 AXI5 Master Read with Lite Monitor

Module: `axi5_master_rd_monlite.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready
(amba/monitor-lite TASK-001, 2026-09-26)

8.1 Overview

`axi5_master_rd_monlite` is `axi5_master_rd` with `axi_monitor_lite` watching its master-side read channels. It is the lite-monitor sibling of `axi5_master_rd_mon`: same core, same taps, same 128-bit `monitor_packet_t` on the same monbus with the same `UNIT_ID/AGENT_ID`, so the monbus arbiter, the AXI-Lite group, the tally and the host tooling cannot tell the two apart. The difference is what it costs and what it can be asked for: about a fifth of the monitor LUTs (677 against 3,249 per read monitor in the same bridge fixture, see [axi_monitor_lite](#)), and only the four packet classes the lite emits: error, timeout, completion and active-count threshold.

8.1.1 What is not here

Compared with `axi5_master_rd_mon`: no performance window or counters, no debug packets, no address-range checker, no ID or address filters, no per-event masks, no latency threshold, and no `block_ready`. The lite never stalls the port: an event it cannot deliver is dropped and counted (`dropped_count`, reported as an `EVENT_DROPPED` packet), and a command that finds no free table entry is counted (`refused_count`) and left untracked, so its beats report as orphans.

8.1.2 Key Features

- Every `axi5_master_rd` parameter and port, declared verbatim and passed through by name
 - `axi_monitor_lite` on the m_-side taps; `USE_MONITOR=0` omits it and ties its outputs
 - Nine config inputs: the enables, the microsecond timeout, the tick LUT index and the packet-type mask
 - Five status outputs, two of them (`dropped_count`, `refused_count`) unique to the lite
-

8.2 Parameters

8.2.1 Monitor Parameters

Parameter	Type	Default	Description
<code>USE_MONITOR</code>	bit	<code>1'b1</code>	0 = omit the monitor, tie its outputs
<code>UNIT_ID</code>	logic [7:0]	<code>8'h01</code>	Unit id in every packet
<code>AGENT_ID</code>	logic [15:0]	<code>16'h000A</code>	Agent id in every packet
<code>MAX_TRANSACTIONS</code>	int	8	table entries; a command finding none is counted, not tracked
<code>ACTIVE_TRANS_THR</code> <code>ESHOLD</code>	int	$\text{MAX_TRANSACTIONS} / 2$	Table occupancy that fires a threshold packet (rising edge)

Parameter	Type	Default	Description
OUT_DEPTH	int	4	monbus output queue, a power of two
ACLK_MHZ	int	100	Clock in MHz; keeps the 1 us tick exact
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT lower bound (cfg_freq_sel indexes it)
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT upper bound

8.2.2 Core Parameters (passed through to axi5_master_rd)

Parameter	Type	Default	Description
N_ADDR_RANGES	int	0	address-range checker windows; 0 = not built
ADDR_RANGE_IS_ERROR	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	'0	per range: 1 = miss is an error, 0 = hit is a match
SKID_DEPTH_AR	int	2	as on axi5_master_rd
SKID_DEPTH_R	int	4	as on axi5_master_rd
AXI_ID_WIDTH	int	8	as on axi5_master_rd
AXI_ADDR_WIDTH	int	32	as on axi5_master_rd
AXI_DATA_WIDTH	int	32	as on axi5_master_rd

Parameter	Type	Default	Description
AXI_USER_WIDTH	int	1	as on axi5_master_rd
AXI_WSTRB_WIDTH	int	AXI_DATA_WIDTH / 8	as on axi5_master_rd
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	as on axi5_master_rd
ENABLE_TRACE	bit	1	as on axi5_master_rd
ENABLE_MPAM	bit	1	as on axi5_master_rd
ENABLE_MECID	bit	1	as on axi5_master_rd
ENABLE_UNIQUE	bit	1	as on axi5_master_rd
ENABLE_CHUNKING	bit	1	as on axi5_master_rd
ENABLE_MTE	bit	1	Memory Tagging Extension
ENABLE_POISON	bit	1	as on axi5_master_rd
AW	int	AXI_ADDR_WIDTH	as on axi5_master_rd

Parameter	Type	Default	Description
DW	int	AXI_DATA_WIDTH	as on axi5_master_rd
IW	int	AXI_ID_WIDTH	as on axi5_master_rd
SW	int	AXI_WSTRB_WIDTH	as on axi5_master_rd
UW	int	AXI_USER_WIDTH	as on axi5_master_rd
NUM_TAGS	int	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$	as on axi5_master_rd
TW	int	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	as on axi5_master_rd
CHUNK_STRB_WIDTH	int	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$	as on axi5_master_rd
ARSize	int	$\text{IW} + \text{AW} + 8 + 3$ $+ 2 + 1 + 4 + 3$ $+ 4 + \text{UW} +$	as on axi5_master_rd
RSize	int	$\text{IW} + \text{DW} + 2 + 1$ $+ \text{UW} +$	as on axi5_master_rd

8.3 Ports

8.3.1 Monitor Control, Bus and Status

Port	Direction	Type	Description
cam_clear	input	logic	sync clear of the monitor's table (named as on the _mon wrapper: pin-compatible)
cfg_monitor_enable	input	logic	0 = monitor inert, table held clear
cfg_error_enable	input	logic	

Port	Direction	Type	Description
cfg_timeout_enable	input	logic	
cfg_compl_enable	input	logic	
cfg_threshold_enable	input	logic	
cfg_timeout_cycles	input	logic [15:0]	MICROSECONDS of no progress; 0 = never
cfg_freq_sel	input	logic [3:0]	counter_freq_invariant LUT index
cfg_axi_pkt_mask	input	logic [15:0]	drop mask by packet type
i_mon_time	input	monitor_common_pkg::monbus_timestamp_t	
monbus_valid	output	logic	
monbus_ready	input	logic	
monbus_packet	output	monitor_common_pkg::monitor_packet_t	
monbus_timestamp	output	monitor_common_pkg::monbus_timestamp_t	
active_transactions	output	logic [7:0]	entries in the table
error_count	output	logic [15:0]	error + timeout packets emitted
transaction_count	output	logic [31:0]	completion packets emitted
dropped_count	output	logic [15:0]	events lost to monbus backpressure since the last report
refused_count	output	logic [15:0]	commands that found no free

Port	Direction	Type	Description
table entry			

8.3.2 Core Ports (as on axi5_master_rd)

Port	Direction	Type	Description
aclk	input	logic	
aresetn	input	logic	
fub_axi_arid	input	logic [IW-1:0]	
fub_axi_araddr	input	logic [AW-1:0]	
fub_axi_arlen	input	logic [7:0]	
fub_axi_arsize	input	logic [2:0]	
fub_axi_arburst	input	logic [1:0]	
fub_axi_arlock	input	logic	
fub_axi_arcache	input	logic [3:0]	
fub_axi_arprot	input	logic [2:0]	
fub_axi_arqos	input	logic [3:0]	
fub_axi_aruser	input	logic [UW-1:0]	
fub_axi_arvalid	input	logic	
fub_axi_arready	output	logic	
fub_axi_arnsaid	input	logic [AXI_NSAID_WIDTH-1:0]	Non-secure access ID
fub_axi_artrace	input	logic	Trace signal
fub_axi_armpam	input	logic [AXI_MPAM_WIDTH-1:0]	Memory partitioning
fub_axi_armecid	input	logic [AXI_MECID_WIDTH-1:0]	Memory encryption context
fub_axi_arunique	input	logic	Unique ID indicator
fub_axi_archunkenable	input	logic	Chunk enable
fub_axi_artagop	input	logic [AXI_TAGOP_WIDTH-1:0]	Tag operation (MTE)

Port	Direction	Type	Description
		-1:0]	
fub_axi_rid	output	logic [IW-1:0]	
fub_axi_rdata	output	logic [DW-1:0]	
fub_axi_rresp	output	logic [1:0]	
fub_axi_rlast	output	logic	
fub_axi_ruser	output	logic [UW-1:0]	
fub_axi_rvalid	output	logic	
fub_axi_rready	input	logic	
fub_axi_rtrace	output	logic	Trace signal
fub_axi_rpoison	output	logic	Data poison indicator
fub_axi_rchunkv	output	logic	Chunk valid
fub_axi_rchunknum	output	logic [AXI_CHUNKNUM_WIDTH-1:0]	Chunk number
fub_axi_rchunkstrob	output	logic [CHUNK_STRB_WIDTH-1:0]	Chunk strobe
fub_axi_rtag	output	logic [TW-1:0]	Memory tags
fub_axi_rtagmatch	output	logic	Tag match response
m_axi_arid	output	logic [IW-1:0]	
m_axi_araddr	output	logic [AW-1:0]	
m_axi_arlen	output	logic [7:0]	
m_axi_arsize	output	logic [2:0]	
m_axi_arburst	output	logic [1:0]	
m_axi_arlock	output	logic	
m_axi_arcache	output	logic [3:0]	
m_axi_arprot	output	logic [2:0]	
m_axi_arqos	output	logic [3:0]	
m_axi_aruser	output	logic [UW-1:0]	
m_axi_arvalid	output	logic	

Port	Direction	Type	Description
m_axi_arready	input	logic	
m_axi_arnsaid	output	logic [AXI_NSAID_WIDTH-1:0]	
m_axi_artrace	output	logic	
m_axi_arpam	output	logic [AXI_MPAM_WIDTH-1:0]	
m_axi_armecid	output	logic [AXI_MECID_WIDTH-1:0]	
m_axi_arunique	output	logic	
m_axi_archunken	output	logic	
m_axi_artagop	output	logic [AXI_TAGOP_WIDTH-1:0]	
m_axi_rid	input	logic [IW-1:0]	
m_axi_rdata	input	logic [DW-1:0]	
m_axi_rresp	input	logic [1:0]	
m_axi_rlast	input	logic	
m_axi_ruser	input	logic [UW-1:0]	
m_axi_rvalid	input	logic	
m_axi_rready	output	logic	
m_axi_rtrace	input	logic	
m_axi_rpoison	input	logic	
m_axi_rchunkv	input	logic	
m_axi_rchunknum	input	logic [AXI_CHUNKNUM_WIDTH-1:0]	
m_axi_rchunkstrb	input	logic [CHUNK_STRB_WIDTH-1:0]	
m_axi_rtag	input	logic [TW-1:0]	
m_axi_rtagmatch	input	logic	
busy	output	logic	

Port	Direction	Type	Description
cfg_latency_threshold	input	logic [31:0]	completion latency (cycles) above this -> Threshold/LATENCY
cfg_addr_check_enable	input	logic	
cfg_addr_match_enable	input	logic	hit in a match range -> AddrMatch packet
cfg_addr_range_enable	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	
cfg_addr_range_low	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	
cfg_addr_range_high	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	

8.4 Functional Description

The core is instantiated untouched; unlike `axi5_master_rd_mon` there is no gating of the command handshake, because the lite has no admission stall. The monitor taps the m_-side command, data and response channels through three valids gated by `cfg_monitor_enable`, which also holds the table clear while low. `cfg_timeout_cycles` is a microsecond count of no progress on an entry, passed at full width; 0 means never. The active-count threshold is the parameter `ACTIVE_TRANS_THRESHOLD`, as on the `_mon` wrapper.

The lite's own behaviour – per-ID linked-list attribution, stamps instead of counters, the registered event stage, the 4-entry output queue and drop-and-count – is on the [axi_monitor_lite](#) page.

8.5 Timing Characteristics

The datapath timing is `axi5_master_rd`'s. The monitor adds no gating to any handshake and no path into the datapath; its own paths are two short cycles (attribution, then packet formatting) and met 10 ns on an Artix-7 100T -1 with margin inside `bridge_1x2_rd_lite_mon`.

8.6 Usage Examples

```
axi5_master_rd_monlite #(
    .N_ADDR_RANGES      (0),
    .ADDR_RANGE_IS_ERROR ('0'),
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R        (4),
    .UNIT_ID             (8'h02),
    .AGENT_ID            (16'h0014),
    .MAX_TRANSACTIONS    (8)
) u_axi5_master_rd_monlite (
    .aclk                (aclk),
    .aresetn              (aresetn),
    // ... the axi5_master_rd ports, by name ...
    .cam_clear            (1'b0),
    .cfg_monitor_enable   (1'b1),
    .cfg_error_enable     (1'b1),
    .cfg_timeout_enable   (1'b1),
    .cfg_compl_enable     (1'b0),
    .cfg_threshold_enable (1'b0),
    .cfg_timeout_cycles   (16'd1000),
    .cfg_freq_sel         (4'd0),
    .cfg_axi_pkt_mask     (16'h0000),
    .i_mon_time           (mon_time),
    .monbus_valid         (monbus_valid),
    .monbus_ready         (monbus_ready),
    .monbus_packet        (monbus_packet),
    .monbus_timestamp     (monbus_timestamp),
    .active_transactions  (),
    .error_count          (),
    .transaction_count    (),
    .dropped_count        (dropped_count),
    .refused_count        (refused_count)
);
```

In a generated bridge, `mon_preset = "lite"` selects this wrapper for every monitored port.

8.7 Design Notes

- `cam_clear` keeps the `_mon` wrapper's name so the two are pin-compatible on the monitor side; the lite has a table, not a CAM.
 - `MAX_TRANSACTION` defaults to 8 here against 16 on `axi5_master_rd_mon`: size it to the port's real outstanding depth, since refused commands surface as orphans.
 - Consumers that relied on `block_ready` to bound the table get drop-and-count instead; the count is always reported, the identity of the lost events is not.
-

8.8 Related Modules

- `axi5_master_rd_mon` – the full-monitor sibling
 - `axi5_master_rd` – the core this wraps
 - [axi_monitor_lite](#) – the monitor itself
-

8.9 Testing

`val/amba/monitor-lite/test_axi5_master_rd_monlite.py` exercises this module: the same TB and scenarios as `val/amba/test_axi5_master_rd_mon.py`, with the DUT swapped.

```
source env_python
make -C val/amba/monitor-lite run-axi5_master_rd_monlite-gate
```

Last Updated: 2026-09-26

8.10 Navigation

- [← Back to Monitor Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

9 AXI5 Master Write

Module: `axi5_master_wr.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready

9.1 Overview

The AXI5 Master Write module is the master-side AW/W/B channel transport block. It carries a full AXI5 write signal set — AWATOP and the other AXI5 sideband extensions included — between a FUB (Functional Unit Block) interface and an external AXI5 master interface, with a configurable SKID buffer on each of the AW, W, and B channels.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. AWATOP is carried through unmodified but no atomic read-modify-write is performed, no MTE tag checking or BTAGMATCH generation is performed, and no outstanding-transaction tracking is done. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

9.1.1 Key Features

- Carries the full AXI5 signal set listed below, unmodified, across the SKID buffers
 - **AWATOP:** Atomic transaction operation type (Compare/Swap, Fetch/Add, etc.)
 - **AWNSAID:** Non-secure access identifier for security domains
 - **AWTRACE:** Trace signal for debug and performance monitoring
 - **AWMPAM:** Memory Partitioning and Monitoring (PartID + PMG)
 - **AWMECID:** Memory Encryption Context ID for secure memory
 - **AWUNIQUE:** Unique ID indicator for cache operations
 - **AWTAGOP:** Memory tag operation (MTE - Memory Tagging Extension)
 - **AWTAG:** Memory tags for address
 - **WPOISON:** Write data poison indicator for error injection
 - **WTAG:** Write data memory tags (MTE)
 - **WTAGUPDATE:** Tag update mask for selective tag writing
 - **BTRACE:** Response trace signal
 - **BTAG/BTAGMATCH:** Response memory tags and tag match
 - Configurable SKID buffer depths for AW, W, and B channels
 - Busy signal for power management and clock gating
 - AWREGION not implemented (see *Design Notes*)
-

9.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_W	int	4	W channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_B	int	2	B channel SKID buffer depth (legal range 2..8 inclusive, any integer)
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory

Parameter	Type	Default	Description
ENABLE_MECID	bit	1	partitioning Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator

9.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
SW	AXI_WSTRB_WIDTH	Write strobe width, one bit per data byte
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	Total width of the awtag / wtag / btag fields
AWSize	Sum of the enabled AW fields	AW SKID buffer payload width
WSize	Sum of the enabled W fields	W SKID buffer payload width
BSize	Sum of the enabled B fields	B SKID buffer payload width

9.3 Ports

9.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

9.3.2 FUB AXI5 Interface (Slave Side - Input)

9.3.2.1 AW Channel

Port	Width	Direction	Description
fub_axi_awid	IW	Input	Write address ID
fub_axi_awaddr	AW	Input	Write address
fub_axi_awlen	8	Input	Burst length
fub_axi_awsz	3	Input	Burst size
fub_axi_awburst	2	Input	Burst type
fub_axi_awlock	1	Input	Lock type
fub_axi_awcache	4	Input	Cache attributes
fub_axi_awprot	3	Input	Protection attributes
fub_axi_awqos	4	Input	Quality of Service
fub_axi_awuser	UW	Input	User-defined signal
fub_axi_awvalid	1	Input	Write address valid
fub_axi_awready	1	Output	Write address ready

9.3.2.2 AXI5 AW Extensions

Port	Width	Direction	Description
fub_axi_awatop	AXI_ATOP_WIDTH	Input	Atomic operation type
fub_axi_awnsaid	AXI_NSAID_WIDTH	Input	Non-secure access ID
fub_axi_awtrace	1	Input	Trace signal

Port	Width	Direction	Description
fub_axi_awmpam	AXI_MPAM_WIDTH	Input	Memory partitioning/monitoring
fub_axi_awmecid	AXI_MECID_WIDTH	Input	Memory encryption context ID
fub_axi_awunique	1	Input	Unique ID indicator
fub_axi_awtagop	AXI_TAGOP_WIDTH	Input	Tag operation (MTE)
fub_axi_awtag	TW	Input	Address memory tags

9.3.2.3 W Channel

Port	Width	Direction	Description
fub_axi_wdata	DW	Input	Write data
fub_axi_wstrb	SW	Input	Write strobes
fub_axi_wlast	1	Input	Last transfer in burst
fub_axi_wuser	UW	Input	User-defined signal
fub_axi_wvalid	1	Input	Write data valid
fub_axi_wready	1	Output	Write data ready

9.3.2.4 AXI5 W Extensions

Port	Width	Direction	Description
fub_axi_wpoison	1	Input	Data poison indicator
fub_axi_wtag	TW	Input	Write data tags
fub_axi_wtagupdate	NUM_TAGS	Input	Tag update mask

9.3.2.5 B Channel

Port	Width	Direction	Description
fub_axi_bid	IW	Output	Response ID
fub_axi_bresp	2	Output	Write response
fub_axi_buser	UW	Output	User-defined signal
fub_axi_bvalid	1	Output	Write response valid
fub_axi_bready	1	Input	Write response ready

9.3.2.6 AXI5 B Extensions

Port	Width	Direction	Description
fub_axi_btrace	1	Output	Response trace
fub_axi_btag	TW	Output	Response tags
fub_axi_btagmatch	1	Output	Tag match response


9.3.3 Master AXI5 Interface (Output Side)

Same port list as FUB interface but with `m_axi_*` prefix and reversed directions.

9.3.4 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator for clock gating

9.4 Functional Description

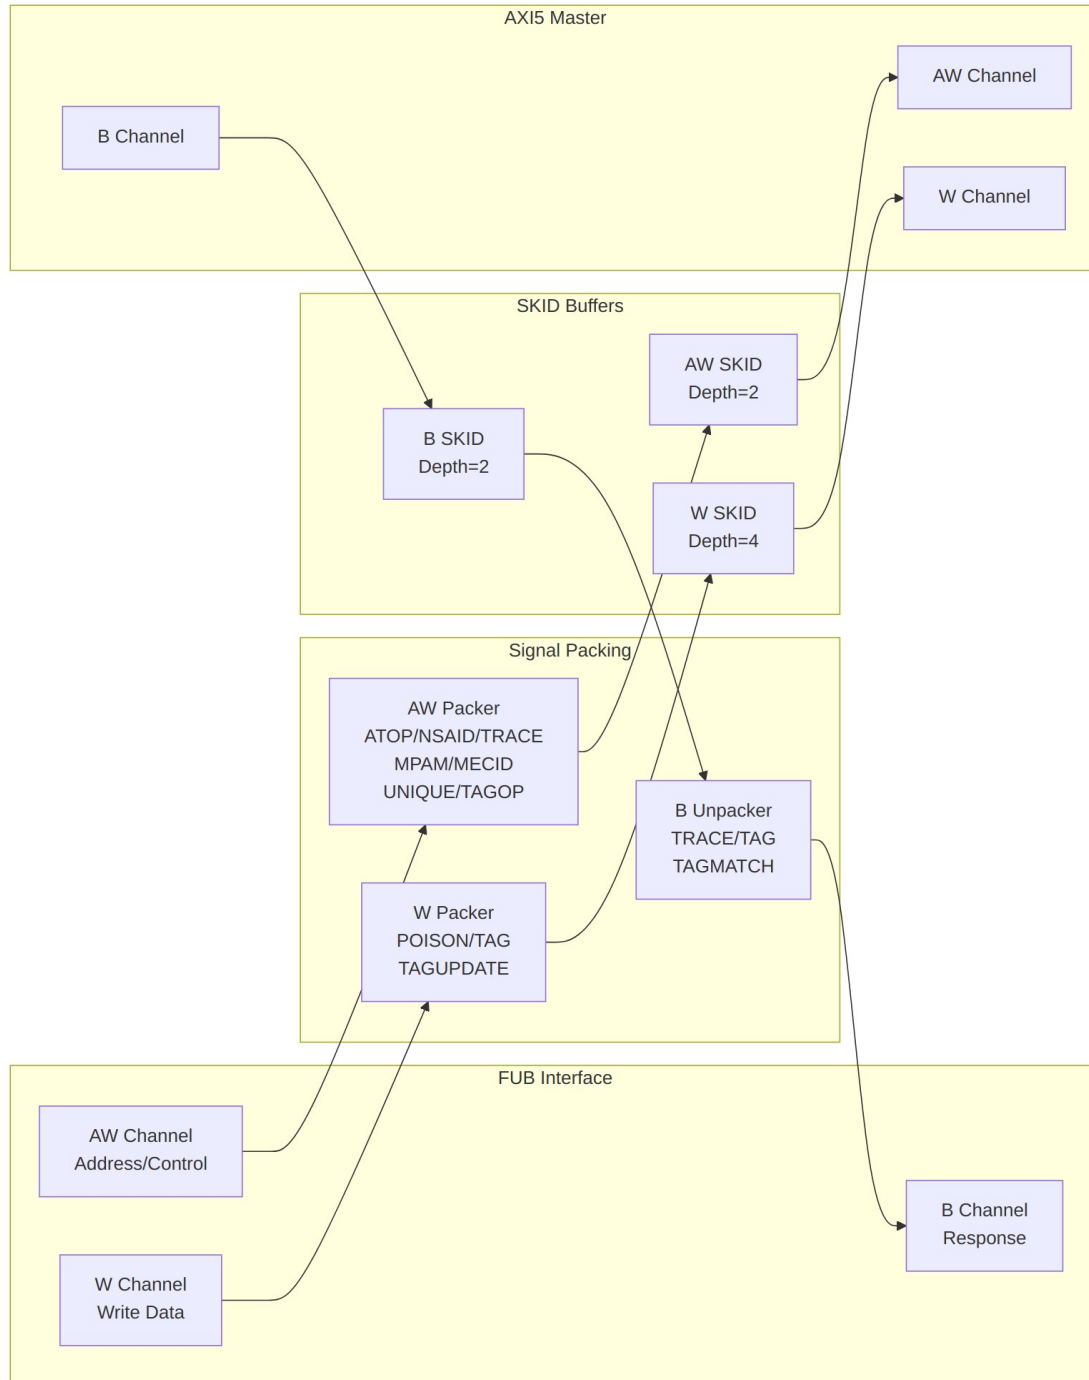

Architecture

9.4.1 AXI5 Enhancements Over AXI4

Atomic Operations: - **AWATOP:** Supports atomic Compare/Swap, Fetch/Add, Fetch/And, etc. - Enables lock-free synchronization primitives

Security and Isolation: - **AWNSAID:** Identifies security domain for non-secure accesses - **AWMECID:** Provides encryption context for secure memory regions

Performance and Monitoring: - **AWTRACE:** Enables performance trace and debug capabilities - **AWMPAM:** Supports memory bandwidth partitioning and QoS

Advanced Features: - **AWUNIQUE:** Indicates unique cache line access (no sharing) - **AWTAGOP/AWTAG/WTAG:** Memory Tagging Extension for security - **WTAGUPDATE:** Selective tag update mask

Data Integrity: - **WPOISON:** Indicates corrupted or test data - **BTRACE/BTAG/BTAGMATCH:** Response with trace and tag information

Not implemented: - **AWREGION:** No port on this module. AxREGION is not deprecated by AXI5; it remains a valid optional signal and is simply omitted here. Decode or route by address instead, or use `axi4_master_wr`

9.4.2 Atomic Transactions

AWATOP is 6 bits wide (`AXI_ATOP_WIDTH = 6`). The module transports it unmodified; it does not perform the atomic operation. Executing the read-modify-write and returning the original data on the R channel is the downstream endpoint's responsibility.

AWATOP[5:4] - transaction class:

AWATOP[5:4]	Class	Description
2'b00	NonAtomic	Ordinary write; AWATOP[3:0] must be zero
2'b01	AtomicStore	Operation applied at the endpoint; no read data returned
2'b10	AtomicLoad	Operation applied at the endpoint; original data returned on R
2'b11	AtomicSwap / AtomicCompare	Selected by AWATOP[3:0] (see below)

AWATOP[3] - endianness (AtomicStore and AtomicLoad only):

AWATOP[3]	Meaning
1'b0	Little-endian operand
1'b1	Big-endian operand

AWATOP[2:0] - arithmetic/logical opcode (AtomicStore and AtomicLoad only):

AWATOP[2:0]	Operation
3'b000	ADD
3'b001	CLR (AND NOT)
3'b010	EOR (XOR)
3'b011	SET (OR)
3'b100	SMAX (signed maximum)
3'b101	SMIN (signed minimum)
3'b110	UMAX (unsigned maximum)
3'b111	UMIN (unsigned minimum)

Full-field encodings when AWATOP[5:4] is 2'b11:

AWATOP	Transaction
6'b110000	AtomicSwap
6'b110001	AtomicCompare
All other 2'b11 values	Reserved

Set `ENABLE_ATOMIC = 0` to drop AWATOP from the AW SKID payload when atomics are not used.

9.5 Timing Characteristics

9.5.1 Basic Write Transaction

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- AWID, AWADDR, AWLEN, AWSIZE
- AWVALID, AWREADY
- AWATOP, AWNSAID, AWTRACE (AXI5 extensions)
- WDATA, WSTRB, WLAST

- WVALID, WREADY
- WPOISON, WTAG (AXI5 extensions)
- BID, BRESP
- BVALID, BREADY
- BTRACE, BTAG (AXI5 extensions)

9.5.2 Atomic Operation

Timing diagram pending. The signals and sequence this scenario exercises:

- AWATOP encoding for atomic operation
- Write data for atomic operand
- Response with atomic result

9.5.3 Memory Tagging Extension (MTE)

Timing diagram pending. The signals and sequence this scenario exercises:

- AWTAGOP encoding
 - AWTAG delivery with address
 - WTAG delivery with data
 - WTAGUPDATE mask
 - BTAGMATCH response
-

9.6 Usage Examples

```
axi5_master_wr #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
    .AXI_DATA_WIDTH    (64),
    .AXI_USER_WIDTH    (4),
    .SKID_DEPTH_AW     (2),
    .SKID_DEPTH_W      (4),
    .SKID_DEPTH_B      (2),
    // Enable AXI5 features
    .ENABLE_ATOMIC     (1),
    .ENABLE_NSaid      (1),
    .ENABLE_TRACE      (1),
    .ENABLE_MPAM       (1),
    .ENABLE_MECID      (1),
    .ENABLE_UNIQUE     (1),
```

```

        .ENABLE_MTE            (1),
        .ENABLE_POISON        (1)
    ) u_axi5_master_wr (
        .aclk                  (axi_clk),
        .aresetn                (axi_rst_n),

        // FUB interface (slave side)
        .fub_axi_awid           (fub_awid),
        .fub_axi_awaddr         (fub_awaddr),
        .fub_axi_awlen          (fub_awlen),
        .fub_axi_awsz           (fub_awsz),
        .fub_axi_awburst        (fub_awburst),
        .fub_axi_awlock         (fub_awlock),
        .fub_axi_awcache        (fub_awcache),
        .fub_axi_awprot         (fub_awprot),
        .fub_axi_awqos          (fub_awqos),
        .fub_axi_awuser         (fub_awuser),
        .fub_axi_awvalid        (fub_awvalid),
        .fub_axi_awready        (fub_awready),

        // AXI5 AW extensions
        .fub_axi_awatop         (fub_awatop),
        .fub_axi_awnsaid        (fub_awnsaid),
        .fub_axi_awtrace        (fub_awtrace),
        .fub_axi_awmpam         (fub_awmpam),
        .fub_axi_awmeced        (fub_awmeced),
        .fub_axi_awunique       (fub_awunique),
        .fub_axi_awtagop        (fub_awtagop),
        .fub_axi_awtag          (fub_awtag),

        // W channel
        .fub_axi_wdata          (fub_wdata),
        .fub_axi_wstrb          (fub_wstrb),
        .fub_axi_wlast          (fub_wlast),
        .fub_axi_wuser          (fub_wuser),
        .fub_axi_wvalid         (fub_wvalid),
        .fub_axi_wready         (fub_wready),

        // AXI5 W extensions
        .fub_axi_wpoison        (fub_wpoison),
        .fub_axi_wtag           (fub_wtag),
        .fub_axi_wtagupdate     (fub_wtagupdate),

        // B channel
        .fub_axi_bid            (fub_bid),
        .fub_axi_bresp          (fub_bresp),
        .fub_axi_buser          (fub_buser),

```

```

.fub_axi_bvalid      (fub_bvalid),
.fub_axi_bready      (fub_bready),

// AXI5 B extensions
.fub_axi_btrace      (fub_btrace),
.fub_axi_btag        (fub_btag),
.fub_axi_btagmatch   (fub_btagmatch),

// Master interface (output side)
.m_axi_awid          (m_axi_awid),
.m_axi_awaddr        (m_axi_awaddr),
// Every remaining m_axi_* port mirrors the fub_axi_* list above,
// same names and widths, opposite directions. All must be
connected.

// Status
.busy                (master_wr_busy)
);

```

9.7 Design Notes

9.7.1 Atomic Operation Support

When `ENABLE_ATOMIC=1`: - **AWATOP[5:4]** selects atomic type (Swap/Compare/Fetch-op) - **AWATOP[3:0]** selects operation for Fetch-op - Write data provides operand value - Response may include atomic result (implementation-dependent)

Common atomic operations: - **Atomic Swap**: Exchange memory value with register - **Compare and Swap**: Update memory if value matches - **Fetch and Add**: Read-modify-write atomically

9.7.2 Memory Tagging Extension (MTE)

When `ENABLE_MTE=1`: - **AWTAGOP**: Specifies tag operation for address tags - **AWTAG**: Provides address-level memory tags - **WTAG**: Provides data-level memory tags (1 tag per 16 bytes) - **WTAGUPDATE**: Mask for selective tag updates - **BTAG/BTAGMATCH**: Response includes tag information

9.7.3 Poison Support

When `ENABLE_POISON=1`: - **WPOISON**: Master flags data as poisoned - Use cases: Error injection, cache pollution testing, security

9.7.4 Feature Enable Strategy

Disable unused features to reduce area:

```
.ENABLE_ATOMIC    (0), // No atomic operations
.ENABLE_NSaid     (0), // No security domains
.ENABLE_TRACE     (0), // No trace capability
.ENABLE_MPAM      (0), // No memory partitioning
.ENABLE_MECID     (0), // No encryption
.ENABLE_UNIQUE    (0), // No unique access
.ENABLE_MTE       (0), // No memory tagging
.ENABLE_POISON    (0)  // No poison indication
```

9.8 Related Modules

- [AXI5 Master Read](#) - Master read interface
 - [AXI5 Slave Write](#) - Slave write interface
 - [AXI5 Master Write CG](#) - Clock-gated variant
 - [AXI5 Master Write Monitor](#) - With integrated monitoring
 - [AXI4 Master Write](#) - AXI4 version for comparison
-

9.9 Testing

val/amba/test_axi5_master_wr.py exercises this module. It collects 8 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_master_wr.py -v
```

9.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

10 AXI5 Master Write with Clock Gating

Module: axi5_master_wr_cg.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready

10.1 Overview

The AXI5 Master Write with Clock Gating module wraps the standard `axi5_master_wr` core with intelligent clock gating for power optimization. When no AXI write activity is detected for a configurable number of idle cycles, the clock gates off automatically.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. AWATOP is carried through unmodified but no atomic read-modify-write is performed, no MTE tag checking or BTAGMATCH generation is performed, and no outstanding-transaction tracking is done. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

10.1.1 Key Features

- Carries the same AXI5 signal set as `axi5_master_wr`, which it wraps
 - **AWATOP:** Atomic operation support (compare-and-swap, atomic operations)
 - **AWNSAID:** Non-secure access identifier for security domains
 - **AWTRACE:** Trace signal for debug and performance monitoring
 - **AWMPAM:** Memory Partitioning and Monitoring (PartID + PMG)
 - **AWMECID:** Memory Encryption Context ID for secure memory
 - **AWUNIQUE:** Unique ID indicator for cache operations
 - **AWTAGOP:** Memory tag operation (MTE - Memory Tagging Extension)
 - **AWTAG:** Memory tags on address channel
 - **WPOISON:** Write data poison indicator for corrupted data detection
 - **WTAG/WTAGUPDATE:** Memory tags and tag update control (MTE)
 - **BTRACE/BTAG/BTAGMATCH:** Response trace and tag signals
 - **Automatic clock gating** based on activity detection
 - **Configurable idle count** before clock gating activates
 - **Power savings** during idle periods
 - **Transparent operation** - no protocol changes
 - **Status outputs** for clock gating state monitoring
 - **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized
-

10.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth
SKID_DEPTH_W	int	4	W channel SKID buffer depth
SKID_DEPTH_B	int	2	B channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context

Parameter	Type	Default	Description
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
CG_IDLE_COUNT_WIDTH	int	4	Width of idle counter (max 2^N-1 cycles)

10.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
SW	AXI_WSTRB_WIDTH	Write strobe width, one bit per data byte
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	Total width of the awtag / wtag / btag fields
AWSize	Sum of the enabled AW fields	AW SKID buffer payload width
WSize	Sum of the enabled W fields	W SKID buffer payload width
BSize	Sum of the enabled B fields	B SKID buffer payload width

10.3 Ports

10.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

10.3.2 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Clock gating enable (1=enable, 0=always active)
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating activates

10.3.3 FUB AXI5 Interface (Slave Side - Input)

10.3.3.1 AW Channel

Port	Width	Direction	Description
fub_axi_aw_id	IW	Input	Write address ID
fub_axi_aw_addr	AW	Input	Write address
fub_axi_aw_len	8	Input	Burst length
fub_axi_aw_size	3	Input	Burst size
fub_axi_aw_burst	2	Input	Burst type
fub_axi_aw_lock	1	Input	Lock type
fub_axi_aw_cache	4	Input	Cache attributes
fub_axi_aw_prot	3	Input	Protection attributes
fub_axi_aw_qos	4	Input	Quality of Service
fub_axi_aw_user	UW	Input	User-defined signal
fub_axi_aw_valid	1	Input	Write address valid
fub_axi_aw	1	Output	Write address ready

Port	Width	Direction	Description
ready			(forced 0 when gating)

10.3.3.2 AXI5 AW Extensions

Port	Width	Direction	Description
fub_axi_aw_atop	AXI_ATOP_W IDTH	Input	Atomic operation
fub_axi_aw_nsaid	AXI_NSAID_ WIDTH	Input	Non-secure access ID
fub_axi_aw_trace	1	Input	Trace signal
fub_axi_aw_mpam	AXI_MPAM_ WIDTH	Input	Memory partitioning/monitoring
fub_axi_aw_mecid	AXI_MECID_ WIDTH	Input	Memory encryption context ID
fub_axi_aw_unique	1	Input	Unique ID indicator
fub_axi_aw_tagop	AXI_TAGOP_ WIDTH	Input	Tag operation (MTE)
fub_axi_aw_tag	TW	Input	Memory tags on address channel

10.3.3.3 W Channel

Port	Width	Direction	Description
fub_axi_w_data	DW	Input	Write data
fub_axi_ws_trb	SW	Input	Write strobes
fub_axi_wlast	1	Input	Last transfer in burst
fub_axi_wuser	UW	Input	User-defined signal
fub_axi_wvalid	1	Input	Write data valid
fub_axi_wr	1	Output	Write data ready (forced 0

Port	Width	Direction	Description
ready			when gating)

10.3.3.4 *AXI5 W Extensions*

Port	Width	Direction	Description
fub_axi_wpoison	1	Input	Write data poison indicator
fub_axi_wtag	TW	Input	Memory tags on write data
fub_axi_wtagupdate	NUM_TAGS	Input	Tag update control (per 16B)

10.3.3.5 *B Channel*

Port	Width	Direction	Description
fub_axi_bid	IW	Output	Write response ID
fub_axi_bresp	2	Output	Write response
fub_axi_buser	UW	Output	User-defined signal
fub_axi_bvalid	1	Output	Write response valid
fub_axi_bready	1	Input	Write response ready

10.3.3.6 *AXI5 B Extensions*

Port	Width	Direction	Description
fub_axi_btrace	1	Output	Trace signal
fub_axi_btag	TW	Output	Memory tags in response
fub_axi_btagmatch	1	Output	Tag match result


10.3.4 Master AXI5 Interface (Output Side)

Same port list as FUB interface but with `m_axi_*` prefix and reversed directions.

10.3.5 Clock Gating Status Outputs

Port	Width	Direction	Description
cg_gating	1	Output	Clock gating active (1=clock gated, 0=clock running)
cg_idle	1	Output	Interface idle (1=no activity detected)

10.4 Functional Description

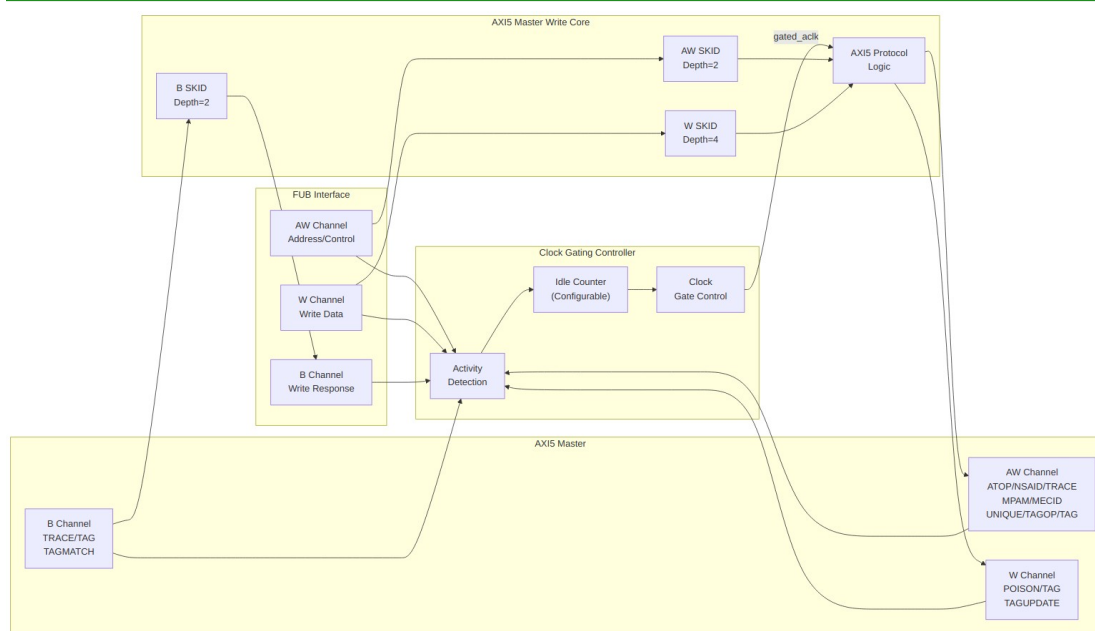

Architecture

10.4.1 Clock Gating Operation

The clock gating controller monitors activity on both user and AXI sides for all three write channels:

User-side activity detection:

```
user_valid = fub_axi_avalid || fub_axi_wvalid || fub_axi_bvalid ||
int_busy // peer VALID (post-fix)
```

AXI-side activity detection:

```
axi_valid = m_axi_avalid || m_axi_wvalid || m_axi_bvalid
```

Ready signal control during gating:

```
fub_axi_awready = cg_gating ? 1'b0 : int_awready;  
fub_axi_wready = cg_gating ? 1'b0 : int_wready;  
m_axi_bready = cg_gating ? 1'b0 : int_bready;
```

All three write channels must be idle before clock gating activates, ensuring no partial writes.

10.4.2 Ready Deassertion and Wake Behavior

While `cg_gating` is asserted, the ready outputs listed above are forced low.

This is legal AXI. A READY output may be deasserted for any number of cycles, and neither side may assume READY asserts within a bounded time, so holding it low is ordinary backpressure rather than a protocol violation. It cannot deadlock either: the same VALID being held off also feeds the activity detector, so gating releases and READY returns to the core's value.

Two consequences are worth designing around:

- **Wake latency adds to first-transfer latency.** Activity is registered once (AXI4, AXI5, AXI4-Lite, AXI4-Stream) or twice (APB, APB5, AXI5-Stream – with one exception: `apb4_slave_cdc_cg` drives `amba_clock_gate_ctrl` combinatorially and so registers once, not twice) before reaching the ICG enable, which is combinatorial. The AXI5 `_cg` wrappers drive the activity terms combinatorially, so there is 1 register stage and the first usable gated-clock edge arrives 2 cycles after activity asserts. Size `cfig_cg_idle_count` so that cost is amortized over the traffic burst that follows.
- **READY is a combinational function of `cg_gating`.** The path from the idle counter to the `fub_axi_awready` and `fub_axi_wready` outputs may need attention during timing closure, particularly at high frequency.

10.4.3 Integration Caveat: `fub_axi_bready` in the Activity Term

The activity detector uses the corresponding VALID (`fub_axi_bvalid`), never the peer's READY. (Historically this term was `fub_axi_bready`, which meant a peer parking its ready high – a common and entirely correct style – pinned the block permanently awake and defeated gating; that defect was fixed family-wide, matching the rule the `mon_cg` wrappers always carried.)

An always-ready consumer no longer prevents gating.

10.4.4 AXI5 Write-Specific Features

Atomic transactions (AWATOP): When `ENABLE_ATOMIC=1`, AWATOP is packed into the AW SKID payload and carried through unmodified, so the following can be signalled end to end: -

AtomicStore - AtomicLoad - AtomicSwap - AtomicCompare - The ADD/CLR/EOR/SET/SMAX/SMIN/UMAX/UMIN opcodes of AtomicStore and AtomicLoad

The module does not execute the atomic operation. See [AXI5 Master Write](#) for the full AWATOP encoding.

Memory Tagging on Write (MTE): When ENABLE_MTE=1: - **AWTAGOP:** Specifies tag operation for write address - **AWTAG:** Memory tags sent with address - **WTAG:** Memory tags sent with each data beat - **WTAGUPDATE:** Controls which tags to update (per 16 bytes) - **BTAG:** Memory tags returned in response - **BTAGMATCH:** Tag match result

Write Poison (WPOISON): When ENABLE_POISON=1: - Indicates corrupted or invalid write data - Propagated to memory/cache - May trigger error response (SLVERR)

10.4.5 Idle Counter Configuration

Same as read variant - see [AXI5 Master Read CG](#).

10.5 Timing Characteristics

10.5.1 Clock Gating with Write Burst

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK (ungated)
- GATED_ACLK (gated clock)
- AW channel: AWVALID, AWREADY
- W channel: WDATA, WLAST, WVALID, WREADY
- B channel: BVALID, BREADY
- Idle counter after BREADY
- cg_gating activation after idle count

10.5.2 Atomic Operation with Clock Gating

Timing diagram pending. The signals and sequence this scenario exercises:

- AWATOP encoding
- Atomic write sequence
- BTAG response
- Clock gating after completion

10.6 Usage Examples

```
axi5_master_wr_cg #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
    .AXI_DATA_WIDTH    (64),
    .AXI_USER_WIDTH    (4),
    .SKID_DEPTH_AW     (2),
    .SKID_DEPTH_W      (4),
    .SKID_DEPTH_B      (2),
    // Enable AXI5 features
    .ENABLE_ATOMIC     (1),
    .ENABLE_NSAID      (1),
    .ENABLE_TRACE      (1),
    .ENABLE_MPAM       (1),
    .ENABLE_MECID      (1),
    .ENABLE_UNIQUE     (1),
    .ENABLE_MTE        (1),
    .ENABLE_POISON     (1),
    // Clock gating configuration
    .CG_IDLE_COUNT_WIDTH (4)
) u_axi5_master_wr_cg (
    .aclk               (axi_clk),
    .aresetn            (axi_rst_n),

    // Clock gating configuration
    .cfg_cg_enable      (power_save_enable),
    .cfg_cg_idle_count  (4'd3), // Gate after 4 idle cycles

    // FUB interface (slave side)
    .fub_axi_awid       (fub_awid),
    .fub_axi_awaddr     (fub_awaddr),
    .fub_axi_awlen      (fub_awlen),
    .fub_axi_awsz       (fub_awsz),
    .fub_axi_awburst    (fub_awburst),
    .fub_axi_awlock     (fub_awlock),
    .fub_axi_awcache    (fub_awcache),
    .fub_axi_awprot     (fub_awprot),
    .fub_axi_awqos      (fub_awqos),
    .fub_axi_awuser     (fub_awuser),
    .fub_axi_awvalid    (fub_awvalid),
    .fub_axi_awready    (fub_awready),

    // AXI5 AW extensions
    .fub_axi_awatop     (fub_awatop),
```

```

.fub_axi_awnsaid      (fub_awnsaid),
.fub_axi_awtrace      (fub_awtrace),
.fub_axi_awmpam       (fub_awmpam),
.fub_axi_awmecid      (fub_awmecid),
.fub_axi_awunique     (fub_awunique),
.fub_axi_awtagop      (fub_awtagop),
.fub_axi_awtag        (fub_awtag),

// W channel
.fub_axi_wdata        (fub_wdata),
.fub_axi_wstrb        (fub_wstrb),
.fub_axi_wlast        (fub_wlast),
.fub_axi_wuser        (fub_wuser),
.fub_axi_wvalid       (fub_wvalid),
.fub_axi_wready       (fub_wready),

// AXI5 W extensions
.fub_axi_wpoison      (fub_wpoison),
.fub_axi_wtag         (fub_wtag),
.fub_axi_wtagupdate   (fub_wtagupdate),

// B channel
.fub_axi_bid          (fub_bid),
.fub_axi_bresp        (fub_bresp),
.fub_axi_buser        (fub_buser),
.fub_axi_bvalid       (fub_bvalid),
.fub_axi_bready       (fub_bready),

// AXI5 B extensions
.fub_axi_btrace       (fub_btrace),
.fub_axi_btag         (fub_btag),
.fub_axi_btagmatch    (fub_btagmatch),

// Master interface (output side)
.m_axi_awid           (m_axi_awid),
.m_axi_awaddr         (m_axi_awaddr),
// Every remaining m_axi_* port mirrors the fub_axi_* list above,
// same names and widths, opposite directions. All must be
connected.

// Clock gating status
.cg_gating            (clock_gated),
.cg_idle              (interface_idle)
);

// Power monitoring

```

```

always_ff @(posedge axi_clk or negedge axi_rst_n) begin
    if (!axi_rst_n) begin
        write_count <= '0;
        power_cycles_saved <= '0;
    end else begin
        if (fub_awvalid && fub_awready)
            write_count <= write_count + 1;

        if (clock_gated)
            power_cycles_saved <= power_cycles_saved + 1;
    end
end

```

10.7 Design Notes

10.7.1 Write vs. Read Clock Gating

Aspect	Read (AR/R)	Write (AW/W/B)
Channels	2 (AR, R)	3 (AW, W, B)
Activity detection	2 valids	3 valids
Idle condition	Both channels idle	All 3 channels idle
Typical idle %	Higher (read-mostly traffic)	Lower (write completion delays)
Relative gating opportunity	Higher	Lower

10.7.2 Write-Specific Gating Considerations

Write data buffering: - Clock may gate after AW but before W (if W delayed) - SKID buffers ensure no data loss - Gate activation waits for W channel idle

Response latency: - B channel responses may delay gating - Typical: B arrives many cycles after W - Idle counter starts after BREADY

Atomic operations: - Longer latency than normal writes - Atomic read-modify-write sequence - Idle detection after atomic completion

10.8 Related Modules

- [AXI5 Master Write](#) - Non-gated base module
 - [AXI5 Master Read CG](#) - Read with clock gating
 - [AXI5 Master Write Monitor CG](#) - With monitoring + clock gating
 - [AMBA Clock Gate Controller](#) - Clock gating controller spec
-

10.9 Testing

`val/amba/test_axi5_master_wr_cg.py` exercises this module. It collects 3 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_master_wr_cg.py -v
```

10.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

11 AXI5 Master Write with Monitor

Module: `axi5_master_wr_mon.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready

11.1 Overview


The AXI5 Master Write with Monitor module wraps the standard `axi5_master_wr` core with an integrated `axi_monitor_filtered`, so every write transaction crossing the core is also visible to the monitor in real time. You get write transaction monitoring, error detection, and configurable packet filtering in one block — no external monitor to wire up.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake

stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

11.1.1 Key Features

- Carries the full AXI5 signal set unmodified (wraps `axi5_master_wr`) – transport, not semantics; see Scope above
- **AWATOP**: Atomic operation support (compare-and-swap, atomic operations)
- **AWNSAID**: Non-secure access identifier for security domains
- **AWTRACE**: Trace signal for debug and performance monitoring
- **AWMPAM**: Memory Partitioning and Monitoring (PartID + PMG)
- **AWMECID**: Memory Encryption Context ID for secure memory
- **AWUNIQUE**: Unique ID indicator for cache operations
- **AWTAGOP**: Memory tag operation (MTE - Memory Tagging Extension)
- **AWTAG**: Memory tags on address channel
- **WPOISON**: Write data poison indicator for corrupted data detection
- **WTAG/WTAGUPDATE**: Memory tags and tag update control (MTE)
- **BTRACE/BTAG/BTAGMATCH**: Response trace and tag signals
- **Integrated AXI monitor** with 2-Level Filtering: packet-type drop masks + per-event masks (`err_select` is reserved – no routing)
- **Error detection**: Protocol violations, `SLVERR`, `DECERR`
- **Timeout monitoring**: Stuck transactions, stalled channels
- **Performance metrics**: Latency, throughput, outstanding transactions
- **MonBus output**: Standardized 128-bit monitor packet format paired with 64-bit side-band timestamp
- **Configuration validation**: Detects filter conflicts

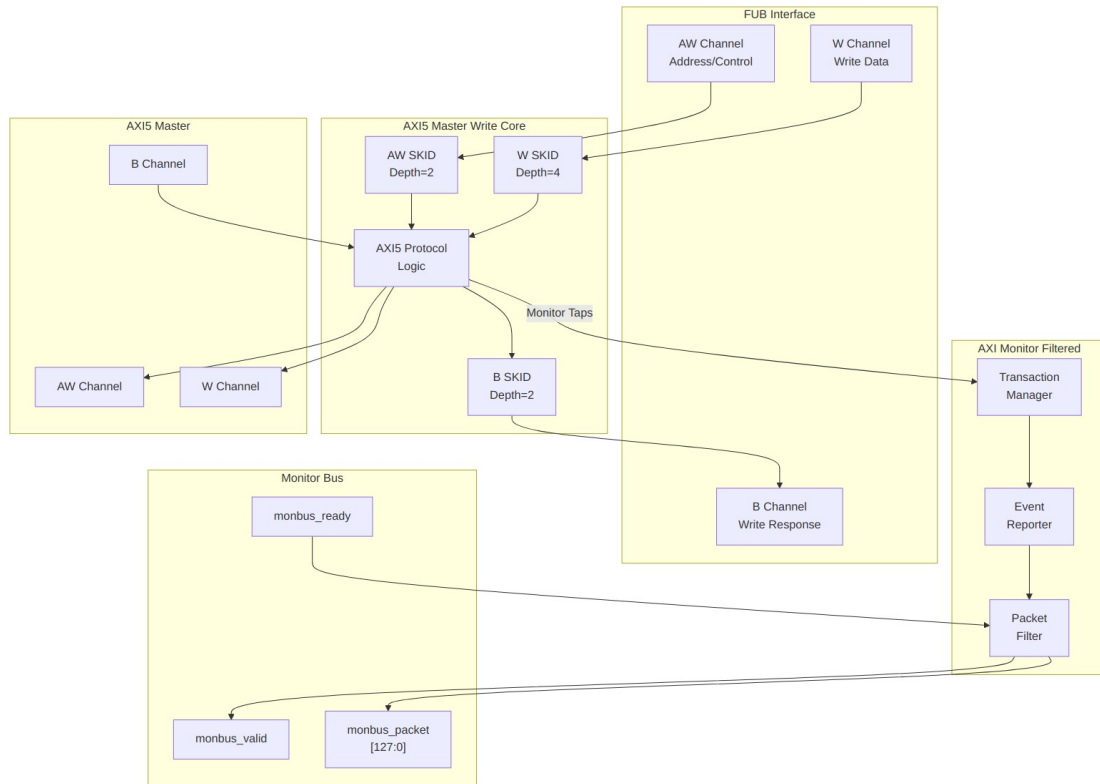

Module Architecture

11.2 Parameters

A lite-monitor version of this wrapper exists as `axi5_master_wr_monlite`: the same core and taps with `axi_monitor_lite` instead of `axi_monitor_filtered`, about a fifth of the monitor gates, error/timeout/completion/threshold packets only. Selected in generated bridges by `mon_preset = "lite"`.

Transport sizing first, then the monitor knobs. The defaults are sane; `MAX_TRANSACTIONS` is the one to think about (see the backpressure section).

Parameter	Type	Default	Description
<code>SKID_DEPTH_AW</code>	int	2	AW channel SKID buffer depth
<code>SKID_DEPTH_W</code>	int	4	W channel SKID buffer depth
<code>SKID_DEPTH_B</code>	int	2	B channel SKID buffer

Parameter	Type	Default	Description
			depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_WSTRB_WIDTH	int	DATA_WIDTH/8	Write strobe width (calculated)
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitor unit identifier

Parameter	Type	Default	Description
AGENT_ID	int	11	Monitor agent identifier (default 11 for write)
MAX_TRANSACTION	int	16	Transaction table size
ACTIVE_TRANSACTION_THRESHOLD	int	MAX_TRANSACTION/2	Active-transaction count that trips a threshold packet when <code>cfg_threshold_enable=1</code> . Replaces the former hardwired 8/4; threshold packets now scale with the table sizing
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue
NUM_BANKS	int	1	Banked transaction tables. >1 on a WRITE monitor requires <code>USE_WDATA_ORDER_Q=1</code> – <code>axi_monitor_trans_mgr</code> fails elaboration otherwise
ID_FILTER_ENABLE	bit	0	Synthesises the per-instance ID-slice filter
ID_MATCH_BASE	int	0	First ID this instance owns
ID_MATCH_COUNT	int	0	How many; 0 means ALL, so a zeroed register block does not silently filter everything away
ACLK_MHZ	int	100	Clock frequency in MHz – keeps the 1 us tick exact off-100MHz
CFI_MIN_FREQ_MHZ / CFI_MAX_FREQ_MHZ	int	= ACLK_MHZ	Freq-invariant counter LUT bounds (<code>cfg_freq_sel</code> indexes

Parameter	Type	Default	Description
Z			within them)
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage in monitor
USE_MONITOR	bit	1	Synthesis-time monitor enable. 0 = omit monitor and tie outputs to safe non-blocking defaults; 1 = full monitor functionality.
N_ADDR_RANGES	int	0	Number of address-range comparators. 0 = checker omitted (zero area). >0 = N independent [low, high] ranges; feeds the shared allowlist checker: a debug-range hit -> AddrMatch, an error-allowlist miss -> Error/ADDR_RANGE (see axi_monitor_addr_check.md).
ENABLE_ERROR_LOGIC	bit	1	Compile-in the error-detection cone (0 drops it for area).
ENABLE_TIMEOUT_LOGIC	bit	1	Compile-in the timeout cone and the axi_monitor_timeout instance.
ENABLE_COMPL_L	bit	1	Compile-in the

Parameter	Type	Default	Description
OGIC			completion cone.
ENABLE_THRESHO LD_LOGIC	bit	1	Compile-in the threshold cone.
ENABLE_PERF_LOGI C	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and bucket/beat/byte/burst counters are unconditional (always compiled, always live)
ENABLE_DEBUG_L OGIC	bit	0	Compile-in the debug cone (off by default).

Synthesis-cone note: the six `ENABLE_*_LOGIC` parameters gate each detection cone at synthesis via generate-if, so unused logic drops to zero area (classic cones default on, debug off). Inside the wrapper's `axi_monitor_filtered` instance the perf/debug master switches are fixed (`ENABLE_PERF_PACKETS = 1`, `ENABLE_DEBUG_MODULE = 0`). The former `CAM_PIPELINE / TRANS_CAM_PIPELINE` parameters were removed — the transaction CAM is now always pipelined.

11.2.1 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
DW	<code>AXI_DATA_WIDTH</code>
IW	<code>AXI_ID_WIDTH</code>
SW	<code>AXI_WSTRB_WIDTH</code>
UW	<code>AXI_USER_WIDTH</code>
NUM_TAGS	<code>(AXI_DATA_WIDTH / 128) > 0 ?</code>

Derived parameter	Default expression
TW	$(\text{AXI_DATA_WIDTH} / 128) : 1$ $\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$

11.3 Ports

11.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

11.3.2 FUB AXI5 Interface (Slave Side)

Same as axi5_master_wr - see [AXI5 Master Write](#) for complete port listing.

11.3.3 Master AXI5 Interface (Output Side)

Same as axi5_master_wr - see [AXI5 Master Write](#) for complete port listing.

11.3.4 Monitor Configuration

Same as axi5_master_rd_mon - see [AXI5 Master Read Monitor](#) for complete configuration port listing. This includes the cam_clear control input (1, Input) - synchronous clear of the monitor transaction CAM (driven from the harness clear control bit, e.g. CTRL[4]).

The configuration set also includes the detection-cone enables `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` (each 1, Input) which turn on the completion, threshold, and debug reporter sub-blocks. `cfg_debug_enable` gates the **debug cone** — the 6th reporter sub-block (`axi_monitor_reporter_debug`). In this wrapper the debug module's `cfg_debug_level` (4) and `cfg_debug_mask` (16) inputs are tied to 4'h0 / 16'h0; `cfg_active_trans_threshold` is driven from the ACTIVE_TRANS_THRESHOLD parameter (default MAX_TRANSACTION/2). None are wrapper ports.

11.3.5 Monitor Bus Output

Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready (backpressure)
monbus_packet	128	Output	monitor_packet_t (see

Port	Width	Direction	Description
packet			format below)
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
debug_block_ready	1	Output	Observability tap for the block_ready gating net (drives nothing internally; leave unconnected if unused)
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

11.3.6 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Core busy indicator
active_transactions	8	Output	Number of outstanding write transactions
error_count	16	Output	Lifetime count of error+timeout packets actually emitted (reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
transaction_count	32	Output	Lifetime count of completion packets actually emitted (zero-extended 16-bit reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
cfg_conflict	1	Output	Configuration conflict

Port	Width	Direction	Description
_error			detected

11.3.7 Packet filters

Two independent runtime filters cut monbus traffic without touching the datapath. Both are inert until driven, which is the failure to watch for: the build-time parameter only decides whether the logic is SYNTHESISED, and a design that sets the parameter but leaves the `cfg_*` ports tied low filters nothing and looks like the feature is broken.

Address-range filter — ADDR_FILTER_ENABLE (bit, default 0) builds it.

Port	Width	Description
cfg_addr_filter_enable	1	High: suppress packets for transactions outside the window. Low: inert, whatever the parameter says
cfg_addr_filter_low	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	ADDR_WIDTH	Window limit, inclusive

The verdict is latched per table entry at ALLOCATION, from the command address, and held for that entry's life. Widening the window mid-flight does not un-filter entries already admitted — which is exactly what makes it safe to reprogram live, since an entry's fate is decided when it is admitted and the retire accounting cannot be corrupted afterwards. Contrast the address-range CHECKER (N_ADDR_RANGES), which re-evaluates per command.

Runtime ID filter — overrides the ID_MATCH_BASE/ID_MATCH_COUNT elaboration constants so an instance can be retargeted at a different master without a rebuild.

Port	Width	Description
cfg_id_filter_enable	1	High: use the window below. Low: use the parameters, bit-identical to a build without this feature
cfg_id_match_base	ID_WIDTH	First ID owned
cfg_id_match_count	ID_WIDTH+1	How many; 0 means ALL, matching the parameter rule so a

Port	Width	Description
		zeroed register block does not silently filter everything away

The window is half-open: [base, base + count).

11.4 Functional Description

11.4.1 Monitor Bus Packet Format

Same 128-bit standardized format (with 64-bit side-band timestamp) as read monitor - see [AXI5 Master Read Monitor](#).

11.4.2 Write-Specific Monitoring Events

Write Transaction Tracking: The monitor correlates three channels: 1. **AW:** Address and control (AWID, AWADDR, AWLEN, etc.) 2. **W:** Write data beats (WDATA,WSTRB,WLAST) 3. **B:** Write response (BID, BRESP)

Event Timeline:

1. AW handshake → Transaction started
2. W beats → Data transfer monitored
3. WLAST → Write data complete
4. B response → Transaction complete

Error Detection Events:

Protocol Errors (implemented set): - Response-before-data ordering (EVT_PROTOCOL) - Orphaned responses (orphaned WRITE DATA cannot be detected on an AXI write monitor – with IS_AXI=1 data never allocates a table entry, so an unmatched W burst is invisible)

(Handshake-stability, WLAST, ID-width, burst-length, alignment and strobe checks are NOT implemented – the monitor taps only cmd/data/resp handshakes, IDs and response codes; none of those signals reach it.)

Response Errors: - SLVERR (slave error response) - DECERR (decode error response) - Orphaned write response (no matching AW) – a B beat whose ID matches no live entry

There is no BID-versus-AWID comparison. A slave returning the BID of a *different* outstanding write is silently mis-attributed with no error; a BID matching nothing is the orphan case above.

Timeout Errors – per phase, measured as DURATION not stall: - AW phase outstanding too long – EVT_CMD_TIMEOUT - W phase outstanding too long – EVT_DATA_TIMEOUT - B phase outstanding too long – EVT_RESP_TIMEOUT

Each timer is zeroed only while its phase is **not pending** (if (!w_data_pending[idx]) r_data_timer[idx] <= '0;) – a beat handshake does NOT reset it. These are phase-duration limits, not stall detectors: a long multi-beat write burst making steady progress still trips EVT_DATA_TIMEOUT once the W phase as a whole exceeds cfg_timeout_cycles.

axi_monitor_timeout runs three per-phase timers (addr, data, resp) and there is no whole-transaction timer. A write can therefore take arbitrarily long AW-to-B without any timeout firing, provided each individual phase completes inside its own threshold – the gaps BETWEEN phases are not timed by anything.

Data Integrity: NOT monitored – WPOISON, MTE tags and ATOP status never reach the monitor (the AXI5 extension signals pass through the transport core untapped). The bullets this section once carried were a wishlist, not the implementation.

Threshold Violations: - Outstanding transaction count > threshold - Transaction latency > cfg_latency_threshold

11.4.3 Atomic Operation Monitoring

NOT implemented: ENABLE_ATOMIC shapes the TRANSPORT (AWATOP carried on the AW channel); the monitor does not tap AWATOP or BTAGMATCH and emits no atomic-specific events. BRESP errors on atomic transactions surface as ordinary SLVERR/DECERR events.

11.4.4 Filtering Hierarchy (two active levels, one reserved)

Same as read monitor - see [AXI5 Master Read Monitor](#).

11.4.5 Monitor Backpressure (block_ready)

block_ready is exported as the debug_block_ready output port – the wrapper deliberately makes the gating contract observable (the _mon_cg wrapper ties it off rather than forwarding it). It goes low when the monitor's transaction-table occupancy reaches its blocking threshold (a function of MAX_TRANSACTION; the reporter FIFO depth INTR_FIFO_DEPTH has no path to it). The wrapper ANDs it into the upstream-facing fub_axi_awready so a saturated monitor throttles new transactions at the handshake instead of dropping events.

- **Where the stall lands:** the upstream fub_axi_awready is forced low until the monitor drains.
- **When USE_MONITOR=0:** block_ready is internally tied high, so the wrapper imposes no stall and runs at full bandwidth.
- **When cfg_monitor_enable=0:** the wrapper gate forces the upstream ready open, so a runtime-disabled monitor can never stall the datapath (the AXI4 monitors assert this as an in-RTL formal property, ap_disabled_never_stalls; this module has no ifdef FORMAL block of its own, so here the guarantee rests on the gate expression above, not a proof).

- The monitor's command tap sits across the AW SKID from the block_ready gate (this master monitor mirrors the slave variant's structure), so there is a SKID_DEPTH_AW cycle lag between block_ready going low and new events ceasing. MAX_TRANSACTIONS should be sized to cover this margin.

Recovery is guaranteed by the **saturation-recovery contract**: command-originated table entries are capped at `MAX_TRANSACTIONS - cmd_entry_reserve(MAX_TRANSACTIONS)` (reserve = 4 for tables of 16 or more, 0 below; the function lives in `monitor_common_pkg`), and `block_ready` re-asserts at occupancy < `MAX_TRANSACTIONS - (reserve - 1)` – a threshold strictly ABOVE the command cap – so a saturated table always drains back below the reopen point. Blocking throttles; it never deadlocks. Tables smaller than 16 keep full legacy allocation (small tables cannot spare slots) and trade the recovery guarantee for tracking capacity. The contract is verified by in-RTL formal properties (mutation-checked) and a 100-seed deliberately-undersized-table stream sweep; see [axi_monitor_base](#) for the canonical description.

Sizing note: a monitor on a bus shared by several channels/requesters must size `MAX_TRANSACTIONS` to cover `NUM_CHANNELS x per-channel outstanding` plus margin – the per-channel limit alone makes the monitor throttle the shared master. Tables deeper than 64 also need Verilator's `--unroll-count` raised (default 64) in sim builds.

11.4.6 Address-Range Checker

With `N_ADDR_RANGES > 0` the wrapper instantiates the shared allowlist checker (`axi_monitor_addr_check`). Each range carries a DEBUG/ERROR flavor:

- **DEBUG range** — a hit emits a `PktTypeAddrMatch` (4'h8) packet with event code `AXI_ADDR_RANGE_MATCH` (8'h01), gated by `cfg_debug_enable`.
- **ERROR range** — the enabled ERROR ranges form an allowlist; an address in NONE of them emits a `PktTypeError` (4'h0) packet with event code `AXI_ERR_ADDR_RANGE` (8'h0D), gated by `cfg_error_enable`.

This wrapper does not expose `ADDR_RANGE_IS_ERROR`; all ranges default to the DEBUG (match) flavor.

Config inputs (active only when `N_ADDR_RANGES > 0`): - `cfg_addr_check_enable` — master on/off for the checker. - `cfg_addr_range_enable[N-1:0]` — per-range enable bit. - `cfg_addr_range_low/high[N-1:0][AXI_ADDR_WIDTH-1:0]` — inclusive bounds.

Event encoding: `event_data[63:60]` = `range_index` (matching DEBUG range, or 4'hF sentinel on an ERROR miss); `event_data[59:0]` = full address. **Filtering:** `AddrMatch` is dropped by `cfg_axi_addr_mask[1]`, the `ADDR_RANGE` error by `cfg_axi_error_mask[13]`. See the checker page for coalescing + formal properties.

11.4.7 Performance Monitoring

When performance tracking is compiled in (`ENABLE_PERF_LOGIC = 1`, the wrapper default, with `ENABLE_PERF_PACKETS` fixed to 1 inside the monitor instance) and `cfg_perf_enable` is asserted at runtime, the monitor runs a **measurement-window state machine** plus a bank of data-channel utilization counters. All counters accumulate **only while a window is open** (`window_active = 1`) and hold their values between windows so the host can read a completed window's totals.

11.4.7.1 The measurement window

A window is opened by a **start event** and closed by an **end event**. The event sources are selected by `cfg_start_event_sel` / `cfg_end_event_sel` (3-bit; e.g. 3'b010 selects the `cfg_perf_enable` edge) and can also be fired directly by the `cfg_start_trigger` / `cfg_end_trigger` pulses (from an engine or CSR write). `cfg_window_force_close` is a software override that closes the window immediately. While the window is open:

- `window_active` is high.
- `window_cycles` free-runs, counting every clock elapsed inside the window.

11.4.7.2 Utilization buckets (W data channel)

Every cycle inside the window is classified by the **W** data channel's valid/ready handshake into exactly one of four buckets:

Output	Width	Condition	Meaning
<code>perf_prod_cycles</code>	32	<code>wvalid && wready</code>	productive beat transferred
<code>perf_bp_cycles</code>	32	<code>wvalid && !wready</code>	back-pressure (data offered, sink not ready)
<code>perf_starv_cycles</code>	32	<code>!wvalid && wready</code>	starvation (sink ready, no data)
<code>perf_idle_cycles</code>	32	<code>!wvalid && !wready</code>	idle

The four buckets sum to `window_cycles - 1` (the start cycle seeds `window_cycles` to 1 while the buckets reset to 0); `utilization = perf_prod_cycles / window_cycles` is off by one count – negligible for long windows, use `window_cycles - 1` for exactness.

11.4.7.3 Throughput counters

Output	Width	Meaning
<code>perf_beat_count</code>	32	W data beats transferred (= <code>perf_prod_cycles</code> , 1)

Output	Width	Meaning
perf_byte_count	64	beat/cycle) bytes transferred = beats x (1 << latched AWSIZE), using the AWSIZE captured at the most recent AW address phase
perf_burst_count	32	AW address-phase handshakes

Average burst length is $\text{perf_beat_count} / \text{perf_burst_count}$. (Transaction completion is still tracked on the B channel; the throughput counters measure the W data phase.)

11.4.7.4 Performance Monitoring Ports

Port	Width	Direction	Description
cfg_perf_enable	1	Input	Enable performance-metric packet generation (also listed under Monitor Configuration)
cfg_start_event_sel	3	Input	Window start event source select
cfg_end_event_sel	3	Input	Window end event source select
cfg_start_trigger	1	Input	Pulse: open the measurement window
cfg_end_trigger	1	Input	Pulse: close the measurement window
cfg_window_force_close	1	Input	Software override: force the window closed
window_active	1	Output	High while a measurement window is open
window_cycles	32	Output	Cycles elapsed in the current window
perf_prod_valid	32	Output	wvalid && wready cycles

Port	Width	Direction	Description
cycles			
perf_bp_cycles	32	Output	wvalid && !wready cycles (back-pressure)
perf_starv_cycles	32	Output	!wvalid && wready cycles (starvation)
perf_idle_cycles	32	Output	!wvalid && !wready cycles
perf_beat_count	32	Output	W data beats transferred
perf_byte_count	64	Output	bytes transferred
perf_burst_count	32	Output	AW address-phase handshakes

When `USE_MONITOR = 0` all perfmon outputs are tied to 0. With `USE_MONITOR = 1` and `ENABLE_PERF_LOGIC = 0`, only `error_count` / `transaction_count` read 0 – the window and bucket/throughput outputs remain LIVE.

11.5 Timing Characteristics

11.5.1 Monitored Write Burst with Error

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- AW channel: AWID, AWADDR, AWLEN, AWVALID, AWREADY
- W channel: WDATA, WSTRB, WLAST, WVALID, WREADY
- B channel: BID, BRESP (SLVERR), BVALID, BREADY
- Monitor bus: monbus_valid, monbus_packet showing ERROR packet

11.5.2 Atomic Operation Monitoring

Timing diagram pending. The signals and sequence this scenario exercises:

- AWATOP encoding (atomic type)

- AW/W channels
- B response with BTAG
- Monitor packets for atomic sequence

11.5.3 Write Timeout Detection

Timing diagram pending. The signals and sequence this scenario exercises:

- AW channel: AWVALID asserted, AWREADY stuck low
 - Timeout counter incrementing
 - cfg_timeout_cycles threshold
 - Monitor bus: TIMEOUT packet generated
-

11.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_master_wr_mon #(
    .SKID_DEPTH_AW          (2),
    .SKID_DEPTH_W           (4),
    .SKID_DEPTH_B           (2),
    .AXI_ID_WIDTH           (8),
    .AXI_ADDR_WIDTH         (32),
    .AXI_DATA_WIDTH         (32),
    .AXI_USER_WIDTH         (1),
    .AXI_ATOP_WIDTH         (6),
    .AXI_NSAID_WIDTH        (4),
    .AXI_MPAM_WIDTH         (11)
) u_axi5_master_wr_mon (
    .aclk                    (aclk),
    .aresetn                 (aresetn),
    .cam_clear               (cam_clear),
    .fub_axi_awid            (fub_axi_awid),
    .fub_axi_awaddr          (fub_axi_awaddr),
    .fub_axi_awlen           (fub_axi_awlen),
    .fub_axi_awsz            (fub_axi_awsz),
    .fub_axi_awburst         (fub_axi_awburst),
    .fub_axi_awlock          (fub_axi_awlock),
    .fub_axi_awcache         (fub_axi_awcache),
    .fub_axi_awprot          (fub_axi_awprot),
    .fub_axi_awqos           (fub_axi_awqos),
    .fub_axi_awuser          (fub_axi_awuser),
    .fub_axi_awvalid         (fub_axi_awvalid),
    .fub_axi_awready         (fub_axi_awready),
```

.fub_axi_awatop	(fub_axi_awatop),
.fub_axi_awnsaid	(fub_axi_awnsaid),
.fub_axi_awtrace	(fub_axi_awtrace),
.fub_axi_awmpam	(fub_axi_awmpam),
.fub_axi_awmecid	(fub_axi_awmecid),
.fub_axi_awunique	(fub_axi_awunique),
.fub_axi_awtagop	(fub_axi_awtagop),
.fub_axi_awtag	(fub_axi_awtag),
.fub_axi_wdata	(fub_axi_wdata),
.fub_axi_wstrb	(fub_axi_wstrb),
.fub_axi_wlast	(fub_axi_wlast),
.fub_axi_wuser	(fub_axi_wuser),
.fub_axi_wvalid	(fub_axi_wvalid),
.fub_axi_wready	(fub_axi_wready),
.fub_axi_wpoison	(fub_axi_wpoison),
.fub_axi_wtag	(fub_axi_wtag),
.fub_axi_wtagupdate	(fub_axi_wtagupdate),
.fub_axi_bid	(fub_axi_bid),
.fub_axi_bresp	(fub_axi_bresp),
.fub_axi_buser	(fub_axi_buser),
.fub_axi_bvalid	(fub_axi_bvalid),
.fub_axi_bready	(fub_axi_bready),
.fub_axi_btrace	(fub_axi_btrace),
.fub_axi_btag	(fub_axi_btag),
.fub_axi_btagmatch	(fub_axi_btagmatch),
.m_axi_awid	(m_axi_awid),
.m_axi_awaddr	(m_axi_awaddr),
.m_axi_awlen	(m_axi_awlen),
.m_axi_awsiz	(m_axi_awsiz),
.m_axi_awburst	(m_axi_awburst),
.m_axi_awlock	(m_axi_awlock),
.m_axi_awcache	(m_axi_awcache),
.m_axi_awprot	(m_axi_awprot),
.m_axi_awqos	(m_axi_awqos),
.m_axi_awuser	(m_axi_awuser),
.m_axi_awvalid	(m_axi_awvalid),
.m_axi_awready	(m_axi_awready),
.m_axi_awatop	(m_axi_awatop),
.m_axi_awnsaid	(m_axi_awnsaid),
.m_axi_awtrace	(m_axi_awtrace),
.m_axi_awmpam	(m_axi_awmpam),
.m_axi_awmecid	(m_axi_awmecid),
.m_axi_awunique	(m_axi_awunique),
.m_axi_awtagop	(m_axi_awtagop),
.m_axi_awtag	(m_axi_awtag),
.m_axi_wdata	(m_axi_wdata),
.m_axi_wstrb	(m_axi_wstrb),
.m_axi_wlast	(m_axi_wlast),

.m_axi_wuser	(m_axi_wuser),
.m_axi_wvalid	(m_axi_wvalid),
.m_axi_wready	(m_axi_wready),
.m_axi_wpoison	(m_axi_wpoison),
.m_axi_wtag	(m_axi_wtag),
.m_axi_wtagupdate	(m_axi_wtagupdate),
.m_axi_bid	(m_axi_bid),
.m_axi_bresp	(m_axi_bresp),
.m_axi_buser	(m_axi_buser),
.m_axi_bvalid	(m_axi_bvalid),
.m_axi_bready	(m_axi_bready),
.m_axi_btrace	(m_axi_btrace),
.m_axi_btag	(m_axi_btag),
.m_axi_btagmatch	(m_axi_btagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.i_mon_time	(i_mon_time),
.monbus_valid	(monbus_valid),
.monbus_ready	(monbus_ready),
.monbus_packet	(monbus_packet),
.monbus_timestamp	(monbus_timestamp),

```

.busy                (busy),
.active_transactions (active_transactions),
.error_count         (error_count),
.transaction_count   (transaction_count),
.debug_block_ready   (debug_block_ready),
.cfg_conflict_error   (cfg_conflict_error),
.cfg_start_event_sel (cfg_start_event_sel),
.cfg_end_event_sel    (cfg_end_event_sel),
.cfg_start_trigger    (cfg_start_trigger),
.cfg_end_trigger      (cfg_end_trigger),
.cfg_window_force_close(cfg_window_force_close),
.window_active        (window_active),
.window_cycles        (window_cycles),
.perf_prod_cycles     (perf_prod_cycles),
.perf_bp_cycles       (perf_bp_cycles),
.perf_starv_cycles    (perf_starv_cycles),
.perf_idle_cycles     (perf_idle_cycles),
.perf_beat_count      (perf_beat_count),
.perf_byte_count      (perf_byte_count),
.perf_burst_count     (perf_burst_count)
);

```

11.7 Design Notes

11.7.1 W-Channel Wiring into the Monitor Core

The wrapper feeds the shared `axi_monitor_base` data channel from the W channel with `data_id = AWID` (the W channel itself carries no WID in AXI4/AXI5) and `data_resp = 2'b00` (write data carries no response; the response arrives on B). This matches the AXI4 write-monitor convention. Before commit 95c9490a the AXI5 write monitors wired `data_id = BID` and `data_resp = BRESP` onto W beats (cross-channel), which mis-keyed write-data attribution; that defect is fixed.

11.7.2 Write vs. Read Monitoring Differences

Aspect	Read Monitor	Write Monitor
Channels monitored	2 (AR, R)	3 (AW, W, B)
Transaction ID	ARID → RID	AWID → BID
Data direction	Slave → Master	Master → Slave
Typical latency	Lower	Higher (write buffers)
Common errors	SLVERR on read data	SLVERR on write response
Atomic ops	Load atomics	Store/RMW atomics

11.7.3 Write Transaction Table Management

The transaction table tracks: - **AW phase:** Allocate entry, store address/control - **W phase:** Count beats; completion is WLAST OR the expected count – WLAST is not VERIFIED against AWLEN (no mismatch event) - **B phase:** Match BID to AWID, record response, deallocate entry

Outstanding write tracking:

Active transactions = (AW issued) - (B received)

11.7.4 Write Latency Measurement

Start: AW handshake (AWVALID && AWREADY) **End:** B handshake (BVALID && BREADY)

Latency: Clock cycles from start to end

Typical write latencies: - Single-beat write: 5-20 cycles - Burst write: 10-100 cycles - Atomic operation: 20-200 cycles (includes read phase)

11.7.5 Configuration Best Practices

Same as read monitor - see [AXI5 Master Read Monitor](#).

Write-specific tip: Writes often have higher latency variance than reads due to write buffering and posted writes. Set `cfg_latency_threshold` higher for write monitors.

11.8 Related Modules

- [AXI5 Master Write](#) - Base module without monitoring
 - [AXI5 Master Write CG](#) - With clock gating only
 - [AXI5 Master Write Monitor CG](#) - Monitor + clock gating
 - [AXI5 Master Read Monitor](#) - Read variant
 - [AXI Monitor Filtered](#) - Monitor core specification
 - [Monitor Package Spec](#) - Packet format details
 - [AXI Monitor Configuration Guide](#) - Complete configuration reference
-

11.9 Testing

`val/amba/test_axi5_master_wr_mon.py` exercises this module. It collects 3 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_master_wr_mon.py -v
```

11.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

12 AXI5 Master Write with Monitor and Clock Gating

Module: `axi5_master_wr_mon_cg.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready

12.1 Overview


Take the monitored write master and add power management. This module combines `axi5_master_wr_mon` (AXI5 write master with integrated monitoring) with activity-driven clock gating, so the write path keeps its full transaction monitoring and error detection while the clock shuts itself off during idle stretches.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

12.1.1 Key Features

- Carries the full AXI5 signal set unmodified – transport, not semantics; see Scope above
- **All AXI5 write extensions:** ATOP, NSAIID, TRACE, MPAM, MECID, UNIQUE, MTE, POISON
- **Integrated AXI monitor** with 2-Level Filtering: packet-type drop masks + per-event masks (`err_select` is reserved – no routing)
- **Error detection:** Protocol violations, SLVERR, DECERR
- **Timeout monitoring:** Stuck transactions, stalled channels
- **Performance metrics:** Latency, throughput, outstanding transactions

- **MonBus output:** Standardized 128-bit monitor packet format paired with 64-bit side-band timestamp
- **Automatic clock gating** based on write activity detection
- **Configurable idle threshold** before clock gating activates
- **Power savings** during idle periods
- **Transparent operation** - no protocol changes
- **Dual status outputs:** Monitor status + clock gating status
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

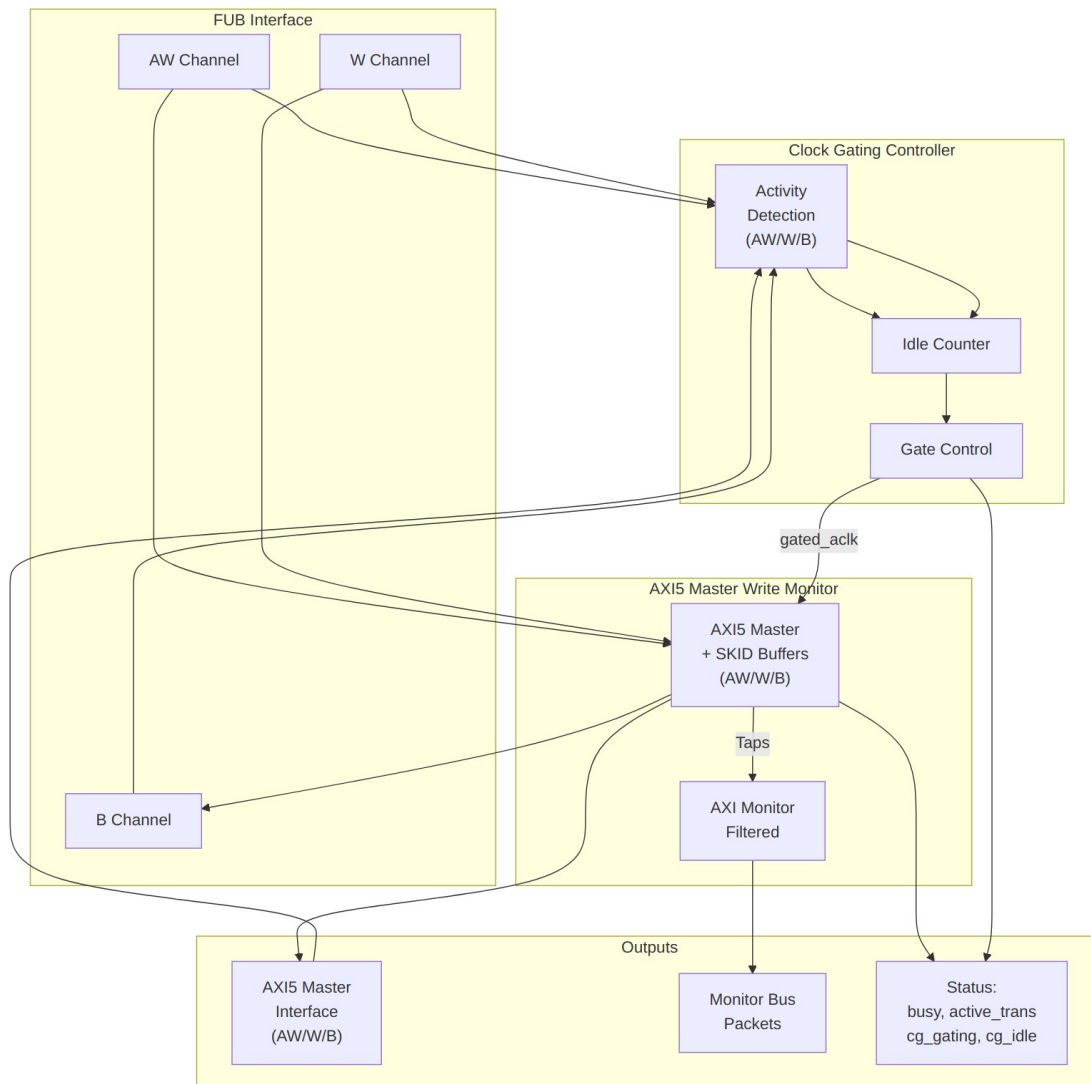

Module Architecture

12.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth
SKID_DEPTH_W	int	4	W channel SKID buffer depth
SKID_DEPTH_B	int	2	B channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width (PartID + PMG)
AXI_MECID_WIDTH	int	16	Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption context
ENABLE_UNIQUE	bit	1	Enable unique ID indicator

Parameter	Type	Default	Description
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitor unit identifier
AGENT_ID	int	11	Monitor agent identifier (default 11 for write)
MAX_TRANSACTION_S	int	16	Transaction table size
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage in monitor
USE_MONITOR	bit	1	Synthesis-time monitor enable (forwarded to inner monitor).
N_ADDR_RANGES	int	0	Number of address-range comparators (forwarded to base module).
ENABLE_ERROR_LOGIC	bit	1	Synthesis-cone enable for error detection (forwarded to base module)
ENABLE_TIMEOUT_LOGIC	bit	1	Synthesis-cone enable for timeout detection (forwarded to base module)
ENABLE_COMPL_LOGIC	bit	1	Synthesis-cone enable for completion tracking (forwarded to base module)

Parameter	Type	Default	Description
ENABLE_THRESHOLD_LOGIC	bit	1	Synthesis-cone enable for threshold detection (forwarded to base module)
ENABLE_PERF_LOGIC	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and bucket/beat/byte/burst counters are unconditional (always compiled, always live)
ENABLE_DEBUG_LOGIC	bit	0	Synthesis-cone enable for the debug/trace cone (forwarded to base module)
ACLK_MHZ	int	100	Clock frequency in MHz. Builds the microsecond tick LUT in counter_freq_invariant. Leave this at 100 on a 90 MHz part and every us-denominated timeout is wrong, silently – it was unreachable through this wrapper until 2026-09-01.
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Lowest frequency the tick LUT must cover (dynamic-frequency builds).
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Highest frequency the tick LUT must cover.

Parameter	Type	Default	Description
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue. Required (=1) whenever NUM_BANKS > 1.
NUM_BANKS	int	1	Transaction-table banking. >1 on this WRITE monitor requires USE_WDATA_ORDER_Q=1 – axi_monitor_trans_mgr fails elaboration otherwise (the WID-less fallback double-counts one W beat across banks).
ADDR_FILTER_ENABLE	bit	0	Synthesises the address-range report filter. The parameter only decides whether the logic EXISTS – a build that sets it and leaves cfg_addr_filter_enabl e low filters nothing and looks broken.
ID_FILTER_ENABLE	bit	0	Synthesises the ID report filter (see cfg_id_* for the runtime override).
ID_MATCH_BASE	int	0	First ID this instance owns.
ID_MATCH_COUNT	int	0	How many IDs; 0 means ALL, so a zeroed register block does not silently filter everything away.
CG_IDLE_COUNT_W IDTH	int	4	Width of idle counter (max 2^N-1 cycles)

12.2.1 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	AXI_DATA_WIDTH / 8
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1
TW	AXI_TAG_WIDTH * NUM_TAGS

12.3 Ports

12.3.1 Filter configuration (forwarded)

These reach the inner monitor through this wrapper; before 2026-09-01 they did not.

Port	Direction	Width	Description
cfg_addr_filter_enable	Input	1	High: suppress packets for transactions outside the window. Low: inert, whatever ADDR_FILTER_ENABLE says
cfg_addr_filter_low	Input	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	Input	ADDR_WIDTH	Window limit, inclusive
cfg_id_filter_enable	Input	1	High: use the runtime window below instead of the ID_MATCH_* parameters
cfg_id_match_base	Input	ID_WIDTH	First ID to accept

Port	Direction	Width	Description
cfg_id_match_count	Input	ID_WIDTH+1	How many; 0 means ALL

12.3.2 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

12.3.3 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Clock gating enable (1=enable, 0=always active)
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating activates

12.3.4 FUB AXI5 Interface (Slave Side)

Same as axi5_master_wr_mon - see [AXI5 Master Write Monitor](#).

12.3.5 Master AXI5 Interface (Output Side)

Same as axi5_master_wr_mon - see [AXI5 Master Write Monitor](#).

12.3.6 Monitor Configuration

Same as axi5_master_wr_mon - see [AXI5 Master Write Monitor](#).

12.3.7 Monitor Bus Output

Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready (backpressure)
monbus_packet	128	Output	monitor_packet_t (128-bit format)

Port	Width	Direction	Description
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

12.3.8 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Core busy indicator
active_transactions	8	Output	Number of outstanding write transactions
error_count	16	Output	Cumulative error count (live – reporter lifetime counter)
transaction_count	32	Output	Total transaction count (live – reporter lifetime counter, zero-extended)
cfg_conflict_error	1	Output	Configuration conflict detected
cg_gating	1	Output	Clock gating active (1=gated, 0=running)
cg_idle	1	Output	Interface idle (1=no activity)

12.4 Functional Description

12.4.1 Combined Write Monitoring and Power Management

This module stacks both jobs on the write path:

Monitoring (from axi5_master_wr_mon): - Real-time write transaction monitoring (AW/W/B) - Error and timeout detection - Performance metrics collection - Atomic operation tracking - Configurable packet filtering - MonBus output for system integration

Power Management (from axi5_master_wr_cg): - Automatic clock gating during write idle periods - Configurable idle threshold - Activity-based wake-up - Status outputs for power monitoring

12.4.2 Clock Gating with Write Monitor Active

The clock gating logic considers all three write channels plus monitor activity:

```
user_valid = fub_axi_awvalid || fub_axi_wvalid || fub_axi_bvalid ||
int_busy ||
                w_monbus_valid || (!active_transactions); // peer VALID,
never peer READY
axi_valid = m_axi_awvalid || m_axi_wvalid || m_axi_bvalid;

// Clock remains active if:
// - AW channel active (address phase)
// - W channel active (data phase)
// - B channel active (response phase)
// - Internal busy (transactions in flight)
// - A monitor packet is pending on the monitor bus (w_monbus_valid)
// - The monitor CAM still holds entries (!active_transactions) --
covers
// the reporter's retire -> FIFO -> output emission window
```

The monitor continues operating during clock gating transitions, ensuring no write events are lost. A packet pending on the monitor bus holds the block awake until the consumer accepts it, and the external `monbus_valid` is masked with `!cg_gating`, so monitor-bus delivery is exactly-once across gating at any idle count (asserted by `val/amba/test_mon_cg_gating.py` phase 6). The monitor CAM's occupancy (`active_transactions`) is also a wake term: a tracked entry stays in the CAM until its packet is marked into the reporter FIFO, so the clock cannot stop inside the reporter's few-cycle emission window and strand a trailing packet, even at `cfg_cg_idle_count = 0`.

12.4.3 Ready Signal Control During Gating

When clock gating is active, all write channel ready signals are forced low:

```
fub_axi_awready = cg_gating ? 1'b0 : int_awready;
fub_axi_wready = cg_gating ? 1'b0 : int_wready;
m_axi_bready = cg_gating ? 1'b0 : int_bready;
```

This ensures protocol compliance during power management across all write phases.

12.4.4 Performance Monitoring

The clock-gated wrapper exposes the full perfmon interface of the base module and **forwards every port unchanged** to the inner `axi5_master_wr_mon`. The measurement-window state machine, the four W-channel utilization buckets (productive / back-pressure / starvation / idle), and the beat/byte/burst throughput counters behave exactly as documented in the base module —

see [Performance Monitoring in axi5_master_wr_mon](#) for the full narrative and per-bit semantics.

Forwarded perfmon ports (identical width and direction to the base module):

- **Inputs:** `cfg_perf_enable`, `cfg_start_event_sel` (3), `cfg_end_event_sel` (3), `cfg_start_trigger`, `cfg_end_trigger`, `cfg_window_force_close`
- **Outputs:** `window_active`, `window_cycles` (32), `perf_prod_cycles` (32), `perf_bp_cycles` (32), `perf_starv_cycles` (32), `perf_idle_cycles` (32), `perf_beat_count` (32), `perf_byte_count` (64), `perf_burst_count` (32)

The `perf_burst_count` output tracks AW (write address) handshakes. **WARNING:** an open measurement window is NOT a wake term – the window FSM and all counters run on the gated clock, so if the bus idles past `cfg_cg_idle_count` mid-window the counters FREEZE while wall-clock time passes, and trigger pulses arriving while gated are DROPPED. For exact wall-clock windows hold `cfg_cg_enable` low around the measurement, or use the base module.

Alongside perfmon, the wrapper forwards the `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` control inputs, plus the six `ENABLE_*_LOGIC` synthesis-cone parameters (see [Parameters](#)), straight through to the base monitor.

12.5 Timing Characteristics

12.5.1 Clock Gating with Write Burst and Monitoring

Timing diagram pending. The signals and sequence this scenario exercises:

- `ACLK` (ungated)
- `GATED_ACLK` (gated clock)
- AW channel: `AWVALID`, `AWREADY`
- W channel: `WDATA`, `WLAST`, `WVALID`, `WREADY`
- B channel: `BVALID`, `BREADY`
- Monitor packets generated
- Idle period detection after B phase
- `cg_gating` activation
- Monitor quiescent before clock stops

12.5.2 Atomic Operation with Monitor + Clock Gating

Timing diagram pending. The signals and sequence this scenario exercises:

- AWATOP encoding
 - Atomic write sequence
 - Monitor packet for atomic operation
 - B response with BTAGMATCH
 - Clock gating after atomic completion
-

12.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_master_wr_mon_cg #(
    .SKID_DEPTH_AW      (2),
    .SKID_DEPTH_W       (4),
    .SKID_DEPTH_B       (2),
    .AXI_ID_WIDTH       (8),
    .AXI_ADDR_WIDTH     (32),
    .AXI_DATA_WIDTH     (32),
    .AXI_USER_WIDTH     (1),
    .AXI_ATOP_WIDTH     (6),
    .AXI_NSAID_WIDTH    (4),
    .AXI_MPAM_WIDTH     (11)
) u_axi5_master_wr_mon_cg (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .cfg_cg_enable       (cfg_cg_enable),
    .cfg_cg_idle_count   (cfg_cg_idle_count),
    .fub_axi_awid        (fub_axi_awid),
    .fub_axi_awaddr      (fub_axi_awaddr),
    .fub_axi_awlen       (fub_axi_awlen),
    .fub_axi_awsiz       (fub_axi_awsiz),
    .fub_axi_awburst     (fub_axi_awburst),
    .fub_axi_awlock      (fub_axi_awlock),
    .fub_axi_awcache     (fub_axi_awcache),
    .fub_axi_awprot      (fub_axi_awprot),
    .fub_axi_awqos       (fub_axi_awqos),
    .fub_axi_awuser      (fub_axi_awuser),
    .fub_axi_awvalid     (fub_axi_awvalid),
    .fub_axi_awready     (fub_axi_awready),
    .fub_axi_awatop      (fub_axi_awatop),
```

.fub_axi_awnsaid	(fub_axi_awnsaid),
.fub_axi_awtrace	(fub_axi_awtrace),
.fub_axi_awmpam	(fub_axi_awmpam),
.fub_axi_awmecid	(fub_axi_awmecid),
.fub_axi_awunique	(fub_axi_awunique),
.fub_axi_awtagop	(fub_axi_awtagop),
.fub_axi_awtag	(fub_axi_awtag),
.fub_axi_wdata	(fub_axi_wdata),
.fub_axi_wstrb	(fub_axi_wstrb),
.fub_axi_wlast	(fub_axi_wlast),
.fub_axi_wuser	(fub_axi_wuser),
.fub_axi_wvalid	(fub_axi_wvalid),
.fub_axi_wready	(fub_axi_wready),
.fub_axi_wpoison	(fub_axi_wpoison),
.fub_axi_wtag	(fub_axi_wtag),
.fub_axi_wtagupdate	(fub_axi_wtagupdate),
.fub_axi_bid	(fub_axi_bid),
.fub_axi_bresp	(fub_axi_bresp),
.fub_axi_buser	(fub_axi_buser),
.fub_axi_bvalid	(fub_axi_bvalid),
.fub_axi_bready	(fub_axi_bready),
.fub_axi_btrace	(fub_axi_btrace),
.fub_axi_btag	(fub_axi_btag),
.fub_axi_btagmatch	(fub_axi_btagmatch),
.m_axi_awid	(m_axi_awid),
.m_axi_awaddr	(m_axi_awaddr),
.m_axi_awlen	(m_axi_awlen),
.m_axi_awsz	(m_axi_awsz),
.m_axi_awburst	(m_axi_awburst),
.m_axi_awlock	(m_axi_awlock),
.m_axi_awcache	(m_axi_awcache),
.m_axi_awprot	(m_axi_awprot),
.m_axi_awqos	(m_axi_awqos),
.m_axi_awuser	(m_axi_awuser),
.m_axi_awvalid	(m_axi_awvalid),
.m_axi_awready	(m_axi_awready),
.m_axi_awatop	(m_axi_awatop),
.m_axi_awnsaid	(m_axi_awnsaid),
.m_axi_awtrace	(m_axi_awtrace),
.m_axi_awmpam	(m_axi_awmpam),
.m_axi_awmecid	(m_axi_awmecid),
.m_axi_awunique	(m_axi_awunique),
.m_axi_awtagop	(m_axi_awtagop),
.m_axi_awtag	(m_axi_awtag),
.m_axi_wdata	(m_axi_wdata),
.m_axi_wstrb	(m_axi_wstrb),
.m_axi_wlast	(m_axi_wlast),
.m_axi_wuser	(m_axi_wuser),

.m_axi_wvalid	(m_axi_wvalid),
.m_axi_wready	(m_axi_wready),
.m_axi_wpoison	(m_axi_wpoison),
.m_axi_wtag	(m_axi_wtag),
.m_axi_wtagupdate	(m_axi_wtagupdate),
.m_axi_bid	(m_axi_bid),
.m_axi_bresp	(m_axi_bresp),
.m_axi_buser	(m_axi_buser),
.m_axi_bvalid	(m_axi_bvalid),
.m_axi_bready	(m_axi_bready),
.m_axi_btrace	(m_axi_btrace),
.m_axi_btag	(m_axi_btag),
.m_axi_btagmatch	(m_axi_btagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.i_mon_time	(i_mon_time),
.monbus_valid	(monbus_valid),
.monbus_ready	(monbus_ready),
.monbus_packet	(monbus_packet),
.monbus_timestamp	(monbus_timestamp),
.busy	(busy),

```

.active_transactions    (active_transactions),
.error_count            (error_count),
.transaction_count      (transaction_count),
.cfg_conflict_error     (cfg_conflict_error),
.cg_gating              (cg_gating),
.cg_idle                (cg_idle),
.cfg_start_event_sel    (cfg_start_event_sel),
.cfg_end_event_sel      (cfg_end_event_sel),
.cfg_start_trigger      (cfg_start_trigger),
.cfg_end_trigger        (cfg_end_trigger),
.cfg_window_force_close (cfg_window_force_close),
.window_active          (window_active),
.window_cycles          (window_cycles),
.perf_prod_cycles       (perf_prod_cycles),
.perf_bp_cycles         (perf_bp_cycles),
.perf_starv_cycles      (perf_starv_cycles),
.perf_idle_cycles       (perf_idle_cycles),
.perf_beat_count        (perf_beat_count),
.perf_byte_count        (perf_byte_count),
.perf_burst_count       (perf_burst_count)
);

```

12.7 Design Notes

12.7.1 When to Use This Module

Ideal for: - Battery-powered systems with write-intensive workloads - Systems with bursty write traffic and significant idle periods - Designs requiring comprehensive write path visibility - Production systems needing runtime monitoring + power optimization - Write-heavy cache implementations - DMA engines with intermittent activity

Consider alternatives if: - Continuous streaming writes (clock gating ineffective) - Ultra-low write latency requirements (avoid gating overhead) - Area-constrained designs (monitor + CG adds ~12% area) (first-order estimate – no power/area analysis has been run) - Simple write-through caches (simpler monitoring sufficient)

12.7.2 Write-Specific Configuration Strategy

Write Path Characteristics:

Aspect	Typical Value	Impact on Configuration
Write latency	10-100 cycles	Set higher cfg_latency_threshold
Burst length	4-16 beats	Longer monitoring

Aspect	Typical Value	Impact on Configuration
		windows
Response delay	5-50 cycles	Longer idle count before gating
Atomic operations	20-200 cycles	Extended timeout thresholds

Recommended Configuration:

```
// For write path (vs. read path adjustments)
.cfg_cg_idle_count      (4'd5),      // Longer than read (B latency)
.cfg_timeout_cycles     (16'd15),    // 15 microseconds per phase (full
16-bit range)
.cfg_latency_threshold  (32'd800)    // Higher variance than reads
```

12.7.3 Monitor + Clock Gating Interaction for Writes

Key Write-Specific Considerations:

- Three-channel coordination:**
 - Monitor tracks AW, W, B phases independently
 - All three must be idle before gating
 - Longer idle detection time than read (2 channels)
- Write buffering impact:**
 - Posted writes may delay B responses
 - Clock gating may activate between W and B
 - Monitor ensures B responses still tracked after wake
- Atomic operation handling:**
 - Atomic ops have read+write phases
 - Longer latency prevents premature gating
 - Monitor tracks full atomic sequence
- Power savings accounting:**
 - Writes typically 60-70% traffic vs. reads (system dependent)
 - Write-specific gating saves 15-30% total power
 - Combined with read path CG: 40-60% total savings

12.7.4 Performance Analysis with Write Monitoring

The monitor provides valuable write path metrics:

```
// Extract write performance from monitor packets
always_comb begin
    write_bandwidth = (write_count * data_width) / elapsed_cycles;
    write_efficiency = (active_write_cycles) / total_cycles;
    avg_outstanding = total_outstanding_samples / sample_count;
end

// Compare with/without clock gating
$display("Write Perf: BW=%d GB/s, Efficiency=%d%%, Power saved=%d%%",
    write_bandwidth, write_efficiency,
    (power_cycles_saved * 100) / total_cycles);
```

12.8 Related Modules

- [AXI5 Master Write](#) - Base module
 - [AXI5 Master Write CG](#) - Clock gating only
 - [AXI5 Master Write Monitor](#) - Monitor only
 - [AXI5 Master Read Monitor CG](#) - Read variant
 - [AXI Monitor Configuration Guide](#) - Monitor setup
 - [AMBA Clock Gate Controller](#) - Clock gating details
-

12.9 Testing

12.9.1 Verification Recommendations for Write Path

1. **Test write burst + gating:**

```
// Phase 1: Short bursts with gating between
for (int i = 0; i < 100; i++) begin
    write_burst(addr, len=4);
    wait_idle_cycles(10); // Allow gating
    check_monitor_packets();
end
```

2. **Test atomic operations:**

```
// Verify atomic ops don't get interrupted by gating
atomic_compare_swap(addr, old_val, new_val);
check_no_premature_gating();
verify_atomic_completion_monitored();
```

3. **Test write errors with gating:**

```
// Trigger SLVERR, verify monitored correctly
write_to_protected_address();
wait_error_packet();
check_gating_after_error_handled();
```

12.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

13 AXI5 Master Write with Lite Monitor

Module: axi5_master_wr_monlite.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready (amba/monitor-lite TASK-001, 2026-09-26)

13.1 Overview

axi5_master_wr_monlite is axi5_master_wr with axi_monitor_lite watching its master-side write channels. It is the lite-monitor sibling of axi5_master_wr_mon: same core, same taps, same 128-bit monitor_packet_t on the same monbus with the same UNIT_ID/AGENT_ID, so the monbus arbiter, the AXI-Lite group, the tally and the host tooling cannot tell the two apart. The difference is what it costs and what it can be asked for: about a fifth of the monitor LUTs (677 against 3,249 per read monitor in the same bridge fixture, see [axi_monitor_lite](#)), and only the four packet classes the lite emits: error, timeout, completion and active-count threshold.

13.1.1 What is not here

Compared with axi5_master_wr_mon: no performance window or counters, no debug packets, no address-range checker, no ID or address filters, no per-event masks, no latency threshold, and no block_ready. The lite never stalls the port: an event it cannot deliver is dropped and counted (dropped_count, reported as an EVENT_DROPPED packet), and a command that finds no free table entry is counted (refused_count) and left untracked, so its beats report as orphans.

13.1.2 Key Features

- Every axi5_master_wr parameter and port, declared verbatim and passed through by name
- axi_monitor_lite on the m_-side taps; USE_MONITOR=0 omits it and ties its outputs

- Nine config inputs: the enables, the microsecond timeout, the tick LUT index and the packet-type mask
- Five status outputs, two of them (dropped_count, refused_count) unique to the lite

13.2 Parameters

13.2.1 Monitor Parameters

Parameter	Type	Default	Description
USE_MONITOR	bit	1'b1	0 = omit the monitor, tie its outputs
UNIT_ID	logic [7:0]	8'h01	Unit id in every packet
AGENT_ID	logic [15:0]	16'h000B	Agent id in every packet
MAX_TRANSACTIONS	int	8	table entries; a command finding none is counted, not tracked
ACTIVE_TRANS_THR ESHOLD	int	MAX_TRANSACTIONS / 2	Table occupancy that fires a threshold packet (rising edge)
OUT_DEPTH	int	4	monbus output queue, a power of two
ACLK_MHZ	int	100	Clock in MHz; keeps the 1 us tick exact
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT lower bound (cfg_freq_sel indexes it)

Parameter	Type	Default	Description
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT upper bound

13.2.2 Core Parameters (passed through to axi5_master_wr)

Parameter	Type	Default	Description
N_ADDR_RANGES	int	0	address-range checker windows; 0 = not built
ADDR_RANGE_IS_ERROR	logic [(N_ADDR_RANGE_S > 0 ? N_ADDR_RANGES : 1)-1:0]	'0	per range: 1 = miss is an error, 0 = hit is a match
SKID_DEPTH_AW	int	2	as on axi5_master_wr
SKID_DEPTH_W	int	4	as on axi5_master_wr
SKID_DEPTH_B	int	2	as on axi5_master_wr
AXI_ID_WIDTH	int	8	as on axi5_master_wr
AXI_ADDR_WIDTH	int	32	as on axi5_master_wr
AXI_DATA_WIDTH	int	32	as on axi5_master_wr
AXI_USER_WIDTH	int	1	as on axi5_master_wr
AXI_WSTRB_WIDTH	int	AXI_DATA_WIDTH / 8	as on axi5_master_wr
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width

Parameter	Type	Default	Description
AXI_MECID_WIDTH	int	16	(PartID + PMG) Memory encryption context ID width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	as on axi5_master_wr
ENABLE_NSAID	bit	1	as on axi5_master_wr
ENABLE_TRACE	bit	1	as on axi5_master_wr
ENABLE_MPAM	bit	1	as on axi5_master_wr
ENABLE_MECID	bit	1	as on axi5_master_wr
ENABLE_UNIQUE	bit	1	as on axi5_master_wr
ENABLE_MTE	bit	1	Memory Tagging Extension
ENABLE_POISON	bit	1	as on axi5_master_wr
AW	int	AXI_ADDR_WIDTH	as on axi5_master_wr
DW	int	AXI_DATA_WIDTH	as on axi5_master_wr
IW	int	AXI_ID_WIDTH	as on axi5_master_wr
SW	int	AXI_WSTRB_WIDTH	as on axi5_master_wr
UW	int	AXI_USER_WIDTH	as on axi5_master_wr
NUM_TAGS	int	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$	as on axi5_master_wr

Parameter	Type	Default	Description
		$(\text{AXI_DATA_WIDTH} / 128) : 1$	
TW	int	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	as on axi5_master_wr
AWSize	int	$\text{IW} + \text{AW} + 8 + 3 + 2 + 1 + 4 + 3 + 4 + \text{UW} +$	as on axi5_master_wr
WSize	int	$\text{DW} + \text{SW} + 1 + \text{UW} +$	as on axi5_master_wr
BSize	int	$\text{IW} + 2 + \text{UW} +$	as on axi5_master_wr

13.3 Ports

13.3.1 Monitor Control, Bus and Status

Port	Direction	Type	Description
cam_clear	input	logic	sync clear of the monitor's table (named as on the _mon wrapper: pin-compatible)
cfg_monitor_enable	input	logic	0 = monitor inert, table held clear
cfg_error_enable	input	logic	
cfg_timeout_enable	input	logic	
cfg_compl_enable	input	logic	
cfg_threshold_enable	input	logic	
cfg_timeout_cycles	input	logic [15:0]	MICROSECONDS of no progress; 0 = never
cfg_freq_sel	input	logic [3:0]	counter_freq_invariant LUT index
cfg_axi_pkt_mask	input	logic [15:0]	drop mask by

Port	Direction	Type	Description
			packet type
i_mon_time	input	monitor_common_pkg::monbus_times_tamp_t	
monbus_valid	output	logic	
monbus_ready	input	logic	
monbus_packet	output	monitor_common_pkg::monitor_packet_t	
monbus_timestamp	output	monitor_common_pkg::monbus_times_tamp_t	
active_transactions	output	logic [7:0]	entries in the table
error_count	output	logic [15:0]	error + timeout packets emitted
transaction_count	output	logic [31:0]	completion packets emitted
dropped_count	output	logic [15:0]	events lost to monbus backpressure since the last report
refused_count	output	logic [15:0]	commands that found no free table entry

13.3.2 Core Ports (as on axi5_master_wr)

Port	Direction	Type	Description
aclk	input	logic	
aresetn	input	logic	
fub_axi_awid	input	logic [IW-1:0]	
fub_axi_awaddr	input	logic [AW-1:0]	
fub_axi_awlen	input	logic [7:0]	
fub_axi_awsz	input	logic [2:0]	

Port	Direction	Type	Description
fub_axi_awburst	input	logic [1:0]	
fub_axi_awlock	input	logic	
fub_axi_awcache	input	logic [3:0]	
fub_axi_awprot	input	logic [2:0]	
fub_axi_awqos	input	logic [3:0]	
fub_axi_awuser	input	logic [UW-1:0]	
fub_axi_awvalid	input	logic	
fub_axi_awready	output	logic	
fub_axi_awatop	input	logic [AXI_ATOP_WIDTH-1:0]	Atomic operation
fub_axi_awnsaid	input	logic [AXI_NSAID_WIDTH-1:0]	Non-secure access ID
fub_axi_awtrace	input	logic	Trace signal
fub_axi_awmpam	input	logic [AXI_MPAM_WIDTH-1:0]	Memory partitioning
fub_axi_awmeced	input	logic [AXI_MECID_WIDTH-1:0]	Memory encryption context
fub_axi_awunique	input	logic	Unique ID indicator
fub_axi_awtagop	input	logic [AXI_TAGOP_WIDTH-1:0]	Tag operation (MTE)
fub_axi_awtag	input	logic [TW-1:0]	Address memory tags
fub_axi_wdata	input	logic [DW-1:0]	
fub_axi_wstrb	input	logic [SW-1:0]	
fub_axi_wlast	input	logic	
fub_axi_wuser	input	logic [UW-1:0]	
fub_axi_wvalid	input	logic	
fub_axi_wready	output	logic	

Port	Direction	Type	Description
fub_axi_wpoison	input	logic	Data poison indicator
fub_axi_wtag	input	logic [TW-1:0]	Write data tags
fub_axi_wtagupdate	input	logic [NUM_TAGS-1:0]	Tag update mask
fub_axi_bid	output	logic [IW-1:0]	
fub_axi_bresp	output	logic [1:0]	
fub_axi_buser	output	logic [UW-1:0]	
fub_axi_bvalid	output	logic	
fub_axi_bready	input	logic	
fub_axi_btrace	output	logic	Response trace
fub_axi_btag	output	logic [TW-1:0]	Response tags
fub_axi_btagmatch	output	logic	Tag match response
m_axi_awid	output	logic [IW-1:0]	
m_axi_awaddr	output	logic [AW-1:0]	
m_axi_awlen	output	logic [7:0]	
m_axi_awsz	output	logic [2:0]	
m_axi_awburst	output	logic [1:0]	
m_axi_awlock	output	logic	
m_axi_awcache	output	logic [3:0]	
m_axi_awprot	output	logic [2:0]	
m_axi_awqos	output	logic [3:0]	
m_axi_awuser	output	logic [UW-1:0]	
m_axi_awvalid	output	logic	
m_axi_awready	input	logic	
m_axi_awatop	output	logic [AXI_ATOP_WIDTH-1:0]	
m_axi_awnsaid	output	logic [AXI_NSaid_WIDTH-1:0]	
m_axi_awtrace	output	logic	

Port	Direction	Type	Description
m_axi_awmpam	output	logic [AXI_MPAM_WIDTH-1:0]	
m_axi_awmecid	output	logic [AXI_MECID_WIDTH-1:0]	
m_axi_awunique	output	logic	
m_axi_awtagop	output	logic [AXI_TAGOP_WIDTH-1:0]	
m_axi_awtag	output	logic [TW-1:0]	
m_axi_wdata	output	logic [DW-1:0]	
m_axi_wstrb	output	logic [SW-1:0]	
m_axi_wlast	output	logic	
m_axi_wuser	output	logic [UW-1:0]	
m_axi_wvalid	output	logic	
m_axi_wready	input	logic	
m_axi_wpoison	output	logic	
m_axi_wtag	output	logic [TW-1:0]	
m_axi_wtagupdate	output	logic [NUM_TAGS-1:0]	
m_axi_bid	input	logic [IW-1:0]	
m_axi_bresp	input	logic [1:0]	
m_axi_buser	input	logic [UW-1:0]	
m_axi_bvalid	input	logic	
m_axi_bready	output	logic	
m_axi_btrace	input	logic	
m_axi_btag	input	logic [TW-1:0]	
m_axi_btagmatch	input	logic	
busy	output	logic	
cfg_latency_thre shold	input	logic [31:0]	completion latency (cycles) above this -> Threshold/LATEN

Port	Direction	Type	Description
			CY
cfg_addr_check_enable	input	logic	
cfg_addr_match_enable	input	logic	hit in a match range -> AddrMatch packet
cfg_addr_range_enable	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	
cfg_addr_range_low	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	
cfg_addr_range_high	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	

13.4 Functional Description

The core is instantiated untouched; unlike `axi5_master_wr_mon` there is no gating of the command handshake, because the lite has no admission stall. The monitor taps the `m_side` command, data and response channels through three `valids` gated by `cfg_monitor_enable`, which also holds the table clear while low. `cfg_timeout_cycles` is a microsecond count of no progress on an entry, passed at full width; 0 means never. The active-count threshold is the parameter `ACTIVE_TRANS_THRESHOLD`, as on the `_mon` wrapper.

The lite's own behaviour – per-ID linked-list attribution, stamps instead of counters, the registered event stage, the 4-entry output queue and drop-and-count – is on the [axi_monitor_lite](#) page.

13.5 Timing Characteristics

The datapath timing is `axi5_master_wr`'s. The monitor adds no gating to any handshake and no path into the datapath; its own paths are two short cycles (attribution, then packet formatting) and met 10 ns on an Artix-7 100T -1 with margin inside `bridge_1x2_rd_lite_mon`.

13.6 Usage Examples

```
axi5_master_wr_monlite #(
    .N_ADDR_RANGES      (0),
    .ADDR_RANGE_IS_ERROR ('0'),
    .SKID_DEPTH_AW      (2),
    .SKID_DEPTH_W        (4),
    .UNIT_ID             (8'h02),
    .AGENT_ID            (16'h0014),
    .MAX_TRANSACTIONS    (8)
) u_axi5_master_wr_monlite (
    .aclk                (aclk),
    .aresetn             (aresetn),
    // ... the axi5_master_wr ports, by name ...
    .cam_clear           (1'b0),
    .cfg_monitor_enable  (1'b1),
    .cfg_error_enable    (1'b1),
    .cfg_timeout_enable  (1'b1),
    .cfg_compl_enable    (1'b0),
    .cfg_threshold_enable (1'b0),
    .cfg_timeout_cycles  (16'd1000),
    .cfg_freq_sel        (4'd0),
    .cfg_axi_pkt_mask    (16'h0000),
    .i_mon_time          (mon_time),
    .monbus_valid        (monbus_valid),
    .monbus_ready        (monbus_ready),
    .monbus_packet       (monbus_packet),
    .monbus_timestamp    (monbus_timestamp),
    .active_transactions (),
    .error_count         (),
    .transaction_count   (),
    .dropped_count       (dropped_count),
    .refused_count       (refused_count)
);
```

In a generated bridge, `mon_preset = "lite"` selects this wrapper for every monitored port.

13.7 Design Notes

- `cam_clear` keeps the `_mon` wrapper's name so the two are pin-compatible on the monitor side; the lite has a table, not a CAM.

- MAX_TRANSACTIONS defaults to 8 here against 16 on `axi5_master_wr_mon`: size it to the port's real outstanding depth, since refused commands surface as orphans.
 - Consumers that relied on `block_ready` to bound the table get drop-and-count instead; the count is always reported, the identity of the lost events is not.
-

13.8 Related Modules

- `axi5_master_wr_mon` – the full-monitor sibling
 - `axi5_master_wr` – the core this wraps
 - [axi_monitor_lite](#) – the monitor itself
-

13.9 Testing

`val/amba/monitor-lite/test_axi5_master_wr_monlite.py` exercises this module: the same TB and scenarios as `val/amba/test_axi5_master_wr_mon.py`, with the DUT swapped.

```
source env_python
make -C val/amba/monitor-lite run-axi5_master_wr_monlite-gate
```

Last Updated: 2026-09-26

13.10 Navigation

- [← Back to Monitor Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

14 AXI5 Slave Read

Module: `axi5_slave_rd.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready


14.1 Overview

The AXI5 Slave Read module is the slave-side AR/R channel transport block. It receives read requests from an external AXI5 master and forwards them, with the full AXI5 sideband signal set intact, to backend memory or logic on the FUB (Functional Unit Block) interface.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no outstanding-transaction tracking. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

14.1.1 Key Features

- Carries the full AXI5 signal set listed below, unmodified, across the SKID buffers
- **ARNSAID:** Non-secure access identifier reception
- **ARTRACE:** Trace signal support
- **ARMPAM:** Memory Partitioning and Monitoring reception
- **ARMECID:** Memory Encryption Context ID reception
- **ARUNIQUE:** Unique ID indicator reception
- **ARCHUNKEN:** Chunking enable reception
- **ARTAGOP:** Memory tag operation reception (MTE)
- **RTRACE/RPOISON:** Response extensions
- **RCHUNKV/RCHUNKNUM/RCHUNKSTRB:** Chunking support
- **RTAG/RTAGMATCH:** Memory tag responses (MTE)
- SKID buffering for AR and R channels
- Busy signal for power management

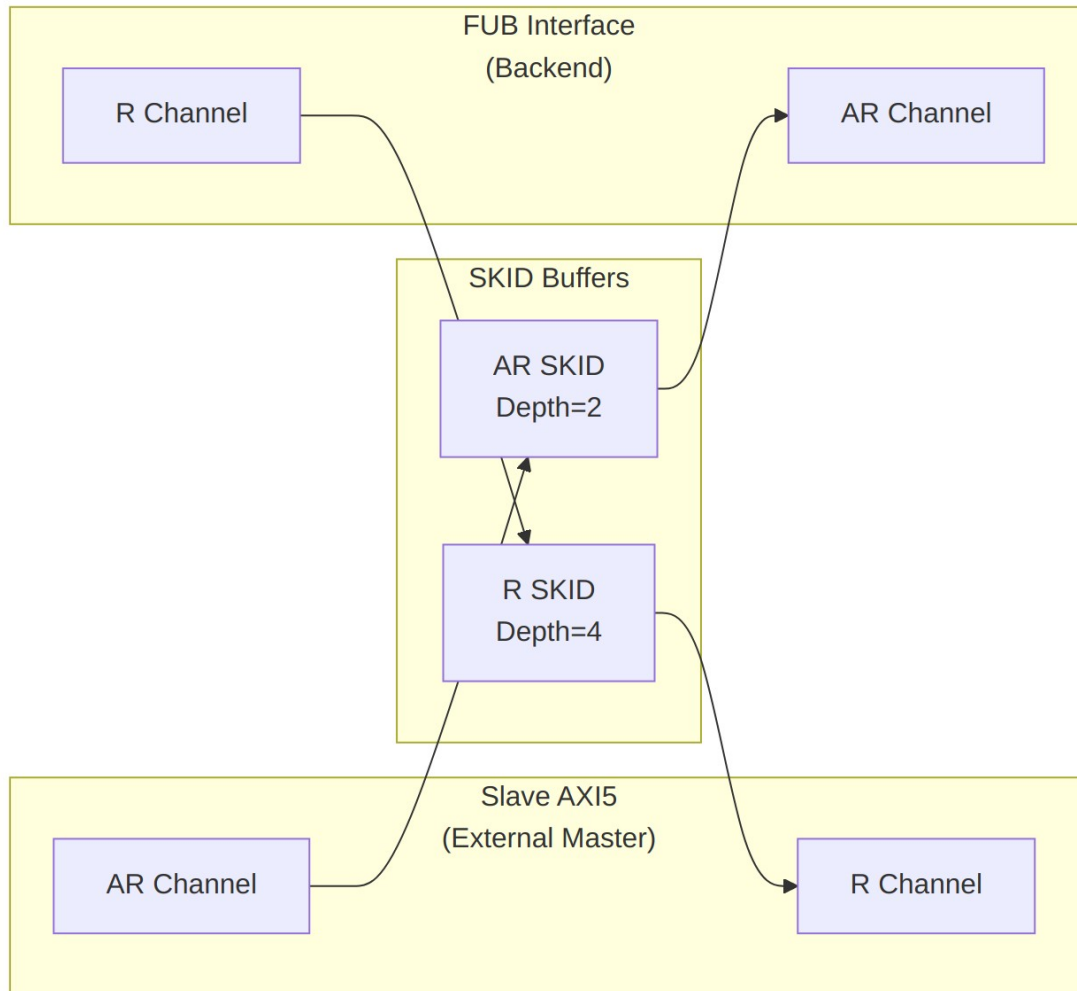

Module Architecture

14.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_R	int	4	R channel SKID buffer depth (legal range 2..8 inclusive, any integer)
AXI_ID_WIDTH	int	8	Transaction ID width

Parameter	Type	Default	Description
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator

14.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)

Parameter	Expression	Description
TW	AXI_TAG_WIDTH * NUM_TAGS	Total width of the rtag field
CHUNK_STRB_WIDTH	max(AXI_DATA_WIDTH / 128, 1)	Width of rchunkstrb, one bit per 128-bit granule
ARSize	Sum of the enabled AR fields	AR SKID buffer payload width
RSize	Sum of the enabled R fields	R SKID buffer payload width

Note on AXI_WSTRB_WIDTH: this module declares AXI_WSTRB_WIDTH (default AXI_DATA_WIDTH/8) and its short alias SW, but neither is used. A read module has no W channel and therefore no write strobes. The parameter is retained only so the read and write module parameter lists line up; overriding it has no effect.

14.3 Ports

14.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

14.3.2 Slave AXI5 Interface (External Master Input)

14.3.2.1 AR Channel (Input)

Port	Width	Direction	Description
s_axi_arid	IW	Input	Read address ID
s_axi_aradr	AW	Input	Read address
s_axi_arlen	8	Input	Burst length
s_axi_arsize	3	Input	Burst size
s_axi_arburst	2	Input	Burst type

Port	Width	Direction	Description
s_axi_arlock	1	Input	Lock type
s_axi_arcache	4	Input	Cache attributes
s_axi_arprot	3	Input	Protection attributes
s_axi_arqos	4	Input	Quality of Service
s_axi_aruser	UW	Input	User-defined signal
s_axi_arvalid	1	Input	Read address valid
s_axi_arready	1	Output	Read address ready
s_axi_arnsaids	AXI_NSAID_WIDTH	Input	Non-secure access ID (AXI5)
s_axi_artrace	1	Input	Trace signal (AXI5)
s_axi_armpam	AXI_MPAM_WIDTH	Input	Memory partitioning (AXI5)
s_axi_armecid	AXI_MECID_WIDTH	Input	Memory encryption context (AXI5)
s_axi_arunique	1	Input	Unique ID indicator (AXI5)
s_axi_archunkenable	1	Input	Chunking enable (AXI5)
s_axi_artagop	AXI_TAGOP_WIDTH	Input	Tag operation (AXI5 MTE)

14.3.2.2 R Channel (Output)

Port	Width	Direction	Description
s_axi_rid	IW	Output	Read data ID
s_axi_rdata	DW	Output	Read data

Port	Width	Direction	Description
s_axi_rresp	2	Output	Read response
s_axi_rlast	1	Output	Last transfer in burst
s_axi_ruser	UW	Output	User-defined signal
s_axi_rvalid	1	Output	Read data valid
s_axi_rready	1	Input	Read data ready
s_axi_rtrace	1	Output	Trace signal (AXI5)
s_axi_rpoison	1	Output	Data poison indicator (AXI5)
s_axi_rchunkv	1	Output	Chunk valid (AXI5)
s_axi_rchunknum	AXI_CHUNKNUM_WIDTH	Output	Chunk number (AXI5)
s_axi_rchunkstrob	CHUNK_STRB_WIDTH	Output	Chunk strobe (AXI5)
s_axi_rtag	TW	Output	Memory tags (AXI5 MTE)
s_axi_rtagmatch	1	Output	Tag match response (AXI5 MTE)

14.3.3 FUB Interface (Backend Memory/Logic Output)

Same signals as slave interface but with `fub_axi_*` prefix and reversed directions for AR (output) and R (input).

14.3.4 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator

14.4 Functional Description

This slave module acts as an adapter between: - **External AXI5 master** (s_axi_* interface) - **Backend memory or functional unit block** (fub_axi_* interface)

Signal Flow: 1. AR channel: External master → SKID → Backend 2. R channel: Backend → SKID → External master

SKID Buffering: Provides elasticity and breaks combinational paths for timing closure.

14.5 Timing Characteristics

14.5.1 Basic Read Transaction

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
 - S_AXI_ARID, S_AXI_ARADDR, S_AXI_ARVALID, S_AXI_ARREADY
 - FUB_AXI_ARVALID, FUB_AXI_ARREADY (request forwarded to the backend)
 - FUB_AXI_RDATA, FUB_AXI_RVALID, FUB_AXI_RREADY
 - S_AXI_RDATA, S_AXI_RLAST, S_AXI_RVALID, S_AXI_RREADY
-

14.6 Usage Examples

```
axi5_slave_rd #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
    .AXI_DATA_WIDTH    (64),
    .SKID_DEPTH_AR     (2),
    .SKID_DEPTH_R      (4),
    .ENABLE_NSaid      (1),
    .ENABLE_TRACE      (1),
    .ENABLE_MPAM        (1),
    .ENABLE_MECID      (1),
    .ENABLE_UNIQUE     (1),
    .ENABLE_CHUNKING    (1),
    .ENABLE_MTE         (1),
    .ENABLE_POISON     (1)
```

```

) u_axi5_slave_rd (
    .aclk                (axi_clk),
    .aresetn             (axi_rst_n),

    // Slave interface (from external master)
    .s_axi_arid          (s_axi_arid),
    .s_axi_araddr        (s_axi_araddr),
    .s_axi_arlen         (s_axi_arlen),
    // Every remaining s_axi_ar* port mirrors the fub_axi_ar* list.
    // All must be connected.
    .s_axi_arnsaid       (s_axi_arnsaid),
    .s_axi_artrace       (s_axi_artrace),
    // ... (connect AXI5 extensions)

    .s_axi_rid           (s_axi_rid),
    .s_axi_rdata         (s_axi_rdata),
    // Every remaining s_axi_r* port mirrors the fub_axi_r* list. All
    // must be connected.

    // FUB interface (to backend)
    .fub_axi_arid        (mem_arid),
    .fub_axi_araddr      (mem_araddr),
    // ... (connect to memory controller)

    .busy                (slave_rd_busy)
);

```

14.7 Design Notes

- Use when you need AXI5 slave functionality with SKID buffering
 - Backend FUB interface can connect to memory controller, SRAM, or functional units
 - SKID buffers improve timing by breaking long combinational paths
 - Feature enables allow area optimization by disabling unused AXI5 extensions
-

14.8 Related Modules

- [AXI5 Slave Write](#) - Slave write interface
- [AXI5 Master Read](#) - Master read interface
- [AXI5 Slave Read CG](#) - Clock-gated variant

- [AXI5 Slave Read Monitor](#) - With integrated monitoring
-

14.9 Testing

`val/amba/test_axi5_slave_rd.py` exercises this module. It collects 8 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_slave_rd.py -v
```

14.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

15 AXI5 Slave Read with Clock Gating

Module: `axi5_slave_rd_cg.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready

15.1 Overview


The AXI5 Slave Read with Clock Gating module wraps the standard `axi5_slave_rd` module with integrated clock gating for power optimization. When the module sits idle, the internal clock gates itself off.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no outstanding-transaction tracking. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

15.1.1 Key Features

- Carries the full AXI5 read signal set listed below, unmodified, across the SKID buffers
- **Integrated clock gating** for dynamic power reduction
- Configurable idle count before gating

- All AXI5 extensions supported (NSAID, TRACE, MPAM, MECID, UNIQUE, CHUNKING, MTE, POISON)
- Transparent gating - no protocol changes
- Gating status outputs for system monitoring
- SKID buffering for AR and R channels
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

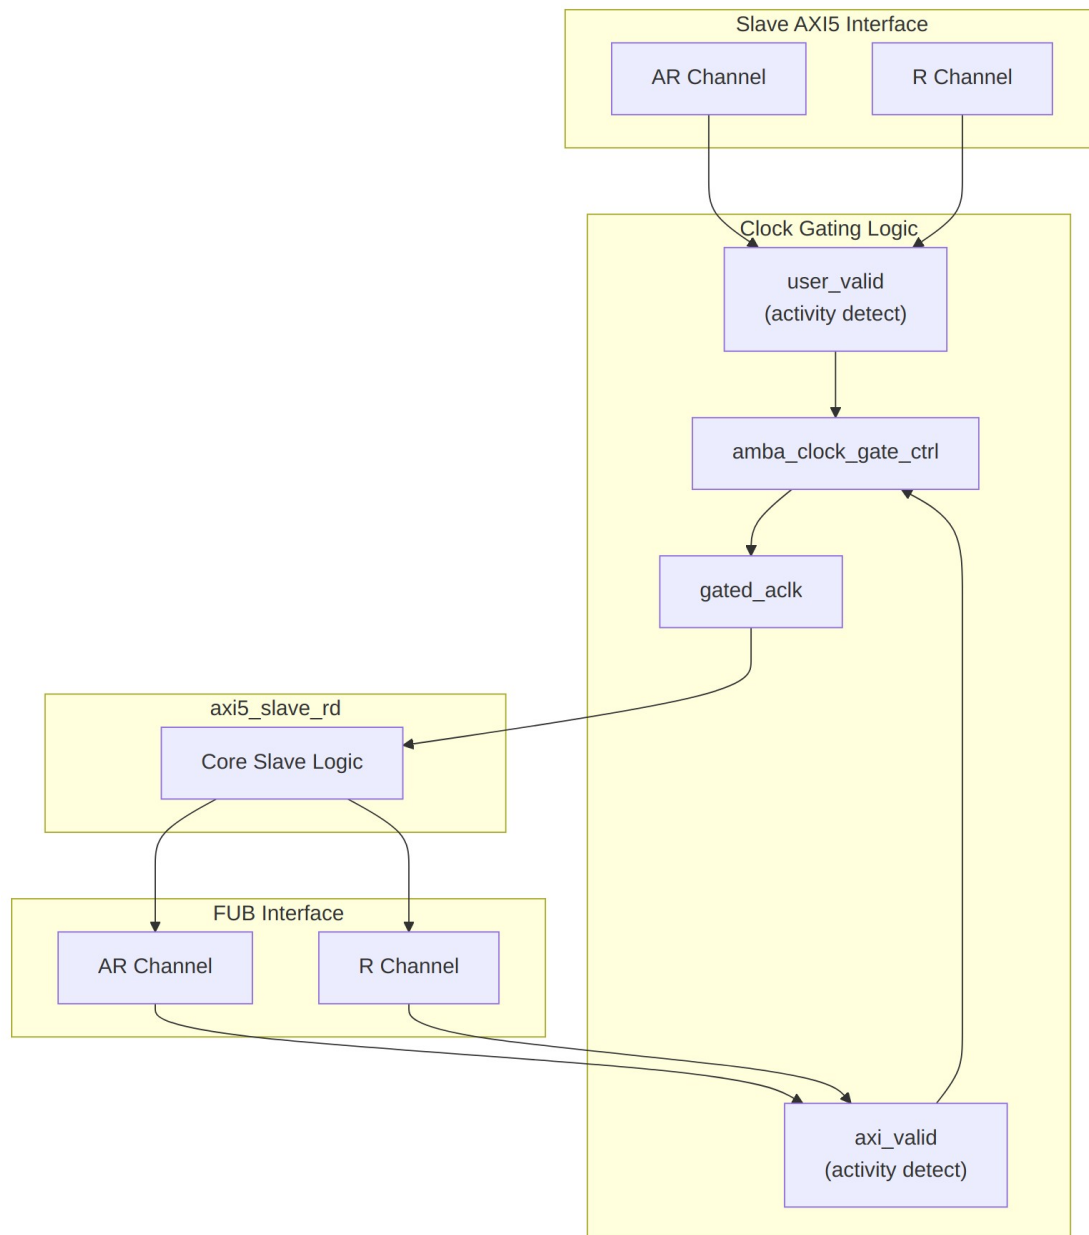

Module Architecture

15.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAI	bit	1	Enable non-secure access

Parameter	Type	Default	Description
			ID
ENABLE_TRAC E	bit	1	Enable trace signals
ENABLE_MPA M	bit	1	Enable memory partitioning
ENABLE_MECI D	bit	1	Enable memory encryption
ENABLE_UNIQ UE	bit	1	Enable unique ID indicator
ENABLE_CHUN KING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POIS ON	bit	1	Enable poison indicator
CG_IDLE_COU NT_WIDTH	int	4	Clock gating idle counter width

15.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	Total width of the rtag field
CHUNK_STRB_WIDTH	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	Width of rchunkstrb, one bit per 128-bit granule
ARSize	Sum of the enabled AR	AR SKID buffer payload

Parameter	Expression	Description
	fields	width
RSize	Sum of the enabled R fields	R SKID buffer payload width

Note on AXI_WSTRB_WIDTH: this module declares AXI_WSTRB_WIDTH (default AXI_DATA_WIDTH/8) and its short alias SW, but neither is used. A read module has no W channel and therefore no write strobes. The parameter is retained only so the read and write module parameter lists line up; overriding it has no effect.

15.2.2 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AW	AXI_ADDR_WIDTH
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
UW	AXI_USER_WIDTH

15.3 Ports

15.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

15.3.2 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Enable clock gating
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating

15.3.3 Slave AXI5 Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

15.3.4 FUB Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

15.3.5 Clock Gating Status

Port	Width	Direction	Description
cg_gating	1	Output	Clock is currently gated
cg_idle	1	Output	Module is idle

15.4 Functional Description

15.4.1 Clock Gating Behavior

Activity Detection: - **user_valid:** Asserted when slave interface has activity (arvalid, rvalid, or internal busy – peer VALID, post-fix) - **axi_valid:** Asserted when FUB interface has activity (arvalid, rvalid)

Gating State Machine:

```
stateDiagram-v2
    [*] --> ACTIVE

    ACTIVE --> COUNTING : !user_valid && !axi_valid
    COUNTING --> ACTIVE : user_valid || axi_valid
    COUNTING --> GATED : count == cfg_cg_idle_count
    GATED --> ACTIVE : user_valid || axi_valid

    state ACTIVE {
        note right of ACTIVE : Clock enabled<br/>cg_gating = 0
    }
    state COUNTING {
        note right of COUNTING : Idle countdown<br/>cg_gating = 0
    }
    state GATED {
        note right of GATED : Clock gated<br/>cg_gating = 1
    }
```


Key Points: - Clock gating disabled when `cfg_cg_enable = 0` - Ready signals forced to 0 when gated (prevents new transactions) - Gating only occurs after configured idle period - Any activity immediately ungates the clock

15.4.2 Ready Deassertion and Wake Behavior

While `cg_gating` is asserted, the ready outputs listed above are forced low.

This is legal AXI. A READY output may be deasserted for any number of cycles, and neither side may assume READY asserts within a bounded time, so holding it low is ordinary backpressure rather than a protocol violation. It cannot deadlock either: the same VALID being held off also feeds the activity detector, so gating releases and READY returns to the core's value.

Two consequences are worth designing around:

- **Wake latency adds to first-transfer latency.** Activity is registered once (AXI4, AXI5, AXI4-Lite, AXI4-Stream) or twice (APB, APB5, AXI5-Stream – with one exception: `apb4_slave_cdc_cg` drives `amba_clock_gate_ctrl` combinatorially and so registers once, not twice) before reaching the ICG enable, which is combinatorial. The AXI5 `_cg` wrappers drive the activity terms combinatorially, so there is 1 register stage and the first usable gated-clock edge arrives 2 cycles after activity asserts. Size `cfg_cg_idle_count` so that cost is amortized over the traffic burst that follows.
- **READY is a combinational function of `cg_gating`.** The path from the idle counter to the `s_axi_arready` output may need attention during timing closure, particularly at high frequency.

15.4.3 Integration Caveat: `s_axi_rready` in the Activity Term

The activity detector uses the corresponding VALID (`s_axi_rvalid`), never the peer's READY. (Historically this term was `s_axi_rready`, which meant a peer parking its ready high – a common and entirely correct style – pinned the block permanently awake and defeated gating; that defect was fixed family-wide, matching the rule the `mon_cg` wrappers always carried.)

An always-ready consumer no longer prevents gating.

15.4.4 Clock Gating Configuration

15.4.4.1 Idle Count Selection

<code>cfg_cg_idle_count</code>	Idle Cycles	Use Case
0	1	Aggressive power saving, frequent gating

cfg_cg_idle_count	Idle Cycles	Use Case
1-3	2-4	Balanced, reduces gate churn
4-7	5-8	Conservative, for bursty traffic
8-15	9-16	Minimal gating (the 4-bit field maxes at 16 cycles – the count is LITERAL, gating at count+1, not a power of two)

Recommendations: - **Streaming workloads:** Higher count (4-8) to avoid frequent gate/ungate - **Sporadic transactions:** Lower count (0-2) for maximum power savings - **Real-time systems:** Disable gating or use high count to ensure deterministic latency

15.5 Timing Characteristics

15.5.1 Clock Gating Sequence

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK (ungated)
- GATED_ACLK
- user_valid, axi_valid activity terms
- Idle counter progression
- cg_idle assertion
- cg_gating activation

15.6 Usage Examples

```
axi5_slave_rd_cg #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
```

```

        .AXI_DATA_WIDTH      (64),
        .SKID_DEPTH_AR      (2),
        .SKID_DEPTH_R       (4),
        .CG_IDLE_COUNT_WIDTH(4),
        .ENABLE_NSaid       (1),
        .ENABLE_TRACE       (1),
        .ENABLE_MPAM        (1),
        .ENABLE_MECID       (1),
        .ENABLE_UNIQUE      (1),
        .ENABLE_CHUNKING    (1),
        .ENABLE_MTE         (1),
        .ENABLE_POISON      (1)
    ) u_axi5_slave_rd_cg (
        .aclk                (axi_clk),
        .aresetn             (axi_rst_n),

        // Clock gating config
        .cfg_cg_enable       (1'b1),           // Enable gating
        .cfg_cg_idle_count   (4'd3),           // Gate after 4 idle cycles
        // (count+1; a LITERAL count, not a power of two)

        // Slave interface (from external master)
        .s_axi_arid          (s_axi_arid),
        .s_axi_araddr        (s_axi_araddr),
        // Every remaining s_axi_ar*/s_axi_r* port mirrors the fub_axi_*
        // list,
        // same names and widths, opposite directions. All must be
        // connected.

        // FUB interface (to backend)
        .fub_axi_arid        (mem_arid),
        .fub_axi_araddr      (mem_araddr),
        // ... (connect to memory controller)

        // Clock gating status
        .cg_gating           (slave_rd_gating),
        .cg_idle             (slave_rd_idle)
    );

    // Optional: Monitor power savings
    always @(posedge axi_clk) begin
        if (slave_rd_gating)
            $display("AXI5 Slave RD clock gated - saving power");
    end

```

15.7 Design Notes

15.7.1 Power Savings Estimation

Worked example, assuming the module is active 60% of the time: - **Without gating**: 100% of this module's dynamic power - **With gating (idle_count=2)**: roughly 50%, allowing for wake/sleep transitions - **With gating (idle_count=0)**: roughly 60%; more aggressive gating, but more transition overhead

All power figures on this page are first-order estimates derived from duty cycle, not measured results. No power analysis (gate-level or otherwise) has been run against these modules. Actual savings depend on the gated logic's share of total design power, the technology library's clock-gate cell, and leakage, which clock gating does not reduce at all. Treat these numbers as a sizing aid and characterize your own instance before quoting a savings figure.

15.7.2 Clock Gating Overhead

- **Area**: +5 flops, counted from the RTL – r_wakeup in amba_clock_gate_ctrl plus r_idle_counter at IDLE_CNTR_WIDTH (default 4), scaling as 1 + CG_IDLE_COUNT_WIDTH. Against a base module of a few hundred flops that is low single-digit percent. The ICG itself is a latch/BUFGCE, not fabric flops; the LUT delta is not measured
- **Timing**: Clock gating adds minimal delay (typically <50ps)
- **Power**: Overhead from gate control logic usually <1% of savings

15.7.3 When to Use Clock Gating

Good candidates: - Low-duty-cycle interfaces (sporadic transactions) - Systems with strict power budgets - Battery-operated devices

Avoid when: - Interface is continuously active - Gate/ungate transitions exceed power savings - Deterministic latency required (use high idle count instead)

15.7.4 Integration with Power Management

```
// System power controller
assign axi_power_save_mode = slave_rd_gating &&
                             slave_wr_gating &&
                             master_rd_gating;

// Optional: Track gating efficiency
always @(posedge axi_clk or negedge aresetn) begin
    if (!aresetn) begin
        gating_cycles <= 0;
        total_cycles <= 0;
    end else begin
        total_cycles <= total_cycles + 1;
    end
end
```

```
        if (slave_rd_gating)
            gating_cycles <= gating_cycles + 1;
    end
end

assign gating_efficiency = (gating_cycles * 100) / total_cycles;
```

15.8 Related Modules

- [AXI5 Slave Read](#) - Non-clock-gated version
 - [AXI5 Slave Write CG](#) - Clock-gated write variant
 - [AXI5 Slave Read Monitor CG](#) - With monitoring
 - [AMBA Clock Gate Control](#) - Clock gating controller
-

15.9 Testing

val/amba/test_axi5_slave_rd_cg.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_slave_rd_cg.py -v
```

15.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

16 AXI5 Slave Read Monitor

Module: axi5_slave_rd_mon.sv **Location:** rtl/amba/axi5/ (protocol monitors live with their protocol; only the monitor CORE pieces are in rtl/amba/monitor/) **Status:** Production Ready


16.1 Overview

The AXI5 Slave Read Monitor module combines the `axi5_slave_rd` interface with integrated transaction monitoring. You get real-time visibility into slave read operations, with configurable packet filtering and error detection built in rather than bolted on.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

16.1.1 Key Features

- Full AMBA AXI5 slave read protocol compliance
- **Integrated filtered monitoring** - no external monitor needed
- All AXI5 extensions supported (NSAID, TRACE, MPAM, MECID, UNIQUE, CHUNKING, MTE, POISON)
- Transaction tracking with configurable table size
- Error detection (SLVERR, timeout, orphan transactions)
- Performance metrics (latency, throughput)
- Configurable packet filtering to reduce bandwidth
- 128-bit monitor bus packet output paired with 64-bit side-band timestamp
- Active transaction count tracking

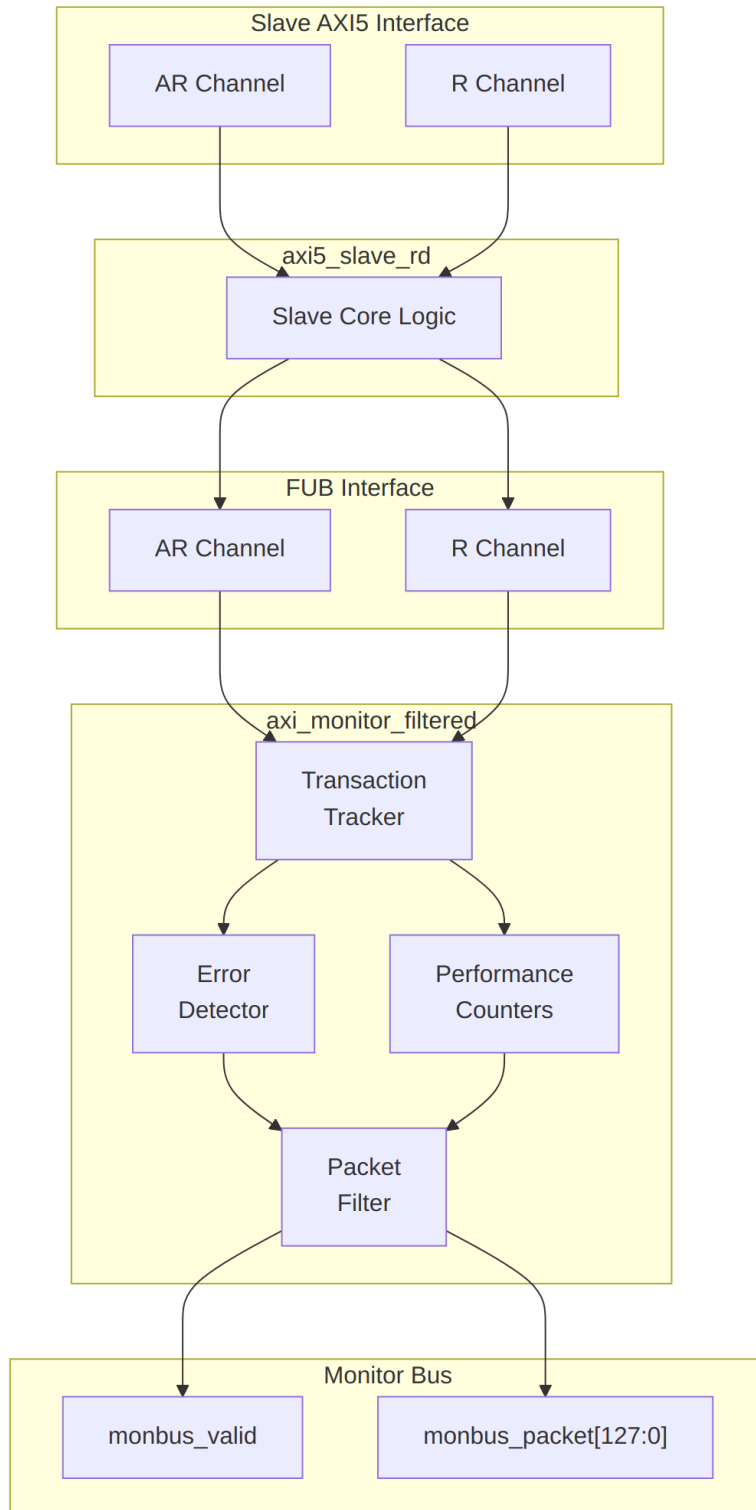

Module Architecture

16.2 Parameters

A lite-monitor version of this wrapper exists as `axi5_slave_rd_monlite`: the same core and taps with `axi_monitor_lite` instead of `axi_monitor_filtered`, about a fifth of the monitor gates, error/timeout/completion/threshold packets only. Selected in generated bridges by `mon_preset = "lite"`.

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory

Parameter	Type	Default	Description
			encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitoring unit identifier
AGENT_ID	int	12	Agent identifier
MAX_TRANSACTION S	int	16	Transaction table size
USE_WDATA_ORDER _Q	bit	0	Write-data ordering queue
NUM_BANKS	int	1	Banked transaction tables. >1 on a WRITE monitor requires USE_WDATA_ORDER_Q=1 – axi_monitor_trans_mgr fails elaboration otherwise
ID_FILTER_ENABLE	bit	0	Synthesises the per-instance ID-slice filter
ID_MATCH_BASE	int	0	First ID this instance owns
ID_MATCH_COUNT	int	0	How many; 0 means ALL, so a zeroed register block does not silently filter everything away
ACLK_MHZ	int	100	Clock frequency in MHz – keeps the 1 us tick exact off-100MHz
CFI_MIN_FREQ_MHZ /	int	= ACLK_MHZ	Freq-invariant counter LUT bounds

Parameter	Type	Default	Description
CFI_MAX_FREQ_MHZ			(cfg_freq_sel indexes within them)
ACTIVE_TRANS_THRESHOLD	int	MAX_TRANSACTION/2	Active-transaction count that trips a threshold packet when cfg_threshold_enable=1. Replaces the former hardwired 8/4; threshold packets now scale with the table sizing
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage for timing
USE_MONITOR	bit	1	Synthesis-time monitor enable. 0 = omit monitor and tie outputs to safe non-blocking defaults; 1 = full monitor functionality.
N_ADDR_RANGES	int	0	Number of address-range comparators. 0 = checker omitted (zero area). >0 = N independent [low, high] ranges; feeds the shared allowlist checker: a debug-range hit -> AddrMatch, an error-allowlist miss -> Error/ADDR_RANGE (see axi_monitor_addr_check.

Parameter	Type	Default	Description
			md).
ENABLE_ERROR_LO GIC	bit	1	Compile-in the error- detection cone (0 drops it for area).
ENABLE_TIMEOUT_ LOGIC	bit	1	Compile-in the timeout cone and the axi_monitor_timeout instance.
ENABLE_COMPL_LO GIC	bit	1	Compile-in the completion cone.
ENABLE_THRESHOL D_LOGIC	bit	1	Compile-in the threshold cone.
ENABLE_PERF_LOGI C	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and bucket/beat/byte/burst counters are unconditional (always compiled, always live)
ENABLE_DEBUG_LO GIC	bit	0	Compile-in the debug cone (off by default).

Synthesis-cone note: the six ENABLE_*_LOGIC parameters gate each detection cone at synthesis via generate-if, so unused logic drops to zero area (classic cones default on, debug off). Inside the wrapper's axi_monitor_filtered instance the perf/debug master switches are fixed (ENABLE_PERF_PACKETS = 1, ENABLE_DEBUG_MODULE = 0). The former CAM_PIPELINE / TRANS_CAM_PIPELINE parameters were removed — the transaction CAM is now always pipelined.

16.2.1 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	AXI_DATA_WIDTH / 8
AW	AXI_ADDR_WIDTH
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1
TW	AXI_TAG_WIDTH * NUM_TAGS
CHUNK_STRB_WIDTH	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1

16.3 Ports

16.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

16.3.2 Slave AXI5 Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

16.3.3 FUB Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

16.3.4 Monitor Configuration

Port	Width	Direction	Description
cfg_monito r_enable	1	Input	Master runtime gate. 0 = monitor inert: no allocation, transaction

Port	Width	Direction	Description
			CAM held clear, and the upstream ready is never stalled (a disabled monitor cannot block the datapath). 1 = normal operation
cam_clear	1	Input	Synchronous clear of the monitor transaction CAM (driven from the harness clear control bit, e.g. CTRL[4])
cfg_error_enable	1	Input	Enable error packets
cfg_timeout_enable	1	Input	Enable timeout packets
cfg_performance_enable	1	Input	Enable performance packets (see Performance Monitoring)
cfg_completion_enable	1	Input	Enable transaction-completion packets
cfg_threshold_enable	1	Input	Enable threshold-crossed packets
cfg_debug_enable	1	Input	Enable debug/trace packets (gates the debug cone — the 6th reporter sub-block)
cfg_timeout_cycles	16	Input	Unified coarse timeout control, a MICROSECOND count passed through at FULL 16-bit width: 1..65535 us per phase; 0 = 16'hFFFF (~65 ms, effectively never). One value drives all three phase counts

Port	Width	Direction	Description
			(addr/data/resp). The old 4-bit squash that saturated ≥ 16 at 15 us is retired
cfg_latency_threshold	32	Input	High latency threshold (cycles)
cfg_freq_sel	4	Input	counter_freq_invariant LUT index scaling the 1 us timer tick
cfg_axi_pkt_mask	16	Input	Packet type filter mask
cfg_axi_err_select	16	Input	Error selection mask
cfg_axi_err_or_mask	16	Input	Error event filter
cfg_axi_timeout_mask	16	Input	Timeout event filter
cfg_axi_completion_mask	16	Input	Completion event filter
cfg_axi_threshold_mask	16	Input	Threshold event filter
cfg_axi_performance_mask	16	Input	Performance event filter
cfg_axi_address_mask	16	Input	Address event filter
cfg_axi_debug_mask	16	Input	Debug event filter

Detection-cone enables: `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` turn on the completion, threshold, and debug reporter sub-blocks respectively. `cfg_debug_enable` gates the **debug cone** — the 6th reporter sub-block (`axi_monitor_reporter_debug`). In this wrapper the debug module's `cfg_debug_level` (4) and `cfg_debug_mask` (16) inputs are tied to `4'h0` / `16'h0`; `cfg_active_trans_threshold` is driven from the `ACTIVE_TRANS_THRESHOLD` parameter (default `MAX_TRANSACTIONS/2`). None are wrapper ports.

16.3.5 Monitor Bus Output

Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready
monbus_packet	128	Output	monitor_packet_t (see format below)
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
debug_block_ready	1	Output	Observability tap for the block_ready gating net (drives nothing internally; leave unconnected if unused)
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

16.3.6 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator
active_transactions	8	Output	Current outstanding transactions
error_count	16	Output	Lifetime count of error+timeout packets actually emitted (reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
transaction_count	32	Output	Lifetime count of completion packets actually emitted (zero-

Port	Width	Direction	Description
			extended 16-bit reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
cfg_conflict_error	1	Output	Configuration conflict detected

16.3.7 Packet filters

Two independent runtime filters cut monbus traffic without touching the datapath. Both are inert until driven, which is the failure to watch for: the build-time parameter only decides whether the logic is SYNTHESISED, and a design that sets the parameter but leaves the `cfg_*` ports tied low filters nothing and looks like the feature is broken.

Address-range filter — ADDR_FILTER_ENABLE (bit, default 0) builds it.

Port	Width	Description
cfg_addr_filter_enable	1	High: suppress packets for transactions outside the window. Low: inert, whatever the parameter says
cfg_addr_filter_low	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	ADDR_WIDTH	Window limit, inclusive

The verdict is latched per table entry at ALLOCATION, from the command address, and held for that entry's life. Widening the window mid-flight does not un-filter entries already admitted — which is exactly what makes it safe to reprogram live, since an entry's fate is decided when it is admitted and the retire accounting cannot be corrupted afterwards. Contrast the address-range CHECKER (N_ADDR_RANGES), which re-evaluates per command.

Runtime ID filter — overrides the ID_MATCH_BASE/ID_MATCH_COUNT elaboration constants so an instance can be retargeted at a different master without a rebuild.

Port	Width	Description
cfg_id_filter_enable	1	High: use the window below. Low: use the parameters, bit-identical

Port	Width	Description
		to a build without this feature
cfg_id_match_base	ID_WIDTH	First ID owned
cfg_id_match_count	ID_WIDTH+1	How many; 0 means ALL, matching the parameter rule so a zeroed register block does not silently filter everything away

The window is half-open: [base, base + count).

16.4 Functional Description

16.4.1 Monitor Packet Format

The 128-bit monbus_packet (paired with the 64-bit monbus_timestamp side-band signal) follows the standardized AMBA monitor bus format:

Bits [127:124] - Packet Type:

- 0x0 = ERROR Error events (SLVERR, DECERR, protocol violations)
- 0x1 = COMPL Completion events (transaction finished)
- 0x2 = THRESH Threshold events
- 0x3 = TIMEOUT Timeout events
- 0x4 = PERF Performance metrics
- 0x8 = ADDR_MATCH Address match events
- 0x9 = APB APB-specific events
- 0xF = DEBUG Debug events

Bits [123:109] - Reserved (15 bits, forward-compat slack)

Bits [108:105] - Protocol (4 bits): 0x0=AXI, 0x1=AXIS, 0x2=APB, 0x3=ARB, 0x4=CORE

Bits [104:97] - Event Code (8 bits, protocol-specific)

Bits [96:88] - Channel ID (9 bits – AXI ID or channel index)

Bits [87:72] - Agent ID (16 bits, from AGENT_ID parameter)

Bits [71:64] - Unit ID (8 bits, from UNIT_ID parameter)

Bits [63:0] - Event Data (64 bits – full address, latency, etc.)

16.4.2 Event Types

16.4.2.1 Error Packets (Type=0)

Event Code	Description	Event Data
0x1	SLVERR response	Zero-extended 32-bit

Event Code	Description	Event Data
		ADDRESS (the reporter cones carry address only)
0x2	DECERR response	Zero-extended 32-bit ADDRESS
0x3	Orphan data/response	Zero-extended 32-bit ADDRESS
0x4	Protocol violation	Zero-extended 32-bit ADDRESS – write monitors only , see note

(Event code 0x4 is part of the shared monitor encoding but cannot be emitted by a read monitor: `axi_monitor_trans_mgr` sets `EVT_PROTOCOL` only inside its `if (!IS_READ && resp_valid && resp_ready)` block, which a read instance never enters.)

(Event codes 0x5 “poison” and 0x6 “tag mismatch” were documented here but are NOT implemented – no poison/tag signal reaches the monitor.)

16.4.2.2 Completion Packets (Type=1)

Event Code	Description	Event Data
0x0	Read completion	Zero-extended 32-bit ADDRESS

16.4.2.3 Timeout Packets (Type=3)

Event Code	Description	Event Data
0x1	AR channel timeout	Zero-extended 32-bit ADDRESS
0x2	R channel timeout	Zero-extended 32-bit ADDRESS

16.4.2.4 Performance Packets (Type=4)

Event Code	Description	Event Data
(only two exist)	AXI_PERF_COMPLETED_COUNT	64’(completed-packet lifetime count)
	AXI_PERF_ERROR_COUNT	64’(error-packet lifetime count)

(High-latency / bandwidth / outstanding packets were never implemented – window outputs carry that data, not packets.)

16.4.3 Monitor Backpressure (**block_ready**)

block_ready is exported as the **debug_block_ready** output port – the wrapper deliberately makes the gating contract observable (the **_mon_cg** wrapper ties it off rather than forwarding it). It goes low when the monitor’s transaction-table occupancy reaches its blocking threshold (a function of **MAX_TRANSACTION**s; the reporter FIFO depth **INTR_FIFO_DEPTH** has no path to it). The wrapper ANDs it into the upstream-facing **s_axi_arready** so a saturated monitor throttles new transactions at the handshake instead of dropping events.

- **Where the stall lands:** the upstream **s_axi_arready** is forced low until the monitor drains.
- **When `USE_MONITOR=0`:** **block_ready** is internally tied high, so the wrapper imposes no stall and runs at full bandwidth.
- **When `cfg_monitor_enable=0`:** the wrapper gate forces the upstream ready open, so a runtime-disabled monitor can never stall the datapath (the AXI4 monitors assert this as an in-RTL formal property, **ap_disabled_never_stalls**; this module has no `ifdef FORMAL` block of its own, so here the guarantee rests on the gate expression above, not a proof).
- **For axi5 slave variants:** the monitor watches the FUB-side handshake, so there is a **SKID_DEPTH_AR** cycle lag between **block_ready** going low and new events ceasing. **MAX_TRANSACTION**s should be sized to cover this margin.

Recovery is guaranteed by the **saturation-recovery contract**: command-originated table entries are capped at **MAX_TRANSACTION**s - **cmd_entry_reserve**(**MAX_TRANSACTION**s) (reserve = 4 for tables of 16 or more, 0 below; the function lives in **monitor_common_pkg**), and **block_ready** re-asserts at occupancy < **MAX_TRANSACTION**s - (reserve - 1) – a threshold strictly ABOVE the command cap – so a saturated table always drains back below the reopen point. Blocking throttles; it never deadlocks. Tables smaller than 16 keep full legacy allocation (small tables cannot spare slots) and trade the recovery guarantee for tracking capacity. The contract is verified by in-RTL formal properties (mutation-checked) and a 100-seed deliberately-undersized-table stream sweep; see [axi_monitor_base](#) for the canonical description.

Sizing note: a monitor on a bus shared by several channels/requesters must size **MAX_TRANSACTION**s to cover **NUM_CHANNELS** × per-channel outstanding plus margin – the per-channel limit alone makes the monitor throttle the shared master. Tables deeper than 64 also need Verilator’s `--unroll-count` raised (default 64) in sim builds.

16.4.4 Address-Range Checker

With **N_ADDR_RANGES** > 0 the wrapper instantiates the shared allowlist checker (**axi_monitor_addr_check**). Each range carries a **DEBUG/ERROR** flavor:

- **DEBUG range** — a hit emits a PktTypeAddrMatch (4'h8) packet with event code AXI_ADDR_RANGE_MATCH (8'h01), gated by cfg_debug_enable.
- **ERROR range** — the enabled ERROR ranges form an allowlist; an address in NONE of them emits a PktTypeError (4'h0) packet with event code AXI_ERR_ADDR_RANGE (8'h0D), gated by cfg_error_enable.

This wrapper does not expose ADDR_RANGE_IS_ERROR; all ranges default to the DEBUG (match) flavor.

Config inputs (active only when N_ADDR_RANGES > 0): - cfg_addr_check_enable — master on/off for the checker. - cfg_addr_range_enable[N-1:0] — per-range enable bit. - cfg_addr_range_low/high[N-1:0][AXI_ADDR_WIDTH-1:0] — inclusive bounds.

Event encoding: event_data[63:60] = range_index (matching DEBUG range, or 4'hF sentinel on an ERROR miss); event_data[59:0] = full address. **Filtering:** AddrMatch is dropped by cfg_axi_addr_mask[1], the ADDR_RANGE error by cfg_axi_error_mask[13]. See the checker page for coalescing + formal properties.

16.4.5 Performance Monitoring

When performance tracking is compiled in (ENABLE_PERF_LOGIC = 1, the wrapper default, with ENABLE_PERF_PACKETS fixed to 1 inside the monitor instance) and cfg_perf_enable is asserted at runtime, the monitor runs a **measurement-window state machine** plus a bank of data-channel utilization counters. All counters accumulate **only while a window is open** (window_active = 1) and hold their values between windows so the host can read a completed window's totals.

16.4.5.1 The measurement window

A window is opened by a **start event** and closed by an **end event**. The event sources are selected by cfg_start_event_sel / cfg_end_event_sel (3-bit; e.g. 3'b010 selects the cfg_perf_enable edge) and can also be fired directly by the cfg_start_trigger / cfg_end_trigger pulses (from an engine or CSR write). cfg_window_force_close is a software override that closes the window immediately. While the window is open:

- window_active is high.
- window_cycles free-runs, counting every clock elapsed inside the window.

16.4.5.2 Utilization buckets (R data channel)

Every cycle inside the window is classified by the **R** data channel's valid/ready handshake into exactly one of four buckets:

Output	Width	Condition	Meaning
perf_prod_cycles	32	rvalid && rready	productive beat transferred

Output	Width	Condition	Meaning
perf_bp_cycles	32	rvalid && !rready	back-pressure (data offered, sink not ready)
perf_starv_cycles	32	!rvalid && rready	starvation (sink ready, no data)
perf_idle_cycles	32	!rvalid && !rready	idle

The four buckets sum to `window_cycles - 1` (the start cycle seeds `window_cycles` to 1 while the buckets reset to 0); `utilization = perf_prod_cycles / window_cycles` is off by one count – negligible for long windows, use `window_cycles - 1` for exactness.

16.4.5.3 Throughput counters

Output	Width	Meaning
perf_beat_count	32	R data beats transferred (= <code>perf_prod_cycles</code> , 1 beat/cycle)
perf_byte_count	64	bytes transferred = beats x (1 << latched ARSIZE), using the ARSIZE captured at the most recent AR address phase
perf_burst_count	32	AR address-phase handshakes

Average burst length is `perf_beat_count / perf_burst_count`.

16.4.5.4 Performance Monitoring Ports

Port	Width	Direction	Description
cfg_perf_enable	1	Input	Enable performance-metric packet generation (also listed under Monitor Configuration)
cfg_start_event_sel	3	Input	Window start event source select
cfg_end_event_sel	3	Input	Window end event source select

Port	Width	Direction	Description
cfg_start_trigger	1	Input	Pulse: open the measurement window
cfg_end_trigger	1	Input	Pulse: close the measurement window
cfg_window_force_close	1	Input	Software override: force the window closed
window_active	1	Output	High while a measurement window is open
window_cycles	32	Output	Cycles elapsed in the current window
perf_prod_cycles	32	Output	rvalid && rready cycles
perf_bp_cycles	32	Output	rvalid && !rready cycles (back-pressure)
perf_starv_cycles	32	Output	!rvalid && rready cycles (starvation)
perf_idle_cycles	32	Output	!rvalid && !rready cycles
perf_beat_count	32	Output	R data beats transferred
perf_byte_count	64	Output	bytes transferred
perf_burst_count	32	Output	AR address-phase handshakes

When USE_MONITOR = 0 all perfmon outputs are tied to 0. With USE_MONITOR = 1 and ENABLE_PERF_LOGIC = 0, only error_count / transaction_count read 0 – the window and bucket/throughput outputs remain LIVE.

16.5 Timing Characteristics

Skid parameter	Default depth
SKID_DEPTH_AR	2 entries
SKID_DEPTH_R	4 entries

Each channel traverses one `gaxi_skid_buffer`, which registers both `rd_valid` and its storage. The **1-cycle input-to-output latency therefore applies on every transfer, including the unstalled case** – there is no combinational bypass. Depth buys backpressure absorption, not throughput; full rate is sustained once the pipeline is primed. Legal range is 2..8 inclusive, odd values included.

Clocking: `aclk`, reset `aresetn` (active-low asynchronous).

No synthesis numbers are quoted here. Frequency and area depend on the target device and the parameters you elaborate with; run your own build.

16.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_slave_rd_mon #(
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    .AXI_ID_WIDTH       (8),
    .AXI_ADDR_WIDTH     (32),
    .AXI_DATA_WIDTH     (32),
    .AXI_USER_WIDTH     (1),
    .AXI_NSAID_WIDTH    (4),
    .AXI_MPAM_WIDTH     (11),
    .AXI_MECID_WIDTH    (16),
    .AXI_TAG_WIDTH      (4)
) u_axi5_slave_rd_mon (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .s_axi_arid          (s_axi_arid),
    .s_axi_araddr        (s_axi_araddr),
    .s_axi_arlen         (s_axi_arlen),
    .s_axi_arsize        (s_axi_arsize),
    .s_axi_arburst       (s_axi_arburst),
    .s_axi_arlock        (s_axi_arlock),
    .s_axi_arcache       (s_axi_arcache),
    .s_axi_arprot        (s_axi_arprot),
    .s_axi_arqos         (s_axi_arqos),
```

.s_axi_aruser	(s_axi_aruser),
.s_axi_arvalid	(s_axi_arvalid),
.s_axi_arready	(s_axi_arready),
.s_axi_arnsaid	(s_axi_arnsaid),
.s_axi_artrace	(s_axi_artrace),
.s_axi_arpam	(s_axi_arpam),
.s_axi_armecid	(s_axi_armecid),
.s_axi_arunique	(s_axi_arunique),
.s_axi_archunken	(s_axi_archunken),
.s_axi_artagop	(s_axi_artagop),
.s_axi_rid	(s_axi_rid),
.s_axi_rdata	(s_axi_rdata),
.s_axi_rresp	(s_axi_rresp),
.s_axi_rlast	(s_axi_rlast),
.s_axi_ruser	(s_axi_ruser),
.s_axi_rvalid	(s_axi_rvalid),
.s_axi_rready	(s_axi_rready),
.s_axi_rtrace	(s_axi_rtrace),
.s_axi_rpoison	(s_axi_rpoison),
.s_axi_rchunkv	(s_axi_rchunkv),
.s_axi_rchunknum	(s_axi_rchunknum),
.s_axi_rchunkstrb	(s_axi_rchunkstrb),
.s_axi_rtag	(s_axi_rtag),
.s_axi_rtagmatch	(s_axi_rtagmatch),
.fub_axi_arid	(fub_axi_arid),
.fub_axi_araddr	(fub_axi_araddr),
.fub_axi_arlen	(fub_axi_arlen),
.fub_axi_arsize	(fub_axi_arsize),
.fub_axi_arburst	(fub_axi_arburst),
.fub_axi_arlock	(fub_axi_arlock),
.fub_axi_arcache	(fub_axi_arcache),
.fub_axi_arprot	(fub_axi_arprot),
.fub_axi_arqos	(fub_axi_arqos),
.fub_axi_aruser	(fub_axi_aruser),
.fub_axi_arvalid	(fub_axi_arvalid),
.fub_axi_arready	(fub_axi_arready),
.fub_axi_arnsaid	(fub_axi_arnsaid),
.fub_axi_artrace	(fub_axi_artrace),
.fub_axi_arpam	(fub_axi_arpam),
.fub_axi_armecid	(fub_axi_armecid),
.fub_axi_arunique	(fub_axi_arunique),
.fub_axi_archunken	(fub_axi_archunken),
.fub_axi_artagop	(fub_axi_artagop),
.fub_axi_rid	(fub_axi_rid),
.fub_axi_rdata	(fub_axi_rdata),
.fub_axi_rresp	(fub_axi_rresp),
.fub_axi_rlast	(fub_axi_rlast),
.fub_axi_ruser	(fub_axi_ruser),

.fub_axi_rvalid	(fub_axi_rvalid),
.fub_axi_rready	(fub_axi_rready),
.fub_axi_rtrace	(fub_axi_rtrace),
.fub_axi_rpoison	(fub_axi_rpoison),
.fub_axi_rchunkv	(fub_axi_rchunkv),
.fub_axi_rchunknum	(fub_axi_rchunknum),
.fub_axi_rchunkstrb	(fub_axi_rchunkstrb),
.fub_axi_rtag	(fub_axi_rtag),
.fub_axi_rtagmatch	(fub_axi_rtagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.i_mon_time	(i_mon_time),
.monbus_valid	(monbus_valid),
.monbus_ready	(monbus_ready),
.monbus_packet	(monbus_packet),
.monbus_timestamp	(monbus_timestamp),
.busy	(busy),
.active_transactions	(active_transactions),
.error_count	(error_count),
.transaction_count	(transaction_count),
.debug_block_ready	(debug_block_ready),

```

.cfg_conflict_error      (cfg_conflict_error),
.cfg_start_event_sel     (cfg_start_event_sel),
.cfg_end_event_sel       (cfg_end_event_sel),
.cfg_start_trigger       (cfg_start_trigger),
.cfg_end_trigger         (cfg_end_trigger),
.cfg_window_force_close  (cfg_window_force_close),
.window_active           (window_active),
.window_cycles           (window_cycles),
.perf_prod_cycles        (perf_prod_cycles),
.perf_bp_cycles          (perf_bp_cycles),
.perf_starv_cycles       (perf_starv_cycles),
.perf_idle_cycles        (perf_idle_cycles),
.perf_beat_count         (perf_beat_count),
.perf_byte_count         (perf_byte_count),
.perf_burst_count        (perf_burst_count)
);

```

16.7 Design Notes

- Monitor packets provide real-time transaction visibility without external logic
 - Filtering reduces monitor bus bandwidth - critical for high-throughput systems
 - Transaction table size (MAX_TRANSACTIONS) must accommodate peak outstanding transactions
 - Performance packets can generate high traffic - use sparingly or with filtering
 - UNIT_ID and AGENT_ID identify this monitor in multi-agent systems
 - Error count WRAPS at 16'hFFFF (plain increment, no saturation – the perfmon BUCKET counters are the ones that saturate)
-

16.8 Related Modules

- [AXI5 Slave Read](#) - Non-monitored version
 - [AXI5 Slave Read Monitor CG](#) - Clock-gated variant
 - [AXI5 Slave Write Monitor](#) - Write monitor
 - [AXI Monitor Filtered](#) - Monitor core
 - [Monitor Package Spec](#) - Packet format details
-

16.9 Testing

`val/amba/test_axi5_slave_rd_mon.py` exercises this module. It collects 3 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_slave_rd_mon.py -v
```

16.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

17 AXI5 Slave Read Monitor with Clock Gating

Module: `axi5_slave_rd_mon_cg.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready

17.1 Overview


The AXI5 Slave Read Monitor with Clock Gating module puts both power management and observability on the slave read path: it wraps `axi5_slave_rd_mon` with clock gating logic, so transaction monitoring and automatic clock gating come in one block.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

17.1.1 Key Features

- Full AMBA AXI5 slave read protocol compliance
- **Integrated filtered monitoring** - real-time transaction visibility
- **Integrated clock gating** for dynamic power reduction
- All AXI5 extensions supported (NSAID, TRACE, MPAM, MECID, UNIQUE, CHUNKING, MTE, POISON)

- Configurable idle count before gating
- Transaction tracking with error detection
- Performance metrics and filtering
- Transparent gating - no protocol changes
- Gating status outputs for system monitoring
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

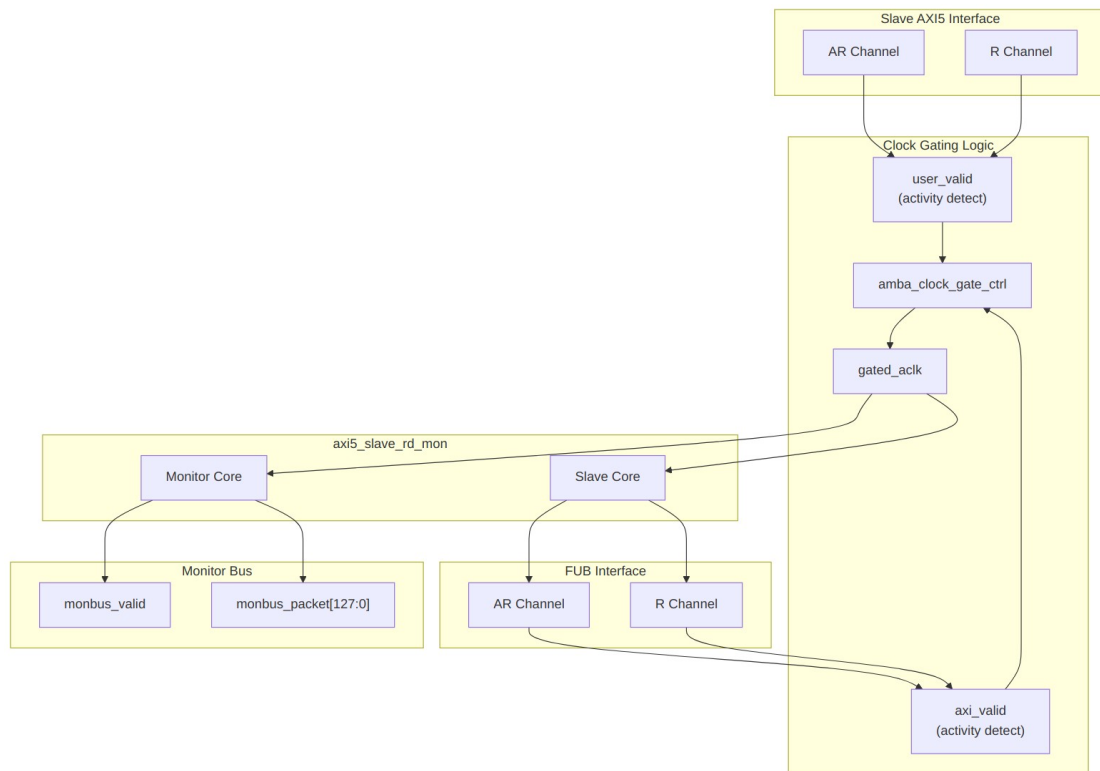

Module Architecture

17.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AR	int	2	AR channel SKID buffer depth
SKID_DEPTH_R	int	4	R channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width

Parameter	Type	Default	Description
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
AXI_CHUNKNUM_WIDTH	int	4	Chunk number width
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_CHUNKING	bit	1	Enable data chunking
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitoring unit identifier
AGENT_ID	int	12	Agent identifier
MAX_TRANSACTION_SIZE	int	16	Transaction table size
ENABLE_FILTERING	bit	1	Enable packet filtering:

Parameter	Type	Default	Description
			two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage for timing
USE_MONITOR	bit	1	Synthesis-time monitor enable (forwarded to inner monitor).
N_ADDR_RANGES	int	0	Number of address-range comparators (forwarded to base module).
ENABLE_ERROR_LOGIC	bit	1	Synthesis-cone enable for error detection (forwarded to base module)
ENABLE_TIMEOUT_LOGIC	bit	1	Synthesis-cone enable for timeout detection (forwarded to base module)
ENABLE_COMPL_LOGIC	bit	1	Synthesis-cone enable for completion tracking (forwarded to base module)
ENABLE_THRESHOLD_LOGIC	bit	1	Synthesis-cone enable for threshold detection (forwarded to base module)
ENABLE_PERF_LOGIC	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and

Parameter	Type	Default	Description
ENABLE_DEBUG_LO GIC	bit	0	bucket/beat/byte/burst counters are unconditional (always compiled, always live) Synthesis-cone enable for the debug/trace cone (forwarded to base module)
ACLK_MHZ	int	100	Clock frequency in MHz. Builds the microsecond tick LUT in counter_freq_invariant. Leave this at 100 on a 90 MHz part and every us-denominated timeout is wrong, silently – it was unreachable through this wrapper until 2026-09-01.
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Lowest frequency the tick LUT must cover (dynamic-frequency builds).
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Highest frequency the tick LUT must cover.
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue. Required (=1) whenever NUM_BANKS > 1.
NUM_BANKS	int	1	Transaction-table banking. The USE_WDATA_ORDER_Q pairing rule applies to WRITE monitors only – axi_monitor_trans_mgr guards on (NUM_BANKS >

Parameter	Type	Default	Description
			1) <code>&& !IS_READ && !USE_WDATA_ORDER_Q</code> , so a read monitor may bank freely.
ADDR_FILTER_ENABLE	bit	0	Synthesises the address-range report filter. The parameter only decides whether the logic EXISTS – a build that sets it and leaves <code>cfg_addr_filter_enable</code> low filters nothing and looks broken.
ID_FILTER_ENABLE	bit	0	Synthesises the ID report filter (see <code>cfg_id_*</code> for the runtime override).
ID_MATCH_BASE	int	0	First ID this instance owns.
ID_MATCH_COUNT	int	0	How many IDs; 0 means ALL, so a zeroed register block does not silently filter everything away.
CG_IDLE_COUNT_WIDTH	int	4	Clock gating idle counter width

17.2.1 Derived Parameters (do not override)

These are declared as `parameter` so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	<code>AXI_DATA_WIDTH / 8</code>
AW	<code>AXI_ADDR_WIDTH</code>
DW	<code>AXI_DATA_WIDTH</code>
IW	<code>AXI_ID_WIDTH</code>

Derived parameter	Default expression
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$
CHUNK_STRB_WIDTH	$(\text{AXI_DATA_WIDTH} / 128) > 0 ?$ $(\text{AXI_DATA_WIDTH} / 128) : 1$

17.3 Ports

17.3.1 Filter configuration (forwarded)

These reach the inner monitor through this wrapper; before 2026-09-01 they did not.

Port	Direction	Width	Description
cfg_addr_filter_enable	Input	1	High: suppress packets for transactions outside the window. Low: inert, whatever ADDR_FILTER_ENABLE says
cfg_addr_filter_low	Input	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	Input	ADDR_WIDTH	Window limit, inclusive
cfg_id_filter_enable	Input	1	High: use the runtime window below instead of the ID_MATCH_* parameters
cfg_id_match_base	Input	ID_WIDTH	First ID to accept
cfg_id_match_count	Input	ID_WIDTH+1	How many; 0 means ALL

17.3.2 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)

Port	Width	Direction	Description
aresetn	1	Input	AXI active-low reset

17.3.3 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Enable clock gating
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating

17.3.4 Slave AXI5 Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

17.3.5 FUB Interface

Same as axi5_slave_rd - see [AXI5 Slave Read](#) for complete port list.

17.3.6 Monitor Configuration

Same as axi5_slave_rd_mon - see [AXI5 Slave Read Monitor](#) for complete list.

17.3.7 Monitor Bus Output

Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready
monbus_packet	128	Output	monitor_packet_t (see format below)
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

17.3.8 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator
active_transactions	8	Output	Current outstanding transactions
error_count	16	Output	Total errors detected
transaction_count	32	Output	Total transactions completed
cfg_conflict_err	1	Output	Configuration conflict detected
cg_gating	1	Output	Clock is currently gated
cg_idle	1	Output	Module is idle

17.4 Functional Description

17.4.1 Clock Gating Behavior

Activity Detection: - **user_valid:** Asserted when slave interface has activity (arvalid, rvalid, internal busy, a monitor packet pending on the monitor bus, or monitor CAM entries still live – peer VALID) - **axi_valid:** Asserted when FUB interface has activity (arvalid, rvalid)

Key Points: - Clock gating disabled when `cfg_cg_enable = 0` - Ready signals forced to 0 when gated (prevents new transactions) - Gating only occurs after configured idle period - Any activity immediately ungates the clock - Monitor state IS a wake term: both a packet pending on the monitor bus (`w_monbus_valid`) and live monitor CAM entries (`|active_transactions`, which covers the reporter's few-cycle emission window) hold the block awake, and the external `monbus_valid` is masked with `!cg_gating` – so monitor-bus delivery is exactly-once across gating at any idle count (`val/amba/test_mon_cg_gating.py` phase 6)

17.4.2 Performance Monitoring

The clock-gated wrapper exposes the full perfmon interface of the base module and **forwards every port unchanged** to the inner `axi5_slave_rd_mon`. The measurement-window state

machine, the four R-channel utilization buckets (productive / back-pressure / starvation / idle), and the beat/byte/burst throughput counters behave exactly as documented in the base module — see [Performance Monitoring in axi5_slave_rd_mon](#) for the full narrative and per-bit semantics.

Forwarded perfmon ports (identical width and direction to the base module):

- **Inputs:** `cfg_perf_enable`, `cfg_start_event_sel` (3), `cfg_end_event_sel` (3), `cfg_start_trigger`, `cfg_end_trigger`, `cfg_window_force_close`
- **Outputs:** `window_active`, `window_cycles` (32), `perf_prod_cycles` (32), `perf_bp_cycles` (32), `perf_starv_cycles` (32), `perf_idle_cycles` (32), `perf_beat_count` (32), `perf_byte_count` (64), `perf_burst_count` (32)

The `perf_burst_count` output tracks AR (read address) handshakes. **WARNING:** an open measurement window is NOT a wake term – the window FSM and all counters run on the gated clock, so if the bus idles past `cfg_cg_idle_count` mid-window the counters FREEZE while wall-clock time passes, and trigger pulses arriving while gated are DROPPED. For exact wall-clock windows hold `cfg_cg_enable` low around the measurement, or use the base module.

Alongside perfmon, the wrapper forwards the `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` control inputs, plus the six `ENABLE_*_LOGIC` synthesis-cone parameters (see [Parameters](#)), straight through to the base monitor.

17.5 Timing Characteristics

Skid parameter	Default depth
SKID_DEPTH_AR	2 entries
SKID_DEPTH_R	4 entries

Each channel traverses one `gaxi_skid_buffer`, which registers both `rd_valid` and its storage. The **1-cycle input-to-output latency therefore applies on every transfer, including the uninstalled case** – there is no combinational bypass. Depth buys backpressure absorption, not throughput; full rate is sustained once the pipeline is primed. Legal range is 2..8 inclusive, odd values included.

Clocking: `aclk`, reset `aresetn` (active-low asynchronous).

No synthesis numbers are quoted here. Frequency and area depend on the target device and the parameters you elaborate with; run your own build.

17.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_slave_rd_mon_cg #(
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    .AXI_ID_WIDTH       (8),
    .AXI_ADDR_WIDTH     (32),
    .AXI_DATA_WIDTH     (32),
    .AXI_USER_WIDTH     (1),
    .AXI_NSAID_WIDTH    (4),
    .AXI_MPAM_WIDTH     (11),
    .AXI_MECID_WIDTH    (16),
    .AXI_TAG_WIDTH      (4)
) u_axi5_slave_rd_mon_cg (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .cfg_cg_enable       (cfg_cg_enable),
    .cfg_cg_idle_count   (cfg_cg_idle_count),
    .s_axi_arid          (s_axi_arid),
    .s_axi_araddr        (s_axi_araddr),
    .s_axi_arlen         (s_axi_arlen),
    .s_axi_arsize        (s_axi_arsize),
    .s_axi_arburst       (s_axi_arburst),
    .s_axi_arlock        (s_axi_arlock),
    .s_axi_arcache       (s_axi_arcache),
    .s_axi_arprot        (s_axi_arprot),
    .s_axi_arqos         (s_axi_arqos),
    .s_axi_aruser        (s_axi_aruser),
    .s_axi_arvalid       (s_axi_arvalid),
    .s_axi_arready       (s_axi_arready),
    .s_axi_arnsaid       (s_axi_arnsaid),
    .s_axi_artrace       (s_axi_artrace),
    .s_axi_armspam       (s_axi_armspam),
    .s_axi_armecid       (s_axi_armecid),
    .s_axi_arunique      (s_axi_arunique),
    .s_axi_archunken     (s_axi_archunken),
    .s_axi_artagop       (s_axi_artagop),
    .s_axi_rid           (s_axi_rid),
    .s_axi_rdata         (s_axi_rdata),
    .s_axi_rresp         (s_axi_rresp),
    .s_axi_rlast         (s_axi_rlast),
    .s_axi_ruser         (s_axi_ruser),
    .s_axi_rvalid        (s_axi_rvalid),
    .s_axi_rready        (s_axi_rready),
    .s_axi_rtrace        (s_axi_rtrace),
```

.s_axi_rpoison	(s_axi_rpoison),
.s_axi_rchunkv	(s_axi_rchunkv),
.s_axi_rchunknum	(s_axi_rchunknum),
.s_axi_rchunkstrb	(s_axi_rchunkstrb),
.s_axi_rtag	(s_axi_rtag),
.s_axi_rtagmatch	(s_axi_rtagmatch),
.fub_axi_arid	(fub_axi_arid),
.fub_axi_araddr	(fub_axi_araddr),
.fub_axi_arlen	(fub_axi_arlen),
.fub_axi_arsize	(fub_axi_arsize),
.fub_axi_arburst	(fub_axi_arburst),
.fub_axi_arlock	(fub_axi_arlock),
.fub_axi_arcache	(fub_axi_arcache),
.fub_axi_arprot	(fub_axi_arprot),
.fub_axi_arqos	(fub_axi_arqos),
.fub_axi_aruser	(fub_axi_aruser),
.fub_axi_arvalid	(fub_axi_arvalid),
.fub_axi_arready	(fub_axi_arready),
.fub_axi_arnsaid	(fub_axi_arnsaid),
.fub_axi_artrace	(fub_axi_artrace),
.fub_axi_arpam	(fub_axi_arpam),
.fub_axi_armecid	(fub_axi_armecid),
.fub_axi_arunique	(fub_axi_arunique),
.fub_axi_archunken	(fub_axi_archunken),
.fub_axi_artagop	(fub_axi_artagop),
.fub_axi_rid	(fub_axi_rid),
.fub_axi_rdata	(fub_axi_rdata),
.fub_axi_rresp	(fub_axi_rresp),
.fub_axi_rlast	(fub_axi_rlast),
.fub_axi_ruser	(fub_axi_ruser),
.fub_axi_rvalid	(fub_axi_rvalid),
.fub_axi_rready	(fub_axi_rready),
.fub_axi_rtrace	(fub_axi_rtrace),
.fub_axi_rpoison	(fub_axi_rpoison),
.fub_axi_rchunkv	(fub_axi_rchunkv),
.fub_axi_rchunknum	(fub_axi_rchunknum),
.fub_axi_rchunkstrb	(fub_axi_rchunkstrb),
.fub_axi_rtag	(fub_axi_rtag),
.fub_axi_rtagmatch	(fub_axi_rtagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),

```

.cfg_latency_threshold (cfg_latency_threshold),
.cfg_axi_pkt_mask      (cfg_axi_pkt_mask),
.cfg_axi_err_select    (cfg_axi_err_select),
.cfg_axi_error_mask    (cfg_axi_error_mask),
.cfg_axi_timeout_mask  (cfg_axi_timeout_mask),
.cfg_axi_compl_mask    (cfg_axi_compl_mask),
.cfg_axi_thresh_mask   (cfg_axi_thresh_mask),
.cfg_axi_perf_mask     (cfg_axi_perf_mask),
.cfg_axi_addr_mask     (cfg_axi_addr_mask),
.cfg_axi_debug_mask    (cfg_axi_debug_mask),
.cfg_addr_check_enable (cfg_addr_check_enable),
.cfg_addr_range_enable (cfg_addr_range_enable),
.cfg_addr_range_low    (cfg_addr_range_low),
.cfg_addr_range_high   (cfg_addr_range_high),
.cfg_addr_filter_enable(cfg_addr_filter_enable),
.cfg_addr_filter_low   (cfg_addr_filter_low),
.cfg_addr_filter_high  (cfg_addr_filter_high),
.cfg_id_filter_enable  (cfg_id_filter_enable),
.cfg_id_match_base     (cfg_id_match_base),
.cfg_id_match_count    (cfg_id_match_count),
.i_mon_time            (i_mon_time),
.monbus_valid          (monbus_valid),
.monbus_ready          (monbus_ready),
.monbus_packet         (monbus_packet),
.monbus_timestamp      (monbus_timestamp),
.busy                  (busy),
.active_transactions   (active_transactions),
.error_count           (error_count),
.transaction_count     (transaction_count),
.cfg_conflict_error    (cfg_conflict_error),
.cg_gating             (cg_gating),
.cg_idle               (cg_idle),
.cfg_start_event_sel   (cfg_start_event_sel),
.cfg_end_event_sel     (cfg_end_event_sel),
.cfg_start_trigger     (cfg_start_trigger),
.cfg_end_trigger       (cfg_end_trigger),
.cfg_window_force_close(cfg_window_force_close),
.window_active         (window_active),
.window_cycles         (window_cycles),
.perf_prod_cycles      (perf_prod_cycles),
.perf_bp_cycles        (perf_bp_cycles),
.perf_starv_cycles     (perf_starv_cycles),
.perf_idle_cycles      (perf_idle_cycles),
.perf_beat_count       (perf_beat_count),
.perf_byte_count       (perf_byte_count),
.perf_burst_count      (perf_burst_count)
);

```

17.7 Design Notes

17.7.1 Power Optimization

Power Savings Estimation: - Base slave logic: ~40% of total power (*first-order estimates – no power/area analysis has been run*) - Monitor logic: ~60% of total power - With gating at 50% duty cycle: ~50% dynamic power savings - Actual savings depend on traffic pattern and idle_count setting

17.7.2 Observability

Monitoring Capabilities: - Error detection (SLVERR, timeout, orphan) - Performance tracking (latency, throughput) - Transaction completion tracking - All monitoring continues when ungated

17.7.3 When to Use This Module

Ideal for: - Power-constrained systems needing visibility - Debug/validation builds with power budgets - Systems with sporadic transaction patterns - SoC integration requiring both monitoring and power optimization

Avoid when: - Interface is continuously active (minimal gating opportunities) - Monitoring overhead unacceptable (use non-monitored version) - Deterministic latency critical (use high idle count or disable gating)

17.7.4 Configuration Recommendations

Low-Power Debug Mode:

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd1),    // Aggressive gating  
.cfg_monitor_enable (1'b1),    // Full monitoring  
.cfg_error_enable   (1'b1),  
.cfg_perf_enable    (1'b0)     // Reduce packet traffic
```

Performance Analysis Mode:

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd4),    // Conservative gating  
.cfg_monitor_enable (1'b1),    // Master gate MUST stay 1 (0 disables  
ALL monitoring); disable completions via cfg_compl_enable  
.cfg_perf_enable    (1'b1)     // Enable performance metrics
```

17.7.5 Area and Timing Impact

- **Area:** not 5-8%. That figure was an unsourced estimate and is off by orders of magnitude. The monitor's transaction table alone is a counted floor of thousands of flops (see the resource table in the family README) against a few hundred for the unmonitored slave, so a monitored instance is a

multiple of the base module, not a few percent on top of it. Clock gating adds 5 flops. MAX_TRANSACTION is the knob and the cost is linear in it

- **Timing:** first-order estimate, not measured. The monitor is NOT automatically off the critical path – axi_monitor_trans_mgr is banked precisely because it was not (16 entries closed at WNS +1.018 ns where 40 entries came in at -25.183 ns), so size the transaction table for your clock
 - **Power:** Net savings depends on activity factor (typically 30-50% at 50% duty cycle)
-

17.8 Related Modules

- [AXI5 Slave Read](#) - Non-monitored, non-gated version
 - [AXI5 Slave Read CG](#) - Clock-gated without monitoring
 - [AXI5 Slave Read Monitor](#) - Monitored without clock gating
 - [AXI5 Slave Write Monitor CG](#) - Write variant
 - [AMBA Clock Gate Control](#) - Clock gating controller
-

17.9 Testing

val/amba/test_axi5_slave_rd_mon_cg.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_slave_rd_mon_cg.py -v
```

17.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

18 AXI5 Slave Read with Lite Monitor

Module: axi5_slave_rd_monlite.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready (amba/monitor-lite TASK-001, 2026-09-26)

18.1 Overview

`axi5_slave_rd_monlite` is `axi5_slave_rd` with `axi_monitor_lite` watching its slave-side read channels. It is the lite-monitor sibling of `axi5_slave_rd_mon`: same core, same taps, same 128-bit `monitor_packet_t` on the same monbus with the same `UNIT_ID/AGENT_ID`, so the monbus arbiter, the AXI-Lite group, the tally and the host tooling cannot tell the two apart. The difference is what it costs and what it can be asked for: about a fifth of the monitor LUTs (677 against 3,249 per read monitor in the same bridge fixture, see [axi_monitor_lite](#)), and only the four packet classes the lite emits: error, timeout, completion and active-count threshold.

18.1.1 What is not here

Compared with `axi5_slave_rd_mon`: no performance window or counters, no debug packets, no address-range checker, no ID or address filters, no per-event masks, no latency threshold, and no `block_ready`. The lite never stalls the port: an event it cannot deliver is dropped and counted (`dropped_count`, reported as an `EVENT_DROPPED` packet), and a command that finds no free table entry is counted (`refused_count`) and left untracked, so its beats report as orphans.

18.1.2 Key Features

- Every `axi5_slave_rd` parameter and port, declared verbatim and passed through by name
- `axi_monitor_lite` on the s_-side taps; `USE_MONITOR=0` omits it and ties its outputs
- Nine config inputs: the enables, the microsecond timeout, the tick LUT index and the packet-type mask
- Five status outputs, two of them (`dropped_count`, `refused_count`) unique to the lite

18.2 Parameters

18.2.1 Monitor Parameters

Parameter	Type	Default	Description
<code>USE_MONITOR</code>	bit	<code>1'b1</code>	0 = omit the monitor, tie its outputs
<code>UNIT_ID</code>	logic [7:0]	<code>8'h01</code>	Unit id in every packet
<code>AGENT_ID</code>	logic [15:0]	<code>16'h000C</code>	Agent id in every packet

Parameter	Type	Default	Description
MAX_TRANSACTIONS	int	8	table entries; a command finding none is counted, not tracked
ACTIVE_TRANS_THR ESHOLD	int	MAX_TRANSACTIONS / 2	Table occupancy that fires a threshold packet (rising edge)
OUT_DEPTH	int	4	monbus output queue, a power of two
ACLK_MHZ	int	100	Clock in MHz; keeps the 1 us tick exact
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT lower bound (cfg_freq_sel indexes it)
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT upper bound

18.2.2 Core Parameters (passed through to axi5_slave_rd)

Parameter	Type	Default	Description
N_ADDR_RANGES	int	0	address-range checker windows; 0 = not built
ADDR_RANGE_IS_ERROR	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	'0	per range: 1 = miss is an error, 0 = hit is a match
SKID_DEPTH_AR	int	2	as on axi5_slave_rd

Parameter	Type	Default	Description
SKID_DEPTH_R	int	4	as on axi5_slave_rd
AXI_ID_WIDTH	int	8	as on axi5_slave_rd
AXI_ADDR_WIDTH	int	32	as on axi5_slave_rd
AXI_DATA_WIDTH	int	32	as on axi5_slave_rd
AXI_USER_WIDTH	int	1	as on axi5_slave_rd
AXI_WSTRB_WIDTH	int	AXI_DATA_WIDTH / 8	as on axi5_slave_rd
AXI_NSAID_WIDTH	int	4	as on axi5_slave_rd
AXI_MPAM_WIDTH	int	11	as on axi5_slave_rd
AXI_MECID_WIDTH	int	16	as on axi5_slave_rd
AXI_TAG_WIDTH	int	4	as on axi5_slave_rd
AXI_TAGOP_WIDTH	int	2	as on axi5_slave_rd
AXI_CHUNKNUM_WIDTH	int	4	as on axi5_slave_rd
ENABLE_NSAID	bit	1	as on axi5_slave_rd
ENABLE_TRACE	bit	1	as on axi5_slave_rd
ENABLE_MPAM	bit	1	as on axi5_slave_rd
ENABLE_MECID	bit	1	as on axi5_slave_rd
ENABLE_UNIQUE	bit	1	as on axi5_slave_rd
ENABLE_CHUNKING	bit	1	as on axi5_slave_rd
ENABLE_MTE	bit	1	as on

Parameter	Type	Default	Description
ENABLE_POISON	bit	1	axi5_slave_rd as on axi5_slave_rd
AW	int	AXI_ADDR_WIDTH	as on axi5_slave_rd
DW	int	AXI_DATA_WIDTH	as on axi5_slave_rd
IW	int	AXI_ID_WIDTH	as on axi5_slave_rd
SW	int	AXI_WSTRB_WIDTH	as on axi5_slave_rd
UW	int	AXI_USER_WIDTH	as on axi5_slave_rd
NUM_TAGS	int	$(AXI_DATA_WIDTH / 128) > 0 ?$ $(AXI_DATA_WIDTH / 128) : 1$	as on axi5_slave_rd
TW	int	$AXI_TAG_WIDTH * NUM_TAGS$	as on axi5_slave_rd
CHUNK_STRB_WIDTH	int	$(AXI_DATA_WIDTH / 128) > 0 ?$ $(AXI_DATA_WIDTH / 128) : 1$	as on axi5_slave_rd
ARSize	int	$IW + AW + 8 + 3$ $+ 2 + 1 + 4 + 3$ $+ 4 + UW +$	as on axi5_slave_rd
RSize	int	$IW + DW + 2 + 1$ $+ UW +$	as on axi5_slave_rd

18.3 Ports

18.3.1 Monitor Control, Bus and Status

Port	Direction	Type	Description
cam_clear	input	logic	sync clear of the monitor's table (named as on the _mon wrapper:

Port	Direction	Type	Description
cfg_monitor_enable	input	logic	pin-compatible) 0 = monitor inert, table held clear
cfg_error_enable	input	logic	
cfg_timeout_enable	input	logic	
cfg_compl_enable	input	logic	
cfg_threshold_enable	input	logic	
cfg_timeout_cycles	input	logic [15:0]	MICROSECONDS of no progress; 0 = never
cfg_freq_sel	input	logic [3:0]	counter_freq_inva riant LUT index
cfg_axi_pkt_mask	input	logic [15:0]	drop mask by packet type
i_mon_time	input	monitor_common_p kg::monbus_times tamp_t	
monbus_valid	output	logic	
monbus_ready	input	logic	
monbus_packet	output	monitor_common_p kg::monitor_pack et_t	
monbus_timestamp	output	monitor_common_p kg::monbus_times tamp_t	
active_transactions	output	logic [7:0]	entries in the table
error_count	output	logic [15:0]	error + timeout packets emitted
transaction_count	output	logic [31:0]	completion packets emitted
dropped_count	output	logic [15:0]	events lost to monbus backpressure

Port	Direction	Type	Description
refused_count	output	logic [15:0]	since the last report commands that found no free table entry

18.3.2 Core Ports (as on axi5_slave_rd)

Port	Direction	Type	Description
aclk	input	logic	
aresetn	input	logic	
s_axi_arid	input	logic [IW-1:0]	
s_axi_araddr	input	logic [AW-1:0]	
s_axi_arlen	input	logic [7:0]	
s_axi_arsize	input	logic [2:0]	
s_axi_arburst	input	logic [1:0]	
s_axi_arlock	input	logic	
s_axi_arcache	input	logic [3:0]	
s_axi_arprot	input	logic [2:0]	
s_axi_arqos	input	logic [3:0]	
s_axi_aruser	input	logic [UW-1:0]	
s_axi_arvalid	input	logic	
s_axi_arready	output	logic	
s_axi_arnsaid	input	logic [AXI_NSAID_WIDTH-1:0]	
s_axi_artrace	input	logic	
s_axi_armpam	input	logic [AXI_MPAM_WIDTH-1:0]	
s_axi_armecid	input	logic [AXI_MECID_WIDTH-1:0]	
s_axi_arunique	input	logic	
s_axi_archunken	input	logic	

Port	Direction	Type	Description
s_axi_artagop	input	logic [AXI_TAGOP_WIDTH-1:0]	
s_axi_rid	output	logic [IW-1:0]	
s_axi_rdata	output	logic [DW-1:0]	
s_axi_rresp	output	logic [1:0]	
s_axi_rlast	output	logic	
s_axi_ruser	output	logic [UW-1:0]	
s_axi_rvalid	output	logic	
s_axi_rready	input	logic	
s_axi_rtrace	output	logic	
s_axi_rpoison	output	logic	
s_axi_rchunkv	output	logic	
s_axi_rchunknum	output	logic [AXI_CHUNKNUM_WIDTH-1:0]	
s_axi_rchunkstrb	output	logic [CHUNK_STRB_WIDTH-1:0]	
s_axi_rtag	output	logic [TW-1:0]	
s_axi_rtagmatch	output	logic	
fub_axi_arid	output	logic [IW-1:0]	
fub_axi_araddr	output	logic [AW-1:0]	
fub_axi_arlen	output	logic [7:0]	
fub_axi_arsize	output	logic [2:0]	
fub_axi_arburst	output	logic [1:0]	
fub_axi_arlock	output	logic	
fub_axi_arcache	output	logic [3:0]	
fub_axi_arprot	output	logic [2:0]	
fub_axi_arqos	output	logic [3:0]	
fub_axi_aruser	output	logic [UW-1:0]	
fub_axi_arvalid	output	logic	
fub_axi_arready	input	logic	

Port	Direction	Type	Description
fub_axi_arnsaid	output	logic [AXI_NSAID_WIDTH-1:0]	
fub_axi_artrace	output	logic	
fub_axi_arpam	output	logic [AXI_MPAM_WIDTH-1:0]	
fub_axi_armecid	output	logic [AXI_MECID_WIDTH-1:0]	
fub_axi_arunique	output	logic	
fub_axi_archunkenn	output	logic	
fub_axi_artagop	output	logic [AXI_TAGOP_WIDTH-1:0]	
fub_axi_rid	input	logic [IW-1:0]	
fub_axi_rdata	input	logic [DW-1:0]	
fub_axi_rresp	input	logic [1:0]	
fub_axi_rlast	input	logic	
fub_axi_ruser	input	logic [UW-1:0]	
fub_axi_rvalid	input	logic	
fub_axi_rready	output	logic	
fub_axi_rtrace	input	logic	
fub_axi_rpoison	input	logic	
fub_axi_rchunkv	input	logic	
fub_axi_rchunknum	input	logic [AXI_CHUNKNUM_WIDTH-1:0]	
fub_axi_rchunkstrb	input	logic [CHUNK_STRB_WIDTH-1:0]	
fub_axi_rtag	input	logic [TW-1:0]	
fub_axi_rtagmatch	input	logic	
busy	output	logic	
cfg_latency_thre	input	logic [31:0]	completion

Port	Direction	Type	Description
shold			latency (cycles) above this -> Threshold/LATENCY
cfg_addr_check_enable	input	logic	
cfg_addr_match_enable	input	logic	hit in a match range -> AddrMatch packet
cfg_addr_range_enable	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	
cfg_addr_range_low	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	
cfg_addr_range_high	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	

18.4 Functional Description

The core is instantiated untouched; unlike `axi5_slave_rd_mon` there is no gating of the command handshake, because the lite has no admission stall. The monitor taps the `s_`-side command, data and response channels through three valids gated by `cfg_monitor_enable`, which also holds the table clear while low. `cfg_timeout_cycles` is a microsecond count of no progress on an entry, passed at full width; 0 means never. The active-count threshold is the parameter `ACTIVE_TRANS_THRESHOLD`, as on the `_mon` wrapper.

The lite's own behaviour – per-ID linked-list attribution, stamps instead of counters, the registered event stage, the 4-entry output queue and drop-and-count – is on the [axi_monitor_lite](#) page.

18.5 Timing Characteristics

The datapath timing is `axi5_slave_rd`'s. The monitor adds no gating to any handshake and no path into the datapath; its own paths are two short cycles (attribution, then packet formatting) and met 10 ns on an Artix-7 100T -1 with margin inside `bridge_1x2_rd_lite_mon`.

18.6 Usage Examples

```
axi5_slave_rd_monlite #(
    .N_ADDR_RANGES      (0),
    .ADDR_RANGE_IS_ERROR ('0'),
    .SKID_DEPTH_AR      (2),
    .SKID_DEPTH_R       (4),
    .UNIT_ID             (8'h02),
    .AGENT_ID            (16'h0014),
    .MAX_TRANSACTIONS    (8)
) u_axi5_slave_rd_monlite (
    .aclk                (aclk),
    .aresetn             (aresetn),
    // ... the axi5_slave_rd ports, by name ...
    .cam_clear           (1'b0),
    .cfg_monitor_enable  (1'b1),
    .cfg_error_enable    (1'b1),
    .cfg_timeout_enable  (1'b1),
    .cfg_compl_enable    (1'b0),
    .cfg_threshold_enable (1'b0),
    .cfg_timeout_cycles  (16'd1000),
    .cfg_freq_sel        (4'd0),
    .cfg_axi_pkt_mask    (16'h0000),
    .i_mon_time          (mon_time),
    .monbus_valid        (monbus_valid),
    .monbus_ready        (monbus_ready),
    .monbus_packet       (monbus_packet),
    .monbus_timestamp    (monbus_timestamp),
    .active_transactions (),
    .error_count          (),
    .transaction_count    (),
    .dropped_count        (dropped_count),
    .refused_count        (refused_count)
);
```

In a generated bridge, `mon_preset = "lite"` selects this wrapper for every monitored port.

18.7 Design Notes

- `cam_clear` keeps the `_mon` wrapper's name so the two are pin-compatible on the monitor side; the lite has a table, not a CAM.
 - `MAX_TRANSACTION` defaults to 8 here against 16 on `axi5_slave_rd_mon`: size it to the port's real outstanding depth, since refused commands surface as orphans.
 - Consumers that relied on `block_ready` to bound the table get drop-and-count instead; the count is always reported, the identity of the lost events is not.
-

18.8 Related Modules

- `axi5_slave_rd_mon` – the full-monitor sibling
 - `axi5_slave_rd` – the core this wraps
 - [axi_monitor_lite](#) – the monitor itself
-

18.9 Testing

`val/amba/monitor-lite/test_axi5_slave_rd_monlite.py` exercises this module: the same TB and scenarios as `val/amba/test_axi5_slave_rd_mon.py`, with the DUT swapped.

```
source env_python
make -C val/amba/monitor-lite run-axi5_slave_rd_monlite-gate
```

Last Updated: 2026-09-26

18.10 Navigation

- [← Back to Monitor Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

19 AXI5 Slave Write

Module: `axi5_slave_wr.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready


19.1 Overview

The AXI5 Slave Write module implements a complete AMBA AXI5 slave write interface with full AXI5 protocol support. It receives write requests from external masters and forwards them to backend memory/logic (FUB interface).

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. AWATOP is carried through unmodified but no atomic read-modify-write is performed, no MTE tag checking or BTAGMATCH generation is performed, and no outstanding-transaction tracking is done. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

19.1.1 Key Features

- Carries the full AXI5 signal set listed below, unmodified, across the SKID buffers
- **AWATOP:** Atomic transaction operation type
- **AWNSAID:** Non-secure access identifier reception
- **AWTRACE:** Trace signal support
- **AWMPAM:** Memory Partitioning and Monitoring reception
- **AWMECID:** Memory Encryption Context ID reception
- **AWUNIQUE:** Unique ID indicator reception
- **AWTAGOP/AWTAG:** Memory tag operation reception (MTE)
- **WPOISON:** Write data poison indicator
- **WTAG/WTAGUPDATE:** Write data memory tags (MTE)
- **BTRACE/BTAG/BTAGMATCH:** Response extensions
- SKID buffering for AW, W, and B channels
- Busy signal for power management
- AWREGION not implemented (see *Design Notes*)

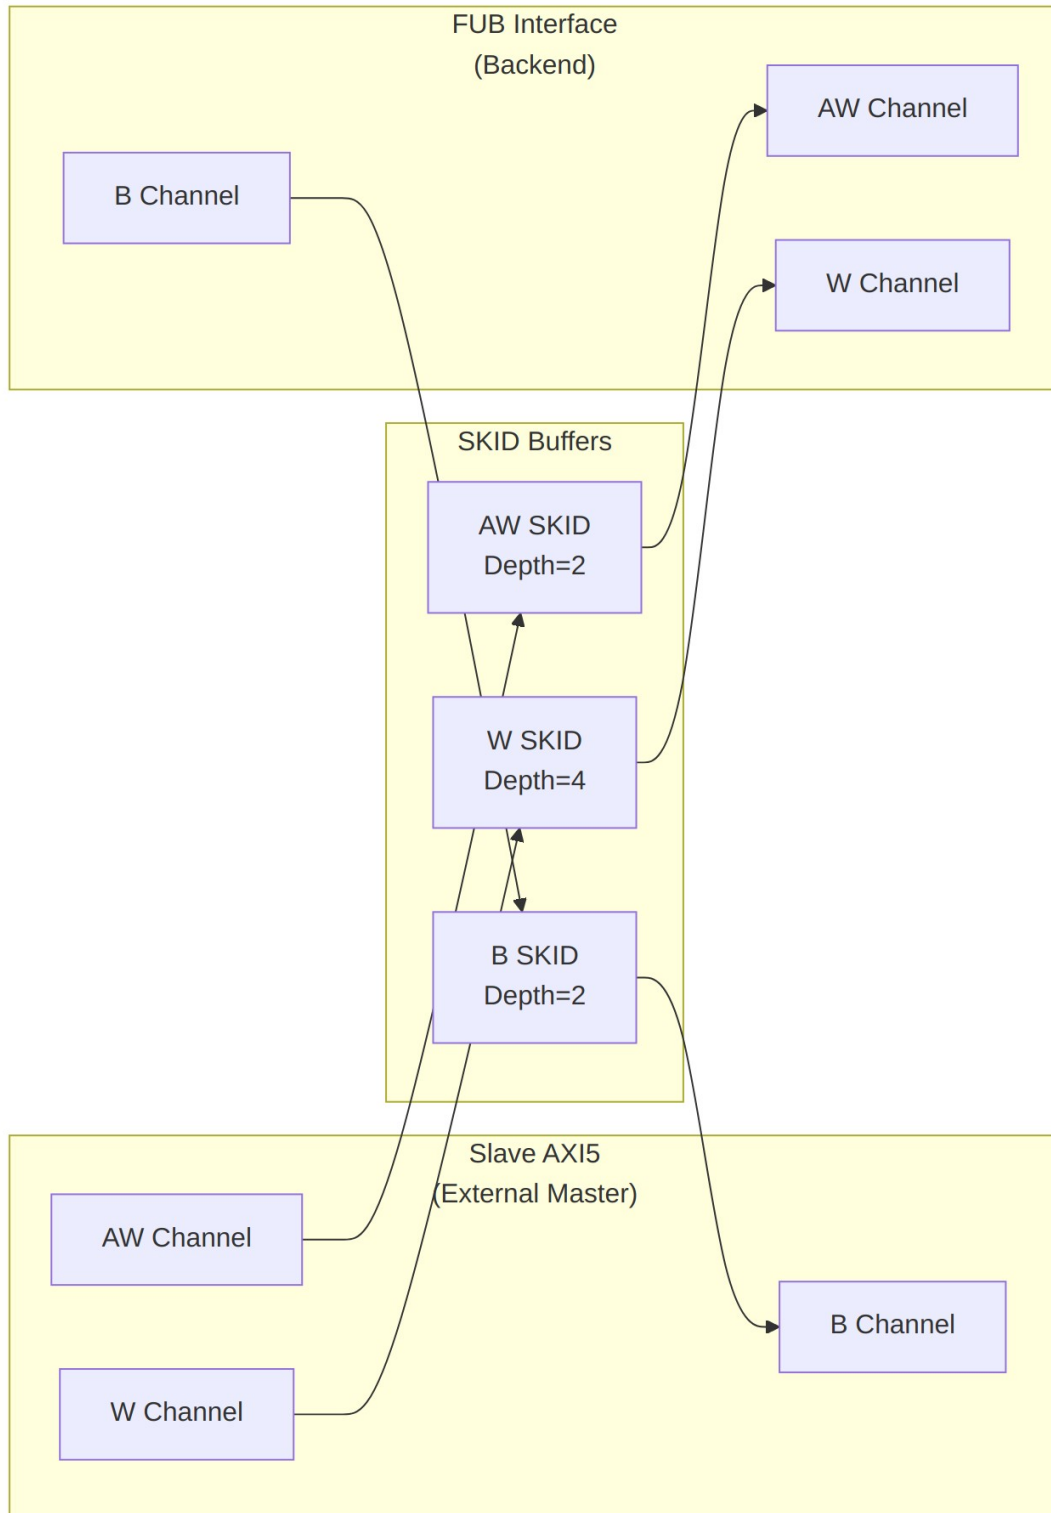

Module Architecture

19.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_W	int	4	W channel SKID buffer depth (legal range 2..8 inclusive, any integer)
SKID_DEPTH_B	int	2	B channel SKID buffer depth (legal range 2..8 inclusive, any integer)
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning

Parameter	Type	Default	Description
ENABLE_MECID	bit	1	Enable memory encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator

19.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
SW	AXI_WSTRB_WIDTH	Write strobe width, one bit per data byte
NUM_TAGS	$\max(\text{AXI_DATA_WIDTH} / 128, 1)$	MTE tags carried per beat (one tag per 16 bytes)
TW	$\text{AXI_TAG_WIDTH} * \text{NUM_TAGS}$	Total width of the awtag / wtag / btag fields
AWSize	Sum of the enabled AW fields	AW SKID buffer payload width
WSize	Sum of the enabled W fields	W SKID buffer payload width
BSize	Sum of the enabled B fields	B SKID buffer payload width

19.3 Ports

19.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

19.3.2 Slave AXI5 Interface (External Master Input)

19.3.2.1 AW Channel (Input)

Port	Width	Direction	Description
s_axi_awid	IW	Input	Write address ID
s_axi_awa ddr	AW	Input	Write address
s_axi_awle n	8	Input	Burst length
s_axi_aws ize	3	Input	Burst size
s_axi_awb urst	2	Input	Burst type
s_axi_awlo ck	1	Input	Lock type
s_axi_awca che	4	Input	Cache attributes
s_axi_awpr ot	3	Input	Protection attributes
s_axi_awq os	4	Input	Quality of Service
s_axi_awus er	UW	Input	User-defined signal
s_axi_awva lid	1	Input	Write address valid
s_axi_awre ady	1	Output	Write address ready
s_axi_awa t op	AXI_ATOP_W IDTH	Input	Atomic operation (AXI5)
s_axi_awns aid	AXI_NSAID_ WIDTH	Input	Non-secure access ID (AXI5)
s_axi_awtr ace	1	Input	Trace signal (AXI5)
s_axi_awa m pam	AXI_MPAM_ WIDTH	Input	Memory partitioning (AXI5)

Port	Width	Direction	Description
s_axi_awm ecid	AXI_MECID_ WIDTH	Input	Memory encryption context (AXI5)
s_axi_awu nique	1	Input	Unique ID indicator (AXI5)
s_axi_awta gop	AXI_TAGOP_ WIDTH	Input	Tag operation (AXI5 MTE)
s_axi_awta g	TW	Input	Memory tags (AXI5 MTE)

19.3.2.2 W Channel (Input)

Port	Width	Direction	Description
s_axi_wdata	DW	Input	Write data
s_axi_wstrb	SW	Input	Write strobes
s_axi_wlast	1	Input	Last transfer in burst
s_axi_wuser	UW	Input	User-defined signal
s_axi_wvalid	1	Input	Write data valid
s_axi_wready	1	Output	Write data ready
s_axi_wpoison	1	Input	Data poison indicator (AXI5)
s_axi_wtag	TW	Input	Write data memory tags (AXI5 MTE)
s_axi_wtagupd ate	NUM_TAGS	Input	Tag update mask (AXI5 MTE)

19.3.2.3 B Channel (Output)

Port	Width	Direction	Description
s_axi_bid	IW	Output	Write response

Port	Width	Direction	Description
			ID
s_axi_bresp	2	Output	Write response
s_axi_buser	UW	Output	User-defined signal
s_axi_bvalid	1	Output	Write response valid
s_axi_bready	1	Input	Write response ready
s_axi_btrace	1	Output	Trace signal (AXI5)
s_axi_btag	TW	Output	Memory tags (AXI5 MTE)
s_axi_btagmatch	1	Output	Tag match response (AXI5 MTE)

19.3.3 FUB Interface (Backend Memory/Logic Output)

Same signals as slave interface but with fub_axi_* prefix and reversed directions for AW/W (output) and B (input).

19.3.4 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator

19.4 Functional Description

This slave module acts as an adapter between: - **External AXI5 master** (s_axi_* interface) - **Backend memory or functional unit block** (fub_axi_* interface)

Signal Flow: 1. AW channel: External master → SKID → Backend 2. W channel: External master → SKID → Backend 3. B channel: Backend → SKID → External master

SKID Buffering: Provides elasticity and breaks combinational paths for timing closure.

Busy Signal: Asserted when any SKID buffer has data or handshakes are pending.

19.5 Timing Characteristics

19.5.1 Basic Write Transaction

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
- S_AXI_AWID, S_AXI_AWADDR, S_AXI_AWVALID, S_AXI_AWREADY
- S_AXI_WDATA, S_AXI_WSTRB, S_AXI_WLAST, S_AXI_WVALID, S_AXI_WREADY
- FUB_AXI_AW* and FUB_AXI_W* (request forwarded to the backend)
- FUB_AXI_BRESP, FUB_AXI_BVALID, FUB_AXI_BREADY
- S_AXI_BID, S_AXI_BRESP, S_AXI_BVALID, S_AXI_BREADY

19.5.2 Write with Poison Indicator

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK
 - S_AXI_WDATA, S_AXI_WVALID, S_AXI_WREADY
 - S_AXI_WPOISON asserted on the poisoned beat
 - FUB_AXI_WPOISON transported to the backend on the same beat
-

19.6 Usage Examples

```
axi5_slave_wr #(
    .AXI_ID_WIDTH      (8),
    .AXI_ADDR_WIDTH    (32),
    .AXI_DATA_WIDTH    (64),
    .SKID_DEPTH_AW     (2),
    .SKID_DEPTH_W      (4),
    .SKID_DEPTH_B      (2),
    .ENABLE_ATOMIC     (1),
    .ENABLE_NSAID      (1),
    .ENABLE_TRACE      (1),
    .ENABLE_MPAM       (1),
    .ENABLE_MECID      (1),
    .ENABLE_UNIQUE     (1),
    .ENABLE_MTE        (1),
```

```

        .ENABLE_POISON          (1)
    ) u_axi5_slave_wr (
        .aclk                    (axi_clk),
        .aresetn                 (axi_rst_n),

        // Slave interface (from external master)
        .s_axi_awid               (s_axi_awid),
        .s_axi_awaddr             (s_axi_awaddr),
        .s_axi_awlen              (s_axi_awlen),
        // Every remaining s_axi_aw* port mirrors the fub_axi_aw* list.
        // All must be connected.
        .s_axi_awatop             (s_axi_atop),
        .s_axi_awnsaid            (s_axi_awnsaid),
        .s_axi_awtrace            (s_axi_awtrace),
        // ... (connect AXI5 extensions)

        .s_axi_wdata              (s_axi_wdata),
        .s_axi_wstrb              (s_axi_wstrb),
        // Every remaining s_axi_w* port mirrors the fub_axi_w* list. All
        // must be connected.

        .s_axi_bid                (s_axi_bid),
        .s_axi_bresp              (s_axi_bresp),
        // Every remaining s_axi_b* port mirrors the fub_axi_b* list. All
        // must be connected.

        // FUB interface (to backend)
        .fub_axi_awid             (mem_awid),
        .fub_axi_awaddr           (mem_awaddr),
        // ... (connect to memory controller)

        .busy                     (slave_wr_busy)
    );

```

19.7 Design Notes

- Use when you need AXI5 slave write functionality with SKID buffering
- Backend FUB interface can connect to memory controller, SRAM, or functional units
- SKID buffers improve timing by breaking long combinational paths
- W channel SKID depth typically larger than AW/B due to burst data

- Feature enables allow area optimization by disabling unused AXI5 extensions
 - AWREGION has no port on this module. AxREGION is not deprecated by AXI5; it remains a valid optional signal and is simply omitted here. Decode or route by address instead, or use `axi4_slave_wr`
-

19.8 Related Modules

- [AXI5 Slave Read](#) - Slave read interface
 - [AXI5 Master Write](#) - Master write interface
 - [AXI5 Slave Write CG](#) - Clock-gated variant
 - [AXI5 Slave Write Monitor](#) - With integrated monitoring
-

19.9 Testing

`val/amba/test_axi5_slave_wr.py` exercises this module. It collects 8 parameter cases at the default `REG_LEVEL`.

```
source env_python
pytest val/amba/test_axi5_slave_wr.py -v
```

19.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

20 AXI5 Slave Write with Clock Gating

Module: `axi5_slave_wr_cg.sv` **Location:** `rtl/amba/axi5/` **Status:** Production Ready


20.1 Overview

The AXI5 Slave Write with Clock Gating module wraps the standard `axi5_slave_wr` module with integrated clock gating for power optimization. When the module sits idle, the internal clock gates itself off.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. AWATOP is carried through unmodified but no atomic read-modify-write is performed, no MTE tag checking or BTAGMATCH generation is performed, and no outstanding-transaction tracking is done. Those behaviors belong to the endpoints on either side. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

20.1.1 Key Features

- Carries the full AXI5 write signal set listed below, unmodified, across the SKID buffers
- **Integrated clock gating** for dynamic power reduction
- Configurable idle count before gating
- All AXI5 extensions supported (ATOMIC, NSAID, TRACE, MPAM, MECID, UNIQUE, MTE, POISON)
- Transparent gating - no protocol changes
- Gating status outputs for system monitoring
- SKID buffering for AW, W, and B channels
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

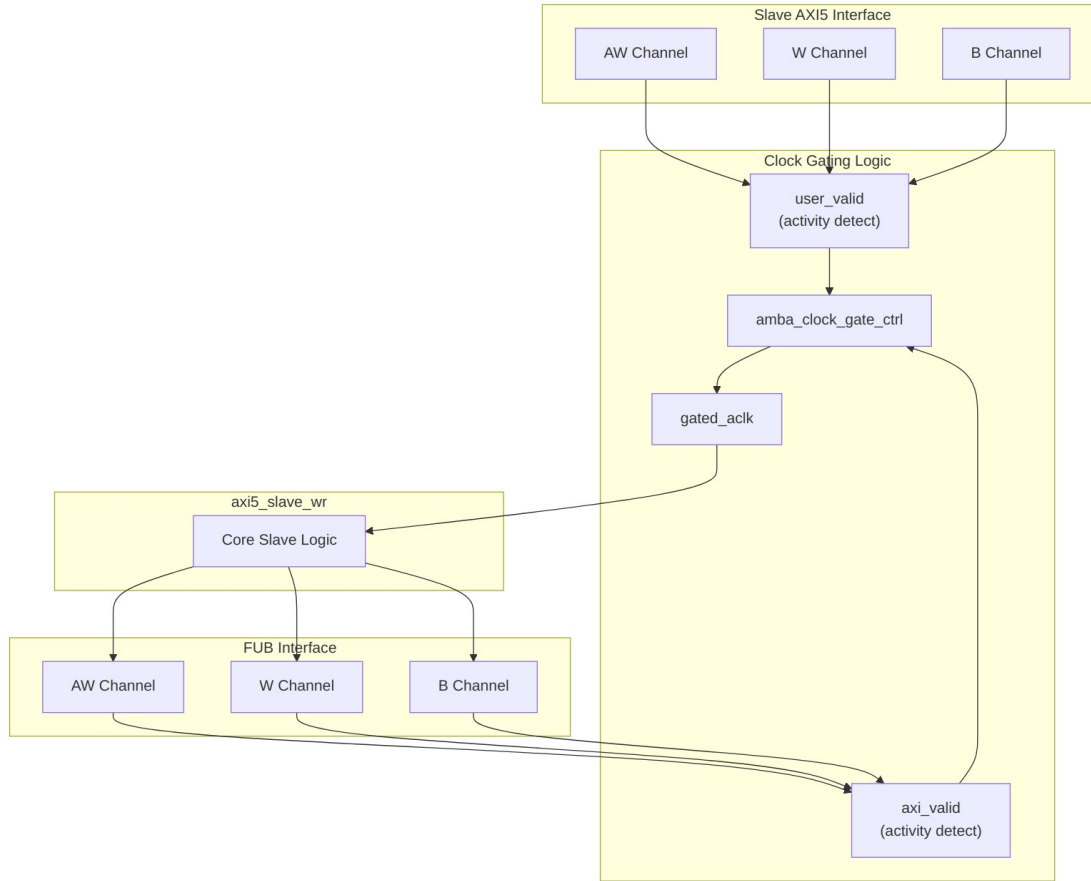

Module Architecture

20.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_A W	int	2	AW channel SKID buffer depth
SKID_DEPTH_ W	int	4	W channel SKID buffer depth
SKID_DEPTH_B	int	2	B channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width

Parameter	Type	Default	Description
AXI_ADDR_WI DTH	int	32	Address bus width
AXI_DATA_WI DTH	int	32	Data bus width
AXI_USER_WID TH	int	1	User signal width
AXI_ATOP_WI DTH	int	6	Atomic operation width
AXI_NSAID_WI DTH	int	4	Non-secure access ID width
AXI_MPAM_WI DTH	int	11	MPAM width
AXI_MECID_WI DTH	int	16	Memory encryption context width
AXI_TAG_WID TH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_W IDTH	int	2	Tag operation width
ENABLE_ATO MIC	bit	1	Enable atomic operations
ENABLE_NSAI D	bit	1	Enable non-secure access ID
ENABLE_TRAC E	bit	1	Enable trace signals
ENABLE_MPA M	bit	1	Enable memory partitioning
ENABLE_MECI D	bit	1	Enable memory

Parameter	Type	Default	Description
			encryption
ENABLE_UNIQ UE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POIS ON	bit	1	Enable poison indicator
CG_IDLE_COU NT_WIDTH	int	4	Clock gating idle counter width

20.2.1 Derived Parameters

These are computed inside the module from the parameters above. Do not override them.

Parameter	Expression	Description
SW	AXI_WSTRB_WIDTH	Write strobe width, one bit per data byte
NUM_TAGS	max(AXI_DATA_WIDTH / 128, 1)	MTE tags carried per beat (one tag per 16 bytes)
TW	AXI_TAG_WIDTH * NUM_TAGS	Total width of the awtag / wtag / btag fields
AWSize	Sum of the enabled AW fields	AW SKID buffer payload width
WSize	Sum of the enabled W fields	W SKID buffer payload width
BSize	Sum of the enabled B fields	B SKID buffer payload width

20.2.2 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from

its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
UW	AXI_USER_WIDTH

20.3 Ports

20.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset

20.3.2 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Enable clock gating
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating

20.3.3 Slave AXI5 Interface

Same as axi5_slave_wr - see [AXI5 Slave Write](#) for complete port list.

20.3.4 FUB Interface

Same as axi5_slave_wr - see [AXI5 Slave Write](#) for complete port list.

20.3.5 Clock Gating Status

Port	Width	Direction	Description
cg_gating	1	Output	Clock is currently gated
cg_idle	1	Output	Module is idle

20.4 Functional Description

20.4.1 Clock Gating Behavior

Activity Detection: - **user_valid:** Asserted when slave interface has activity (awvalid, wvalid, bvalid, or internal busy – peer VALID, post-fix) - **axi_valid:** Asserted when FUB interface has activity (awvalid, wvalid, bvalid)

Gating State Machine:

```
stateDiagram-v2
    [*] --> ACTIVE

    ACTIVE --> COUNTING : !user_valid && !axi_valid
    COUNTING --> ACTIVE : user_valid || axi_valid
    COUNTING --> GATED : count == cfg_cg_idle_count
    GATED --> ACTIVE : user_valid || axi_valid

    state ACTIVE {
        note right of ACTIVE : Clock enabled<br/>cg_gating = 0
    }
    state COUNTING {
        note right of COUNTING : Idle countdown<br/>cg_gating = 0
    }
    state GATED {
        note right of GATED : Clock gated<br/>cg_gating = 1
    }
```

Key Points: - Clock gating disabled when `cfg_cg_enable = 0` - Ready signals (awready, wready) forced to 0 when gated (prevents new transactions) - bready forced to 0 when gated (prevents accepting responses) - Gating only occurs after configured idle period - Any activity immediately ungates the clock

20.4.2 Ready Deassertion and Wake Behavior

While `cg_gating` is asserted, the ready outputs listed above are forced low.

This is legal AXI. A READY output may be deasserted for any number of cycles, and neither side may assume READY asserts within a bounded time, so holding it low is ordinary backpressure rather than a protocol violation. It cannot deadlock either: the same VALID being held off also feeds the activity detector, so gating releases and READY returns to the core's value.

Two consequences are worth designing around:

- **Wake latency adds to first-transfer latency.** Activity is registered once (AXI4, AXI5, AXI4-Lite, AXI4-Stream) or twice (APB, APB5, AXI5-Stream – with one exception: `apb4_slave_cdc_cg` drives `amba_clock_gate_ctrl`)

combinationally and so registers once, not twice) before reaching the ICG enable, which is combinational. The AXI5 _cg wrappers drive the activity terms combinationally, so there is 1 register stage and the first usable gated-clock edge arrives 2 cycles after activity asserts. Size `cfg_cg_idle_count` so that cost is amortized over the traffic burst that follows.

- **READY is a combinational function of cg_gating.** The path from the idle counter to the `s_axi_awready` and `s_axi_wready` outputs may need attention during timing closure, particularly at high frequency.

20.4.3 Integration Caveat: `s_axi_bready` in the Activity Term

The activity detector uses the corresponding VALID (`s_axi_bvalid`), never the peer's READY. (Historically this term was `s_axi_bready`, which meant a peer parking its ready high – a common and entirely correct style – pinned the block permanently awake and defeated gating; that defect was fixed family-wide, matching the rule the `mon_cg` wrappers always carried.)

An always-ready consumer no longer prevents gating.

20.4.4 Clock Gating Configuration

20.4.4.1 Idle Count Selection

<code>cfg_cg_idle_count</code>	Idle Cycles	Use Case
0	1	Aggressive power saving, frequent gating
1-3	2-4	Balanced, reduces gate churn
4-7	5-8	Conservative, for bursty traffic
8-15	9-16	Minimal gating (the 4-bit field maxes at 16 cycles – the count is LITERAL, gating at count+1, not a power of two)

Recommendations: - **Burst writes:** Higher count (4-8) to avoid gating mid-burst - **Sporadic writes:** Lower count (0-2) for maximum power savings - **Real-time systems:** Disable gating or use high count to ensure deterministic latency

20.5 Timing Characteristics

20.5.1 Clock Gating During Write Burst

Timing diagram pending. The signals and sequence this scenario exercises:

- ACLK (ungated)
 - GATED_ACLK
 - AWVALID, WVALID, BVALID across a burst write
 - user_valid, axi_valid activity terms
 - cg_idle, cg_gating
 - Gating engaging after the burst and its B response complete
-

20.6 Usage Examples

```
axi5_slave_wr_cg #(
    .AXI_ID_WIDTH          (8),
    .AXI_ADDR_WIDTH        (32),
    .AXI_DATA_WIDTH        (64),
    .SKID_DEPTH_AW         (2),
    .SKID_DEPTH_W          (4),
    .SKID_DEPTH_B          (2),
    .CG_IDLE_COUNT_WIDTH  (4),
    .ENABLE_ATOMIC         (1),
    .ENABLE_NSaid          (1),
    .ENABLE_TRACE          (1),
    .ENABLE_MPAM           (1),
    .ENABLE_MECID          (1),
    .ENABLE_UNIQUE         (1),
    .ENABLE_MTE            (1),
    .ENABLE_POISON         (1)
) u_axi5_slave_wr_cg (
    .aclk                   (axi_clk),
    .aresetn                (axi_rst_n),

    // Clock gating config
    .cfg_cg_enable          (1'b1),           // Enable gating
```

```

        .cfg_cg_idle_count  (4'd3),           // Gate after 4 idle cycles
        (count+1; a LITERAL count, not a power of two)

        // Slave interface (from external master)
        .s_axi_awid         (s_axi_awid),
        .s_axi_awaddr       (s_axi_awaddr),
        // Every remaining s_axi_aw*/s_axi_w*/s_axi_b* port mirrors the
        fub_axi_* list,
        // same names and widths, opposite directions. All must be
        connected.

        // FUB interface (to backend)
        .fub_axi_awid       (mem_awid),
        .fub_axi_awaddr     (mem_awaddr),
        // ... (connect to memory controller)

        // Clock gating status
        .cg_gating          (slave_wr_gating),
        .cg_idle             (slave_wr_idle)
    );

    // Optional: Monitor power savings
    always @(posedge axi_clk) begin
        if (slave_wr_gating)
            $display("AXI5 Slave WR clock gated - saving power");
    end

    // Power management integration
    assign system_low_power = slave_wr_gating &&
                             slave_rd_gating;

```

20.7 Design Notes

20.7.1 Power Savings Estimation

Worked example, assuming the module is active 60% of the time: - **Without gating**: 100% of this module's dynamic power - **With gating (idle_count=2)**: roughly 50%, allowing for wake/sleep transitions - **With gating (idle_count=0)**: roughly 60%; more aggressive gating, but more transition overhead

All power figures on this page are first-order estimates derived from duty cycle, not measured results. No power analysis (gate-level or otherwise) has been run against these modules. Actual savings depend on the gated logic's share of total design power, the technology library's clock-gate

cell, and leakage, which clock gating does not reduce at all. Treat these numbers as a sizing aid and characterize your own instance before quoting a savings figure.

20.7.2 Write-Specific Considerations

Burst Handling: - W channel SKID depth (4) larger than AW/B (2) to accommodate burst data - Gating should not occur mid-burst (use adequate idle_count) - Burst latency unaffected if gating disabled during active bursts

Atomic Operations: - Atomic writes may have longer latencies - Consider higher idle_count when ENABLE_ATOMIC=1 - Gating safe between atomic transactions

20.7.3 Clock Gating Overhead

- **Area:** +5 flops, counted from the RTL – r_wakeup in amba_clock_gate_ctrl plus r_idle_counter at IDLE_CNTR_WIDTH (default 4), scaling as 1 + CG_IDLE_COUNT_WIDTH. Against a base module of a few hundred flops that is low single-digit percent. The ICG itself is a latch/BUFGCE, not fabric flops; the LUT delta is not measured
- **Timing:** Clock gating adds minimal delay (typically <50ps)
- **Power:** Overhead from gate control logic usually <1% of savings

20.7.4 When to Use Clock Gating

Good candidates: - Low-duty-cycle interfaces (sporadic transactions) - Systems with strict power budgets - Battery-operated devices - Write-infrequent applications (logging, configuration)

Avoid when: - Interface is continuously active (streaming writes) - Gate/ungate transitions exceed power savings - Deterministic latency required (use high idle count instead) - Write bursts dominate (minimal idle periods)

20.8 Related Modules

- [AXI5 Slave Write](#) - Non-clock-gated version
 - [AXI5 Slave Read CG](#) - Clock-gated read variant
 - [AXI5 Slave Write Monitor CG](#) - With monitoring
 - [AMBA Clock Gate Control](#) - Clock gating controller
-

20.9 Testing

val/amba/test_axi5_slave_wr_cg.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.


```
source env_python
pytest val/amba/test_axi5_slave_wr_cg.py -v
```

20.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

21 AXI5 Slave Write Monitor

Module: `axi5_slave_wr_mon.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready

21.1 Overview


Most designs don't want a separate monitor bolted onto the bus — you want the slave to tell you what it's seeing. That's what this module does. It takes the `axi5_slave_wr` interface and builds the transaction monitor directly into the wrapper, giving you real-time visibility into slave write operations with configurable packet filtering and error detection. No external monitor block, no extra wiring beyond the monitor bus itself.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

21.1.1 Key Features

- Full AMBA AXI5 slave write protocol compliance
- **Integrated filtered monitoring** — no external monitor needed
- All AXI5 extensions supported (ATOMIC, NSAIID, TRACE, MPAM, MECID, UNIQUE, MTE, POISON)
- Transaction tracking with configurable table size
- Error detection (SLVERR, timeout, orphan transactions — poison is NOT observable by the monitor)
- Performance metrics (latency, throughput)

- Configurable packet filtering to reduce bandwidth
- 128-bit monitor bus packet output paired with 64-bit side-band timestamp
- Active transaction count tracking

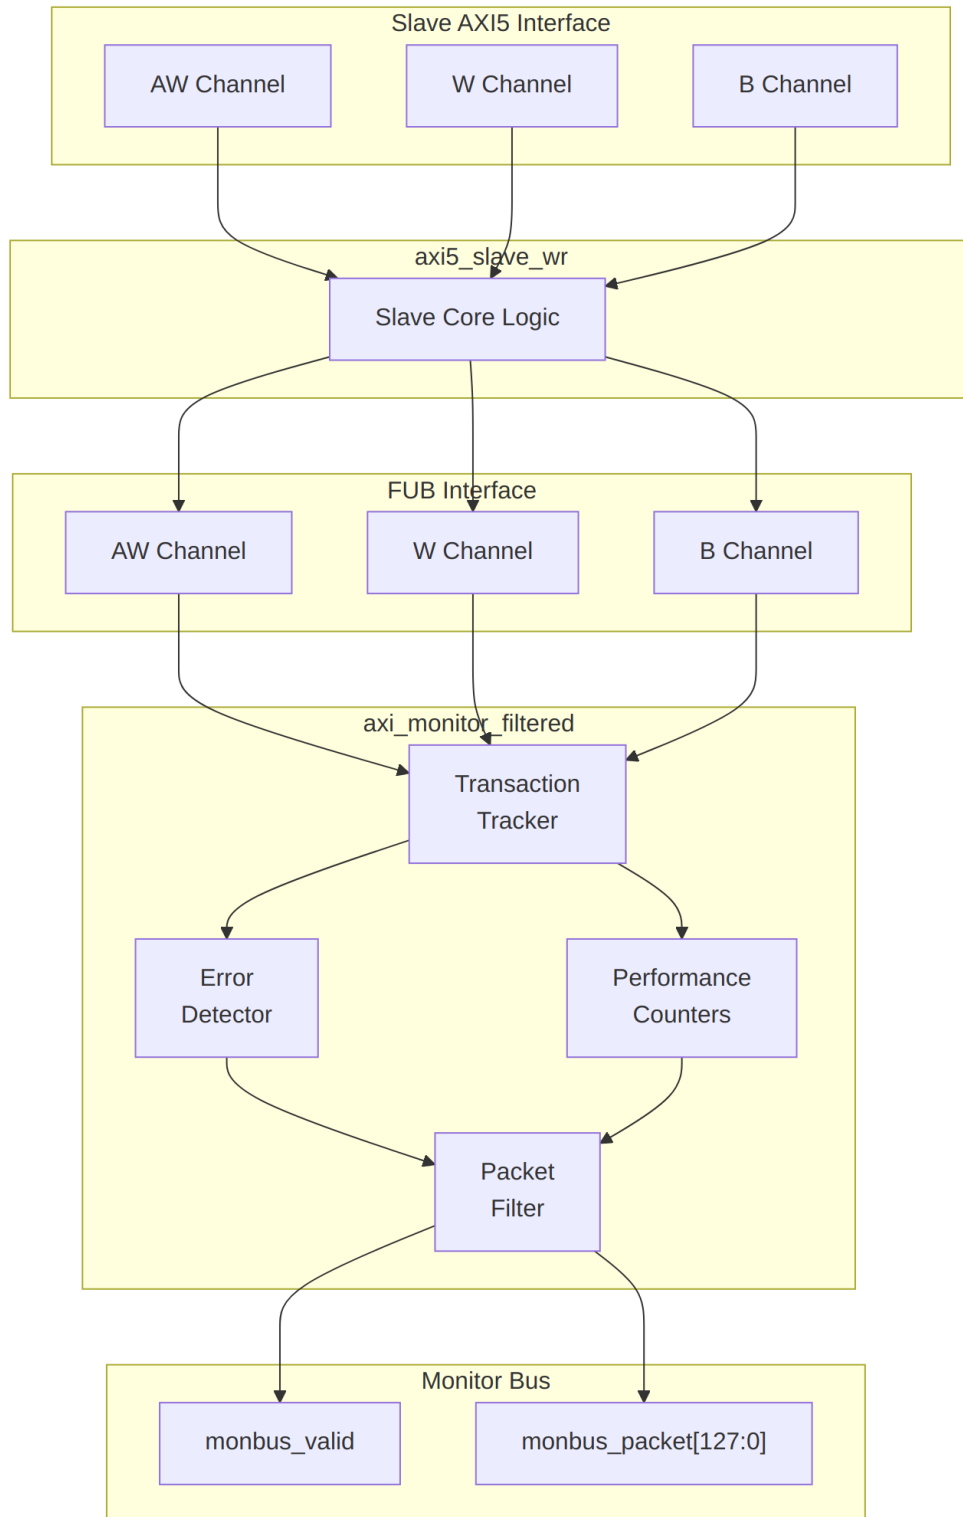

Block Diagram

21.2 Parameters

A lite-monitor version of this wrapper exists as `axi5_slave_wr_monlite`: the same core and taps with `axi_monitor_lite` instead of `axi_monitor_filtered`, about a fifth of the monitor gates, error/timeout/completion/threshold packets only. Selected in generated bridges by `mon_preset = "lite"`.

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth
SKID_DEPTH_W	int	4	W channel SKID buffer depth
SKID_DEPTH_B	int	2	B channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSAID	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals

Parameter	Type	Default	Description
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitoring unit identifier
AGENT_ID	int	13	Agent identifier
MAX_TRANSACTION S	int	16	Transaction table size
ACLK_MHZ	int	100	Clock frequency in MHz — keeps the 1 us tick exact, including off-100MHz operation
CFI_MIN_FREQ_MHZ / CFI_MAX_FREQ_MHZ	int	= ACLK_MHZ	Freq-invariant counter LUT bounds (cfg_freq_sel indexes within them)
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue
NUM_BANKS	int	1	Banked transaction tables. >1 on a WRITE monitor requires USE_WDATA_ORDER_Q=1 – axi_monitor_trans_mgr fails elaboration otherwise
ID_FILTER_ENABLE	bit	0	Synthesises the per-instance ID-slice filter
ID_MATCH_BASE	int	0	First ID this instance

Parameter	Type	Default	Description
ID_MATCH_COUNT	int	0	owns How many; 0 means ALL, so a zeroed register block does not silently filter everything away
ACTIVE_TRANS_THR ESHOLD	int	MAX_TRANSACTION/2	Active-transaction count that trips a threshold packet when <code>cfg_threshold_enable=1</code> . Replaces the former hardwired 8/4; threshold packets now scale with the table sizing
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage for timing
USE_MONITOR	bit	1	Synthesis-time monitor enable. 0 = omit monitor and tie outputs to safe non-blocking defaults; 1 = full monitor functionality.
N_ADDR_RANGES	int	0	Number of address-range comparators. 0 = checker omitted (zero area). >0 = N independent [low, high] ranges; feeds the shared allowlist checker: a debug-range hit -> AddrMatch, an error-

Parameter	Type	Default	Description
			allowlist miss -> Error/ADDR_RANGE (see axi_monitor_addr_check.md).
ENABLE_ERROR_LO GIC	bit	1	Compile-in the error-detection cone (0 drops it for area).
ENABLE_TIMEOUT_LOGIC	bit	1	Compile-in the timeout cone and the axi_monitor_timeout instance.
ENABLE_COMPL_LO GIC	bit	1	Compile-in the completion cone.
ENABLE_THRESHOLD_LOGIC	bit	1	Compile-in the threshold cone.
ENABLE_PERF_LOGIC	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – the window FSM and bucket/beat/byte/burst counters are unconditional (always compiled, always live)
ENABLE_DEBUG_LO GIC	bit	0	Compile-in the debug cone (off by default).

Synthesis-cone note: the six ENABLE_*_LOGIC parameters gate each detection cone at synthesis via generate-if, so unused logic drops to zero area (classic cones default on, debug off). Inside the wrapper's axi_monitor_filtered instance the perf/debug master switches are fixed (ENABLE_PERF_PACKETS = 1, ENABLE_DEBUG_MODULE = 0). The former CAM_PIPELINE / TRANS_CAM_PIPELINE parameters were removed — the transaction CAM is now always pipelined.

21.2.1 Derived Parameters (do not override)

These are declared as parameter so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	AXI_DATA_WIDTH / 8
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1
TW	AXI_TAG_WIDTH * NUM_TAGS

21.3 Ports

21.3.1 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock
aresetn	1	Input	AXI active-low reset

21.3.2 Slave AXI5 Interface

Identical to axi5_slave_wr — see [AXI5 Slave Write](#) for the complete port list.

21.3.3 FUB Interface

Identical to axi5_slave_wr — see [AXI5 Slave Write](#) for the complete port list.

21.3.4 Monitor Configuration

Port	Width	Direction	Description
cfg_monito r_enable	1	Input	Master runtime gate. 0 = monitor inert: no allocation, transaction CAM held clear, and the upstream ready is never stalled (a disabled monitor

Port	Width	Direction	Description
			cannot block the datapath). 1 = normal operation
cam_clear	1	Input	Synchronous clear of the monitor transaction CAM (driven from the harness clear control bit, e.g. CTRL[4])
cfg_error_enable	1	Input	Enable error packets
cfg_timeout_enable	1	Input	Enable timeout packets
cfg_performance_enable	1	Input	Enable performance packets (see Performance Monitoring)
cfg_completion_enable	1	Input	Enable transaction-completion packets
cfg_threshold_enable	1	Input	Enable threshold-crossed packets
cfg_debug_enable	1	Input	Enable debug/trace packets (gates the debug cone — the 6th reporter sub-block)
cfg_timeout_cycles	16	Input	Unified coarse timeout control, a MICROSECOND count passed through at FULL 16-bit width: 1..65535 us per phase; 0 = 16'hFFFF (~65 ms, effectively never). One value drives all three phase counts (addr/data/resp). The old 4-bit squash that saturated >= 16 at 15 us is retired

Port	Width	Direction	Description
cfg_latency_threshold	32	Input	High latency threshold (cycles)
cfg_freq_sel	4	Input	counter_freq_invariant LUT index scaling the 1 us timer tick
cfg_axi_pkt_mask	16	Input	Packet type filter mask
cfg_axi_err_select	16	Input	Error selection mask
cfg_axi_err_or_mask	16	Input	Error event filter
cfg_axi_timeout_mask	16	Input	Timeout event filter
cfg_axi_completion_mask	16	Input	Completion event filter
cfg_axi_threshold_mask	16	Input	Threshold event filter
cfg_axi_performance_mask	16	Input	Performance event filter
cfg_axi_address_mask	16	Input	Address event filter
cfg_axi_debug_mask	16	Input	Debug event filter

Detection-cone enables: `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` turn on the completion, threshold, and debug reporter sub-blocks respectively. `cfg_debug_enable` gates the **debug cone** — the 6th reporter sub-block (`axi_monitor_reporter_debug`). In this wrapper the debug module's `cfg_debug_level` (4) and `cfg_debug_mask` (16) inputs are tied to `4'h0 / 16'h0`; `cfg_active_trans_threshold` is driven from the `ACTIVE_TRANS_THRESHOLD` parameter (default `MAX_TRANSACTIONS/2`). None are wrapper ports.

21.3.5 Monitor Bus Output

Port	Width	Direction	Description
monbus_valid	1	Output	Monitor packet valid
monbus_ready	1	Input	Monitor packet ready
monbus_packet	128	Output	monitor_packet_t (see format below)
monbus_timestamp	64	Output	monbus_timestamp_t paired atomically with monbus_packet
debug_block_ready	1	Output	Observability tap for the block_ready gating net (drives nothing internally; leave unconnected if unused)
i_mon_time	64	Input	Free-running counter from monbus_group_core, sampled at packet emission

21.3.6 Status Outputs

Port	Width	Direction	Description
busy	1	Output	Module busy indicator
active_transactions	8	Output	Current outstanding transactions
error_count	16	Output	Lifetime count of error+timeout packets actually emitted (reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
transaction_count	32	Output	Lifetime count of completion packets actually emitted (zero-

Port	Width	Direction	Description
			extended 16-bit reporter perf counter; reads 0 when ENABLE_PERF_LOGIC=0 or USE_MONITOR=0)
cfg_conflict_error	1	Output	Configuration conflict detected

21.3.7 Packet filters

Two independent runtime filters cut monbus traffic without touching the datapath. Both are inert until driven, which is the failure to watch for: the build-time parameter only decides whether the logic is SYNTHESISED, and a design that sets the parameter but leaves the `cfg_*` ports tied low filters nothing and looks like the feature is broken.

Address-range filter — ADDR_FILTER_ENABLE (bit, default 0) builds it.

Port	Width	Description
cfg_addr_filter_enable	1	High: suppress packets for transactions outside the window. Low: inert, whatever the parameter says
cfg_addr_filter_low	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	ADDR_WIDTH	Window limit, inclusive

The verdict is latched per table entry at ALLOCATION, from the command address, and held for that entry's life. Widening the window mid-flight does not un-filter entries already admitted — which is exactly what makes it safe to reprogram live, since an entry's fate is decided when it is admitted and the retire accounting cannot be corrupted afterwards. Contrast the address-range CHECKER (N_ADDR_RANGES), which re-evaluates per command.

Runtime ID filter — overrides the ID_MATCH_BASE/ID_MATCH_COUNT elaboration constants so an instance can be retargeted at a different master without a rebuild.

Port	Width	Description
cfg_id_filter_enable	1	High: use the window below. Low: use the parameters, bit-identical

Port	Width	Description
		to a build without this feature
cfg_id_match_base	ID_WIDTH	First ID owned
cfg_id_match_count	ID_WIDTH+1	How many; 0 means ALL, matching the parameter rule so a zeroed register block does not silently filter everything away

The window is half-open: [base, base + count).

21.4 Functional Description

21.4.1 Monitor Backpressure (block_ready)

block_ready is the monitor's throttle signal, and the wrapper deliberately exports it as the debug_block_ready output port so the gating contract stays observable (the _mon_cg wrapper ties it off rather than forwarding it). It goes low when the monitor's transaction-table occupancy reaches its blocking threshold — a function of MAX_TRANSACTION; the reporter FIFO depth INTR_FIFO_DEPTH has no path to it. The wrapper ANDs it into the upstream-facing s_axi_awready, so a saturated monitor throttles new transactions at the handshake instead of dropping events.

- **Where the stall lands:** the upstream s_axi_awready is forced low until the monitor drains.
- **When USE_MONITOR=0:** block_ready is internally tied high, so the wrapper imposes no stall and runs at full bandwidth.
- **When cfg_monitor_enable=0:** the wrapper gate forces the upstream ready open, so a runtime-disabled monitor can never stall the datapath (the AXI4 monitors assert this as an in-RTL formal property, ap_disabled_never_stalls; this module has no ifdef FORMAL block of its own, so here the guarantee rests on the gate expression above, not a proof).
- **For axi5 slave variants:** the monitor watches the FUB-side handshake, so there is a SKID_DEPTH_AW cycle lag between block_ready going low and new events ceasing. MAX_TRANSACTION should be sized to cover this margin.

Recovery is guaranteed by the **saturation-recovery contract** — and this is the clever part. Command-originated table entries are capped at MAX_TRANSACTION - cmd_entry_reserve(MAX_TRANSACTION) (reserve = 4 for tables of 16 or more, 0 below; the

function lives in `monitor_common_pkg`), and `block_ready` re-asserts at occupancy $< \text{MAX_TRANSACTIONS} - (\text{reserve} - 1)$ — a threshold strictly ABOVE the command cap — so a saturated table always drains back below the reopen point. Blocking throttles; it never deadlocks. Tables smaller than 16 keep full legacy allocation (small tables cannot spare slots) and trade the recovery guarantee for tracking capacity. The contract is verified by in-RTL formal properties (mutation-checked) and a 100-seed deliberately-undersized-table stream sweep; see [axi_monitor_base](#) for the canonical description.

Sizing note: a monitor on a bus shared by several channels/requesters must size `MAX_TRANSACTIONS` to cover `NUM_CHANNELS` $\times$ per-channel outstanding plus margin — the per-channel limit alone makes the monitor throttle the shared master. Tables deeper than 64 also need Verilator's `--unroll-count` raised (default 64) in sim builds.

21.4.2 Address-Range Checker

With `N_ADDR_RANGES > 0` the wrapper instantiates the shared allowlist checker (`axi_monitor_addr_check`). Each range carries a DEBUG/ERROR flavor:

- **DEBUG range** — a hit emits a `PktTypeAddrMatch` (4'h8) packet with event code `AXI_ADDR_RANGE_MATCH` (8'h01), gated by `cfg_debug_enable`.
- **ERROR range** — the enabled ERROR ranges form an allowlist; an address in NONE of them emits a `PktTypeError` (4'h0) packet with event code `AXI_ERR_ADDR_RANGE` (8'h0D), gated by `cfg_error_enable`.

This wrapper does not expose `ADDR_RANGE_IS_ERROR`; all ranges default to the DEBUG (match) flavor.

Config inputs (active only when `N_ADDR_RANGES > 0`): - `cfg_addr_check_enable` — master on/off for the checker. - `cfg_addr_range_enable[N-1:0]` — per-range enable bit. - `cfg_addr_range_low/high[N-1:0][AXI_ADDR_WIDTH-1:0]` — inclusive bounds.

Event encoding: `event_data[63:60]` = `range_index` (matching DEBUG range, or 4'hF sentinel on an ERROR miss); `event_data[59:0]` = full address. **Filtering:** `AddrMatch` is dropped by `cfg_axi_addr_mask[1]`, the `ADDR_RANGE` error by `cfg_axi_error_mask[13]`. See the checker page for coalescing + formal properties.

21.4.3 Monitor Packet Format

The 128-bit `monbus_packet` (paired with the 64-bit `monbus_timestamp` side-band signal) follows the standardized AMBA monitor bus format:

Bits [127:124] - Packet Type:

0x0 = ERROR	Error events (SLVERR, DECERR, protocol violations)
0x1 = COMPL	Completion events (transaction finished)
0x2 = THRESH	Threshold events
0x3 = TIMEOUT	Timeout events
0x4 = PERF	Performance metrics

0x8 = ADDR_MATCH Address match events
 0x9 = APB APB-specific events
 0xF = DEBUG Debug events
 Bits [123:109] - Reserved (15 bits, forward-compat slack)
 Bits [108:105] - Protocol (4 bits): 0x0=AXI, 0x1=AXIS, 0x2=APB, 0x3=ARB, 0x4=CORE
 Bits [104:97] - Event Code (8 bits, protocol-specific)
 Bits [96:88] - Channel ID (9 bits – AXI ID or channel index)
 Bits [87:72] - Agent ID (16 bits, from AGENT_ID parameter)
 Bits [71:64] - Unit ID (8 bits, from UNIT_ID parameter)
 Bits [63:0] - Event Data (64 bits – full address, latency, etc.)

21.4.4 Event Types

21.4.4.1 Error Packets (Type=0)

Event Code	Description	Event Data
0x1	SLVERR response	Zero-extended 32-bit ADDRESS
0x2	DECERR response	Zero-extended 32-bit ADDRESS
0x3	Orphan data/response	Zero-extended 32-bit ADDRESS
0x4	Protocol violation	Zero-extended 32-bit ADDRESS

(Event codes 0x5 “poison”, 0x6 “tag mismatch” and 0x7 “missing WLAST” were documented here but are NOT implemented — no poison/tag/WLAST signal reaches the monitor; these codes are never emitted.)

21.4.4.2 Completion Packets (Type=1)

Event Code	Description	Event Data
0x0	Write completion	Zero-extended 32-bit ADDRESS (the reporter cones carry address only – no ID/length/latency in event_data)

21.4.4.3 Timeout Packets (Type=3)

Event Code	Description	Event Data
0x1	AW channel timeout	Zero-extended 32-bit

Event Code	Description	Event Data
		ADDRESS (no ID/cycle count in event_data)
0x2	W channel timeout	Zero-extended 32-bit ADDRESS
0x3	B channel timeout	Zero-extended 32-bit ADDRESS

21.4.4.4 Performance Packets (Type=4)

Event Code	Description	Event Data
(only two exist)	AXI_PERF_COMPLETED_COUNT	64'(completed-packet lifetime count)
	AXI_PERF_ERROR_COUNT	64'(error-packet lifetime count)

(High-latency / bandwidth-sample / outstanding-count packets were never implemented — the reporter's own comment marks those states placeholders. Latency and utilization data come from the perfmon WINDOW outputs, not packets.)

21.4.5 Performance Monitoring

When performance tracking is compiled in (`ENABLE_PERF_LOGIC = 1`, the wrapper default, with `ENABLE_PERF_PACKETS` fixed to 1 inside the monitor instance) and `cfg_perf_enable` is asserted at runtime, the monitor runs a **measurement-window state machine** plus a bank of data-channel utilization counters. All counters accumulate **only while a window is open** (`window_active = 1`) and hold their values between windows so the host can read a completed window's totals.

21.4.5.1 The Measurement Window

A window is opened by a **start event** and closed by an **end event**. The event sources are selected by `cfg_start_event_sel` / `cfg_end_event_sel` (3-bit; e.g. 3'b010 selects the `cfg_perf_enable` edge) and can also be fired directly by the `cfg_start_trigger` / `cfg_end_trigger` pulses (from an engine or CSR write). `cfg_window_force_close` is a software override that closes the window immediately. While the window is open:

- `window_active` is high.
- `window_cycles` free-runs, counting every clock elapsed inside the window.

21.4.5.2 Utilization Buckets (W Data Channel)

Every cycle inside the window is classified by the **W** data channel's valid/ready handshake into exactly one of four buckets:

Output	Width	Condition	Meaning
perf_prod_cycles	32	wvalid && wready	productive beat transferred
perf_bp_cycles	32	wvalid && !wready	back-pressure (data offered, sink not ready)
perf_starv_cycles	32	!wvalid && wready	starvation (sink ready, no data)
perf_idle_cycles	32	!wvalid && !wready	idle

The four buckets sum to `window_cycles - 1` (the start cycle seeds `window_cycles` to 1 while the buckets reset to 0); utilization = `perf_prod_cycles / window_cycles` is off by one count — negligible for long windows, use `window_cycles - 1` for exactness.

21.4.5.3 Throughput Counters

Output	Width	Meaning
perf_beat_count	32	W data beats transferred (= <code>perf_prod_cycles</code> , 1 beat/cycle)
perf_byte_count	64	bytes transferred = beats x (1 << latched <code>AWSIZE</code>), using the <code>AWSIZE</code> captured at the most recent AW address phase
perf_burst_count	32	AW address-phase handshakes

Average burst length is `perf_beat_count / perf_burst_count`. (Transaction completion is still tracked on the B channel; the throughput counters measure the W data phase.)

21.4.5.4 Performance Monitoring Ports

Port	Width	Direction	Description
cfg_perf_enable	1	Input	Enable performance-metric packet generation (also listed under Monitor Configuration)
cfg_start_e	3	Input	Window start event

Port	Width	Direction	Description
vent_sel			source select
cfg_end_ev ent_sel	3	Input	Window end event source select
cfg_start_tr igger	1	Input	Pulse: open the measurement window
cfg_end_tri gger	1	Input	Pulse: close the measurement window
cfg_windo w_force_cl ose	1	Input	Software override: force the window closed
window_ac tive	1	Output	High while a measurement window is open
window_cy cles	32	Output	Cycles elapsed in the current window
perf_prod_ cycles	32	Output	wvalid && wready cycles
perf_bp_cy cles	32	Output	wvalid && !wready cycles (back-pressure)
perf_starv_ cycles	32	Output	!wvalid && wready cycles (starvation)
perf_idle_c ycles	32	Output	!wvalid && !wready cycles
perf_beat_ count	32	Output	W data beats transferred
perf_byte_ count	64	Output	bytes transferred
perf_burst _count	32	Output	AW address-phase handshakes

When `USE_MONITOR = 0` all perfmon outputs are tied to 0. With `USE_MONITOR = 1` and `ENABLE_PERF_LOGIC = 0`, only `error_count` / `transaction_count` read 0 — the window and bucket/throughput outputs remain LIVE.

21.5 Timing Characteristics

Skid parameter	Default depth
SKID_DEPTH_AW	2 entries
SKID_DEPTH_W	4 entries
SKID_DEPTH_B	2 entries

Each channel traverses one `gaxi_skid_buffer`, which registers both `rd_valid` and its storage. The **1-cycle input-to-output latency therefore applies on every transfer, including the unstalled case** – there is no combinational bypass. Depth buys backpressure absorption, not throughput; full rate is sustained once the pipeline is primed. Legal range is 2..8 inclusive, odd values included.

Clocking: `aclk`, reset `aresetn` (active-low asynchronous).

No synthesis numbers are quoted here. Frequency and area depend on the target device and the parameters you elaborate with; run your own build.

21.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_slave_wr_mon #(
    .SKID_DEPTH_AW      (2),
    .SKID_DEPTH_W       (4),
    .SKID_DEPTH_B       (2),
    .AXI_ID_WIDTH       (8),
    .AXI_ADDR_WIDTH     (32),
    .AXI_DATA_WIDTH     (32),
    .AXI_USER_WIDTH     (1),
    .AXI_ATOP_WIDTH     (6),
    .AXI_NSAID_WIDTH    (4),
    .AXI_MPAM_WIDTH     (11)
) u_axi5_slave_wr_mon (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .s_axi_awid          (s_axi_awid),
    .s_axi_awaddr        (s_axi_awaddr),
    .s_axi_awlen         (s_axi_awlen),
    .s_axi_awsz         (s_axi_awsz),
    .s_axi_awburst       (s_axi_awburst),
    .s_axi_awlock        (s_axi_awlock),
    .s_axi_awcache       (s_axi_awcache),
    .s_axi_awprot        (s_axi_awprot),
```

.s_axi_awqos	(s_axi_awqos),
.s_axi_awuser	(s_axi_awuser),
.s_axi_awvalid	(s_axi_awvalid),
.s_axi_awready	(s_axi_awready),
.s_axi_awatop	(s_axi_awatop),
.s_axi_awnsaid	(s_axi_awnsaid),
.s_axi_awtrace	(s_axi_awtrace),
.s_axi_awmpam	(s_axi_awmpam),
.s_axi_awmeced	(s_axi_awmeced),
.s_axi_awunique	(s_axi_awunique),
.s_axi_awtagop	(s_axi_awtagop),
.s_axi_awtag	(s_axi_awtag),
.s_axi_wdata	(s_axi_wdata),
.s_axi_wstrb	(s_axi_wstrb),
.s_axi_wlast	(s_axi_wlast),
.s_axi_wuser	(s_axi_wuser),
.s_axi_wvalid	(s_axi_wvalid),
.s_axi_wready	(s_axi_wready),
.s_axi_wpoison	(s_axi_wpoison),
.s_axi_wtag	(s_axi_wtag),
.s_axi_wtagupdate	(s_axi_wtagupdate),
.s_axi_bid	(s_axi_bid),
.s_axi_bresp	(s_axi_bresp),
.s_axi_buser	(s_axi_buser),
.s_axi_bvalid	(s_axi_bvalid),
.s_axi_bready	(s_axi_bready),
.s_axi_btrace	(s_axi_btrace),
.s_axi_btag	(s_axi_btag),
.s_axi_btagmatch	(s_axi_btagmatch),
.fub_axi_awid	(fub_axi_awid),
.fub_axi_awaddr	(fub_axi_awaddr),
.fub_axi_awlen	(fub_axi_awlen),
.fub_axi_awsiz	(fub_axi_awsiz),
.fub_axi_awburst	(fub_axi_awburst),
.fub_axi_awlock	(fub_axi_awlock),
.fub_axi_awcach	(fub_axi_awcach),
.fub_axi_awprot	(fub_axi_awprot),
.fub_axi_awqos	(fub_axi_awqos),
.fub_axi_awuser	(fub_axi_awuser),
.fub_axi_awvalid	(fub_axi_awvalid),
.fub_axi_awready	(fub_axi_awready),
.fub_axi_awatop	(fub_axi_awatop),
.fub_axi_awnsaid	(fub_axi_awnsaid),
.fub_axi_awtrace	(fub_axi_awtrace),
.fub_axi_awmpam	(fub_axi_awmpam),
.fub_axi_awmeced	(fub_axi_awmeced),
.fub_axi_awunique	(fub_axi_awunique),
.fub_axi_awtagop	(fub_axi_awtagop),

.fub_axi_awtag	(fub_axi_awtag),
.fub_axi_wdata	(fub_axi_wdata),
.fub_axi_wstrb	(fub_axi_wstrb),
.fub_axi_wlast	(fub_axi_wlast),
.fub_axi_wuser	(fub_axi_wuser),
.fub_axi_wvalid	(fub_axi_wvalid),
.fub_axi_wready	(fub_axi_wready),
.fub_axi_wpoison	(fub_axi_wpoison),
.fub_axi_wtag	(fub_axi_wtag),
.fub_axi_wtagupdate	(fub_axi_wtagupdate),
.fub_axi_bid	(fub_axi_bid),
.fub_axi_bresp	(fub_axi_bresp),
.fub_axi_buser	(fub_axi_buser),
.fub_axi_bvalid	(fub_axi_bvalid),
.fub_axi_bready	(fub_axi_bready),
.fub_axi_btrace	(fub_axi_btrace),
.fub_axi_btag	(fub_axi_btag),
.fub_axi_btagmatch	(fub_axi_btagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.i_mon_time	(i_mon_time),

```

.monbus_valid      (monbus_valid),
.monbus_ready      (monbus_ready),
.monbus_packet     (monbus_packet),
.monbus_timestamp  (monbus_timestamp),
.busy              (busy),
.active_transactions (active_transactions),
.error_count       (error_count),
.transaction_count  (transaction_count),
.debug_block_ready  (debug_block_ready),
.cfg_conflict_error (cfg_conflict_error),
.cfg_start_event_sel (cfg_start_event_sel),
.cfg_end_event_sel  (cfg_end_event_sel),
.cfg_start_trigger  (cfg_start_trigger),
.cfg_end_trigger    (cfg_end_trigger),
.cfg_window_force_close(cfg_window_force_close),
.window_active      (window_active),
.window_cycles      (window_cycles),
.perf_prod_cycles   (perf_prod_cycles),
.perf_bp_cycles     (perf_bp_cycles),
.perf_starv_cycles  (perf_starv_cycles),
.perf_idle_cycles   (perf_idle_cycles),
.perf_beat_count    (perf_beat_count),
.perf_byte_count    (perf_byte_count),
.perf_burst_count   (perf_burst_count)
);

```

21.7 Design Notes

21.7.1 W-Channel Wiring into the Monitor Core

The wrapper feeds the shared `axi_monitor_base` data channel from the W channel with `data_id = AWID` (the W channel itself carries no WID in AXI4/AXI5) and `data_resp = 2'b00` (write data carries no response; the response arrives on B). This matches the AXI4 write-monitor convention. Before commit 95c9490a the AXI5 write monitors wired `data_id = BID` and `data_resp = BRESP` onto W beats (cross-channel), which mis-keyed write-data attribution; that defect is fixed.

21.7.2 Write-Specific Monitoring

Poison Detection: NOT implemented — WPOISON never reaches the monitor; no poison packet can be emitted.

Burst Completions: - Tracks AWLEN to verify complete bursts - (Missing-WLAST detection is NOT implemented — WLAST drives completion, not validation) - Monitors AW/W channel synchronization

Atomic Operations: - AWATOP is NOT monitored (ENABLE_ATOMIC shapes the transport only) -
(Atomic latency is not separately tracked — atomics time out / complete like ordinary writes) -
(Atomic failures surface only as ordinary SLVERR/DECERR — no ATOP-specific detection)

21.7.3 Best Practices

- Monitor packets provide real-time transaction visibility without external logic
 - Filtering reduces monitor bus bandwidth — critical for high-throughput systems
 - Transaction table size (MAX_TRANSACTIONS) must accommodate peak outstanding transactions
 - Performance packets can generate high traffic — use sparingly or with filtering
 - UNIT_ID and AGENT_ID identify this monitor in multi-agent systems
 - Error count WRAPS at 16'hFFFF (plain increment, no saturation — the perfmon BUCKET counters are the ones that saturate)
-

21.8 Related Modules

- [AXI5 Slave Write](#) - Non-monitored version
 - [AXI5 Slave Write Monitor CG](#) - Clock-gated variant
 - [AXI5 Slave Read Monitor](#) - Read monitor
 - [AXI Monitor Filtered](#) - Monitor core
 - [Monitor Package Spec](#) - Packet format details
-

21.9 Testing

val/amba/test_axi5_slave_wr_mon.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_slave_wr_mon.py -v
```

21.10 Navigation

- [← Back to AXI5 Index](#)

- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

22 AXI5 Slave Write Monitor with Clock Gating

Module: `axi5_slave_wr_mon_cg.sv` **Location:** `rtl/amba/axi5/` (protocol monitors live with their protocol; only the monitor CORE pieces are in `rtl/amba/monitor/`) **Status:** Production Ready


22.1 Overview

Same slave, same monitor — plus a clock gate. This module wraps `axi5_slave_wr_mon` with automatic clock gating logic, so you keep the integrated transaction monitoring and claw back dynamic power whenever the bus goes quiet.

Scope: this module transports AXI5 signals; it does not implement AXI5 transaction semantics. It performs no MTE tag checking or RTAGMATCH generation, no chunk reassembly, no poison generation, and no atomic read-modify-write – AWATOP is transported, not executed. The monitor observes handshakes, responses and timing; it performs no protocol checking of handshake stability, ID width, burst length or address alignment. See [Scope of This Implementation](#) in the AXI5 index for the full coverage statement.

22.1.1 Key Features

- Full AMBA AXI5 slave write protocol compliance
- **Integrated filtered monitoring** — real-time transaction visibility
- **Integrated clock gating** for dynamic power reduction
- All AXI5 extensions supported (ATOMIC, NSAID, TRACE, MPAM, MECID, UNIQUE, MTE, POISON)
- Configurable idle count before gating
- Transaction tracking with error detection
- Performance metrics and filtering
- Transparent gating — no protocol changes
- Gating status outputs for system monitoring
- **Power Savings:** traffic-dependent; unmeasured in this repo – treat any percentage as a placeholder until characterized

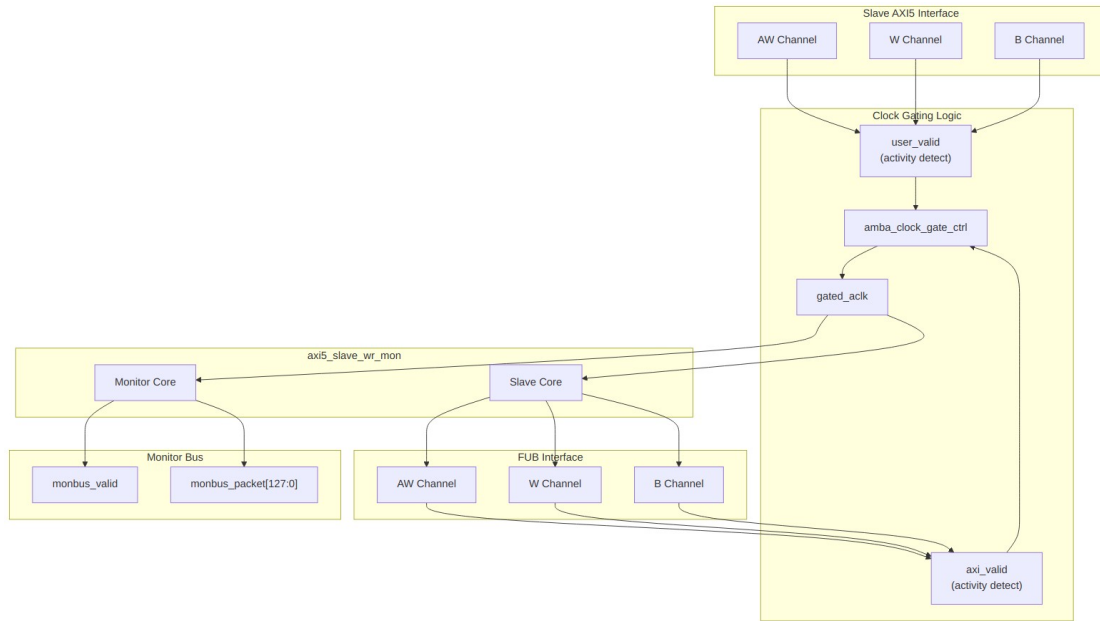

Block Diagram

22.2 Parameters

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	AW channel SKID buffer depth
SKID_DEPTH_W	int	4	W channel SKID buffer depth
SKID_DEPTH_B	int	2	B channel SKID buffer depth
AXI_ID_WIDTH	int	8	Transaction ID width
AXI_ADDR_WIDTH	int	32	Address bus width
AXI_DATA_WIDTH	int	32	Data bus width
AXI_USER_WIDTH	int	1	User signal width
AXI_ATOP_WIDTH	int	6	Atomic operation width
AXI_NSAID_WIDTH	int	4	Non-secure access ID width
AXI_MPAM_WIDTH	int	11	MPAM width
AXI_MECID_WIDTH	int	16	Memory encryption

Parameter	Type	Default	Description
			context width
AXI_TAG_WIDTH	int	4	Memory tag width per 16 bytes
AXI_TAGOP_WIDTH	int	2	Tag operation width
ENABLE_ATOMIC	bit	1	Enable atomic operations
ENABLE_NSaid	bit	1	Enable non-secure access ID
ENABLE_TRACE	bit	1	Enable trace signals
ENABLE_MPAM	bit	1	Enable memory partitioning
ENABLE_MECID	bit	1	Enable memory encryption
ENABLE_UNIQUE	bit	1	Enable unique ID indicator
ENABLE_MTE	bit	1	Enable Memory Tagging Extension
ENABLE_POISON	bit	1	Enable poison indicator
UNIT_ID	int	1	Monitoring unit identifier
AGENT_ID	int	13	Agent identifier
MAX_TRANSACTION S	int	16	Transaction table size
ENABLE_FILTERING	bit	1	Enable packet filtering: two active drop levels (packet type, then event code). Level 2 is reserved and routes nothing
ADD_PIPELINE_STAGE	bit	0	Add pipeline stage for timing
USE_MONITOR	bit	1	Synthesis-time monitor enable (forwarded to inner monitor).

Parameter	Type	Default	Description
N_ADDR_RANGES	int	0	Number of address-range comparators (forwarded to base module).
ENABLE_ERROR_LO GIC	bit	1	Synthesis-cone enable for error detection (forwarded to base module)
ENABLE_TIMEOUT_ LOGIC	bit	1	Synthesis-cone enable for timeout detection (forwarded to base module)
ENABLE_COMPL_LO GIC	bit	1	Synthesis-cone enable for completion tracking (forwarded to base module)
ENABLE_THRESHOL D_LOGIC	bit	1	Synthesis-cone enable for threshold detection (forwarded to base module)
ENABLE_PERF_LOGI C	bit	1	Synthesis-cone enable for the REPORTER's legacy perf-packet cone and the two lifetime counters only – window FSM and meters are unconditional
ENABLE_DEBUG_LO GIC	bit	0	Synthesis-cone enable for the debug/trace cone (forwarded to base module)
ACLK_MHZ	int	100	Clock frequency in MHz. Builds the microsecond tick LUT in counter_freq_invarian

Parameter	Type	Default	Description
			t. Leave this at 100 on a 90 MHz part and every us-denominated timeout is wrong, silently – it was unreachable through this wrapper until 2026-09-01.
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Lowest frequency the tick LUT must cover (dynamic-frequency builds).
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Highest frequency the tick LUT must cover.
USE_WDATA_ORDER_Q	bit	0	Write-data ordering queue. Required (=1) whenever NUM_BANKS > 1.
NUM_BANKS	int	1	Transaction-table banking. >1 on this WRITE monitor requires USE_WDATA_ORDER_Q=1 – axi_monitor_trans_mgr fails elaboration otherwise (the WID-less fallback double-counts one W beat across banks).
ADDR_FILTER_ENABLE	bit	0	Synthesises the address-range report filter. The parameter only decides whether the logic EXISTS – a build that sets it and leaves cfg_addr_filter_enable low filters nothing and

Parameter	Type	Default	Description
ID_FILTER_ENABLE	bit	0	looks broken. Synthesises the ID report filter (see <code>cfg_id_*</code> for the runtime override).
ID_MATCH_BASE	int	0	First ID this instance owns.
ID_MATCH_COUNT	int	0	How many IDs; 0 means ALL, so a zeroed register block does not silently filter everything away.
CG_IDLE_COUNT_WIDTH	int	4	Clock gating idle counter width

22.2.1 Derived Parameters (do not override)

These are declared as `parameter` so the elaborator can compute them, not so callers can set them. Each defaults to an expression over the parameters above; overriding one desynchronises it from its source and the design fails to elaborate or silently mis-sizes a bus. Set the parameters they are derived FROM and leave these alone.

Derived parameter	Default expression
AXI_WSTRB_WIDTH	$AXI_DATA_WIDTH / 8$
DW	AXI_DATA_WIDTH
IW	AXI_ID_WIDTH
SW	AXI_WSTRB_WIDTH
UW	AXI_USER_WIDTH
NUM_TAGS	$(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1$
TW	$AXI_TAG_WIDTH * NUM_TAGS$

22.3 Ports

22.3.1 Filter configuration (forwarded)

These reach the inner monitor through this wrapper; before 2026-09-01 they did not.

Port	Direction	Width	Description
<code>cfg_addr_</code>	Input	1	High: suppress packets for

Port	Direction	Width	Description
filter_enable			transactions outside the window. Low: inert, whatever ADDR_FILTER_ENABLE says
cfg_addr_filter_low	Input	ADDR_WIDTH	Window base, inclusive
cfg_addr_filter_high	Input	ADDR_WIDTH	Window limit, inclusive
cfg_id_filter_enable	Input	1	High: use the runtime window below instead of the ID_MATCH_* parameters
cfg_id_match_base	Input	ID_WIDTH	First ID to accept
cfg_id_match_count	Input	ID_WIDTH+1	How many; 0 means ALL

22.3.2 Clock and Reset

Port	Width	Direction	Description
aclk	1	Input	AXI clock (ungated)
aresetn	1	Input	AXI active-low reset
cam_clear	1	Input	Synchronous clear of the monitor transaction CAM (do not leave unconnected)

22.3.3 Clock Gating Configuration

Port	Width	Direction	Description
cfg_cg_enable	1	Input	Enable clock gating
cfg_cg_idle_count	CG_IDLE_COUNT_WIDTH	Input	Idle cycles before gating

22.3.4 Slave AXI5 Interface

Identical to `axi5_slave_wr` — see [AXI5 Slave Write](#) for the complete port list.

22.3.5 FUB Interface

Identical to `axi5_slave_wr` — see [AXI5 Slave Write](#) for the complete port list.

22.3.6 Monitor Configuration

Identical to `axi5_slave_wr_mon` — see [AXI5 Slave Write Monitor](#) for the complete list.

22.3.7 Monitor Bus Output

Port	Width	Direction	Description
<code>monbus_valid</code>	1	Output	Monitor packet valid
<code>monbus_ready</code>	1	Input	Monitor packet ready
<code>monbus_packet</code>	128	Output	<code>monitor_packet_t</code> (128-bit; [127:124] type, [104:97] event code – full layout on the base mon page)
<code>monbus_timestamp</code>	64	Output	<code>monbus_timestamp_t</code> paired atomically with <code>monbus_packet</code>
<code>i_mon_time</code>	64	Input	Free-running counter from <code>monbus_group_core</code> , sampled at packet emission

22.3.8 Status Outputs

Port	Width	Direction	Description
<code>busy</code>	1	Output	Module busy indicator
<code>active_transactions</code>	8	Output	Current outstanding transactions
<code>error_count</code>	16	Output	Errors whose packets were actually EMITTED – counts error AND timeout

Port	Width	Direction	Description
			packets emitted – with cfg_error_enable off it still counts timeout packets; only ENABLE_PERF_LOGIC=0 (or USE_MONITOR=0) forces 0
transaction_count	32	Output	Completion packets actually EMITTED – with cfg_compl_enable off (this page's own perf-mode recipe) it reads 0 while transactions complete normally
cfg_conflict_error	1	Output	Configuration conflict detected
cg_gating	1	Output	Clock is currently gated
cg_idle	1	Output	Module is idle

22.4 Functional Description

22.4.1 Clock Gating Behavior

Activity Detection: - **user_valid:** Asserted when slave interface has activity (awvalid, wvalid, bvalid, internal busy, a monitor packet pending on the monitor bus, or monitor CAM entries still live — peer VALID, never peer READY) - **axi_valid:** Asserted when FUB interface has activity (awvalid, wvalid, bvalid)

Key Points: - Clock gating disabled when `cfg_cg_enable = 0` - Ready signals (awready, wready) forced to 0 when gated (prevents new transactions) - bready forced to 0 when gated (prevents accepting responses) - Gating only occurs after configured idle period - Any activity immediately ungates the clock - Monitor state IS a wake term: both a packet pending on the monitor bus (`w_monbus_valid`) and live monitor CAM entries (`|active_transactions`, which covers the reporter's few-cycle emission window) hold the block awake, and the external `monbus_valid` is masked with `!cg_gating` – so monitor-bus delivery is exactly-once across gating at any idle count (`val/amba/test_mon_cg_gating.py` phase 6)

22.4.2 Performance Monitoring

The clock-gated wrapper exposes the full perfmon interface of the base module and **forwards every port unchanged** to the inner `axi5_slave_wr_mon`. The measurement-window state machine, the four W-channel utilization buckets (productive / back-pressure / starvation / idle), and the beat/byte/burst throughput counters behave exactly as documented in the base module — see [Performance Monitoring in axi5_slave_wr_mon](#) for the full narrative and per-bit semantics.

Forwarded perfmon ports (identical width and direction to the base module):

- **Inputs:** `cfg_perf_enable`, `cfg_start_event_sel` (3), `cfg_end_event_sel` (3), `cfg_start_trigger`, `cfg_end_trigger`, `cfg_window_force_close`
- **Outputs:** `window_active`, `window_cycles` (32), `perf_prod_cycles` (32), `perf_bp_cycles` (32), `perf_starv_cycles` (32), `perf_idle_cycles` (32), `perf_beat_count` (32), `perf_byte_count` (64), `perf_burst_count` (32)

The `perf_burst_count` output tracks AW (write address) handshakes.

Warning: an open measurement window is NOT a wake term — the window FSM and all counters run on the gated clock, so if the bus idles past `cfg_cg_idle_count` mid-window the counters FREEZE while wall-clock time passes, and trigger pulses arriving while gated are DROPPED. For exact wall-clock windows hold `cfg_cg_enable` low around the measurement, or use the base module.

Alongside perfmon, the wrapper forwards the `cfg_compl_enable`, `cfg_threshold_enable`, and `cfg_debug_enable` control inputs, plus the six `ENABLE_*_LOGIC` synthesis-cone parameters (see [Parameters](#)), straight through to the base monitor.

22.5 Timing Characteristics

Skid parameter	Default depth
<code>SKID_DEPTH_AW</code>	2 entries
<code>SKID_DEPTH_W</code>	4 entries
<code>SKID_DEPTH_B</code>	2 entries

Each channel traverses one `gaxi_skid_buffer`, which registers both `rd_valid` and its storage. The **1-cycle input-to-output latency therefore applies on every transfer, including the unstalled case** – there is no combinational bypass. Depth buys backpressure absorption, not

throughput; full rate is sustained once the pipeline is primed. Legal range is 2..8 inclusive, odd values included.

Clocking: `aclk`, reset `aresetn` (active-low asynchronous).

No synthesis numbers are quoted here. Frequency and area depend on the target device and the parameters you elaborate with; run your own build.

22.6 Usage Examples

Every parameter and port below is read from the module declaration.

```
axi5_slave_wr_mon_cg #(
    .SKID_DEPTH_AW      (2),
    .SKID_DEPTH_W       (4),
    .SKID_DEPTH_B       (2),
    .AXI_ID_WIDTH       (8),
    .AXI_ADDR_WIDTH     (32),
    .AXI_DATA_WIDTH     (32),
    .AXI_USER_WIDTH     (1),
    .AXI_ATOP_WIDTH     (6),
    .AXI_NSAID_WIDTH    (4),
    .AXI_MPAM_WIDTH     (11)
) u_axi5_slave_wr_mon_cg (
    .aclk                (aclk),
    .aresetn             (aresetn),
    .cam_clear           (cam_clear),
    .cfg_cg_enable       (cfg_cg_enable),
    .cfg_cg_idle_count   (cfg_cg_idle_count),
    .s_axi_awid          (s_axi_awid),
    .s_axi_awaddr        (s_axi_awaddr),
    .s_axi_awlen         (s_axi_awlen),
    .s_axi_awsz         (s_axi_awsz),
    .s_axi_awburst       (s_axi_awburst),
    .s_axi_awlock        (s_axi_awlock),
    .s_axi_awcache       (s_axi_awcache),
    .s_axi_awprot        (s_axi_awprot),
    .s_axi_awqos         (s_axi_awqos),
    .s_axi_awuser        (s_axi_awuser),
    .s_axi_awvalid       (s_axi_awvalid),
    .s_axi_awready       (s_axi_awready),
    .s_axi_awatop        (s_axi_awatop),
    .s_axi_awnsaid       (s_axi_awnsaid),
    .s_axi_awtrace       (s_axi_awtrace),
    .s_axi_awmpam        (s_axi_awmpam),
    .s_axi_awmeced       (s_axi_awmeced),
    .s_axi_awunique      (s_axi_awunique),
```

.s_axi_awtagop	(s_axi_awtagop),
.s_axi_awtag	(s_axi_awtag),
.s_axi_wdata	(s_axi_wdata),
.s_axi_wstrb	(s_axi_wstrb),
.s_axi_wlast	(s_axi_wlast),
.s_axi_wuser	(s_axi_wuser),
.s_axi_wvalid	(s_axi_wvalid),
.s_axi_wready	(s_axi_wready),
.s_axi_wpoison	(s_axi_wpoison),
.s_axi_wtag	(s_axi_wtag),
.s_axi_wtagupdate	(s_axi_wtagupdate),
.s_axi_bid	(s_axi_bid),
.s_axi_bresp	(s_axi_bresp),
.s_axi_buser	(s_axi_buser),
.s_axi_bvalid	(s_axi_bvalid),
.s_axi_bready	(s_axi_bready),
.s_axi_btrace	(s_axi_btrace),
.s_axi_btag	(s_axi_btag),
.s_axi_btagmatch	(s_axi_btagmatch),
.fub_axi_awid	(fub_axi_awid),
.fub_axi_awaddr	(fub_axi_awaddr),
.fub_axi_awlen	(fub_axi_awlen),
.fub_axi_awsz	(fub_axi_awsz),
.fub_axi_awburst	(fub_axi_awburst),
.fub_axi_awlock	(fub_axi_awlock),
.fub_axi_awcache	(fub_axi_awcache),
.fub_axi_awprot	(fub_axi_awprot),
.fub_axi_awqos	(fub_axi_awqos),
.fub_axi_awuser	(fub_axi_awuser),
.fub_axi_awvalid	(fub_axi_awvalid),
.fub_axi_awready	(fub_axi_awready),
.fub_axi_awatop	(fub_axi_awatop),
.fub_axi_awnsaid	(fub_axi_awnsaid),
.fub_axi_awtrace	(fub_axi_awtrace),
.fub_axi_awmpam	(fub_axi_awmpam),
.fub_axi_awmecid	(fub_axi_awmecid),
.fub_axi_awunique	(fub_axi_awunique),
.fub_axi_awtagop	(fub_axi_awtagop),
.fub_axi_awtag	(fub_axi_awtag),
.fub_axi_wdata	(fub_axi_wdata),
.fub_axi_wstrb	(fub_axi_wstrb),
.fub_axi_wlast	(fub_axi_wlast),
.fub_axi_wuser	(fub_axi_wuser),
.fub_axi_wvalid	(fub_axi_wvalid),
.fub_axi_wready	(fub_axi_wready),
.fub_axi_wpoison	(fub_axi_wpoison),
.fub_axi_wtag	(fub_axi_wtag),
.fub_axi_wtagupdate	(fub_axi_wtagupdate),

.fub_axi_bid	(fub_axi_bid),
.fub_axi_bresp	(fub_axi_bresp),
.fub_axi_buser	(fub_axi_buser),
.fub_axi_bvalid	(fub_axi_bvalid),
.fub_axi_bready	(fub_axi_bready),
.fub_axi_btrace	(fub_axi_btrace),
.fub_axi_btag	(fub_axi_btag),
.fub_axi_btagmatch	(fub_axi_btagmatch),
.cfg_monitor_enable	(cfg_monitor_enable),
.cfg_error_enable	(cfg_error_enable),
.cfg_timeout_enable	(cfg_timeout_enable),
.cfg_perf_enable	(cfg_perf_enable),
.cfg_compl_enable	(cfg_compl_enable),
.cfg_threshold_enable	(cfg_threshold_enable),
.cfg_debug_enable	(cfg_debug_enable),
.cfg_timeout_cycles	(cfg_timeout_cycles),
.cfg_freq_sel	(cfg_freq_sel),
.cfg_latency_threshold	(cfg_latency_threshold),
.cfg_axi_pkt_mask	(cfg_axi_pkt_mask),
.cfg_axi_err_select	(cfg_axi_err_select),
.cfg_axi_error_mask	(cfg_axi_error_mask),
.cfg_axi_timeout_mask	(cfg_axi_timeout_mask),
.cfg_axi_compl_mask	(cfg_axi_compl_mask),
.cfg_axi_thresh_mask	(cfg_axi_thresh_mask),
.cfg_axi_perf_mask	(cfg_axi_perf_mask),
.cfg_axi_addr_mask	(cfg_axi_addr_mask),
.cfg_axi_debug_mask	(cfg_axi_debug_mask),
.cfg_addr_check_enable	(cfg_addr_check_enable),
.cfg_addr_range_enable	(cfg_addr_range_enable),
.cfg_addr_range_low	(cfg_addr_range_low),
.cfg_addr_range_high	(cfg_addr_range_high),
.cfg_addr_filter_enable	(cfg_addr_filter_enable),
.cfg_addr_filter_low	(cfg_addr_filter_low),
.cfg_addr_filter_high	(cfg_addr_filter_high),
.cfg_id_filter_enable	(cfg_id_filter_enable),
.cfg_id_match_base	(cfg_id_match_base),
.cfg_id_match_count	(cfg_id_match_count),
.i_mon_time	(i_mon_time),
.monbus_valid	(monbus_valid),
.monbus_ready	(monbus_ready),
.monbus_packet	(monbus_packet),
.monbus_timestamp	(monbus_timestamp),
.busy	(busy),
.active_transactions	(active_transactions),
.error_count	(error_count),
.transaction_count	(transaction_count),
.cfg_conflict_error	(cfg_conflict_error),
.cg_gating	(cg_gating),

```

        .cg_idle                (cg_idle),
        .cfg_start_event_sel    (cfg_start_event_sel),
        .cfg_end_event_sel      (cfg_end_event_sel),
        .cfg_start_trigger      (cfg_start_trigger),
        .cfg_end_trigger        (cfg_end_trigger),
        .cfg_window_force_close(cfg_window_force_close),
        .window_active          (window_active),
        .window_cycles          (window_cycles),
        .perf_prod_cycles       (perf_prod_cycles),
        .perf_bp_cycles         (perf_bp_cycles),
        .perf_starv_cycles      (perf_starv_cycles),
        .perf_idle_cycles       (perf_idle_cycles),
        .perf_beat_count        (perf_beat_count),
        .perf_byte_count        (perf_byte_count),
        .perf_burst_count       (perf_burst_count)
    );

```

22.7 Design Notes

22.7.1 When to Use This Module

Ideal for: - Power-constrained systems needing visibility into write operations - Debug/validation builds with power budgets - Systems with sporadic write transaction patterns - SoC integration requiring both monitoring and power optimization - (NOT for poison detection — WPOISON never reaches the monitor)

Avoid when: - Interface is continuously active (minimal gating opportunities) - Monitoring overhead unacceptable (use non-monitored version) - Deterministic latency critical (use high idle count or disable gating) - Write bursts dominate traffic (reduces gating efficiency)

22.7.2 Configuration Recommendations

22.7.2.1 Low-Power Debug Mode

```

.cfg_cg_enable        (1'b1),
.cfg_cg_idle_count    (4'd1),    // Aggressive gating
.cfg_monitor_enable    (1'b1),    // Full monitoring
.cfg_error_enable      (1'b1),
.cfg_perf_enable       (1'b0)    // Reduce packet traffic

```

22.7.2.2 Performance Analysis Mode

```

.cfg_cg_enable        (1'b1),
.cfg_cg_idle_count    (4'd4),    // Conservative gating
.cfg_monitor_enable    (1'b1),    // Master gate MUST stay 1 (0 disables
ALL monitoring); disable completions via cfg_compl_enable
.cfg_perf_enable       (1'b1)    // Enable performance metrics

```

22.7.2.3 Data Integrity Validation

```
.cfg_cg_enable      (1'b1),  
.cfg_cg_idle_count  (4'd2),    // Balanced  
.cfg_error_enable   (1'b1),    // Catch all errors  
.cfg_monitor_enable (1'b1),    // Master gate: monitor active  
.ENABLE_POISON      (1),      // transport-only: carries WPOISON, no  
detection  
.ENABLE_MTE         (1)       // transport-only: carries tags, no  
checking
```

22.7.3 Area and Timing Impact

- **Area:** not 5-8%. That figure was an unsourced estimate and is off by orders of magnitude. The monitor's transaction table alone is a counted floor of thousands of flops (see the resource table in the family README) against a few hundred for the unmonitored slave, so a monitored instance is a multiple of the base module, not a few percent on top of it. Clock gating adds 5 flops. MAX_TRANSACTIONS is the knob and the cost is linear in it
- **Timing:** first-order estimate, not measured. The monitor is NOT automatically off the critical path – axi_monitor_trans_mgr is banked precisely because it was not (16 entries closed at WNS +1.018 ns where 40 entries came in at -25.183 ns), so size the transaction table for your clock
- **Power:** Net savings depends on activity factor (typically 30-50% at 50% duty cycle)

22.7.4 Power Optimization

Power Savings Estimation: - Base slave logic: ~40% of total power (*first-order estimates — no power/area analysis has been run*) - Monitor logic: ~60% of total power - With gating at 50% duty cycle: ~50% dynamic power savings - Actual savings depend on traffic pattern and idle_count setting

Write-Specific Power Considerations: - Burst writes keep module active longer - W channel SKID buffering consumes additional power - (No poison/tag checking exists — there is no such overhead.) - Atomic operations may extend active periods

22.7.5 Observability

Monitoring Capabilities: - Error detection (SLVERR, timeout, orphan — poison is NOT observable; see below) - Performance tracking (latency, throughput) - Transaction completion tracking - Protocol violation detection - (Atomic operations are NOT monitored — AWATOP never reaches the monitor) - (Tag-mismatch detection is NOT implemented — ENABLE_MTE shapes the transport only) - All monitoring continues when ungated

22.7.6 Write-Specific Considerations

Burst Handling: - Monitor tracks AW/W synchronization - (Missing-WLAST detection is NOT implemented) - Burst latency includes all beats - Gating should not occur mid-burst

Atomic Operations: - AWATOP is NOT tracked by the monitor (transport-only signal) - Atomic transaction latency measured end-to-end - Consider higher idle_count for atomic-heavy workloads

Poison Detection: NOT implemented. WPOISON flows through the transport data plane and never reaches the monitor — no poison event packet can be emitted (the 8'h5 decode some examples showed can never match).

22.8 Related Modules

- [AXI5 Slave Write](#) - Non-monitored, non-gated version
 - [AXI5 Slave Write CG](#) - Clock-gated without monitoring
 - [AXI5 Slave Write Monitor](#) - Monitored without clock gating
 - [AXI5 Slave Read Monitor CG](#) - Read variant
 - [AMBA Clock Gate Control](#) - Clock gating controller
-

22.9 Testing

val/amba/test_axi5_slave_wr_mon_cg.py exercises this module. It collects 3 parameter cases at the default REG_LEVEL.

```
source env_python
pytest val/amba/test_axi5_slave_wr_mon_cg.py -v
```

22.10 Navigation

- [← Back to AXI5 Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)

23 AXI5 Slave Write with Lite Monitor

Module: axi5_slave_wr_monlite.sv **Location:** rtl/amba/axi5/ **Status:** Production Ready (amba/monitor-lite TASK-001, 2026-09-26)

23.1 Overview

`axi5_slave_wr_monlite` is `axi5_slave_wr` with `axi_monitor_lite` watching its slave-side write channels. It is the lite-monitor sibling of `axi5_slave_wr_mon`: same core, same taps, same 128-bit `monitor_packet_t` on the same monbus with the same `UNIT_ID/AGENT_ID`, so the monbus arbiter, the AXI-Lite group, the tally and the host tooling cannot tell the two apart. The difference is what it costs and what it can be asked for: about a fifth of the monitor LUTs (677 against 3,249 per read monitor in the same bridge fixture, see [axi_monitor_lite](#)), and only the four packet classes the lite emits: error, timeout, completion and active-count threshold.

23.1.1 What is not here

Compared with `axi5_slave_wr_mon`: no performance window or counters, no debug packets, no address-range checker, no ID or address filters, no per-event masks, no latency threshold, and no `block_ready`. The lite never stalls the port: an event it cannot deliver is dropped and counted (`dropped_count`, reported as an `EVENT_DROPPED` packet), and a command that finds no free table entry is counted (`refused_count`) and left untracked, so its beats report as orphans.

23.1.2 Key Features

- Every `axi5_slave_wr` parameter and port, declared verbatim and passed through by name
 - `axi_monitor_lite` on the s_-side taps; `USE_MONITOR=0` omits it and ties its outputs
 - Nine config inputs: the enables, the microsecond timeout, the tick LUT index and the packet-type mask
 - Five status outputs, two of them (`dropped_count`, `refused_count`) unique to the lite
-

23.2 Parameters

23.2.1 Monitor Parameters

Parameter	Type	Default	Description
<code>USE_MONITOR</code>	bit	<code>1'b1</code>	0 = omit the monitor, tie its outputs
<code>UNIT_ID</code>	logic [7:0]	<code>8'h01</code>	Unit id in every packet

Parameter	Type	Default	Description
AGENT_ID	logic [15:0]	16'h000D	Agent id in every packet
MAX_TRANSACTIONS	int	8	table entries; a command finding none is counted, not tracked
ACTIVE_TRANS_THR ESHOLD	int	MAX_TRANSACTIONS / 2	Table occupancy that fires a threshold packet (rising edge)
OUT_DEPTH	int	4	monbus output queue, a power of two
ACLK_MHZ	int	100	Clock in MHz; keeps the 1 us tick exact
CFI_MIN_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT lower bound (cfg_freq_sel indexes it)
CFI_MAX_FREQ_MHZ	int	ACLK_MHZ	Frequency-invariant tick LUT upper bound

23.2.2 Core Parameters (passed through to axi5_slave_wr)

Parameter	Type	Default	Description
N_ADDR_RANGES	int	0	address-range checker windows; 0 = not built
ADDR_RANGE_IS_ER ROR	logic [(N_ADDR_RANGE S > 0 ? N_ADDR_RANGES : 1)-1:0]	'0	per range: 1 = miss is an error, 0 = hit is a match

Parameter	Type	Default	Description
SKID_DEPTH_AW	int	2	as on axi5_slave_wr
SKID_DEPTH_W	int	4	as on axi5_slave_wr
SKID_DEPTH_B	int	2	as on axi5_slave_wr
AXI_ID_WIDTH	int	8	as on axi5_slave_wr
AXI_ADDR_WIDTH	int	32	as on axi5_slave_wr
AXI_DATA_WIDTH	int	32	as on axi5_slave_wr
AXI_USER_WIDTH	int	1	as on axi5_slave_wr
AXI_WSTRB_WIDTH	int	$\text{AXI_DATA_WIDTH} / 8$	as on axi5_slave_wr
AXI_ATOP_WIDTH	int	6	as on axi5_slave_wr
AXI_NSAID_WIDTH	int	4	as on axi5_slave_wr
AXI_MPAM_WIDTH	int	11	as on axi5_slave_wr
AXI_MECID_WIDTH	int	16	as on axi5_slave_wr
AXI_TAG_WIDTH	int	4	as on axi5_slave_wr
AXI_TAGOP_WIDTH	int	2	as on axi5_slave_wr
ENABLE_ATOMIC	bit	1	as on axi5_slave_wr
ENABLE_NSAID	bit	1	as on axi5_slave_wr
ENABLE_TRACE	bit	1	as on axi5_slave_wr
ENABLE_MPAM	bit	1	as on axi5_slave_wr
ENABLE_MECID	bit	1	as on

Parameter	Type	Default	Description
ENABLE_UNIQUE	bit	1	axi5_slave_wr as on axi5_slave_wr
ENABLE_MTE	bit	1	as on axi5_slave_wr
ENABLE_POISON	bit	1	as on axi5_slave_wr
AW	int	AXI_ADDR_WIDTH	as on axi5_slave_wr
DW	int	AXI_DATA_WIDTH	as on axi5_slave_wr
IW	int	AXI_ID_WIDTH	as on axi5_slave_wr
SW	int	AXI_WSTRB_WIDTH	as on axi5_slave_wr
UW	int	AXI_USER_WIDTH	as on axi5_slave_wr
NUM_TAGS	int	$(AXI_DATA_WIDTH / 128) > 0 ? (AXI_DATA_WIDTH / 128) : 1$	as on axi5_slave_wr
TW	int	$AXI_TAG_WIDTH * NUM_TAGS$	as on axi5_slave_wr
AWSize	int	$IW + AW + 8 + 3 + 2 + 1 + 4 + 3 + 4 + UW +$	as on axi5_slave_wr
WSize	int	$DW + SW + 1 + UW +$	as on axi5_slave_wr
BSize	int	$IW + 2 + UW +$	as on axi5_slave_wr

23.3 Ports

23.3.1 Monitor Control, Bus and Status

Port	Direction	Type	Description
cam_clear	input	logic	sync clear of the monitor's table

Port	Direction	Type	Description
			(named as on the _mon wrapper: pin-compatible)
cfg_monitor_enable	input	logic	0 = monitor inert, table held clear
cfg_error_enable	input	logic	
cfg_timeout_enable	input	logic	
cfg_compl_enable	input	logic	
cfg_threshold_enable	input	logic	
cfg_timeout_cycles	input	logic [15:0]	MICROSECONDS of no progress; 0 = never
cfg_freq_sel	input	logic [3:0]	counter_freq_invariant LUT index
cfg_axi_pkt_mask	input	logic [15:0]	drop mask by packet type
i_mon_time	input	monitor_common_pkg::monbus_timestamp_t	
monbus_valid	output	logic	
monbus_ready	input	logic	
monbus_packet	output	monitor_common_pkg::monitor_packet_t	
monbus_timestamp	output	monitor_common_pkg::monbus_timestamp_t	
active_transactions	output	logic [7:0]	entries in the table
error_count	output	logic [15:0]	error + timeout packets emitted
transaction_count	output	logic [31:0]	completion packets emitted
dropped_count	output	logic [15:0]	events lost to

Port	Direction	Type	Description
			monbus backpressure since the last report
refused_count	output	logic [15:0]	commands that found no free table entry

23.3.2 Core Ports (as on axi5_slave_wr)

Port	Direction	Type	Description
acclk	input	logic	
aresetn	input	logic	
s_axi_awid	input	logic [IW-1:0]	
s_axi_awaddr	input	logic [AW-1:0]	
s_axi_awlen	input	logic [7:0]	
s_axi_awsz	input	logic [2:0]	
s_axi_awburst	input	logic [1:0]	
s_axi_awlock	input	logic	
s_axi_awcache	input	logic [3:0]	
s_axi_awprot	input	logic [2:0]	
s_axi_awqos	input	logic [3:0]	
s_axi_awuser	input	logic [UW-1:0]	
s_axi_awvalid	input	logic	
s_axi_awready	output	logic	
s_axi_awatop	input	logic [AXI_ATOP_WIDTH- 1:0]	
s_axi_awnsaid	input	logic [AXI_NSAID_WIDTH -1:0]	
s_axi_awtrace	input	logic	
s_axi_awmpam	input	logic [AXI_MPAM_WIDTH- 1:0]	

Port	Direction	Type	Description
s_axi_awmecid	input	logic [AXI_MECID_WIDTH-1:0]	
s_axi_awunique	input	logic	
s_axi_awtagop	input	logic [AXI_TAGOP_WIDTH-1:0]	
s_axi_awtag	input	logic [TW-1:0]	
s_axi_wdata	input	logic [DW-1:0]	
s_axi_wstrb	input	logic [SW-1:0]	
s_axi_wlast	input	logic	
s_axi_wuser	input	logic [UW-1:0]	
s_axi_wvalid	input	logic	
s_axi_wready	output	logic	
s_axi_wpoison	input	logic	
s_axi_wtag	input	logic [TW-1:0]	
s_axi_wtagupdate	input	logic [NUM_TAGS-1:0]	
s_axi_bid	output	logic [IW-1:0]	
s_axi_bresp	output	logic [1:0]	
s_axi_buser	output	logic [UW-1:0]	
s_axi_bvalid	output	logic	
s_axi_bready	input	logic	
s_axi_btrace	output	logic	
s_axi_btag	output	logic [TW-1:0]	
s_axi_btagmatch	output	logic	
fub_axi_awid	output	logic [IW-1:0]	
fub_axi_awaddr	output	logic [AW-1:0]	
fub_axi_awlen	output	logic [7:0]	
fub_axi_awsz	output	logic [2:0]	
fub_axi_awburst	output	logic [1:0]	
fub_axi_awlock	output	logic	

Port	Direction	Type	Description
fub_axi_awcache	output	logic [3:0]	
fub_axi_awprot	output	logic [2:0]	
fub_axi_awqos	output	logic [3:0]	
fub_axi_awuser	output	logic [UW-1:0]	
fub_axi_awvalid	output	logic	
fub_axi_awready	input	logic	
fub_axi_awatop	output	logic [AXI_ATOP_WIDTH-1:0]	
fub_axi_awnsaid	output	logic [AXI_NSAID_WIDTH-1:0]	
fub_axi_awtrace	output	logic	
fub_axi_awmpam	output	logic [AXI_MPAM_WIDTH-1:0]	
fub_axi_awmecid	output	logic [AXI_MECID_WIDTH-1:0]	
fub_axi_awunique	output	logic	
fub_axi_awtagop	output	logic [AXI_TAGOP_WIDTH-1:0]	
fub_axi_awtag	output	logic [TW-1:0]	
fub_axi_wdata	output	logic [DW-1:0]	
fub_axi_wstrb	output	logic [SW-1:0]	
fub_axi_wlast	output	logic	
fub_axi_wuser	output	logic [UW-1:0]	
fub_axi_wvalid	output	logic	
fub_axi_wready	input	logic	
fub_axi_wpoison	output	logic	
fub_axi_wtag	output	logic [TW-1:0]	
fub_axi_wtagupdate	output	logic [NUM_TAGS-1:0]	
fub_axi_bid	input	logic [IW-1:0]	

Port	Direction	Type	Description
fub_axi_bresp	input	logic [1:0]	
fub_axi_buser	input	logic [UW-1:0]	
fub_axi_bvalid	input	logic	
fub_axi_bready	output	logic	
fub_axi_btrace	input	logic	
fub_axi_btag	input	logic [TW-1:0]	
fub_axi_btagmatch	input	logic	
busy	output	logic	
cfg_latency_threshold	input	logic [31:0]	completion latency (cycles) above this -> Threshold/LATENCY
cfg_addr_check_enable	input	logic	
cfg_addr_match_enable	input	logic	hit in a match range -> AddrMatch packet
cfg_addr_range_enable	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0]	
cfg_addr_range_low	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	
cfg_addr_range_high	input	logic [(N_ADDR_RANGES > 0 ? N_ADDR_RANGES : 1)-1:0][AW-1:0]	

23.4 Functional Description

The core is instantiated untouched; unlike `axi5_slave_wr_mon` there is no gating of the command handshake, because the lite has no admission stall. The monitor taps the `s_-side` command, data and response channels through three `valids` gated by `cfg_monitor_enable`, which also holds the table clear while low. `cfg_timeout_cycles` is a microsecond count of no progress on an entry, passed at full width; 0 means never. The active-count threshold is the parameter `ACTIVE_TRANS_THRESHOLD`, as on the `_mon` wrapper.

The lite's own behaviour – per-ID linked-list attribution, stamps instead of counters, the registered event stage, the 4-entry output queue and drop-and-count – is on the [axi_monitor_lite](#) page.

23.5 Timing Characteristics

The datapath timing is `axi5_slave_wr`'s. The monitor adds no gating to any handshake and no path into the datapath; its own paths are two short cycles (attribution, then packet formatting) and met 10 ns on an Artix-7 100T-1 with margin inside `bridge_1x2_rd_lite_mon`.

23.6 Usage Examples

```
axi5_slave_wr_monlite #(
    .N_ADDR_RANGES      (0),
    .ADDR_RANGE_IS_ERROR ('0'),
    .SKID_DEPTH_AW      (2),
    .SKID_DEPTH_W        (4),
    .UNIT_ID             (8'h02),
    .AGENT_ID            (16'h0014),
    .MAX_TRANSACTIONS    (8)
) u_axi5_slave_wr_monlite (
    .aclk                (aclk),
    .aresetn             (aresetn),
    // ... the axi5_slave_wr ports, by name ...
    .cam_clear           (1'b0),
    .cfg_monitor_enable  (1'b1),
    .cfg_error_enable    (1'b1),
    .cfg_timeout_enable  (1'b1),
    .cfg_compl_enable    (1'b0),
    .cfg_threshold_enable (1'b0),
    .cfg_timeout_cycles  (16'd1000),
    .cfg_freq_sel        (4'd0),
    .cfg_axi_pkt_mask    (16'h0000),
    .i_mon_time          (mon_time),
    .monbus_valid        (monbus_valid),
```

```
.monbus_ready      (monbus_ready),  
.monbus_packet     (monbus_packet),  
.monbus_timestamp  (monbus_timestamp),  
.active_transactions  (),  
.error_count       (),  
.transaction_count  (),  
.dropped_count      (dropped_count),  
.refused_count      (refused_count)  
);
```

In a generated bridge, `mon_preset = "lite"` selects this wrapper for every monitored port.

23.7 Design Notes

- `cam_clear` keeps the `_mon` wrapper's name so the two are pin-compatible on the monitor side; the lite has a table, not a CAM.
 - `MAX_TRANSACTION` defaults to 8 here against 16 on `axi5_slave_wr_mon`: size it to the port's real outstanding depth, since refused commands surface as orphans.
 - Consumers that relied on `block_ready` to bound the table get drop-and-count instead; the count is always reported, the identity of the lost events is not.
-

23.8 Related Modules

- `axi5_slave_wr_mon` – the full-monitor sibling
 - `axi5_slave_wr` – the core this wraps
 - [axi_monitor_lite](#) – the monitor itself
-

23.9 Testing

`val/amba/monitor-lite/test_axi5_slave_wr_monlite.py` exercises this module: the same TB and scenarios as `val/amba/test_axi5_slave_wr_mon.py`, with the DUT swapped.

```
source env_python  
make -C val/amba/monitor-lite run-axi5_slave_wr_monlite-gate
```

Last Updated: 2026-09-26

23.10 **Navigation**

- [← Back to Monitor Index](#)
- [← Back to rtl-amba Index](#)
- [← Back to Main Documentation Index](#)