Latency Decides the Ranking: Effective-Rate Evaluation of RIS Phase Optimization for Mobile Users

[Author names]

***Abstract*—Phase optimizers for reconfigurable intelligent surfaces (RIS) are usually compared by the rate they reach on the channel they were given. When users move, however, a method delivers its phase to the channel that exists when it finishes. We evaluate methods by this *effective rate*, using measured latencies, in a 3GPP TR 38.901 indoor-office multi-user MISO downlink with a 32-element RIS and pedestrian users (1.5 m/s, 3 GHz, coherence time 28.2 ms). Three results follow. First, the methods with the highest rate at $t = 0$, a long-run Adam optimizer and coordinate descent, need 0.9–5.9 s and end below a 2.5 ms single-user heuristic. Second, Adam's effective rate has a flat interior optimum at 4–6 steps (5.98 b/s/Hz); running it to $L = 48$ costs 14.0% although its rate at $t = 0$ rises by 13.2%. The optimum persists across Adam step sizes, moves to fewer steps for faster users and longer channel-acquisition delays, and mistaking 1.5 m/s for 1.8 m/s, or the reverse, costs less than 0.5%. Third, a learned (deep-unfolded) update rule beats step-size-tuned Adam at every equal step count, yet on the measured latency axis every learned configuration is dominated by a faster and better Adam configuration, in each of five independent timing rounds. These results assume that the base station refreshes its precoder every frame; without that, the rate at the coherence time would be 11.7–14.2× lower. All tables and figures are generated by scripts from stored measurements, and we report the measurement traps that produced wrong numbers during the study.**

***Index Terms*—Reconfigurable intelligent surface, mobility, computation latency, effective rate, channel aging, deep unfolding, multi-user MISO.**

I. Introduction

RECONFIGURABLE intelligent surfaces (RIS) reshape the radio channel with a large number of passive, phase-controllable elements [1], [2], and prototypes and field trials have demonstrated them in practice [3], [4]. In a multi-user downlink the phases must be optimized jointly with the base-station (BS) precoder, which is a non-convex problem usually attacked with alternating optimization and semidefinite relaxation, block coordinate descent, fractional programming or WMMSE [2], [5]–[8], and, more recently, with learned policies [9].

These methods are almost always compared by the rate they reach on the channel they were given. That comparison is appropriate when the channel is static. When users move, it is not: a method delivers its phase configuration to the channel that exists *when it finishes*, not to the channel it was handed. A slow method answers a question about a channel that is already gone.

[Funding statement, e.g., TÜBİTAK project number, or remove.]
[Authors] are with [Department, University, City, Turkey] (e-mail: [e-mail]).

This paper makes that observation quantitative for a multi-user MISO downlink assisted by a wall-mounted RIS in a 3GPP TR 38.901 indoor-office scenario [10] with pedestrian users ($v = 1.5$ m/s, $f_c = 3$ GHz, reference coherence time $T_c = 0.423/f_d = 28.2$ ms). Our thesis is that *computation latency is not a secondary metric in mobile RIS systems but a first-class design constraint that decides the ranking of methods*. We support it with measurements, not with a channel-aging formula: every phase is computed on the channel at $t = 0$ and evaluated on a geometrically evolved channel at the method's own measured latency.

A. Contributions

1) **Effective-rate evaluation.** We define the effective rate of a method as its minimum user rate on the channel that exists at its own completion time (Section IV) and measure it for single-user heuristics, Adam, coordinate descent and a long-run Adam optimizer (1000 steps from 3 random starts). The long-run optimizer has the highest rate at $t = 0$ (7.117 b/s/Hz) but needs about 5.9 s; its effective rate (4.667 b/s/Hz, an optimistic value of our channel model) falls below that of a 2.5 ms heuristic (5.272 b/s/Hz).
2) **An intrinsic optimum in the step count.** For Adam, the $t = 0$ rate keeps increasing with the number of steps L, but the effective rate has a flat top at $L = 4$–6 (5.98 b/s/Hz at 7–10 ms) and then declines. Running to $L = 48$ costs 14.0% of the effective rate although its $t = 0$ rate is 13.2% higher. The optimum persists across Adam step sizes, and we map how it moves with user speed and channel-acquisition delay and how much a wrongly assumed speed costs.
3) **Ranking reversal between equal steps and equal milliseconds.** A learned (deep-unfolded) update rule beats a step-size-tuned Adam at every budget $L \in \{1, 2, 4, 8, 16\}$ when both run the same number of steps (win rates 68–84% of test scenarios). Measured on an idle machine in five independent rounds, every one of the five learned configurations is dominated, i.e., some Adam configuration is both faster and better, in all five rounds. One learned step costs 2.7–4.0 Adam steps.
4) **Pricing the modelling assumption.** All effective rates assume that the BS precoder is refreshed from current pilots while only the RIS phase ages. We measure what this assumption is worth: if the precoder aged together

with the phase, the rate at T_c would be 11.7–14.2× lower.

5) **Reproducibility.** Every number in the tables and figures is produced by a script from stored measurement files, and re-running the aging sweeps reproduces them bit for bit. We report the measurement traps that produced wrong numbers during this work, including a load-contaminated timing that inflated Adam's latency from 17.48 ms to 29.70 ms and flipped a conclusion.

Section II reviews related work, Section III gives the system and channel model, Section IV defines the evaluation framework, Section V the measurement protocol, Section VI the results, and Section VII concludes.

II. Related Work

A. RIS Phase Optimization

Joint precoding and RIS phase design has been addressed with alternating optimization and semidefinite relaxation [2], beamforming under practical phase-dependent amplitude models [5], block-coordinate-descent designs for multicell systems [6], fractional programming for weighted sum-rate maximization [7] and WMMSE-based rate maximization [8]. These methods are evaluated by the objective value they reach; their run time, when discussed, is characterized by complexity order rather than by measured latency relative to the channel's coherence time.

Learning-based designs replace the iterative solver with a trained policy, for example deep reinforcement learning for joint precoding and phase design in multi-user MISO systems [9]. Algorithm unrolling, which turns the iterations of an optimizer into the layers of a trainable network [11], is the template for the learned update rule studied here; it has been applied to IRS beamforming to avoid the cost of matrix inversions in an iterative solver [12]. Learning-based designs are usually motivated by speed, yet that speed is rarely related to how fast the channel changes, and the classical solvers they are compared against are rarely tuned or timed under the same conditions.

B. Mobility and Outdated Channel Knowledge

High mobility has been addressed by mounting the surface on the vehicle so that a fast-fading channel becomes slow-fading [13]. The effect of channel aging [14] and of outdated channel state information [15] on RIS-aided systems has been analysed, and predictive beamforming, which acts on a forecast of the future channel, has been proposed for fast-moving links such as UAVs [16]. Channel aging has also been analysed for FDD massive MIMO [17], and the cost of imperfect channel knowledge at the transmitter is classical in MIMO broadcast channels [18]. Two-timescale designs update the RIS phases from slowly varying channel statistics and the BS precoder from instantaneous channel knowledge [19], which reduces how often the phases must be recomputed; this has also been developed for fast-changing channels, where the instantaneous channel knowledge used by the precoder is itself quickly outdated [20]. In these works the delay between channel acquisition and use is a system parameter. The optimizer's own run time, which differs from method to method and from iteration count to iteration count, is not part of the model.

C. Discrete Phases

Practical surfaces have a few bits of phase resolution [21]; a recent prototype uses 2-bit unit cells with microcontroller-based control for fast reconfiguration of the whole array [22]. This paper uses continuous phases; the latency dimension of discrete phase design is left to future work (Section VII).

D. Gap Addressed Here

To our knowledge, no prior RIS work (i) evaluates each method on the channel at its own measured completion time, (ii) shows that this creates an interior optimum in the iteration count of a standard optimizer, or (iii) compares a learned update rule with a tuned classical optimizer both at equal steps and at equal measured milliseconds and finds that the two comparisons rank them in opposite order.

III. System and Channel Model

A. Signal Model

A BS with a uniform linear array of $N_t = 8$ antennas at half-wavelength spacing serves $K = 4$ single-antenna users through a direct link and an RIS of $N = 32$ passive elements (an 8×4 planar array, half-wavelength spacing). With RIS phases $\boldsymbol{\theta} \in [0, 2\pi)^N$, $\mathbf{v} = e^{j\boldsymbol{\theta}}$, and precoder $\mathbf{W} = [\mathbf{w}_1, \ldots, \mathbf{w}_K]$, user k receives

$$y_k = \left(\mathbf{h}_{d,k}^H + \mathbf{g}_k^H \,\mathrm{diag}(\mathbf{v})\mathbf{F}\right) \sum_{j=1}^{K} \mathbf{w}_j s_j + n_k, \tag{1}$$

where $\mathbf{F} \in \mathbb{C}^{N \times N_t}$ is the BS–RIS channel, $\mathbf{g}_k^H \in \mathbb{C}^{1 \times N}$ the RIS–user channel, $\mathbf{h}_{d,k}^H \in \mathbb{C}^{1 \times N_t}$ the direct channel and $n_k \sim \mathcal{CN}(0, \sigma^2)$. Writing $\mathbf{h}_k^H(\boldsymbol{\theta})$ for the bracketed effective channel, the rate of user k is $R_k = \log_2(1 + \mathrm{SINR}_k)$ with

$$\mathrm{SINR}_k = \frac{|\mathbf{h}_k^H \mathbf{w}_k|^2}{\sum_{j \neq k} |\mathbf{h}_k^H \mathbf{w}_j|^2 + \sigma^2}. \tag{2}$$

For a given phase the precoder is regularized zero forcing on the effective channel, with the MMSE regularizer $\lambda = K\sigma^2/P$ and total power P. The design objective is the minimum user rate,

$$\max_{\boldsymbol{\theta}} \; \min_{k} R_k(\boldsymbol{\theta}), \tag{3}$$

which Adam and the learned update optimize through the smooth surrogate $-\frac{1}{\beta} \log \sum_k e^{-\beta R_k}$ with $\beta = 8$, evaluated with a log-sum-exp for numerical stability; coordinate descent and the long-run Adam reference maximize the hard minimum directly.

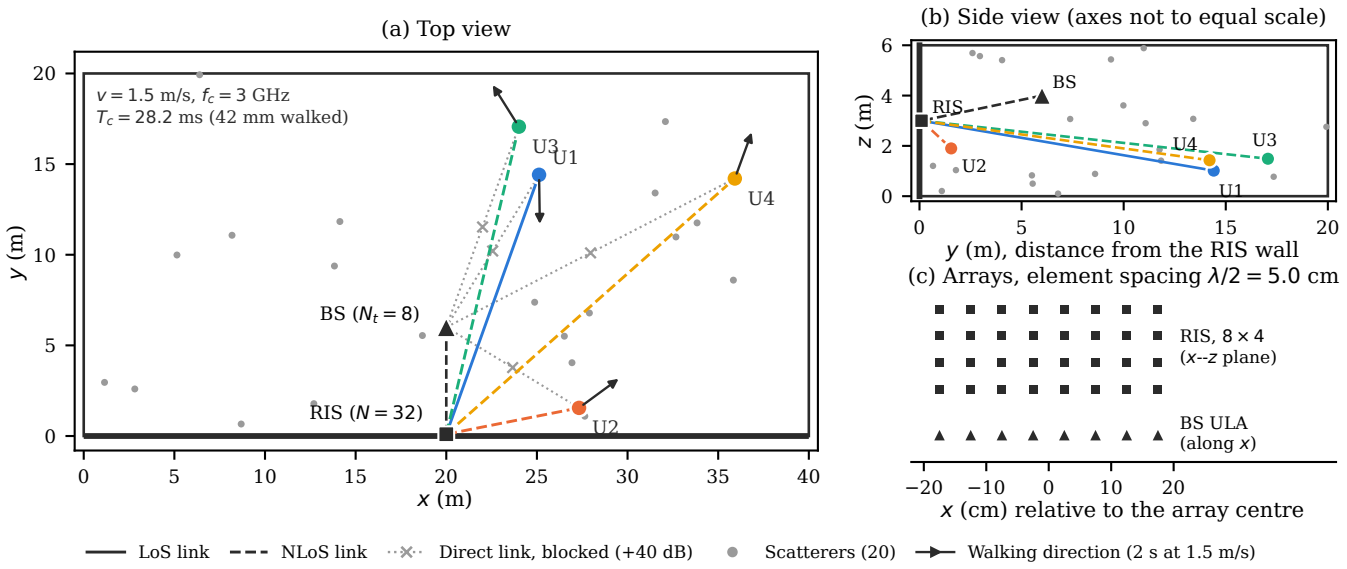


Fig. 1. The simulated scenario, drawn from the first scenario of the aging set (seed 11) exactly as the channel generator produced it. (a) Top view of the $40 \times 20 \times 6$ m office: the BS ($N_t = 8$) at $(20, 6, 4)$ m, the wall-mounted RIS ($N = 32$) centred at $(20, 0.1, 3)$ m, four users at 1–2 m height walking in straight lines at 1.5 m/s, and 20 point scatterers. Line style gives the LoS state drawn for each link from the 3GPP LoS probability. All direct links carry the 40 dB blockage. The arrows show 2 s of walking; within one coherence time a user moves only 42 mm. (b) Side view. (c) Element layouts of the RIS and the BS array.

B. Geometry and Propagation

The room is $40 \times 20 \times 6$ m (Fig. 1). The RIS is mounted on a wall, centred at $(20, 0.1, 3)$ m and facing into the room; the BS is at $(20, 6, 4)$ m, in the panel's boresight and beyond its Fraunhofer distance. Users are dropped uniformly in the room at heights between 1 and 2 m. The carrier is $f_c = 3$ GHz, the bandwidth 20 MHz, the transmit power 20 dBm, the BS antenna gain 5 dBi and the receiver noise figure 7 dB.

All links follow the 3GPP TR 38.901 indoor-office model [10]: its path loss and LoS probability, a Ricean factor K_R drawn from its distribution, and log-normal shadowing with Gudmundson spatial correlation [23] at a 5 m decorrelation distance (TR 38.901 specifies 10 m for LoS and 6 m for NLoS indoor links). Non-LoS components are built from point scatterers placed in the room and shared by all links of a scenario. The cascaded BS–RIS–user amplitude follows the two-hop path-loss model of Tang et al. [24] with a $\cos^q$ element pattern. Because an RIS is deployed where the direct path is obstructed, the direct link is attenuated by an additional 40 dB.

C. Mobility

Users walk in a straight line at $v = 1.5$ m/s and are reflected at the walls. Over the observation window the scatterer positions, per-path complex gains, LoS states, Ricean factors, shadowing values and the BS–RIS channel $\mathbf{F}$ are held fixed; only the user positions move, and the channels $\mathbf{g}_k(t)$ and $\mathbf{h}_{d,k}(t)$ are recomputed from geometry at every time instant. Channel variation therefore comes from geometry rather than from a stochastic aging model. As a reference time scale we use the Doppler frequency $f_d = v f_c / c = 15$ Hz and the coherence time $T_c = 0.423/f_d = 28.2$ ms [25].

D. Known Modelling Limitations

We state the following limitations; the first two bias the results in a known direction.

- *Frozen scatterers.* Over seconds a walking user would see new scatterers, but the model keeps them. Over long horizons the modelled channel therefore changes less than a real one would, which *understates* the loss of slow methods. We treat latencies up to 200 ms as reliable and also report a stale floor, i.e., a $t = 0$ phase evaluated on an independent channel, as the true asymptote.
- *Independent per-antenna path gains.* The complex gains of the scattered paths are drawn independently for each BS antenna instead of being shared across the array. This adds antenna diversity, makes interference nulling easier, and so makes all rates optimistic.
- *Perfect channel knowledge.* Each method is given the exact channel at $t = 0$. Imperfect CSI is left to future work. The channel-acquisition delay is not part of the main results; Section VI-C adds it as a parameter.
- *Narrowband, far field.* The model is a single narrowband carrier, and the BS lies beyond the RIS's Fraunhofer distance. Wideband (OFDM) operation with beam squint and near-field operation of large surfaces are not covered.

IV. Latency-Aware Evaluation Framework

A. Effective Rate

Let a method A receive the channel $\mathcal{H}(0) = \{\mathbf{F}, \mathbf{g}_k(0), \mathbf{h}_{d,k}(0)\}$, return the phase $\boldsymbol{\theta}_A$, and need the wall-clock time τ_A to do so.

Definition 1 (Effective rate). The effective rate of A is its minimum user rate on the channel that exists when it finishes:

$$R_A^{\text{eff}} = \min_k R_k\big(\boldsymbol{\theta}_A;\, \mathcal{H}(\tau_A)\big), \tag{4}$$

where the precoder is recomputed from $\mathcal{H}(\tau_A)$.

The precoder is a closed-form digital computation that the BS can refresh every frame from pilots, whereas the RIS phase requires the iterative optimization whose latency is measured here. The same split between a fast precoder update and a slower phase update underlies two-timescale RIS designs [19]. Definition 1 therefore lets the phase age and keeps the beam fresh. Section VI-E measures how much this assumption is worth.

B. Gain–Aging Decomposition and the Intrinsic Optimum

For an iterative method run for L steps, write $r_0(L) = \min_k R_k(\boldsymbol{\theta}_L; \mathcal{H}(0))$ for its rate at $t = 0$, $\tau(L)$ for its latency and

$$R^{\text{eff}}(L) = r_0(L) - \Delta(L), \tag{5}$$

$$\Delta(L) = r_0(L) - \min_k R_k\big(\boldsymbol{\theta}_L; \mathcal{H}(\tau(L))\big), \tag{6}$$

so that $\Delta(L)$ is the rate lost to aging during the method's own run time. Additional steps raise r_0 with diminishing returns, while Δ grows with $\tau(L)$. An additional step pays off only while

$$r_0(L+1) - r_0(L) \;>\; \Delta(L+1) - \Delta(L), \tag{7}$$

and the effective rate peaks at the first L where this inequality fails. We call that point the *intrinsic optimum* $L^\star$. It is a property of the optimizer and its step size, the per-step latency and the speed of the channel together, not of the optimizer alone. A slower step or a faster user raises the right-hand side and moves $L^\star$ down. Equation (7) is a bookkeeping identity rather than a theorem: whether R^{eff} is unimodal is an empirical question, which we answer in Section VI-B.

C. Equal Steps versus Equal Milliseconds

Learned update rules are usually compared with classical optimizers at an equal number of steps. If one learned step costs c times as much as one classical step, an equal-step comparison gives the learned method c times the compute budget. We therefore also compare at equal measured time and use Pareto dominance.

Definition 2 (Dominance). Configuration B dominates configuration A if $\tau_B \le \tau_A$ and $r_{0,B} \ge r_{0,A}$, with one inequality strict, where r_0 is the rate at $t = 0$.

If B dominates A, there is no latency budget at which A is the better choice. A learned configuration that is dominated by some configuration of the classical optimizer is therefore never worth deploying, regardless of how it compares step for step.

V. Measurement Protocol

A. Scenario Sets

We use three scenario sets, all generated with seed 11, and never mix numbers from different sets in one table or comparison. Absolute rates differ between the sets, mainly because their numbers of scatterers differ.

- *Aging set* (Table I, Figs. 2 and 3, Table II): 400 scenarios with walking users and 20 point scatterers per scenario, close to the 15–19 clusters of the 3GPP indoor-office model.
- *Beam set* (Table V, Fig. 5): a separate draw of 400 scenarios with walking users and the generator's default of 6 scatterers.
- *Static set* (Tables III and IV, Fig. 4): 6000 scenarios without mobility, split 70/15/15 into 4200 training scenarios and two pools of 900, from which 400 validation and 600 test scenarios are used. The generator is not prefix-stable, i.e., drawing n scenarios is not the same as taking the first n of a larger draw, so every trained model is evaluated with the sample count it was trained with.

B. Methods

SU-average and *SU-best-of* are closed-form single-user phase alignments; the latter keeps the best of $K+1$ candidates. *Adam* optimizes the soft-min surrogate starting from SU-average. *Coordinate descent* searches each element over a 16-level phase grid with the others fixed, for up to 8 sweeps. *Long-run Adam* is our strongest classical reference: Adam with step size 0.05 for 1000 iterations from 3 random starts, keeping the best; both it and coordinate descent maximize the hard minimum rather than the soft-min surrogate. The *learned update* is a deep-unfolded network with L learned steps. Each step receives the gradient of the soft-min rate as input and exchanges information across users. A separate network is trained for each L, without labels, with the soft-min rate as the training objective.

Step size on the static set. At every budget $L \le 16$, Adam's step size is selected on the validation set from ten values in $[0.02, 2.0]$, together with the objective (soft-min or hard min). The selected step size is 0.75 with the soft-min objective at every L, an interior point of the grid. The larger budgets used only in the latency comparison ($L = 24, 32, 48, 64$) are tuned the same way on six values in $[0.2, 1.5]$. Comparing a learned rule with an untuned optimizer would overstate its advantage.

Step size on the aging set. The aging experiments use a fixed step size of 0.5. Because the intrinsic optimum depends on how much each step gains, we repeated the sweep with 0.25, 0.75 and 1.0 (Section VI-B). Of the four values, 0.5 gives the highest peak, but this comparison uses the same scenarios and is a robustness check, not a held-out selection.

C. Timing

All latencies are wall-clock times for a single scenario on an Intel Xeon CPU at 2.1 GHz with one PyTorch thread, measured with `time.perf_counter`. The median over repetitions is kept, and the whole measurement is repeated in five rounds.

- *Static set* (Table IV). Adam and the learned update are timed from a shared, precomputed SU-average start, 25 repetitions per configuration. The learned network gets three warm-up calls. Its input features are precomputed and excluded from the timing, which favours the learned method. We report the median over the five rounds; the round-to-round spread is 1.15–1.60× (max/min). The timing script does not record the load average.

- *Aging set* (Table I). SU-average, SU-best-of, coordinate descent, long-run Adam and Adam with $L \in \{1, 2, 4, 8, 16, 32, 48\}$ are timed with one script in a separate session. The load average was 0.20 before the run; it rose during the run, as expected for a continuously busy single-threaded process. The Adam rows of Table I and all step sweeps use a per-step latency of 13.3/8 = 1.66 ms from an earlier measurement. This lies within the range measured here (1.49–2.02 ms per step, least-squares slope 1.50 ms; Adam with $L = 8$: 13.93 ms against 13.3 ms).

Aging sweeps. The sweeps (Fig. 3, Table II) evaluate each phase on a fixed time grid and interpolate linearly at the method's latency plus the acquisition delay T_{ov}. The grid is the one used in the aging experiment, so the baseline sweep reproduces it exactly. Between grid points (e.g., 5, 7.5, 10 ms), and especially at 3 m/s where the grid is coarse relative to T_c, the effective rates are interpolated, and differences of a few thousandths of a b/s/Hz between neighbouring L are not resolved. Latencies beyond the last grid point (5.6 s) take its value.

D. Measurement Traps

Three errors occurred during this work. Each produced a wrong number, and each led to a rule in the protocol.

Timing under load. A timing of Adam with $L = 8$ taken while a training job was running gave 29.70 ms; on the idle machine the same configuration measured 17.48 ms. The slowdown was not neutral: it hit Adam harder than the learned network and put a learned configuration on the latency–rate front. We now time only on an idle machine and report a dominance verdict only if it holds in every round.

A number without a script. An earlier draft stated that a fresh beam is worth "17×" a stale one. The figure had been computed once, interactively, and could not be regenerated; measured with a script, it is 11.7–14.2× (Table V). Every number in this paper is now produced by a script from stored result files.

Stale derived documents. A human-readable summary had not been regenerated after a latency re-measurement and still listed older timings. The dominance verdict was the same, but the milliseconds were not. Tables are therefore generated directly from the result files, never copied from summaries.

E. Reproducibility

One script generates every table and figure in this paper from the stored result files. Re-running the aging sweeps reproduces the stored results bit for bit. The project's separate audit script, which checks 56 assertions about the learning experiments of the underlying thesis, does not cover the numbers reported here.

VI. Results

A. Aging of a Fixed Phase and Effective Rates

Fig. 2 fixes each method's phase at $t = 0$ and tracks the minimum user rate as users walk, with the precoder refreshed at every instant. Rates are flat for the first few milliseconds, drop sharply between roughly 5 and 30 ms, i.e., around T_c, and level off above the stale floor. The more a phase has been optimized, the more it has to lose: by $\tau = T_c$ long-run Adam has fallen from 7.117 to 5.473 b/s/Hz and Adam with $L = 8$ from 6.443 to 5.165, while SU-average has only moved from 4.624 to 4.503.

TABLE I

Rate at $t = 0$, measured latency, and effective rate on the aging set (400 scenarios, $v = 1.5$ m/s). Stale floor: $t = 0$ phase on an independent channel. Adam rows use 1.66 ms per step; other latencies are measured (Section V). †Beyond the 200 ms reliable horizon; optimistic. *Beyond the last time-grid point (5.6 s); value at 5.6 s.

Method	t=0 (b/s/Hz)	Latency (ms)	Effective (b/s/Hz)	Stale (b/s/Hz)
SU-average	4.624	0.42	4.623	4.315
SU-best-of	5.276	2.5	5.272	4.336
Adam, $L = 8$	6.443	13.3	5.849	4.326
Adam, $L = 12$	6.631	20.0	5.515	4.370
Adam, $L = 16$	6.754	26.6	5.324	4.381
Adam, $L = 20$	6.835	33.2	5.276	4.364
Coord. descent	6.925	880.8	4.975†	4.352
Long-run Adam	7.117	5851.7	4.667†*	4.423

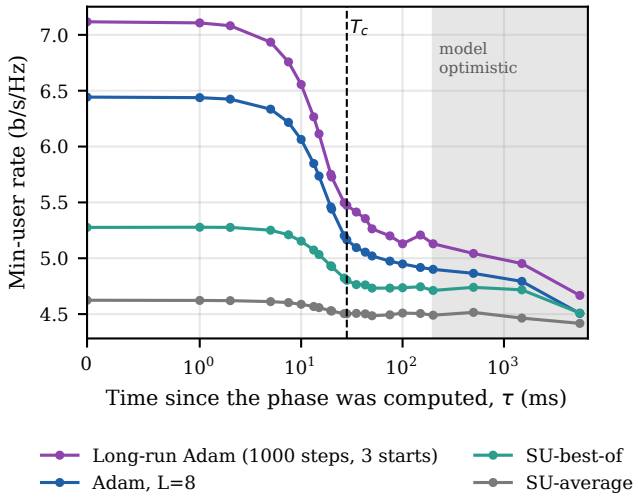


Fig. 2. Minimum user rate of a phase fixed at $t = 0$ as users walk at 1.5 m/s, with the precoder refreshed at every instant. Dashed line: $T_c = 28.2$ ms. Shaded: beyond 200 ms the frozen-scatterer model is optimistic.

Table I evaluates each method at its own measured latency (Definition 1). Long-run Adam and coordinate descent have the best $t = 0$ rates but need 5.9 s and 0.88 s, by which time users have moved metres. Their effective rates lie beyond the 200 ms horizon where our model is reliable and are optimistic; the true values lie between the tabulated effective rate and the stale floor. Even the optimistic values are below that of SU-best-of, which takes 2.5 ms. Among the methods in Table I, Adam with $L = 8$ has the highest effective rate (5.849 b/s/Hz); the step sweep below shows that fewer steps do better still.

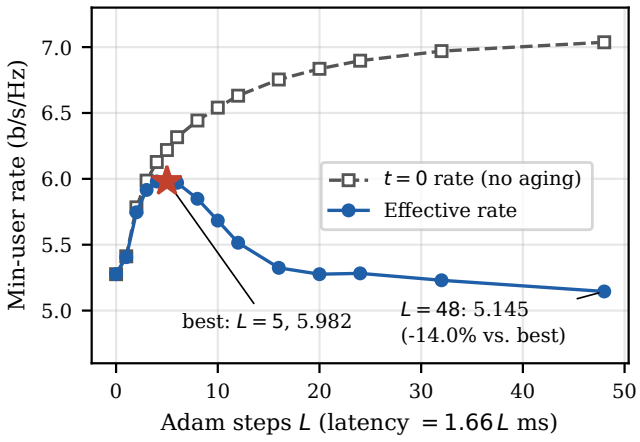


Fig. 3. Adam step sweep on the aging set. The $t = 0$ rate increases monotonically, while the effective rate (rate at the method's own completion time) has a flat top at $L = 4$–6 and is 14.0% below its best value at $L = 48$. $L = 0$: SU-best-of, for reference.

B. The Intrinsic Optimum

Fig. 3 sweeps the number of Adam steps, starting from SU-average (4.624 b/s/Hz); the point at $L = 0$ shows SU-best-of for reference. The $t = 0$ rate grows monotonically with L, from 5.412 at $L = 1$ to 7.037 b/s/Hz at $L = 48$. The effective rate does not. It has a flat top between $L = 4$ and $L = 6$ (5.980, 5.982 and 5.970 b/s/Hz, at 6.7–10.0 ms) and falls beyond it. The differences within the top are smaller than the interpolation resolution (Section V), so we read the optimum as $L^\star \approx 4$–6 rather than as a single value. At $L = 48$ (79.8 ms) it is 5.145 b/s/Hz, 14.0% below the optimum, although the $t = 0$ rate there is 13.2% higher than at the best point ($L = 5$).

In terms of (7): going from $L = 4$ to $L = 6$ adds 0.188 b/s/Hz at $t = 0$, but the additional 3.3 ms of aging cost 0.198 b/s/Hz. Beyond $L = 6$ the effective rate declines; the only exception is a 0.006 b/s/Hz fluctuation between $L = 20$ and $L = 24$. Designing for convergence is therefore not neutral but harmful: the extra steps reduce the effective rate. In this sweep the latency is 1.66 ms per step, within the range of 1.49–2.02 ms per step measured on the same scenario (Section V).

The location of the optimum depends on how much each step gains, and therefore on Adam's step size, which is fixed at 0.5 here. Repeating the sweep with step sizes 0.25, 0.75 and 1.0 moves the best point to $L = 6$, 4 and 5, respectively, and running to $L = 48$ costs 11.5%, 13.7% and 11.3% relative to each peak. The interior optimum at a handful of steps, and the double-digit cost of convergence, do not depend on the step size within this range.

C. Sensitivity to Acquisition Delay and User Speed

The effective rate above charges each method only for its own run time. A deployed system also spends time on pilots, estimation and feedback before the optimizer starts. We therefore add an acquisition delay T_{ov} to every latency and repeat the sweep at four user speeds (Table II). The direction is the one predicted by (7): a faster channel or a longer delay

TABLE II
BEST NUMBER OF ADAM STEPS $L^\star$ ON THE GRID $L \in \{1, \ldots, 6, 8, 10, 12, 16, 20, 24, 32, 48\}$ AND, IN PARENTHESES, THE RANGE OF L WITHIN 0.5% OF THE BEST EFFECTIVE RATE, FOR DIFFERENT USER SPEEDS AND CHANNEL-ACQUISITION DELAYS T_{ov} (AGING SET). $^\ddagger T_{\mathrm{ov}} > T_c/2$: NOT INTERPRETED.

	Acquisition delay T_{ov} (ms)				
v (m/s), T_c	0	1	2	5	10
1, 42.3 ms	6 (6–8)	6 (6–8)	6 (5–8)	6 (5–6)	5 (4–6)
1.5, 28.2 ms	5 (4–6)	4 (4–5)	4 (4–5)	4 (3–4)	3 (3–4)
1.8, 23.5 ms	4 (4–5)	4 (3–4)	4 (3–4)	3 (3–4)	3 (3–4)
3, 14.1 ms	3 (3)	3 (3)	3 (2–3)	2 (2–3)	32‡ (32–48)

TABLE III
EQUAL NUMBER OF STEPS, STATIC TEST SET (600 SCENARIOS). ADAM STEP SIZE AND OBJECTIVE SELECTED ON 400 VALIDATION SCENARIOS AT EACH L.

L	Learned (b/s/Hz)	Adam (b/s/Hz)	Ratio	Diff. -2 s.e. (b/s/Hz)	Wins (%)
1	4.460	4.381	1.018	+0.061	74.8
2	4.879	4.693	1.040	+0.160	83.2
4	5.285	5.025	1.052	+0.228	83.7
8	5.593	5.380	1.040	+0.184	83.2
16	5.800	5.739	1.011	+0.039	68.3

makes each additional step cost more aging, and the optimum moves to fewer steps: without delay, the near-optimal range shifts from $L = 6$–8 at 1 m/s to $L = 3$ at 3 m/s, and at 1.5 m/s it shifts from $L = 4$–6 to $L = 3$–4 as T_{ov} grows from 0 to 10 ms. The best effective rate falls with T_{ov} at every speed. We do not interpret cells with $T_{\mathrm{ov}} > T_c/2$, where the channel has largely changed before optimization starts. The only such cell is 3 m/s with 10 ms; there all step counts give rates within 0.26 b/s/Hz, and the maximum falls at $L = 32$, which carries no meaning. In all other cells, running Adam to $L = 48$ costs 2.9–14.7% of the attainable effective rate. The cost is smallest where aging leaves the optimizer least to gain, i.e., for fast users and long delays.

The optimum is also tolerant of an error in the assumed speed. Choosing L for 1.5 m/s when users actually move at 1.8 m/s costs 0.46% of the attainable effective rate, and the reverse error costs 0.04%. The largest loss in our grid, 5.7%, occurs when L is chosen for 1 m/s and users move at 3 m/s.

D. Learned versus Classical: Equal Steps and Equal Milliseconds

Table III compares the learned update rule with tuned Adam at equal step counts on the static test set; both start from SU-average (3.539 b/s/Hz). The learned rule is ahead at every budget, the paired difference minus two standard errors is positive at every budget, and it wins on 68–84% of test scenarios. On a step axis, the learned rule is the better optimizer.

Steps, however, are not equally expensive. One learned step takes 4.6–6.5 ms, one Adam step 1.60–1.71 ms, so a learned step costs 2.7–4.0 Adam steps. Table IV and Fig. 4(b) place both methods on the measured latency axis. Every learned configuration is dominated by an Adam configuration that is

TABLE IV
EQUAL MILLISECONDS: EACH LEARNED CONFIGURATION AND THE BEST ADAM CONFIGURATION THAT DOMINATES IT (LOWER MEDIAN LATENCY AND HIGHER RATE). MEDIANS OVER FIVE ROUNDS. IN EVERY ROUND EACH LEARNED CONFIGURATION IS DOMINATED BY AT LEAST ONE ADAM CONFIGURATION.

Learned update			Dominating Adam		
L	ms	b/s/Hz	L	ms	b/s/Hz
1	5.16	4.460	2	3.20	4.693
2	12.95	4.879	4	6.49	5.025
4	18.41	5.285	8	13.48	5.380
8	36.76	5.593	16	27.31	5.739
16	83.80	5.800	48	78.77	6.107

both faster and better. This holds in each of the five timing rounds separately, although not always by the configuration listed: for learned $L = 16$, Adam with $L = 48$ is slower in two rounds, and Adam with $L = 32$ (6.013 b/s/Hz, at most 62.97 ms) dominates in every round. For example, the learned rule with $L = 4$ needs 18.41 ms for 5.285 b/s/Hz, while Adam with $L = 8$ needs 13.48 ms for 5.380 b/s/Hz. The ranking from the equal-step comparison reverses completely.

Two remarks bound this result. First, the comparison uses $t = 0$ rates on the static set. Aging was not included; since the learned configuration is the slower one in every pair, aging would be expected to widen rather than close the gap, but we have not measured this. Second, the learned timing excludes feature computation, so the latency gap is if anything understated.

E. What the Fresh-Beam Assumption Is Worth

All results above assume that the BS precoder is recomputed from the current channel while only the RIS phase ages (Section IV). Table V and Fig. 5 measure the alternative in which the precoder ages too, on the separate beam set (Section V), whose absolute rates are not comparable with Table I. Both curves use the same $t = 0$ phase. With a fresh beam the rate decays moderately (Adam with $L = 8$: from 5.342 to 4.358 b/s/Hz at T_c); with a stale beam it collapses within tens of milliseconds, and at T_c it is 11.7–14.2× lower than with a fresh beam, for every phase choice. The assumption therefore matters, and it must hold in a deployment for the effective rates above to apply: the BS has to refresh its precoder at least once per coherence time. Refreshing it is cheap: single-threaded, computing the effective channel and the regularized ZF precoder takes a median of 0.12 ms, about 13× less than a single Adam step (8.0–15.0× across five rounds). We have not included this time in the effective rates. This is the usual frame-by-frame operation of a multi-antenna BS, but it is an assumption of our results rather than a finding.

VII. CONCLUSION

When users move, an RIS phase configuration is worth what it achieves on the channel that exists when it is delivered. Evaluated this way on a 3GPP indoor-office multi-user MISO scenario with pedestrian users, three results follow. First, the methods with the best rate at $t = 0$ (long-run Adam, coordinate descent) take 0.9–5.9 s and end up below a 2.5 ms single-user heuristic. Second, the number of optimizer steps has an interior optimum: Adam's effective rate has a flat top at 4–6 steps (5.98 b/s/Hz), and running it to $L = 48$ costs 14.0% even though the $t = 0$ rate keeps rising; this holds for all four step sizes we tried. The optimum moves to fewer steps as users get faster or channel acquisition gets slower, and it is tolerant of a moderately wrong speed estimate. Third, a learned update rule that beats a tuned Adam at every equal step count is dominated by Adam at every measured latency, in each of five independent timing rounds. Which method is better depends on whether one counts steps or milliseconds, and in a mobile system only milliseconds matter.

TABLE V
FRESH VERSUS STALE PRECODER AT $\tau = T_c = 28.2$ MS, PHASE FIXED AT $t = 0$ IN BOTH (BEAM SET, 400 SCENARIOS).

Phase chosen at $t = 0$	Fresh beam (b/s/Hz)	Stale beam (b/s/Hz)	Ratio
SU-average	3.586	0.306	11.7×
SU-best-of	3.924	0.305	12.9×
Adam, $L = 8$	4.358	0.307	14.2×

A. Practical Implications

- Stop iterating early. For the pedestrian scenario studied here, four to six gradient steps (7–10 ms) give the highest effective rate. The right stopping point moves earlier for faster users, longer acquisition delays or slower steps (Table II), as the marginal condition (7) predicts.
- Compare methods on measured latency, with the classical baseline's hyper-parameters tuned at each budget, and report dominance rather than equal-step wins.
- Measure latency only on an idle machine, and check that the verdict holds in every repeated round.

B. Limitations and Future Work

The channel model keeps scatterers fixed, so effective rates beyond about 200 ms are optimistic. Cluster gains are drawn independently per BS antenna, which makes all rates optimistic. Channel knowledge is perfect, and the model is narrowband and far-field. The effective-rate results rely on the BS refreshing its precoder at least once per coherence time; without that, rates at T_c are an order of magnitude lower. Three extensions follow directly from these limitations. The first is imperfect CSI, where a learned rule trained on noisy channels might outperform a classical optimizer that overfits the estimate; clean-trained and noise-trained models must be reported separately. The second is discrete phases (1–3 bits), including the latency of discrete optimizers. The third is wideband and near-field operation, together with vehicular speeds, which Table II only begins to cover at 3 m/s.

ACKNOWLEDGMENT

[Acknowledgment text, e.g., advisor and computing resources, or remove this section.]

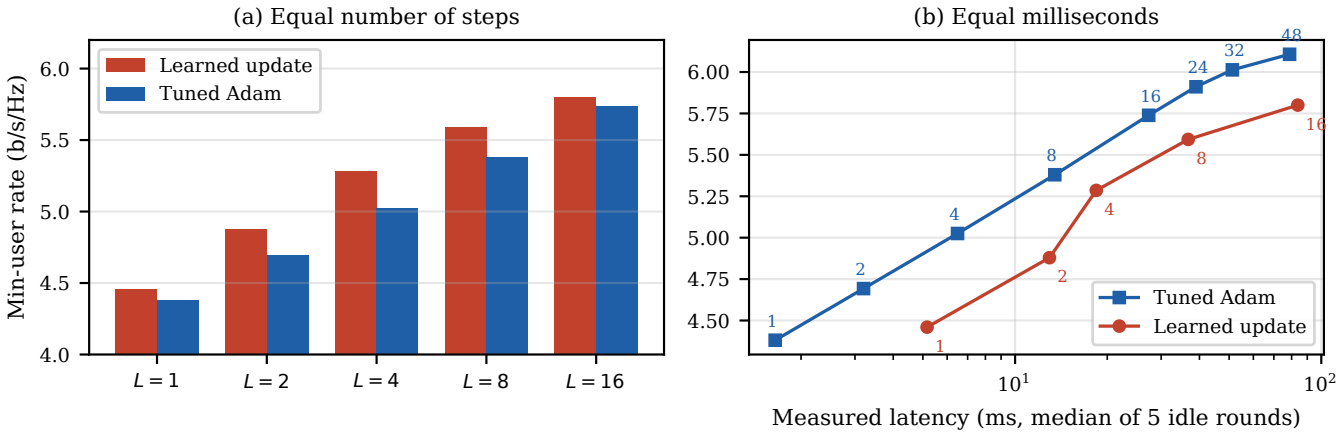


Fig. 4. Learned update rule versus tuned Adam on the static test set. (a) At an equal number of steps, the learned rule is ahead at every budget. (b) On the measured latency axis (numbers: steps), every learned configuration lies below and to the right of the Adam curve, i.e., it is dominated.

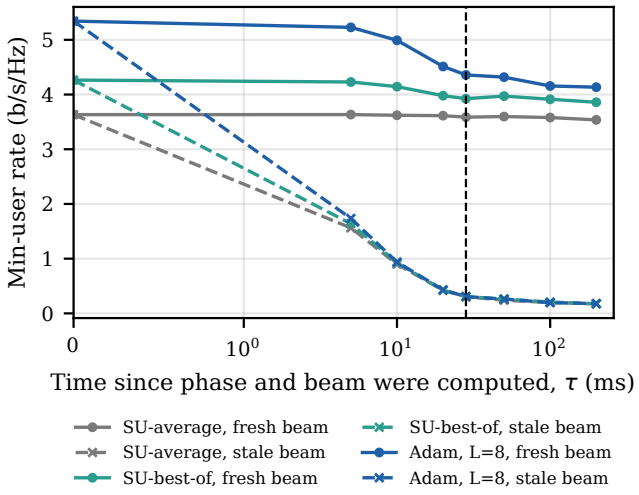


Fig. 5. Same $t = 0$ phase evaluated with a precoder recomputed from the current channel (fresh) or kept from $t = 0$ (stale). Dashed line: T_c.

Data and Code Availability

The scripts that generate every table and figure, and the stored measurement files they read, are available at [public repository URL or "upon request"].

References

[1] E. Basar, M. D. Renzo, J. D. Rosny, M. Debbah, M.-S. Alouini, and R. Zhang, "Wireless communications through reconfigurable intelligent surfaces," *IEEE Access*, vol. 7, pp. 116 753–116 773, 2019.

[2] Q. Wu and R. Zhang, "Intelligent reflecting surface enhanced wireless network via joint active and passive beamforming," *IEEE Transactions on Wireless Communications*, vol. 18, no. 11, pp. 5394–5409, 2019.

[3] L. Dai, B. Wang, M. Wang, X. Yang, J. Tan, S. Bi, S. Xu, F. Yang, Z. Chen, M. D. Renzo, C.-B. Chae, and L. Hanzo, "Reconfigurable intelligent surface-based wireless communications: Antenna design, prototyping, and experimental results," *IEEE Access*, vol. 8, pp. 45 913–45 923, 2020.

[4] X. Pei, H. Yin, L. Tan, L. Cao, Z. Li, K. Wang, K. Zhang, and E. Björnson, "RIS-aided wireless communications: Prototyping, adaptive beamforming, and indoor/outdoor field trials," *IEEE Transactions on Communications*, vol. 69, no. 12, pp. 8627–8640, 2021.

[5] S. Abeywickrama, R. Zhang, Q. Wu, and C. Yuen, "Intelligent reflecting surface: Practical phase shift model and beamforming optimization," *IEEE Transactions on Communications*, vol. 68, no. 9, pp. 5849–5863, 2020.

[6] C. Pan, H. Ren, K. Wang, W. Xu, M. Elkashlan, A. Nallanathan, and L. Hanzo, "Multicell MIMO communications relying on intelligent reflecting surfaces," *IEEE Transactions on Wireless Communications*, vol. 19, no. 8, pp. 5218–5233, 2020.

[7] H. Guo, Y.-C. Liang, J. Chen, and E. G. Larsson, "Weighted sum-rate maximization for reconfigurable intelligent surface aided wireless networks," *IEEE Transactions on Wireless Communications*, vol. 19, no. 5, pp. 3064–3076, 2020.

[8] H. Choi, A. L. Swindlehurst, and J. Choi, "WMMSE-based rate maximization for RIS-assisted MU-MIMO systems," *IEEE Transactions on Communications*, vol. 72, no. 8, pp. 5194–5208, 2024.

[9] C. Huang, R. Mo, and C. Yuen, "Reconfigurable intelligent surface assisted multiuser MISO systems exploiting deep reinforcement learning," *IEEE Journal on Selected Areas in Communications*, vol. 38, no. 8, pp. 1839–1850, 2020.

[10] 3GPP, "Study on channel model for frequencies from 0.5 to 100 GHz," 3rd Generation Partnership Project (3GPP), Technical Report TR 38.901, V16.1.0 (Release 16), Dec. 2019.

[11] V. Monga, Y. Li, and Y. C. Eldar, "Algorithm unrolling: Interpretable, efficient deep learning for signal and image processing," *IEEE Signal Processing Magazine*, vol. 38, no. 2, pp. 18–44, 2021.

[12] Y. Liu, Q. Hu, Y. Cai, G. Yu, and G. Y. Li, "Deep-unfolding beamforming for intelligent reflecting surface assisted full-duplex systems," *IEEE Transactions on Wireless Communications*, vol. 21, no. 7, pp. 4784–4800, 2022.

[13] Z. Huang, B. Zheng, and R. Zhang, "Transforming fading channel from fast to slow: Intelligent refracting surface aided high-mobility communication," *IEEE Transactions on Wireless Communications*, vol. 21, no. 7, pp. 4989–5003, 2022.

[14] A. Papazafeiropoulos, I. Krikidis, and P. Kourtessis, "Impact of channel aging on reconfigurable intelligent surface aided massive MIMO systems with statistical CSI," *IEEE Transactions on Vehicular Technology*, vol. 72, no. 1, pp. 689–703, 2023.

[15] Y. Zhang, J. Zhang, M. D. Renzo, H. Xiao, and B. Ai, "Reconfigurable intelligent surfaces with outdated channel state information: Centralized vs. distributed deployments," *IEEE Transactions on Communications*, vol. 70, no. 4, pp. 2742–2756, 2022.

[16] C. Liu, W. Yuan, Z. Wei, X. Liu, and D. W. K. Ng, "Location-aware predictive beamforming for UAV communications: A deep learning approach," *IEEE Wireless Communications Letters*, vol. 10, no. 3, pp. 668–672, 2021.

[17] R. Chopra, C. R. Murthy, H. A. Suraweera, and E. G. Larsson, "Performance analysis of FDD massive MIMO systems under channel aging," *IEEE Transactions on Wireless Communications*, vol. 17, no. 2, pp. 1094–1108, 2018.

[18] N. Jindal, "MIMO broadcast channels with finite-rate feedback," *IEEE Transactions on Information Theory*, vol. 52, no. 11, pp. 5045–5060, 2006.

[19] M.-M. Zhao, Q. Wu, M.-J. Zhao, and R. Zhang, "Intelligent reflecting surface enhanced wireless networks: Two-timescale beamforming optimization," *IEEE Transactions on Wireless Communications*, vol. 20, no. 1, pp. 2–17, 2021.

[20] Y. Cao, T. Lv, and W. Ni, "Two-timescale optimization for intelligent reflecting surface-assisted MIMO transmission in fast-changing channels," *IEEE Transactions on Wireless Communications*, vol. 21, no. 12, pp. 10 424–10 437, 2022.

[21] Q. Wu and R. Zhang, "Beamforming optimization for wireless network aided by intelligent reflecting surface with discrete phase shifts," *IEEE Transactions on Communications*, vol. 68, no. 3, pp. 1838–1851, 2020.

[22] Y. Zhao, Y. Feng, A. M. Ismail, Z. Wang, Y. L. Guan, Y. Guo, and C. Yuen, "2-bit RIS prototyping enhancing rapid-response space-time wavefront manipulation for wireless communication: Experimental studies," *IEEE Open Journal of the Communications Society*, vol. 5, pp. 4885–4901, 2024.

[23] M. Gudmundson, "Correlation model for shadow fading in mobile radio systems," *Electronics Letters*, vol. 27, no. 23, pp. 2145–2146, 1991.

[24] W. Tang, M. Z. Chen, X. Chen, J. Y. Dai, Y. Han, M. D. Renzo, Y. Zeng, S. Jin, Q. Cheng, and T. J. Cui, "Wireless communications with reconfigurable intelligent surface: Path loss modeling and experimental measurement," *IEEE Transactions on Wireless Communications*, vol. 20, no. 1, pp. 421–439, 2021.

[25] T. S. Rappaport, *Wireless Communications: Principles and Practice*, 2nd ed. Prentice Hall, 2002.