1. Description

1.1. Project

Project Name	Flight_Controller
Board Name	STM32F3DISCOVERY
Generated with:	STM32CubeMX 4.21.0
Date	07/19/2017

1.2. MCU

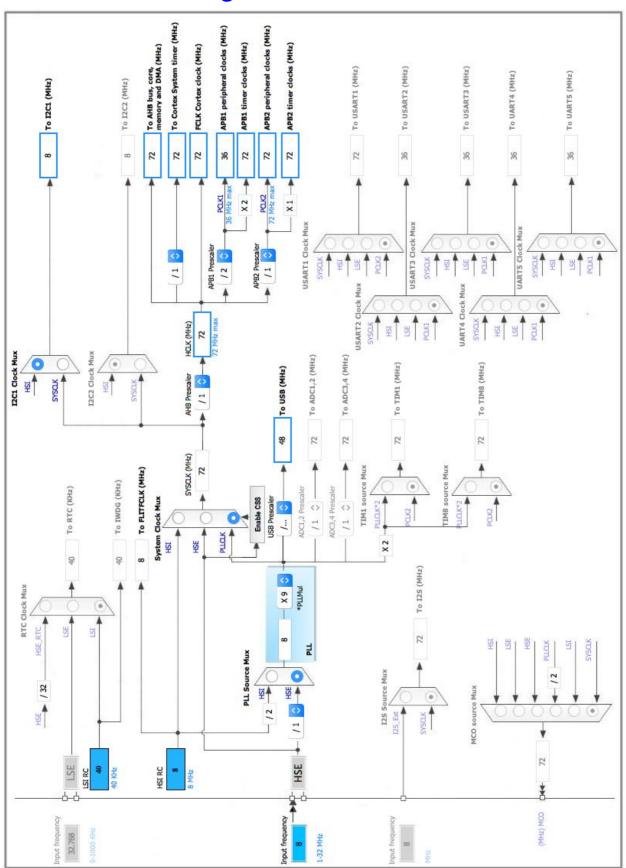|	
MCU Series	STM32F3
MCU Line	STM32F303
MCU name	STM32F303VCTx
MCU Package	LQFP100
MCU Pin number	100

2. Pinout Configuration

3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	PE2	I/O	GPIO_EXTI2	DRDY [LSM303DLHC_DRDY]
2	PE3 *	I/O	GPIO_Output	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
3	PE4	I/O	GPIO_EXTI4	MEMS_INT3 [LSM303DLHC_INT1]
4	PE5	I/O	GPIO_EXTI5	MEMS_INT4 [LSM303DLHC_INT2]
6	VBAT	Power		
8	PC14-OSC32_IN **	I/O	RCC_OSC32_IN	OSC32_IN
9	PC15-OSC32_OUT **	I/O	RCC_OSC32_OUT	OSC32_OUT
12	PF0-OSC_IN	I/O	RCC_OSC_IN	OSC_IN
13	PF1-OSC_OUT **	I/O	RCC_OSC_OUT	OSC_OUT
14	NRST	Reset		
20	VSSA/VREF-	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0 *	I/O	GPIO_Input	B1 [Blue PushButton]
24	PA1	I/O	TIM2_CH2	
28	VDD	Power		
30	PA5	I/O	SPI1_SCK	SPI1_SCK [L3GD20_SCL/SPC]
31	PA6	I/O	SPI1_MISO	SPI1_MISO [L3GD20_SA0/SDO]
32	PA7	I/O	SPI1_MOSI	SPI1_MISO [L3GD20_SDA/SDI/SDO]
39	PE8 *	I/O	GPIO_Output	LD4 [Blue Led]
40	PE9 *	I/O	GPIO_Output	LD3 [Red Led]
41	PE10 *	I/O	GPIO_Output	LD5 [Orange Led]
42	PE11 *	I/O	GPIO_Output	LD7 [Green Led]
43	PE12 *	I/O	GPIO_Output	LD9 [Blue Led]
44	PE13 *	I/O	GPIO_Output	LD10 [Red Led]
45	PE14 *	I/O	GPIO_Output	LD8 [Orange Led]
46	PE15 *	I/O	GPIO_Output	LD6 [Green Led]
49	VSS	Power		
50	VDD	Power		
59	PD12	I/O	TIM4_CH1	

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
70	PA11	I/O	USB_DM	DM
71	PA12	I/O	USB_DP	DP
72	PA13	I/O	SYS_JTMS-SWDIO	SWDIO
74	VSS	Power		
75	VDD	Power		
76	PA14	I/O	SYS_JTCK-SWCLK	SWCLK
77	PA15	I/O	TIM2_CH1	
89	PB3 **	I/O	SYS_JTDO-TRACESWO	SWO
92	PB6	I/O	I2C1_SCL	I2C1_SCL [LSM303DLHC_SCL]
93	PB7	I/O	I2C1_SDA	I2C1_SDA [LSM303DLHC_SDA]
94	BOOT0	Boot		
97	PE0	I/O	GPIO_EXTI0	MEMS_INT1 [L3GD20_INT1]
98	PE1	I/O	GPIO_EXTI1	MEMS_INT2 [L3GD20_DRDY/INT2]
99	VSS	Power		
100	VDD	Power		

 * The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	0
Fall Time (ns)	0
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	0x2000090E

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

5.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

5.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Prefetch Buffer	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

5.3. SPI1

Mode: Full-Duplex Master

5.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	4 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	**4 ***
Baud Rate	**18.0 MBits/s ***
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSSP Mode	Enabled
NSS Signal Type	Software

5.4. SYS

Debug: Serial Wire
Timebase Source: SysTick

5.5. TIM2

Clock Source   : Internal Clock
Channel1: Input Capture direct mode
Channel2: Input Capture direct mode

5.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**71 ***
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	**65535 ***

Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Input Capture Channel 1:

Polarity Selection	**Both Edges ***
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

Input Capture Channel 2:

Polarity Selection	**Both Edges ***
IC Selection	Direct
Prescaler Division Ratio	No division
Input Filter (4 bits value)	0

5.6. TIM4

Channel1: PWM Generation CH1

5.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**21 ***
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**65453 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode	Disable (no sync between this TIM (Master) and its Slaves
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 1:

Mode	**PWM mode 2 ***
Pulse (16 bits value)	0
Fast Mode	Disable
CH Polarity	**Low ***

5.7. USB

mode: Device (FS)

5.7.1. Parameter Settings:

Basic Parameters:

Speed	Full Speed 12MBit/s
Endpoint 0 Max Packet size	64 Bytes
Physical interface	Internal Phy

Power Parameters:

Low Power	Disabled
Battery Charging	Disabled

5.8. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.8.1. Parameter Settings:

Basic Parameters:

USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces)	1
USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration)	1
USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors)	512
USBD_SUPPORT_USER_STRING (Enable user string descriptor)	Disabled
USBD_SELF_POWERED (Enabled self power)	Enabled
USBD_DEBUG_LEVEL (USBD Debug Level)	0: No debug message

Class Parameters:

USBD_CDC_INTERVAL (Number of micro-frames interval)	1000

5.8.2. Device Descriptor:

Device Descriptor:

VID (Vendor IDentifier)	1155
LANGID_STRING (Language Identifier)	English(United States)
MANUFACTURER_STRING (Manufacturer Identifier)	STMicroelectronics

Device Descriptor FS:

PID (Product IDentifier)	22336
PRODUCT_STRING (Product Identifier)	STM32 Virtual ComPort
SERIALNUMBER_STRING (Serial number)	00000000001A
CONFIGURATION_STRING (Configuration Identifier)	CDC Config
INTERFACE_STRING (Interface Identifier)	CDC Interface

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB6	I2C1_SCL	Alternate Function Open Drain	Pull up	**High ***	I2C1_SCL [LSM303DLHC_SCL]
	PB7	I2C1_SDA	Alternate Function Open Drain	Pull up	**High ***	I2C1_SDA [LSM303DLHC_SDA]
RCC	PF0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	OSC_IN
SPI1	PA5	SPI1_SCK	Alternate Function Push Pull	No pull up pull down	**High ***	SPI1_SCK [L3GD20_SCL/SPC]
	PA6	SPI1_MISO	Alternate Function Push Pull	No pull up pull down	**High ***	SPI1_MISO [L3GD20_SA0/SDO]
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull up pull down	**High ***	SPI1_MISO [L3GD20_SDA/SDI/SDO]
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	SWDIO
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	SWCLK
TIM2	PA1	TIM2_CH2	Alternate Function Push Pull	No pull up pull down	Low	
	PA15	TIM2_CH1	Alternate Function Push Pull	No pull up pull down	Low	
TIM4	PD12	TIM4_CH1	Alternate Function Push Pull	No pull up pull down	Low	
USB	PA11	USB_DM	Alternate Function Push Pull	No pull up pull down	**High ***	DM
	PA12	USB_DP	Alternate Function Push Pull	No pull up pull down	**High ***	DP
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	OSC32_IN
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	OSC32_OUT
	PF1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	OSC_OUT
	PB3	SYS_JTDO-TRACESWO	n/a	n/a	n/a	SWO
GPIO	PE2	GPIO_EXTI2	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	DRDY [LSM303DLHC_DRDY]
	PE3	GPIO_Output	Output Push Pull	No pull up pull down	Low	CS_I2C/SPI [L3GD20_CS_I2C/SPI]
	PE4	GPIO_EXTI4	**External Event Mode with Rising edge**	No pull up pull down	n/a	MEMS_INT3 [LSM303DLHC_INT1]

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
			trigger detection *			
	PE5	GPIO_EXTI5	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT4 [LSM303DLHC_INT2]
	PA0	GPIO_Input	Input mode	No pull up pull down	n/a	B1 [Blue PushButton]
	PE8	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD4 [Blue Led]
	PE9	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD3 [Red Led]
	PE10	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD5 [Orange Led]
	PE11	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD7 [Green Led]
	PE12	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD9 [Blue Led]
	PE13	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD10 [Red Led]
	PE14	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD8 [Orange Led]
	PE15	GPIO_Output	Output Push Pull	No pull up pull down	Low	LD6 [Green Led]
	PE0	GPIO_EXTI0	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT1 [L3GD20_INT1]
	PE1	GPIO_EXTI1	**External Event Mode with Rising edge trigger detection ***	No pull up pull down	n/a	MEMS_INT2 [L3GD20_DRDY/INT2]

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
USB low priority or CAN_RX0 interrupts	true	0	0
PVD interrupt through EXTI line16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USB high priority or CAN_TX interrupts	unused		
TIM2 global interrupt	unused		
TIM4 global interrupt	unused		
I2C1 event global interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
SPI1 global interrupt	unused		
USB high priority interrupt remap	unused		
USB low priority interrupt remap	unused		
Floating point unit interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F3
Line	STM32F303
MCU	STM32F303VCTx
Datasheet	023353_Rev13

7.2. Parameter Selection

Temperature	25
Vdd	3.6

8. Software Project

8.1. Project Settings

Name	Value
Project Name	Flight_Controller
Project Folder	/Users/sethcohen/Documents/openSTM32/workspace/Flight_Controller
Toolchain / IDE	SW4STM32
Firmware Package Name and Version	STM32Cube FW_F3 V1.8.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No