


IT

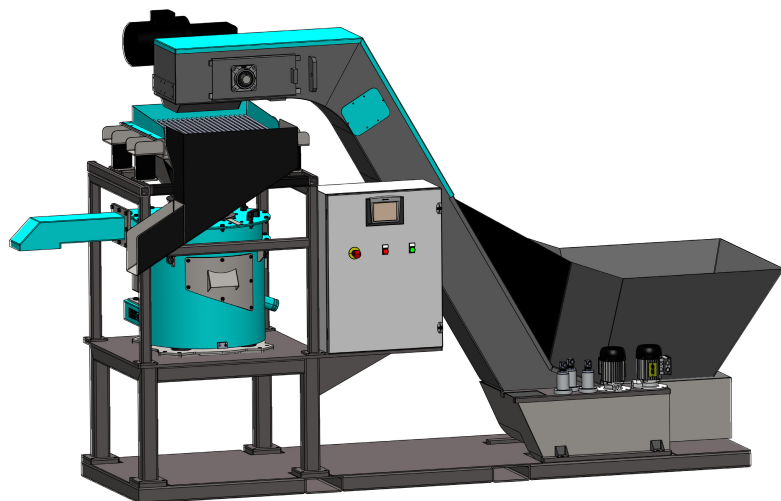

KOMBI-40

Impianto automatico di disoleatura truciolo metallico corto, disponibile in due taglie per la centrifuga:

- **KOMBI-15** fino a 150 kg/ora
- **KOMBI-40** fino a 400 kg/ora

Il sistema è compatto e montato su base palletizzata, completo di trasportatore a tapparelle con tramoggia di accumulo per il carico della centrifuga, setaccio per la separazione pezzi o fine barra, vasca di recupero olio/emulsione e quadro elettrico.

OPTIONAL:

- Trituratore mod. **TR1**
- Vasca dragante autopulente

EN

Automatic metal chip deoiling system in two sizes for the centrifuge:

- **KOMBI-15** up to 150 kg/hour
- **KOMBI-40** up to 400 kg/hour



Compact system on palletized base, complete with a slat conveyor for centrifuge loading with accumulation hopper, sieve for pieces separation, oil/emulsion recovery tank and electrical panel.

OPTIONAL:


- Shredder mod. **TR1**
- Self-cleaning dredging tank

DATI TECNICI - TECHNICAL DATA


A	3900 mm max
B	1350 mm max
C	3200 mm
D	2350 mm
E	1200 mm
F	1000 mm
PESO / WEIGHT	950 - 1150 kg
POTENZA TOTALE / TOTAL POWER	3,5 - 6,5 kW
ALIMENTAZIONE ELETTRICA / POWER SUPPLY	400 V - 50 Hz
VOLUME TRAMOGGIA CARICO LOADING HOPPER VOLUME	600 l
PORTATA ORARIA TRUCIOLO CHIP HOURLY FLOW RATE	150 kg/h - KOMBI 15 400 kg/h - KOMBI 40

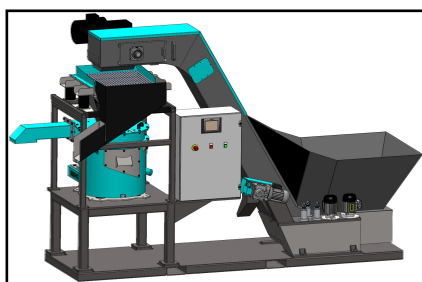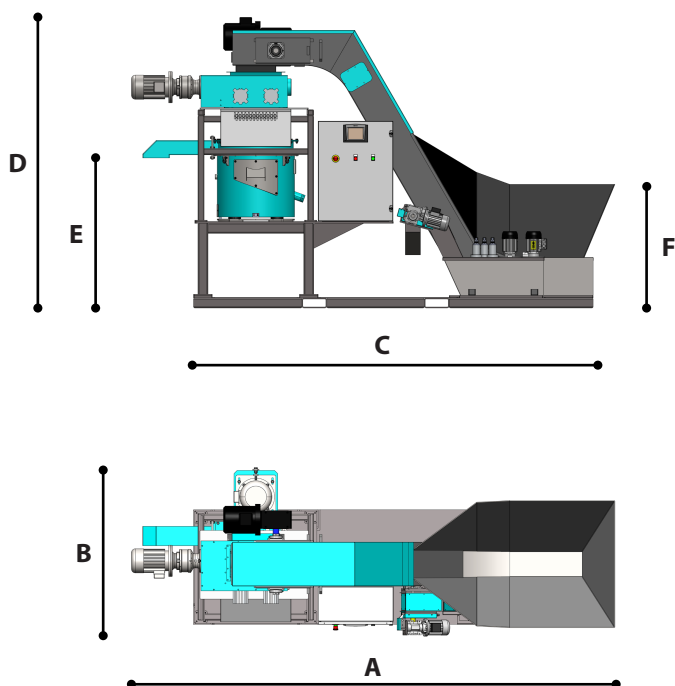

KOMBI-40 D
VASCA DRAGATA - DRED. TANK

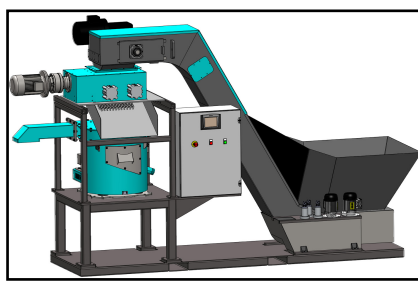

KOMBI-40 T
TRITURATORE TR1 - SHREDDER TR1

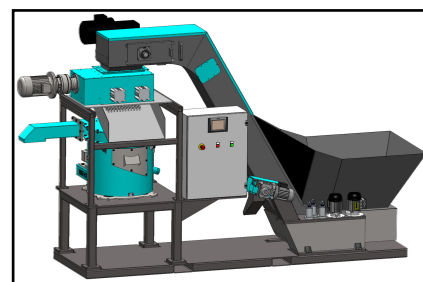

KOMBI-40 DT
VASCA DRAGATA - TRITURATORE TR1
DRED. TANK - SHREDDER TR1

Fase Mechanical Engineering Srl

Via F. Crispi, 12 | 36056 Tezze sul Brenta | Vicenza ITALY
Tel. +39 0424 561848 | Fax +39 0424 564560 | info@fasemec.com
www.fasemec.com