
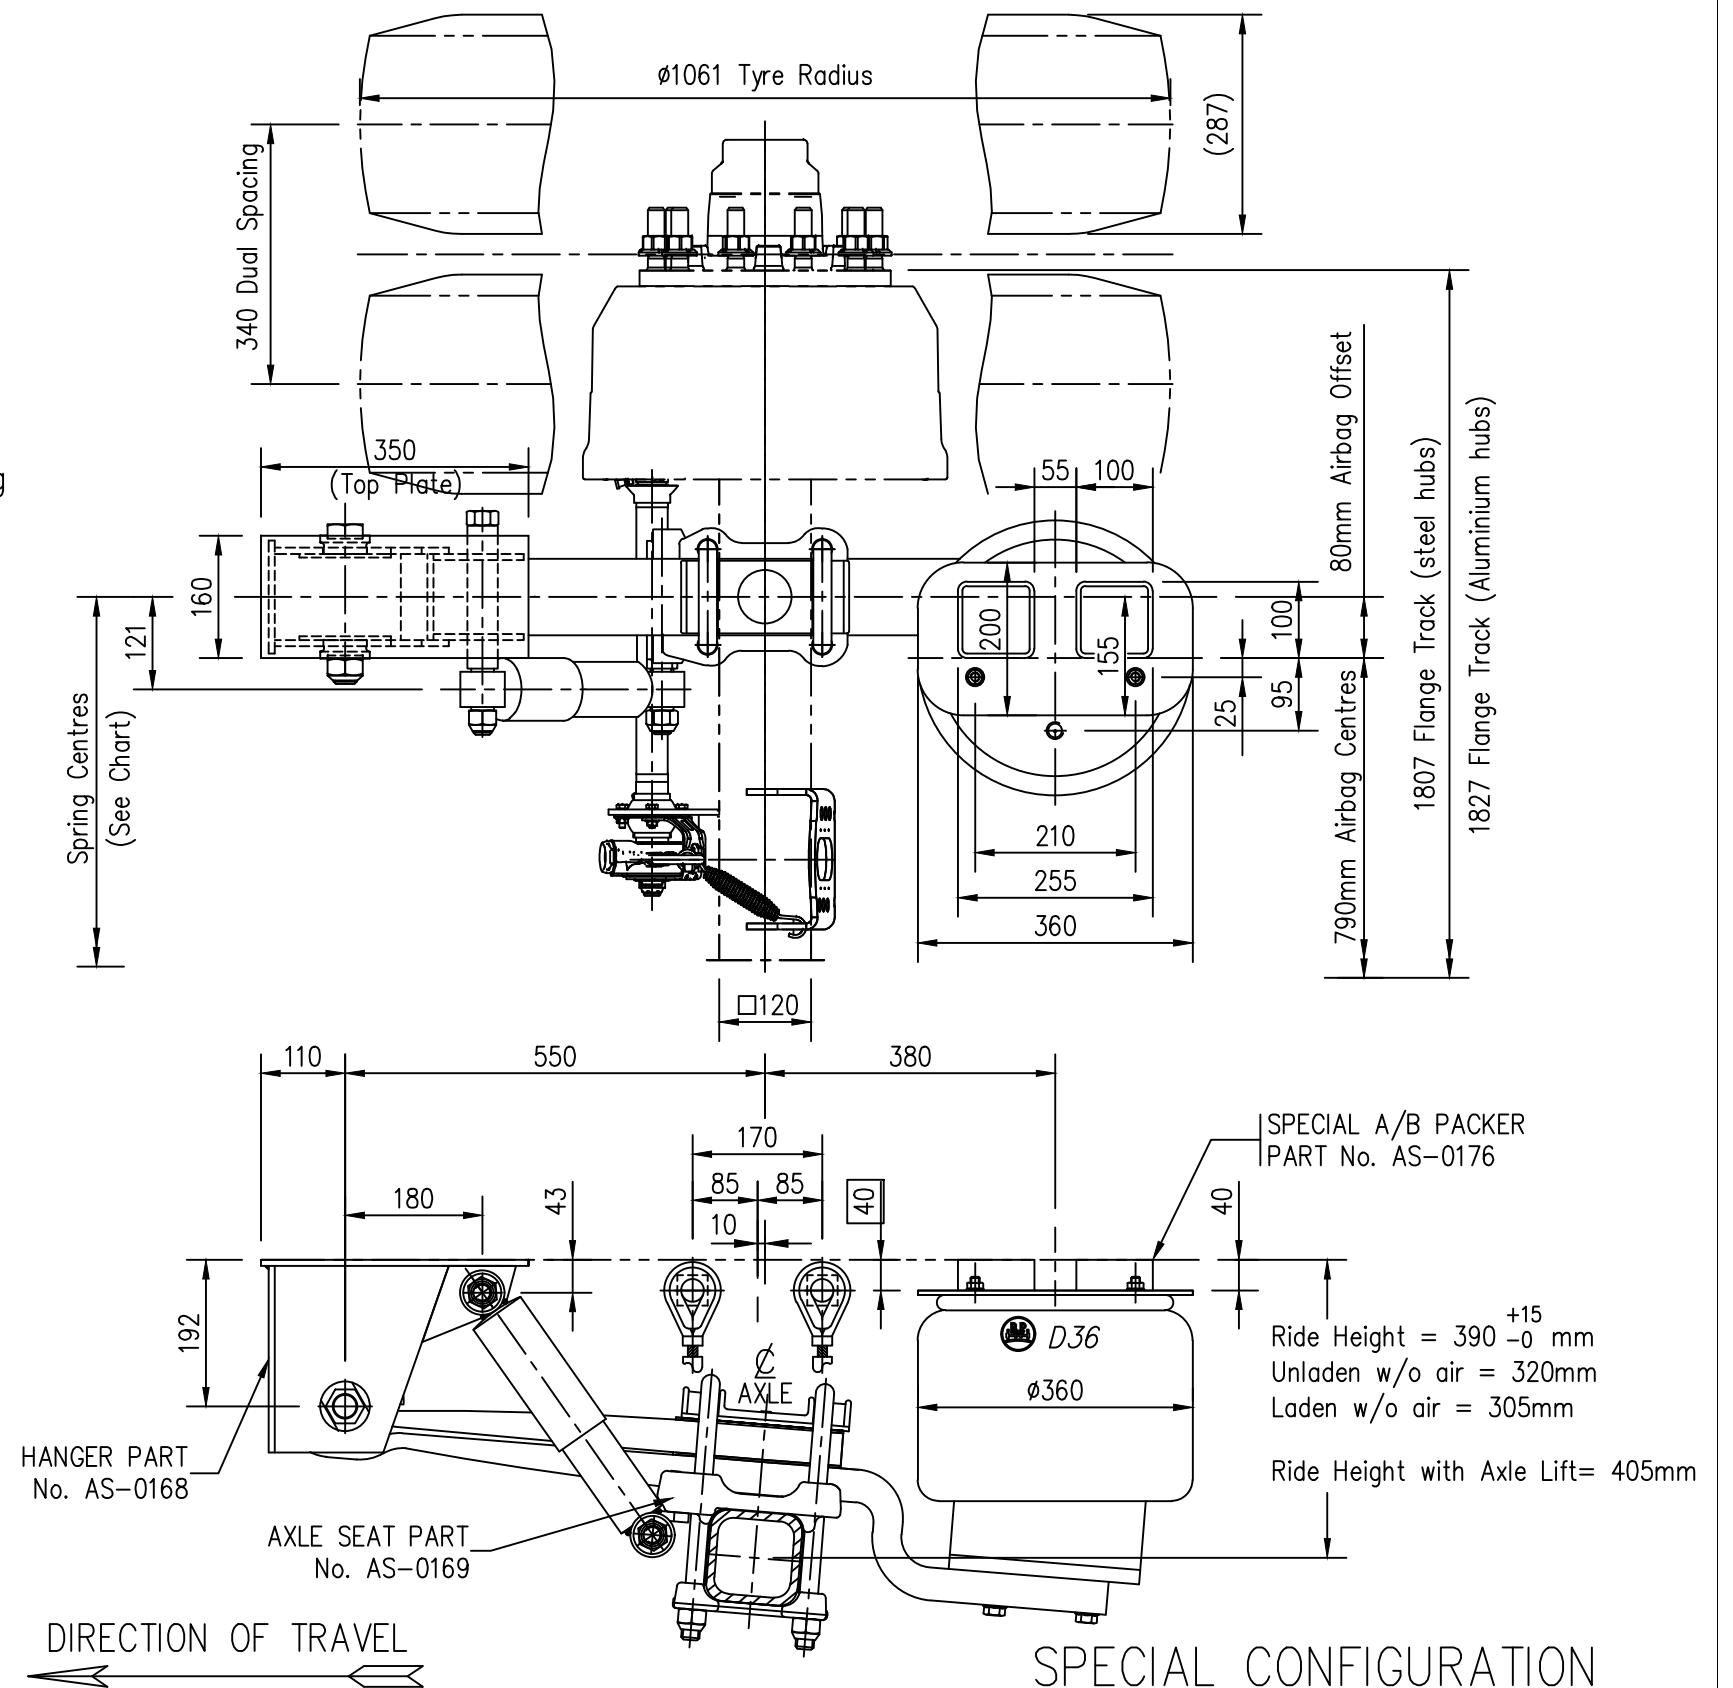


- 10/285 PCD Axle with BL-04 with 11R 22.5" tyres on dual aluminium wheels shown illustration purposes only.
- Suitable for use with booster locations BL-04 and BL-18.
- Minimum Axle spacing =1250mm
- Please refer to LO-0018 for hanger bracing instructions.
- Please refer Assembly Guidelines for airbag mounting plate bracing. (Fitment of airbag mounting plate optional)
- Please refer to LO-0032 for catchstrap mounting installation

Cable Catchstrap Part No. 05.327.14.02.0 (L=1160) – Standard Fitment.
– This suspension is suitable for 980mm spring centres with 80mm airbag offset ONLY when using 11R 22.5" tyres fitted to dual aluminium rims on steel or aluminium hubs.

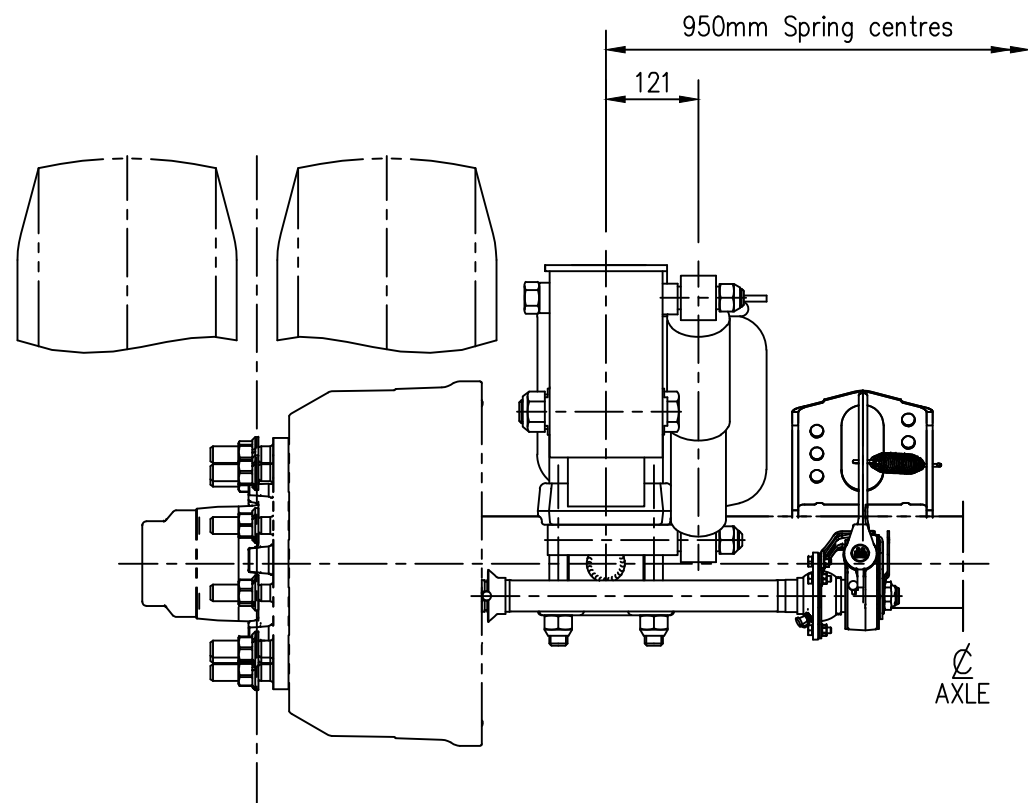

SPECIAL CONFIGURATION

SPECIAL CABLE CATCHSTRAP MOUNT & AIRBAG PACKER

 Transpec PTY LTD.				1 CHERRY LANE, LAVERTON NORTH, VIC. 3026. PHONE: (03) 9267 2444. FAX: (03) 9369 4826. www.bpwtranspec.com.au ABN 63 006 645 272		TITLE SUSPENSION ASSEMBLY H/DUTY 'OM/D36' OVERSLUNG AIRBAG SUSP'N C/W SPECIAL HANGER AND SEATS 40mm A/B PACKER RIDE HEIGHT 390-405mm			
THIS DRAWING IS COPYRIGHT AND THE SOLE PROPERTY OF BPW TRANSPREC PTY LTD, AND MUST NOT BE COPIED OR LOANED WITHOUT WRITTEN PERMISSION AND MUST BE RETURNED UPON REQUEST.				A3		DRAWING NO OM-0059FB		REV A	
DRAWN CHETHAN		APPR'D							
DATE 18-10-2011		SCALE 1:10							