



NT PTY LTD

Job: 7419	B&H Q Crush Trailers
Job: 7420	B&H Q Crush Dollies
Job: 7421	B&H Q Crush Lead

SPECIFICATION SHEET

Tri-axle Quad Roadtrain Side Tip Combination

Brown & Hurley (Q Crush Set # 2 (2025))

QD01517 Rev B – Updated 15/5/25

23m3 Tri-axle Side Tipping Tow Trailer

- Operating Conditions 80% on Road – 20% Maintained Haul Roads

Std Legal Payload

Please tick column

Body Dimensions	23m3 (water level)	
Shell Material	5mm QT450 Wear Plate floor and door, 5mm QT450 Wear Plate side and 5mm QT450 Wear Plate end panels. 4mm runners & stubs.	
Load Deflectors	Set up for Lids	
Discharge	To RH Side / Road side.	
Body Pivots	3 x pivots with 2 1/2" K1045 or equivalent Hi Tensile, Induction Hardened, Chrome pins in maintenance free pivot blocks	
Chassis Dimensions	Approx. 6750mm wheelbase (centre axle group to centre Kingpin) Allemlube chassis mounting holes required	
Chassis Construction	Hi Tensile QT80 8mm flanges with 5mm GR350 webs - MMW 8mm one piece suspension plate - 8mm QT80 Hi Tensile skid plate.	
Suspension	Tri-axle BPW OMD36 overslung Air Suspension	
	9' 1"	
Axles	BPW 120mm square beam – Drum Brake - 285PCD - Std Track – Camtubes	
Alignment	All mechanically aligned.	
Rims	Alloy 10 stud 285 PCD	
Tyres	11R22.5 tyres.	
Brake Kit	Air Brake Corp EBS tri-axle road train brake kit. Voltage: 24V – ADR35/06 requires 24V for multiple trailer operations 24 V Primemover cable required	
Brake Couplings	Glad Hands	
Electrics	6mm x 5 core main spine. 2 core cable to feed sidelights.	
Electrical Plugs	7 Pin to front & rear of trailer.	
Lights	8 x LED sidelights. 2 x LED 3 in 1 taillight assemblies 1 x Number plate light	
Hydraulics	Primemover Hydraulic requirements attached. Powered and controlled from Prime Mover. 2 x 6" lift rams, 800mm stroke with self-lube spherical bearings at each end. 2 x 3 1/2" Door Rams with self-lube spherical bearings at each end. All hydraulic cylinders will be U-bolt mounted. Load operated door open hydraulic circuit. Note – Not suited for light loading of body. MMW fully machined Alum manifold with air operated commercial spool valve & additional manual operating handle. Integral Power beyond, additional port relief for independent adjustment of pull-down pressure. Steel hydraulic lines bracketed for full length of trailer. No tapered threads, all fittings JIC or UN O-ring.	



NT PTY LTD

	Hydraulic piping will be QC at front of trailer. QC couplings at rear of trailer. Rear trailer to be configured with Power Beyond loop hose.	
Hydraulic Couplings	Std 1 inch Stuchhi Screw Type M = (M-VD100-1BSP) - F = (F-VD100-1BSP)	
Festo Lines	6mm - 8 core through trailer frame – Controls configured for Quad Roadtrain	
Skid plate Height	1290mm nominal Laden height	
Mud Guards	Rubber guards with weld on guards & brackets	
Mud Flaps	Mud flaps with holders fitted to front and rear of suspension.	
Landing legs	KHitch 2 speed legs – weld on brackets	
Tow Couplings	90mm Kingpin – 240kN Rated- 2 Kingpin Positions RF50 B AUS ring feeder to rear of trailer – 320kN Rated Quad Roadtrain Rated	
Signage	All statutory signage / no sign writing. Can be done as an extra.	
Wheel Rack	Yes for 2 tyres – weld on brackets	
Paintwork External	Blasted to Class 2.5, painted in two-pack to single colour chassis & single colour bin.	
Chassis Colour	419 KEA CPL3 KW Bright Red	
Bin Colour	419 KEA KMV2 Ice White	
Step	Step & mesh on rear	
Extras Required	3 Way Roadtrain Sign Allemlube chassis mounting holes required – Customer is arranging Alemlube fit out Add Reflective Stripes – Each Side of Bins Underslung chassis mounted Watertank to be fitted	

Options / Additions

Hydraulic Lid System	Yes - Optional Extra – Red Tarp Colour	
Reflective Tape	Yes – Optional Extra - Each Side of Bins	
Spare Tyre / Rim	Yes - Optional Extra – 2 spares per trailer	
Toolbox	Yes - Optional Extra – all trailers	
Watertank 60Ltr	Yes - Optional Extra – all trailers	
Hubometer	Yes - Optional Extra – all trailers (Not Dollies)	
Add Support Arm, Hydraulic Hoses & Festo to 1 st Trailer	Yes - Optional Extra – 1st trailer only	

LW Tri-axle Dolly
- Operating Conditions 80% on Road – 20% Maintained Haul Roads
Std Legal Payload

Please tick column

Chassis Construction	Hi Tensile QT80 8mm Top Plate with MMW QT80 10mm one piece suspension plate suitable for Road train operation	
Draw Bar	2.8m long RHS construction. Incl Amplimesh top & steps, support leg fitted with tensioning device to prevent rattling and wear of pins / bolts. Drawbar pin retainer brackets & bolts to be fitted. Quad Roadtrain may not suitable for AB Triple	
Suspension	Tri-axle BPW OMD36 overslung Air Suspension	
	9' 1"	
Axles	BPW 120mm square beam – Drum Brake - 285PCD - Std Track – Camtubes	
Alignment	All Mechanically aligned	



NT PTY LTD

Rims	Alloy 10 stud 285 PCD	
Tyres	11R22.5 tyres.	
Brake Kit	Air Brake Corp Tri-axle brake kit non EBS . EBS thru cable included. Voltage: 24V – ADR35/06 requires 24V for multiple trailer operations	
Brake Couplings	Glad Hands	
Electrics	6mm x 5 core main spine. 2 core cable to feed sidelights.	
Electrical Plugs	7 Pin to front & rear	
Lights	4 x LED sidelights. 2 x LED 3 in 1 taillight assemblies 1 x Number plate light	
Hydraulics	Steel Hydraulic lines fitted underneath dolly drawbar	
Hydraulic Couplings	Std 1 inch Stuchhi Screw Type M = (M-VD100-1BSP) - F = (F-VD100-1BSP)	
Festo Lines	6mm – Configured for Quad Roadtrain	
Turntable	Holland FW70 90mm T/Table Grease Type - 270kN Rating – Incl 90mm Nylon Pad For T/Table Top Quad Roadtrain Rated	
Mud Guards	Rubber guards, steel front brackets and rear tail light channel to bolt on. Bolt on Guards & Brackets	
Mudflaps	Mudflaps front and rear of suspension. Springs fitted to the front guards.	
Sign Writing	Nil	
Tow eye	MMW 50mm bolt on tow eye	
Signage	All statutory signage	
Painting	Blasted to Class 2.5, painted in two-pack to single colour chassis	
Chassis Colour	419 KEA CPL3 KW Bright Red	
Compliance	Plate fitted.	
Pogo	Yes – Pogo & Spring type - Std clamp arrangement	

Options / Additions

Hubometer	Not Required	

13m3 Tri-axle Side Tipping Tow Trailer **- Operating Conditions 80% on Road – 20% Maintained Haul Roads** **Std Legal Payload**

Please tick column

Body Dimensions	13m3 (water level)	
Shell Material	5mm QT450 Wear Plate floor and door, 5mm QT450 Wear Plate side and 5mm QT450 Wear Plate end panels. 4mm runners & stubs.	
Load Deflectors	Set up for Lids	
Discharge	To RH Side / Road side.	
Body Pivots	3 x pivots with 2 1/2" K1045 or equivalent Hi Tensile, Induction Hardened, Chrome pins in maintenance free pivot blocks	
Chassis Dimensions	Approx. 6700mm wheelbase (centre axle group to centre Kingpin) Allemlube chassis mounting holes required	
Chassis Construction	Hi Tensile QT80 8mm flanges with QT80 5mm webs - QT80 one piece suspension plate - 8mm QT80 Skid Plate. Fold Down Ladder	
Suspension	Tri-axle BPW OMD36 overslung Air Suspension	
	9' 1"	



NT PTY LTD

Axles	BPW 120mm square beam – Drum Brake - 285PCD - Std Track – Camtubes	
Alignment	All mechanically aligned.	
Rims	Alloy 10 stud 285 PCD	
Tyres	11R22.5 tyres.	
Brake Kit	Air Brake Corp EBS tri-axle road train brake kit. Voltage: 24V – ADR35/06 requires 24V for multiple trailer operations	
Brake Couplings	Glad Hands	
Electrics	6mm x 5 core main spine. 2 core cable to feed sidelights.	
Electrical Plugs	7 Pin to front & rear of trailer.	
Lights	8 x LED sidelights. 2 x LED 3 in 1 taillight assemblies 1 x Number plate light	
Hydraulics	Powered and controlled from Prime Mover. 2 x 6" lift rams, 800mm stroke with self-lube spherical bearings at each end. 2 x 3 1/2" Door Rams with self-lube spherical bearings at each end. All hydraulic cylinders will be U-bolt mounted. Load operated door open hydraulic circuit. Note – Not suited for light loading of body. MMW fully machined Alum manifold with air operated commercial spool valve & additional manual operating handle. Integral Power beyond, additional port relief for independent adjustment of pull down pressure. Steel hydraulic lines bracketed for full length of trailer. No tapered threads, all fittings JIC or UN O-ring. Hydraulic piping will be QC at front of trailer. Hoses fixed at rear of trailer with QC couplings to next trailer.	
Hydraulic Couplings	Std 1 inch Stuchhi Screw Type M = (M-VD100-1BSP) - F = (F-VD100-1BSP)	
Festo Lines	6mm - 8 core through trailer frame – Controls configured for Quad Roadtrain	
Skid plate Height	1290mm nominal Laden height	
Mud Guards	Rubber guards with weld on front guards & bolt on rear bracket	
Mud Flaps	Mud flaps with holders fitted to front and rear of suspension.	
Landing legs	KHitch 2 speed legs – Weld on brackets	
Tow Couplings	90mm Kingpin – 240kN Rated- 2 Kingpin Positions Holland FW70 90mm T/Table Grease Type - 270kN Rating – Incl 90mm Nylon Pad For T/Table Top Quad Roadtrain Rated	
Signage	All statutory signage / no sign writing. Can be done as an extra.	
Wheel Rack	Yes for 2 tyres – Weld on brackets	
Paintwork External	Blasted to Class 2.5, painted in two-pack to single colour chassis & single colour bin.	
Chassis Colour	419 KEA CPL3 KW Bright Red	
Bin Colour	419 KEA KMV2 Ice White	
Step	Mesh on rear	
Pogo	Yes – Hose Support Sword	
Extras Required	Long Vehicle signage Allemlube chassis mounting holes required – Customer is arranging Alemlube fit out	

Options / Additions

Hydraulic Lid System	Yes - Optional Extra – Red Tarp Colour	
Reflective Tape	Yes – Optional Extra - Each Side of Bins	
Spare Tyre / Rim	Yes - Optional Extra – 2 spares per trailer	
Toolbox	Yes - Optional Extra	
Watertank 60Ltr	Yes - Optional Extra	
Hubometer	Yes - Optional Extra – all trailers (Not Dollies)	

Name: Date: Signature:

Trailer Connection Layout



Hose Support Arrangement



Rear Trailer Hose Support Arrangement



Prime Mover Hydraulic system requirements.

MMW Std Low Pressure Door type tippers.

Trailers are designed with a power beyond or series type hydraulic system. When the PTO is engaged oil will circulate through the trailers, round the entire circuit, and back to tank via the return filter.

No supply diverter or directional valve is required at the Prime Mover. If one is required for other trailers or operations that is acceptable however it will need to be powered open in one direction only during tipping operations. Precautions should be taken to ensure the oil flow to the trailers is not reversed. *Reversed oil flow will damage seals in directional valves.*

See HYD 5124 for details of the trailer system noting that the PUMP Delivery line is always installed to the LH side of the trailer for standard door type trailers.

Hydraulic tank

Typ 25 litres Oil storage per trailer in the combination plus 25 litres for truck. Triple roadtrain 100 litre storage tank. This capacity should eliminate the need for oil cooling in most situations. Care should be taken to ensure the return line extends below the oil level in the tank to avoid excessive airtation of the oil.

Hydraulic pump

System design flow rate 90l/minute
90 / minute should be delivered with engine at a fast idle.
This will provide total cycle time of under 1 minute.

The type and quality of pump used will depend on the frequency of tipping and expected amount of operation.

Relief valve

A relief valve is required in the pump line able to handle the full flow rate and return oil to the tank via the return filter.

Set pressure 2000PSI

Typ tipping pressure is 1600 - 1800psi


Return filter

Must be installed with recommended flow rate 120l/min and 10 um filtration level.

Delivery hoses

Good quality high flexibility hoses with an abrasion resistant casing are recommended. Hose dia of 1" is suitable for both pump and return lines. It is recommended to use a pressure rated hose for both the pump and return lines to avoid stocking of two hoses for each position.

All hoses installed on the trailers are suitable for 2000 psi operation.

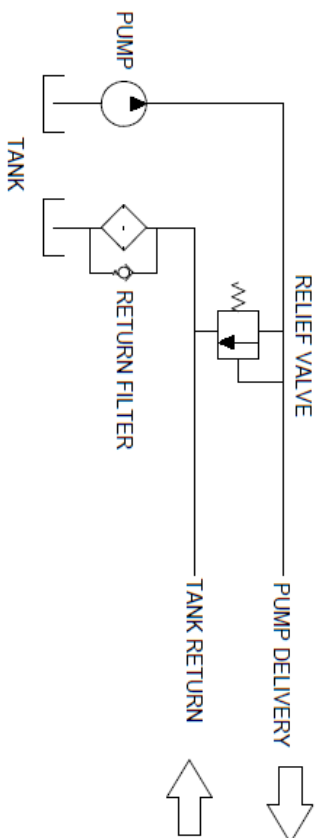

		DRAWING NO	HYD 5125		
THIS DRAWING REMAINS THE PROPERTY OF MICK MURRAY WELDING		TITLE	TYP PRIME MOVER HYD SYSTEM.		
PHONE	08 89473664	RELEASED	Paul van Munster	DATE	20/8/2019
FAX	08 89471411	THICKNESS	DRAFT 1	DATE	20/8/2019
EMAIL		MATERIAL		SHEET	OF 1
DRAWING IS TO BE TREATED AS AN UNCONTROLLED DRAFT COPY UNTILL RELEASED AND DATED - USE FOR PROTOTYPE BUILD ONLY					