



SKU - CHRDI100BRAGLA
Bulb type - B22
Maximum Wattage - 8W LED
Input voltage - 220-240V/50Hz
Weight - 12.8kg


Rodyssey Chandelier Instructions

WARNINGS - Please read carefully before installation

- Installation must be completed by a qualified electrician.
- This product must be tested prior to installation.
- This product must be installed in accordance with local Building Regulations, further information is available through your local authority.
- If using a ladder read all advice and guidelines outlined by the Health and Safety Executive via www.hse.gov.uk.
- The ceiling must have the load bearing capacity of at least five times the weight of the luminaire. Heavy chandeliers are not always suitable for plasterboard ceilings and must be drilled into a secure joist. Fixings used must be appropriate to support the weight of this product. (The installer must determine if the standard fixings supplied are appropriate for the surface type).
- Always disconnect the mains electrical supply before installing or maintaining this product and test that it is isolated. Turning power off using the light switch is not sufficient. Ensure no one else can restore the mains electrical supply without your knowledge.
- This is a Class I product and must be earthed.
- To reduce the risk of fire, electrical shock, or personal injury, always turn off luminaire and allow it to cool prior to replacing the lightbulbs. Do not look directly at lit bulbs or touch the bulbs when luminaire is turned on. Keep flammable materials away from lit bulbs.
- **Avoid placing this product in direct sunlight. The magnifying glass ends can focus sunlight and may create a fire hazard.**
- Two or more people may be required when mounting the luminaire if the fixture is heavy.
- To avoid the risk of fire, do not exceed the recommended wattage.
- The manufacturer and distributor accept no liability for incorrect installation.




Step 1

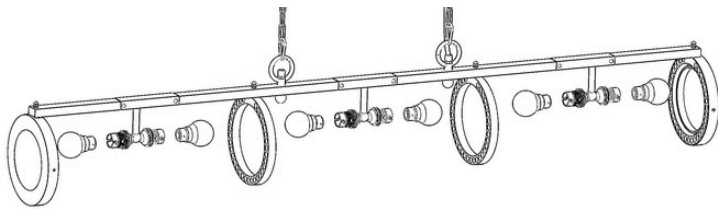


Lay the frame on a flat surface to insert bulbs and glass rods. Insert the correct bulb type, as indicated on the bulb holders. The maximum wattage indicated must not be exceeded,

Step 2

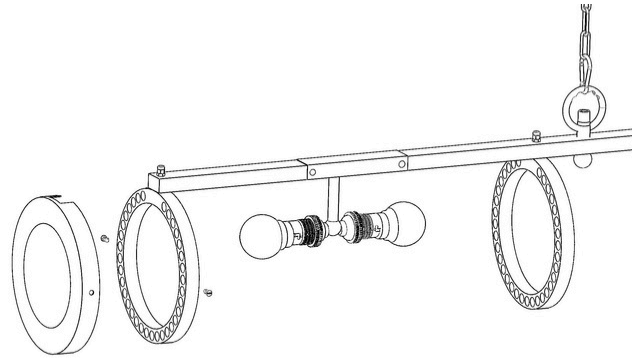

Unscrew the flat head screws to remove one of the side plates to access the holes for the glass rods.


Step 3

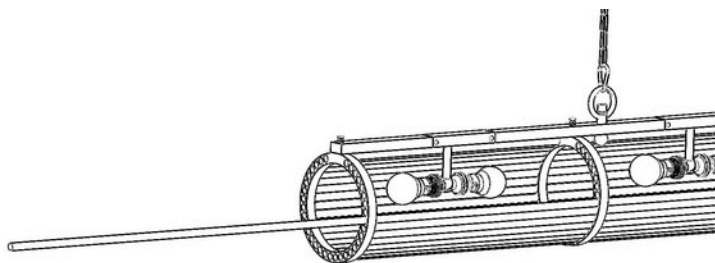

The glass rods must be installed before the chandelier is installed. The rods should be inserted one by one through the holes in the frame into the corresponding holes in the next frame.

Reinstall the side plate to the frame and secure with the flat head screws,

Step 4

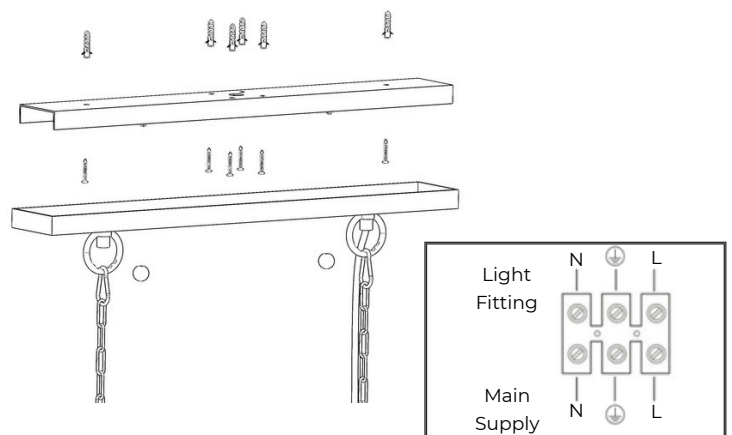


Separate the mounting bracket from the ceiling rose via the two brass finials. Connect the mains supply to the terminal block as referenced above. Ensure that there are no exposed conductors, loose strands, or trapped insulation. Use suitable fixings which will support the weight of the fitting. Connect mains supply to the terminal block, as referenced above.



SKU - CHRDY100BRAGLA
Bulb type - B22
Maximum Wattage - 8W LED
Input voltage - 220-240V/50Hz
Weight - 12.8kg

Rodyssey Chandelier Instructions


Step 5

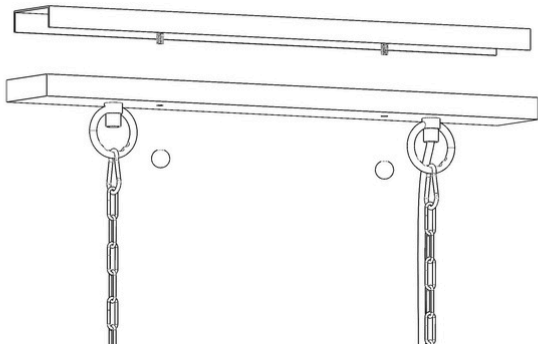

Align the ceiling rose to the mounting bracket and secure with the two brass finials provided.

After completing, switch ON the main supply at the fuse board.

Caring for your chandelier

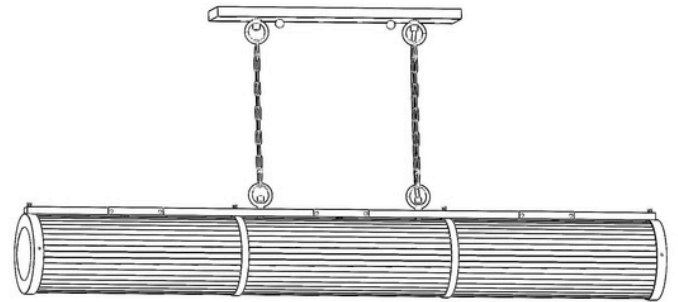

Switch off and allow the chandelier to cool down before cleaning. We recommend cleaning with a soft, dry cloth. Do not use abrasive materials as these will damage the finish and glass.