

Supplementary Material: Distributed Coherent Optical Computing via Injection-Locked Photonic Networks

Shenghan Gao,¹ Kathy Ludge,² Francesco Da Ros,³ and Nathan Youngblood¹

¹*Department of Electrical and Computer Engineering, Swanson School of Engineering, University of Pittsburgh, Pittsburgh, PA 15261, USA*

²*Institute of Physics, Ilmenau University of Technology, 98693 Ilmenau, Germany*

³*DTU Electro, Technical University of Denmark, 2800 Kgs. Lyngby, Denmark*

(*Electronic mail: nathan.youngblood@pitt.edu)

(Dated: 5 October 2026)

This supplementary material provides additional methodological details and supporting simulation results for the primary manuscript. We describe the empirical criteria used to define the locking-region boundary, the Fourier-domain extraction procedure used to calculate modulation responses, and additional simulations showing how the locking maps depend on linewidth enhancement factor and injected-laser operating threshold. We also include time-domain AM and PM modulation traces to illustrate the extraction of AM→AM, AM→PM, PM→AM, and PM→PM response channels and to visualize nonlinear behavior at large phase-modulation depth.

I. SUPPLEMENTARY METHODS

A. Defining the Locking Range

After plotting the parameter maps of $\Delta I/\bar{I}$ and $\Delta\phi$, a fairly clear transition can be observed in both cases: one side corresponds to a low-value region with comparatively steady behavior, whereas the other corresponds to a region with increased residual oscillation or phase drift. To better identify the approximate range of this transition, we tested a series of threshold values and found that the boundary in the present simulations lies roughly near 0.1 for the intensity metric and 0.1 rad for the phase metric. Accordingly, we use $\Delta I/\bar{I} \leq 0.10$ and $\Delta\phi \leq 0.10$ rad as empirical operational thresholds to help delineate the boundary of the locking region. For the intensity metric, $\Delta I/\bar{I} \leq 0.10$ indicates residual variation below approximately 10% of the mean intensity, which in this work generally separates approximately steady trajectories from states with more pronounced oscillation. For the phase metric, $\Delta\phi \leq 0.10$ rad similarly corresponds to a small residual phase excursion over the analysis window, indicating that the field phase remains approximately stationary. These numerical values are therefore not intended as strict theoretical criteria for injection locking, but rather as empirical thresholds used to more clearly identify and outline the locking-region boundary in the present simulations. This distinction is relevant because prior studies have shown that optically injected lasers can exhibit oscillatory states with bounded phase and average-frequency entrainment near Hopf-mediated locking transitions, even when the intensity is no longer strictly steady-state^{1,2}. In that sense, the present thresholds are used to define a conservative practical operating window emphasizing jointly stable amplitude and phase behavior, rather than the broadest possible notion of frequency locking. **The cutoffs describe the visible dark–bright transition, not a rigorous stability boundary or a fraction of the color-bar range. Reducing both metric cutoffs from 0.10 to 0.01 changes the joint-region area by only 0.23% for $\alpha = 0$ and 0.96% for $\alpha = 5$ (Fig. 4). The same trajectories and finite observation window are used throughout. The archived unmodulated maps used for this cutoff comparison span -60 to 0 dB in 1 dB steps and -30 to 30 GHz in 100 MHz steps. The corresponding rate-equation implementation initializes each point with $E(0) = 0$ and $N(0) = N_{\text{th}} = N_0 + 1/(g_0\tau_s)$, with $R_p = 1.15N_{\text{th}}/\tau_n$ and $\kappa_{\text{scale}} = 1$. Fourth-order Runge–Kutta integration uses a 0.2 ps step for 90,000 steps (18 ns); the final 3,000 samples (0.6 ns) provide the intensity and unwrapped-phase metrics. The constant injected field is $E_{\text{inj}} = A_{\text{fr}}10^{R_{\text{inj,dB}}/20}$, where A_{fr} is the model free-running amplitude. No stochastic**

noise is included in these maps.

B. Fourier-Domain Extraction of Modulation Response

Throughout this Supplementary Material, $\Delta\omega = 2\pi(v_{\text{remote}} - v_0)$ and $\Delta\nu = v_{\text{remote}} - v_0 = \Delta\omega/(2\pi)$, where v_0 is the free-running optical frequency of the injected laser in the absence of external optical injection. The remote-carrier frequency is v_{remote} ; $\Delta\omega$ is in rad s^{-1} and $\Delta\nu$ is in Hz.

For each operating point $(\Delta\nu, R_{\text{inj}}, f_{\text{mod}})$, the rate equations are first integrated through a transient interval, and the modulation response is extracted from the steady-state measurement window. The simulated injected-laser field is written as

$$E_{\text{injected}}(t) = \text{Re}\{E_{\text{injected}}(t)\} + i\text{Im}\{E_{\text{injected}}(t)\}. \quad (1)$$

The amplitude response channel is defined as the normalized field-amplitude fluctuation,

$$a_s(t) = \frac{|E_{\text{injected}}(t)|}{\langle |E_{\text{injected}}(t)| \rangle} - 1, \quad (2)$$

where $\langle \cdot \rangle$ denotes the time average over the measurement window. The phase response channel is obtained from the optical phase,

$$\phi_s(t) = \text{unwrap} [\arg(E_{\text{injected}}(t))]. \quad (3)$$

For the modulation-response extraction, the unwrapped phase traces are linearly detrended over the measurement window to remove any residual average phase drift before extracting the modulation component.

The fundamental response amplitude at the imposed modulation frequency is extracted by projecting each input and output waveform onto the sine and cosine components at f_{mod} . Specifically, for a waveform $y(t)$ sampled over the measurement window, the amplitude at f_{mod} is obtained from the quadrature components at angular frequency $2\pi f_{\text{mod}}$. This procedure is equivalent to extracting the Fourier component at the imposed modulation frequency and avoids using broadband spectral features unrelated to the driven response. The resulting input and output amplitudes are denoted as $A_{\text{in}}(f_{\text{mod}})$ and $A_{\text{out}}(f_{\text{mod}})$, respectively.

The response is reported in decibels as

$$H_{\text{dB}}(f_{\text{mod}}) = 20 \log_{10} \left[\frac{A_{\text{out}}(f_{\text{mod}})}{A_{\text{in}}(f_{\text{mod}})} \right]. \quad (4)$$

For AM-driven injection, A_{in} is extracted from the normalized remote amplitude modulation. For PM-driven injection, A_{in} is extracted from the unwrapped and linearly detrended remote phase modulation. The same procedure is applied to the corresponding AM and PM output channels to obtain the AM→AM, AM→PM, PM→AM, and PM→PM responses.

II. SUPPLEMENTARY LOCKING-REGION MAPS

The main text shows representative locking maps for the two limiting cases $\alpha = 0$ and $\alpha = 5$. To show the continuous evolution between these two limits, Fig. 1 provides the full set of two-dimensional maps for $\alpha = 0$ –5 at threshold = 1.15. The upper panel shows the relative intensity swing $\Delta I/\bar{I}$ together with the locking boundary, while the lower panel shows the corresponding binary locking-region map. These results show that the locking-region boundary evolves gradually with increasing linewidth enhancement factor, including changes in both the extent and asymmetry of the locking region.

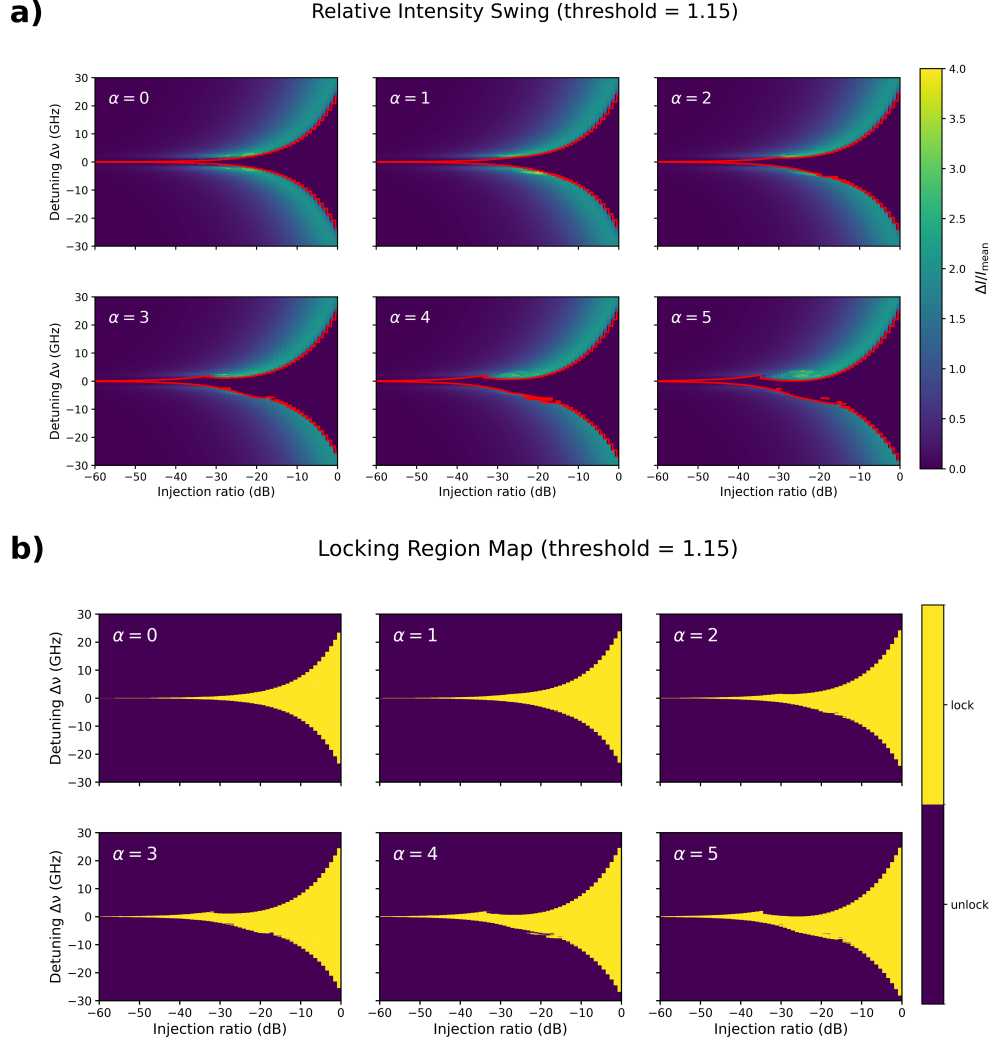


FIG. 1. Supplementary locking-region maps for threshold = 1.15. (a) Relative intensity swing maps for $\alpha = 0$ –5. The color scale shows $\Delta I/\bar{I}$, and the red contours indicate the empirical locking-region boundary defined by $\Delta I/\bar{I} \leq 0.10$ and $\Delta\phi \leq 0.10$ rad. (b) Corresponding binary locking-region maps. Yellow regions satisfy both empirical locking criteria, while purple regions do not.

Figure 2 shows the corresponding results for threshold = 1.94. Comparison with Fig. 1 shows that the locking maps depend not only on α , but also on the injected laser operating condition. In particular, changing the threshold or pump-normalized operating point modifies the locking-region extent and boundary shape as a function of injection ratio and detuning.

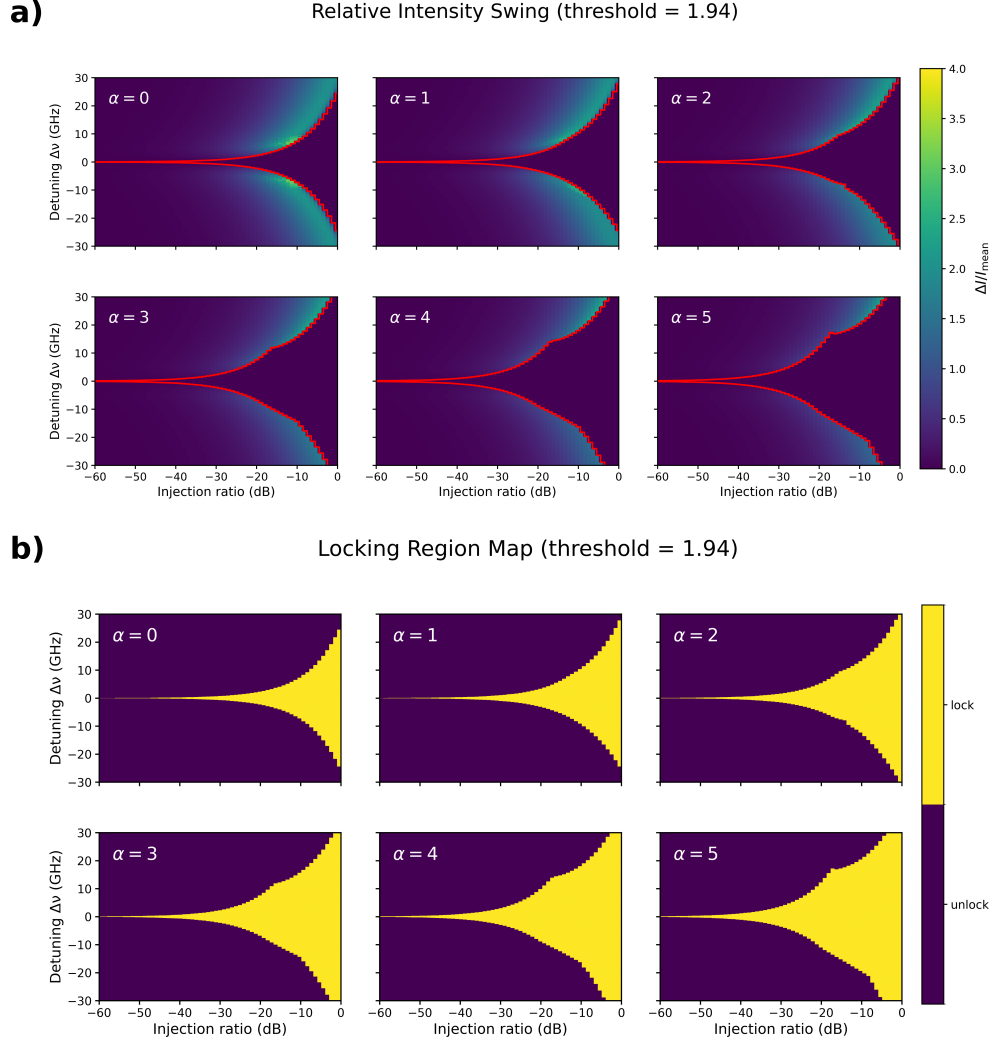


FIG. 2. Supplementary locking-region maps for threshold = 1.94. (a) Relative intensity swing maps with the empirical locking-region boundary. (b) Corresponding binary locking-region maps. Compared with the threshold = 1.15 case, the locking-region boundary and accessible locking range change with the injected laser operating condition.

III. TIME-DOMAIN ILLUSTRATION OF MODULATION CHANNELS

Figure 3 illustrates the time-domain input and output channels used for extracting the modulation response. The traces are calculated at a representative operating point with $\alpha = 5$, $R_{\text{inj}} = -50$ dB, zero detuning, and $f_{\text{mod}} = 2$ GHz. After a transient interval, the last eight modulation cycles are plotted for modulation depths from 0.60 to 1.00. For AM-driven injection, the input channel is the normalized source-field amplitude modulation, and the output channels are the normalized injected-laser field amplitude and the injected-laser field phase. These channels

correspond to the AM $\rightarrow$ AM and AM $\rightarrow$ PM responses. For PM-driven injection, the input channel is the source-field phase modulation with depth $m_\phi = 0.6\pi$ to 1.0π , and the output channels are again the injected-laser field amplitude and phase, corresponding to the PM $\rightarrow$ AM and PM $\rightarrow$ PM responses. Thus, the figure provides a direct time-domain visualization of the channels used in the Fourier-domain extraction procedure described above.

This figure also provides additional detail for the nonlinear phase-modulation behavior discussed in the main text. In the small-signal regime, increasing modulation depth would primarily scale the response amplitude. However, for PM modulation depths of approximately 0.6π and above, the PM $\rightarrow$ AM and PM $\rightarrow$ PM traces show changes in waveform shape and relative amplitude that are not simple proportional rescalings. These time-domain traces therefore help visualize the onset of nonlinear response at large PM depth. **The dimensionless PM depth is $m_\phi = \Delta\phi/\pi$; thus $m_\phi = 0.6\text{--}1.0$ corresponds to a phase excursion amplitude $\Delta\phi = 0.6\pi\text{--}1.0\pi$. Waveform distortion alone does not identify a bifurcation.**

AM/PM modulation responses ($\alpha = 5.0$, $R_{\text{inj}} = -50$ dB, $f_{\text{mod}} = 2$ GHz)

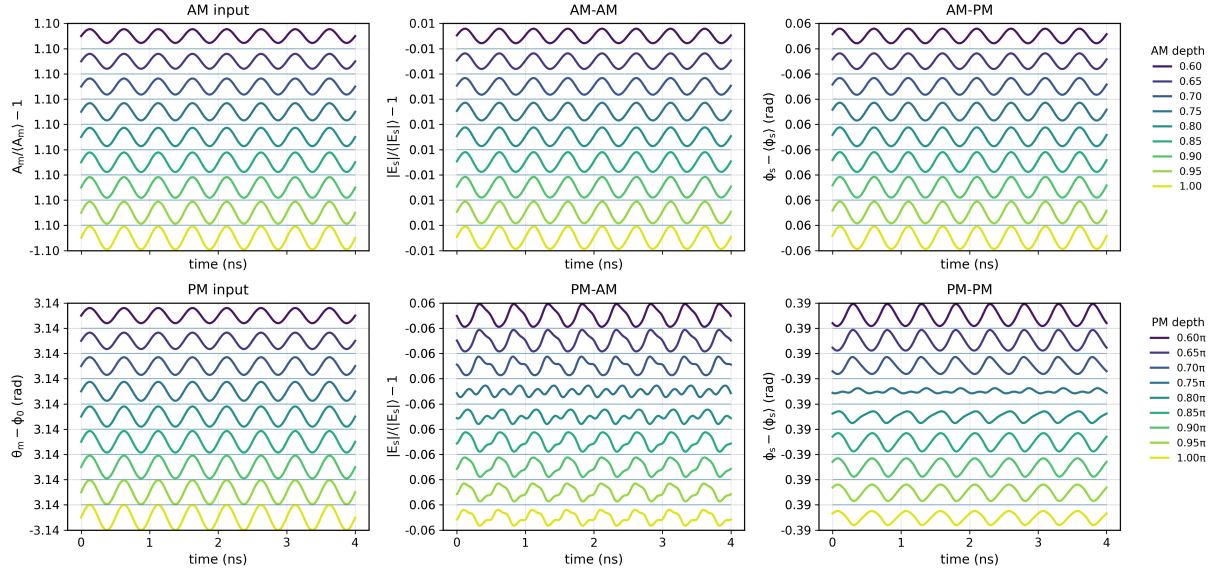


FIG. 3. Time-domain AM and PM modulation responses. The first row shows AM input, AM $\rightarrow$ AM, and AM $\rightarrow$ PM channels. The second row shows PM input, PM $\rightarrow$ AM, and PM $\rightarrow$ PM channels. The traces illustrate how the four modulation response channels are defined for Fourier-domain extraction and show the nonlinear evolution of the PM-driven response at large phase-modulation depth.

IV. ADDITIONAL NUMERICAL AND EXPERIMENTAL VALIDATION

A. Sensitivity of the Descriptive Boundary

Figure 4 overlays the joint cutoff contours on the archived intensity maps. The contours remain close when both metric thresholds are varied between 0.01 and 0.10, although individual intensity-only contours need not show the same insensitivity. The comparison uses the same stored trajectories and observation window; it is not a bifurcation or observation-time convergence test.

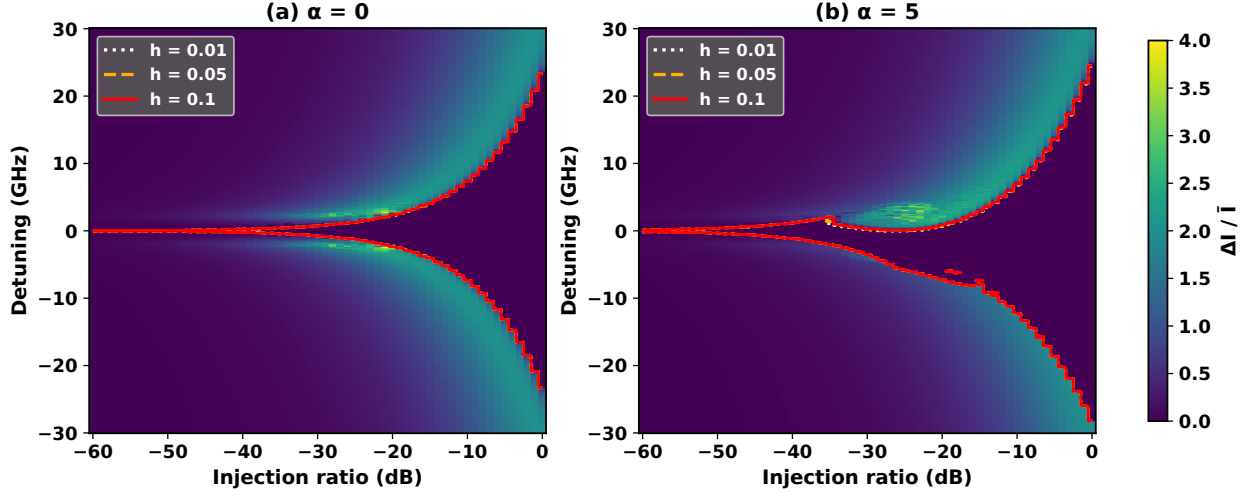


FIG. 4. **Empirical cutoff comparison.** Intensity-swing maps for a) $\alpha = 0$ and b) $\alpha = 5$, with contours of the joint conditions $\Delta I / \bar{I} \leq h$ and $\Delta \phi \leq h$ rad at $h = 0.01, 0.05$, and 0.10 . Color represents the original relative intensity swing. The comparison assesses the descriptive contour, rather than proving dynamical stability.

B. Modulation-Depth Coverage

The Fig. 5 data cover modulation depths from 1% to 100% in 1% increments. Figure 5 explicitly includes the 1%, 5%, and 10% traces alongside the representative larger depths displayed in the main text. These curves are extracted from the original stored frequency-response arrays.

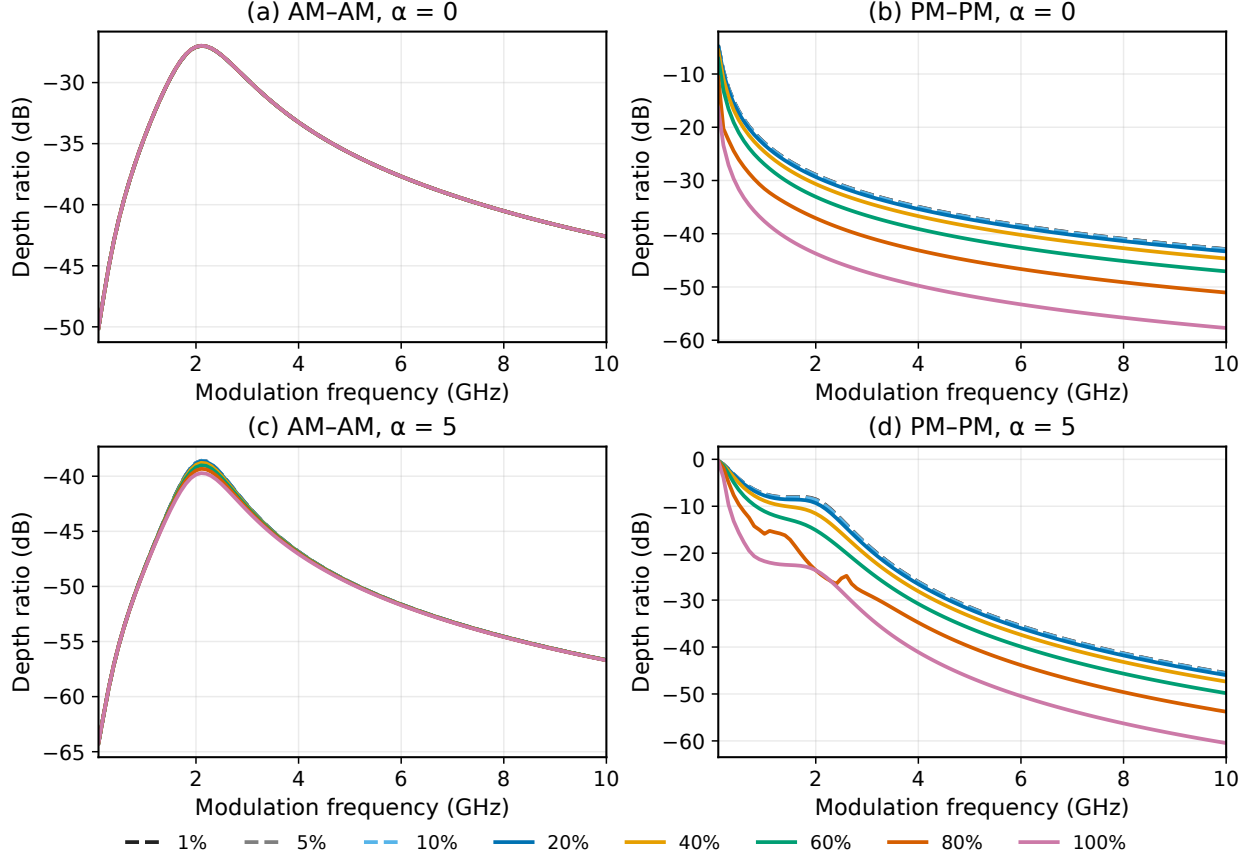


FIG. 5. **Expanded depth selection from the Fig. 5 sweeps.** AM→AM and PM→PM fundamental responses at $R_{\text{inj}} = -50$ dB and zero detuning for **a,b**) $\alpha = 0$ and **c,d**) $\alpha = 5$. The displayed depths are 1%, 5%, 10%, 20%, 40%, 60%, 80%, and 100%; the underlying grid contains every 1% increment.

C. Complex-Field Readout and Facet Reflection

Supplementary Fig. 6 uses the same inputs as main-text Fig. 6: independent generators with seeds 4 and 8 for the remote and local paths, a 20 ns CW settling interval, and 200 active encoded symbols at 10 Gbaud. Each antipodal pair encodes one independent data magnitude, corresponding to a 5 Gbaud data-symbol rate. The zero-order-hold drives are filtered by the 20 GHz Gaussian FIR filter and sampled at 64 points per encoded symbol. Both figures display the first 100 active symbols (20–30 ns).

The local remodulator acts on the complete complex rate-equation output, including residual modulation. With an additive coherent reflected field, the model is

$$\begin{aligned} E_{\text{out}}(t) &= E_{\text{injected}}(t) + \sqrt{R_f} E_{\text{inj}}(t), \\ E_{\text{injected}}^{(\text{modulated})}(t) &= \frac{E_{\text{out}}(t)}{\langle E_{\text{injected}} \rangle_{\text{CW}}} y(t). \end{aligned} \quad (5)$$

Here $R_f = 0$ or 0.30 is a power reflectivity; the reflected field coefficient is therefore $\sqrt{R_f}$. The injection is $E_{\text{inj}} = A_{\text{fr}} 10^{R_{\text{inj,dB}}/20} [1 + x(t)]$, while the computational data arm is the signed field $E_{\text{remote}}^{(\text{modulated})} = x(t)$. The normalization is the complex mean of the no-reflection field over 10–19 ns, before modulation, and is shared by both reflection cases without fitting. Fields use the same effective output-plane units with unit intracavity-to-output conversion. This additive comparison keeps the laser parameters fixed; device-specific facet coupling and output conversion would require calibration.

Balanced detection and sample-resolved accumulation are

$$D_j = 2 \text{Re} \left\{ x_j \left[E_{\text{injected},j}^{(\text{modulated})} \right]^* \right\}, \quad A_n = \frac{1}{64} \sum_{j=1}^n D_j, \quad (6)$$

starting at 20 ns. At each symbol end, this is the cumulative sum of symbol-averaged products. The ideal coherent reference uses the same filtered inputs and $D_j^{\text{ideal}} = 2x_j y_j$. No samples are omitted in the field, differential-signal, or accumulation traces. The mapping $(1 + \text{Re } E)/2$ in main-text Fig. 6b is for display only and is not used for multiplication. Reflection may increase an error or partly cancel it in an individual trajectory; such cancellation does not establish improved performance.

Supplementary Fig. 6: matched main-text sequence with 30% output reflection

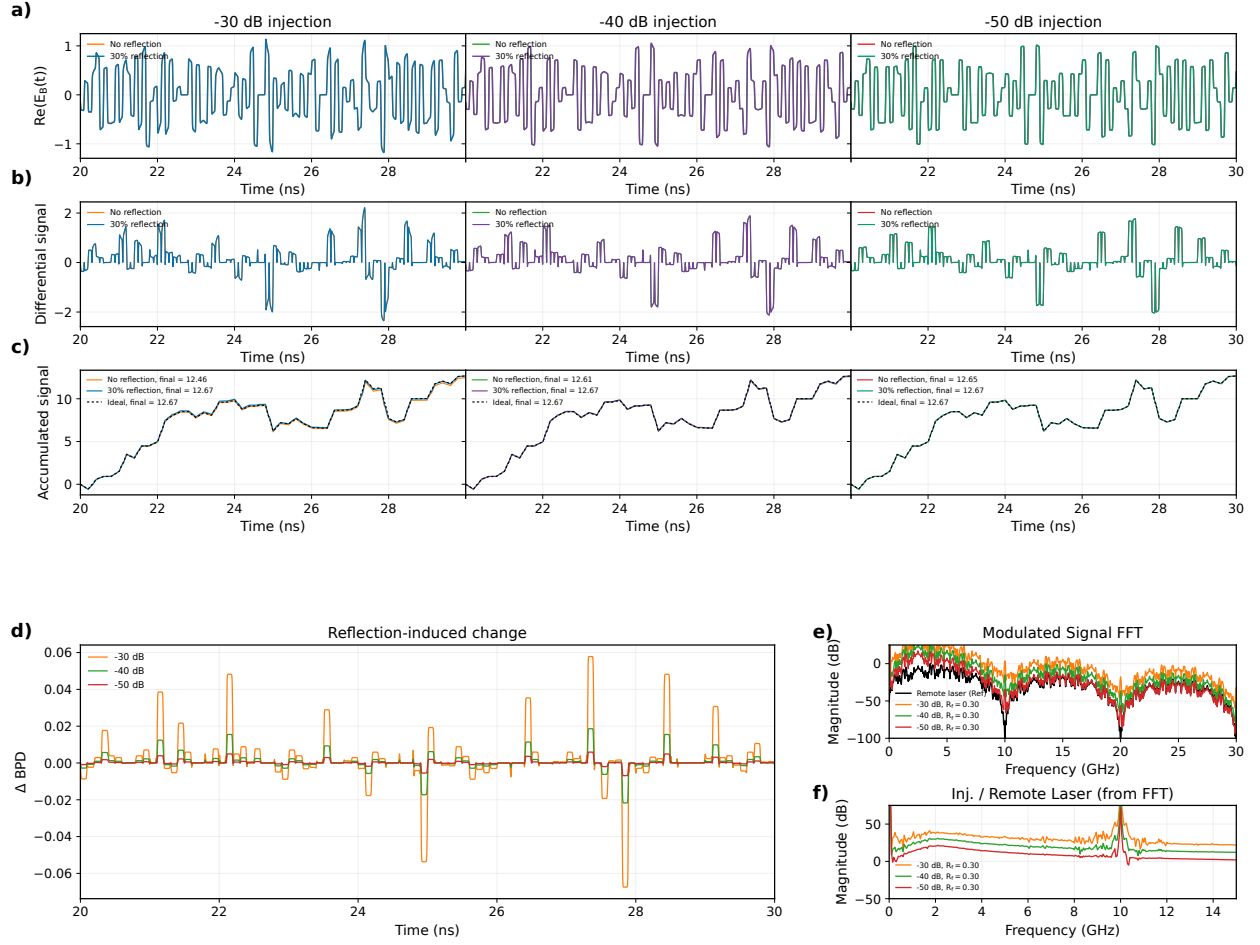


FIG. 6. Output reflection under the main-text Fig. 6 conditions. All panels use $\alpha = 0$. **a–c)** Locally remodulated fields, balanced differential signals, and accumulation over 20–30 ns, respectively, at –30, –40, and –50 dB injection. Contrasting solid curves denote $R_f = 0$ and 0.30; dotted curves in (c) are ideal coherent results. Legends in (c) give the values at 30 ns. **d)** Reflection-induced differential-signal change. **e)** Pre-remodulation spectra of the complete reflected output (carrier, residual modulation, and reflected input), with the remote spectrum as reference. **f)** Injected-to-remote spectral ratios from (e). All time-domain traces retain 64 samples per symbol.

D. Accumulated-Error Statistics over 1000 Inputs

We extend the calculation to $Q = 1000$ independent remote/local input pairs, each containing 1024 active encoded symbols. All conditions reuse the same pairs, with distinct remote and local vectors: $\alpha = 0, 2, 5$, injection ratios $-50, -40$, and -30 dB, and $R_f = 0$ or 0.30 , at zero detuning. The 100% field-modulation depth, eight-level magnitudes with antipodal pairing, filtering, sampling, and 20 ns CW preamble are unchanged. Each length L is a prefix of the same trajectory, without restarting the laser or drawing new inputs.

For input pair q , the error and ensemble RMSE after L encoded symbols are

$$\begin{aligned}\varepsilon_q(L) &= A_{\text{OIL},q}(L) - A_{\text{ideal},q}(L), \\ A_{\text{OIL},q}(L) &= \frac{1}{64} \sum_{j=1}^{64L} D_{q,j}, \quad \text{RMSE}(L) = \sqrt{\frac{1}{Q} \sum_q \varepsilon_q(L)^2}.\end{aligned}\tag{7}$$

The ideal reference uses identical filtered waveforms and perfectly coherent clean carriers. These metrics quantify additional OIL/reflection error, excluding filtering error relative to the unfiltered digital dot product.

Both panels of Fig. 7 use the same final-error percentage:

$$S = \sqrt{\frac{1}{Q} \sum_q A_{\text{ideal},q}(1024)^2} = 27.7159, \quad p_q = 100 \frac{\varepsilon_q(1024)}{S}.\tag{8}$$

Thus S is the RMS scale of all 1000 ideal endpoints, not an error. Each signed error is divided by this common scale and multiplied by 100. The same denominator is used for all parameter/reflection conditions, preserving distribution shape and avoiding division by individual near-zero ideal results. A value of $p_q = 1\%$ means an error of $0.01S$, not 1% of that trial's ideal result. Gaussian fits describe the histograms but do not establish Gaussianity.

Figure 8 also reports

$$\begin{aligned}\text{NRMSE}(L) &= \sqrt{\frac{\sum_q \varepsilon_q(L)^2}{\sum_q A_{\text{ideal},q}(L)^2}}, \\ r_P(L) &= \text{corr}_q[A_{\text{OIL},q}(L), A_{\text{ideal},q}(L)].\end{aligned}\tag{9}$$

NRMSE is displayed as a percentage. Pearson correlation measures covariation across input pairs and must be interpreted together with NRMSE: high correlation alone does not imply small numerical error. These are deterministic calculations without detector or laser noise.

The dependence on α reflects coupled amplitude/phase dynamics and coherent readout. Writing the calibrated no-reflection field as $E_{\text{injected}}/\langle E_{\text{injected}} \rangle_{\text{CW}} = (1 + a_\alpha)e^{i\phi_\alpha}$ gives

$$\delta D_\alpha = 2xy[(1 + a_\alpha)\cos\phi_\alpha - 1] \simeq 2xy\left(a_\alpha - \frac{\phi_\alpha^2}{2}\right). \quad (10)$$

Here a_α and ϕ_α are residual field-amplitude and phase fluctuations after CW calibration. Small AM affects the aligned readout to first order, whereas small PM enters to second order. Nonzero α couples amplitude and phase,³ but does not guarantee lower error. In the sampled conditions, RMSE decreases for nonzero α at -50 and -40 dB, while this trend reverses at -30 dB, especially for $\alpha = 5$. The simulations retain the full nonlinear rate equations and exact readout; the small-residual expansion only explains sensitivity.

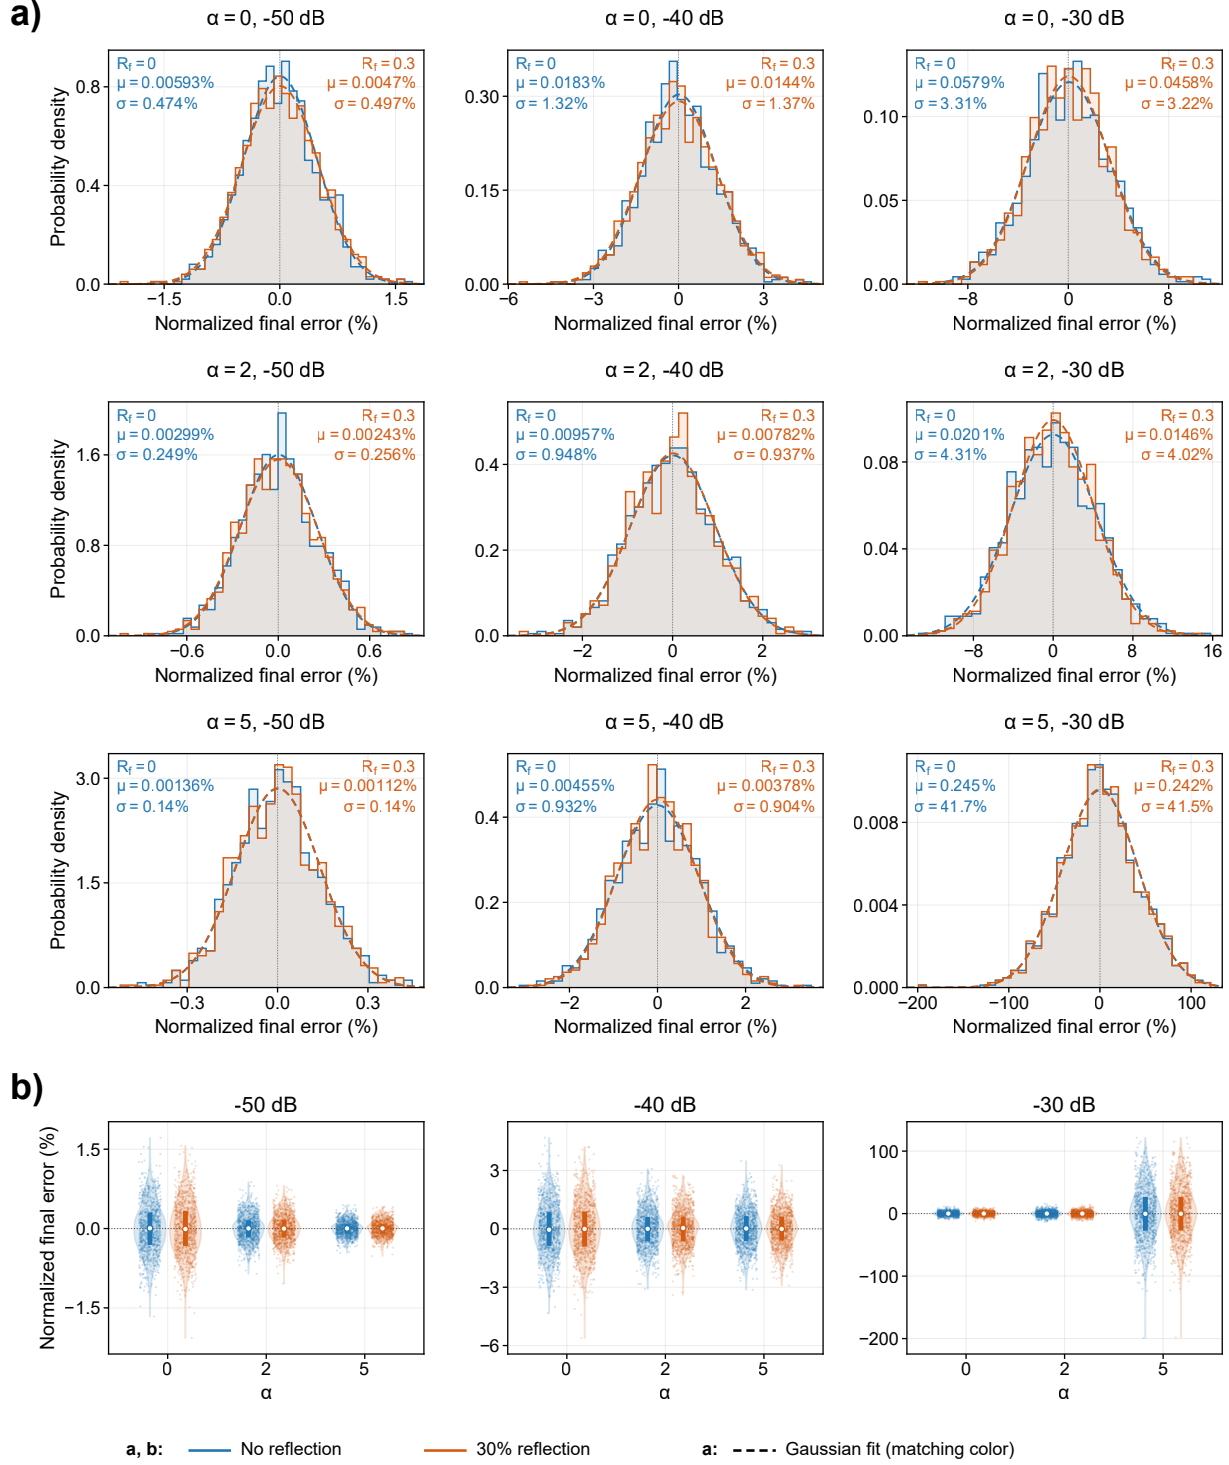


FIG. 7. Final accumulated-error distributions for 1000 inputs at $L = 1024$. **a)** Histograms of p_q (%) with descriptive Gaussian fits; fitted μ, σ are in percentage points. Rows: $\alpha = 0, 2, 5$. **b)** The same normalized errors versus α : dots denote individual inputs, violins density, thick bars the 25th–75th percentiles, and white dots medians. Columns: $-50, -40, -30$ dB. Blue/orange: $R_f = 0/0.30$; matching dashed curves in (a): Gaussian fits. Both panels use the common ideal RMS $S = 27.7159$.

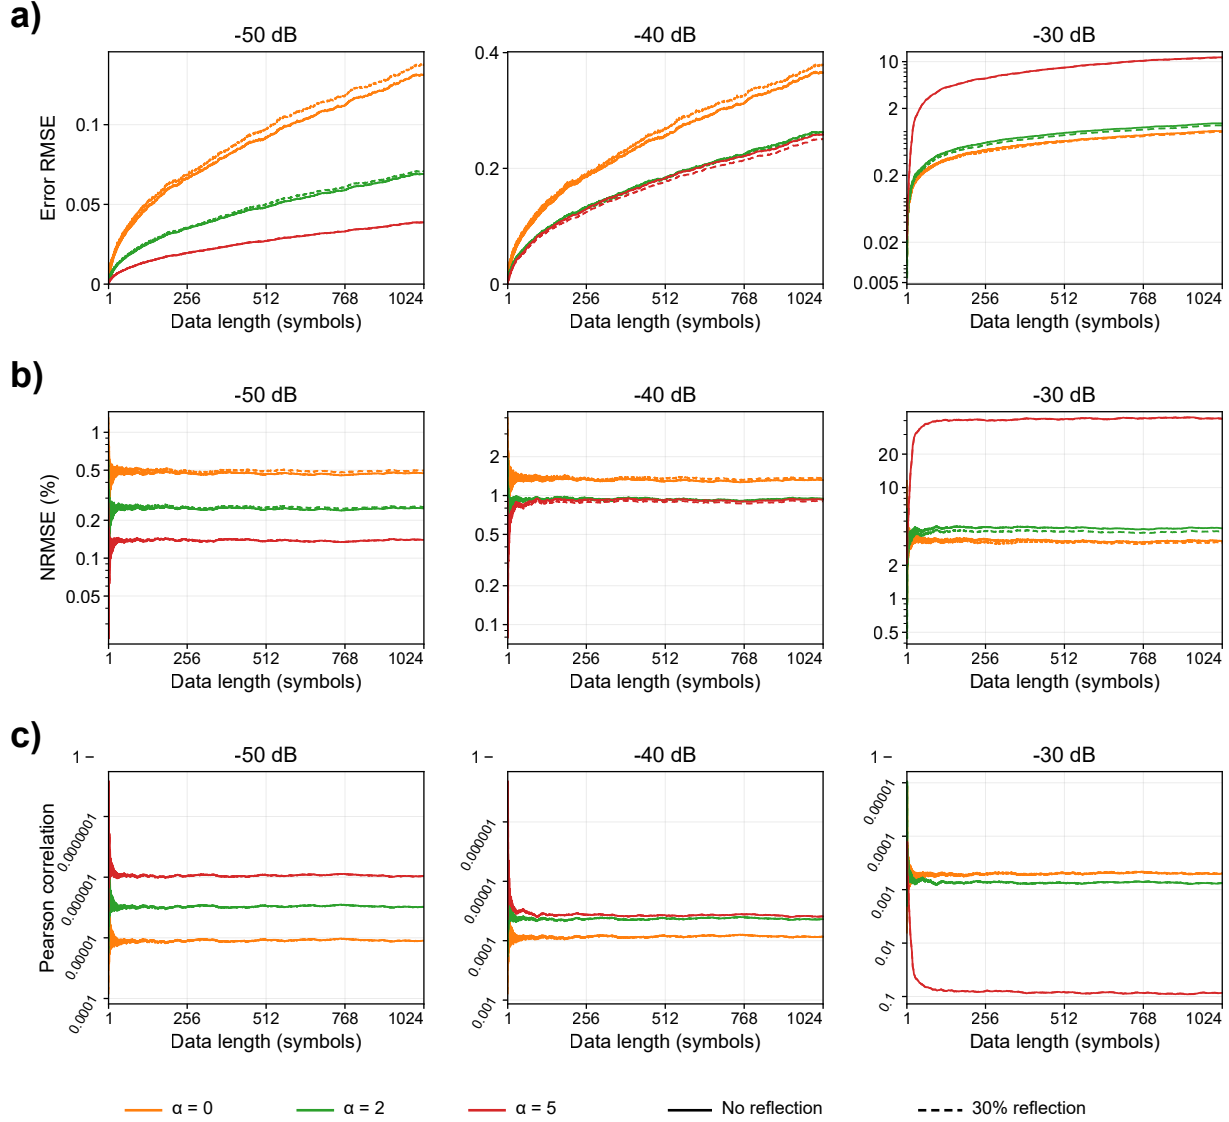


FIG. 8. **Accumulation accuracy versus prefix length for 1000 input pairs.** a) RMSE, b) NRMSE (%), and c) Pearson correlation for $L = 1$ –1024, using the inputs of Fig. 7. Columns: -50 , -40 , -30 dB; orange/green/red: $\alpha = 0/2/5$; solid/dashed: $R_f = 0/0.30$. Subplots have independent vertical ranges. RMSE axes are linear at -50 and -40 dB and logarithmic at -30 dB; NRMSE axes are logarithmic. In (c), logarithmically spaced ticks show $1 - r_p$ under a $1 -$ prefix. The reference uses identical filtered inputs and ideal coherent carriers.

E. Output Phase Control and Frequency-Drift Sensitivity

Figure 9 evaluates a proportional–integral–derivative (PID) phase controller placed after local remodulation and before interference. The rate equations retain the time-dependent detuning term $-i2\pi\Delta\nu(t)E_{\text{injected}}$. For a common received phase ϕ_c and a differential-path perturbation ϕ_d , the fields are

$$E_{\text{remote}}^{(\text{modulated})} = xe^{i\phi_c},$$

$$E_{\text{injected}}^{(\text{modulated})} = \frac{E_{\text{injected}}}{\langle E_{\text{injected}} \rangle_{\text{CW}}} ye^{i(\phi_d + u_{\text{PID}})}.$$

with the same fixed CW-field normalization $\langle E_{\text{injected}} \rangle_{\text{CW}}$ and differential readout defined above. The controller changes only the output phase; it does not actuate the laser frequency. These calculations use $\alpha = 0$, $R_f = 0$, and injection ratios of -50 , -40 , and -30 dB.

The auxiliary phase discriminator is idealized: it removes the data modulation and averages the carrier coherence over 5 ns, followed by a 10 MHz low-pass response; independent 3 mrad RMS readout noise is added before this filter. The PID updates every 5 ns and drives a first-order 20 MHz phase actuator with an additional 10 ns command delay and a $\pm 4\pi$ range. For design crossover parameters $f_c = 0.2, 1, 2$ MHz, the gains are $K_p = 0.15$, $K_i = 2\pi f_c \sqrt{1 - K_p^2}$, and $K_d = 0.015/(2\pi f_c)$, with 10 MHz derivative filtering and anti-windup. These are illustrative controller parameters, not measured hardware bandwidths. An experimental implementation requires a suitable reference or pilot discriminator; low-pass filtering the computational BPD signal alone does not necessarily separate phase drift from data.

The original 10 Gbaud, 100%-depth, Gaussian-filtered encoding is retained at 64 samples per symbol. Following the 20 ns CW preamble, the laser and controller evolve continuously over 256 consecutive 1024-symbol windows. The final-result NRMSE uses the 207 windows centered after $5 \mu\text{s}$, with identical inputs for every comparison; these are consecutive windows of one input pair, not the 1000 independent pairs of Figs. 7 and 8. The ideal reference remains $D_{\text{ideal}} = 2xy$ for the same filtered waveforms.

At -50 dB, the $f_c = 1$ MHz controller reduces final-result NRMSE from 22.26% to 1.96% for the slower phase perturbations, but a further 20 MHz disturbance leaves 8.53% error. For the 30 MHz-amplitude detuning variation, NRMSE decreases from 5.97% to 0.53%. These synthetic perturbations do not represent measured fiber noise. Output PID cannot restore cavity locking outside the locking interval: current/temperature feedback is separately required,⁴ along with controlled polarization and path matching for output phase stabilization.⁵

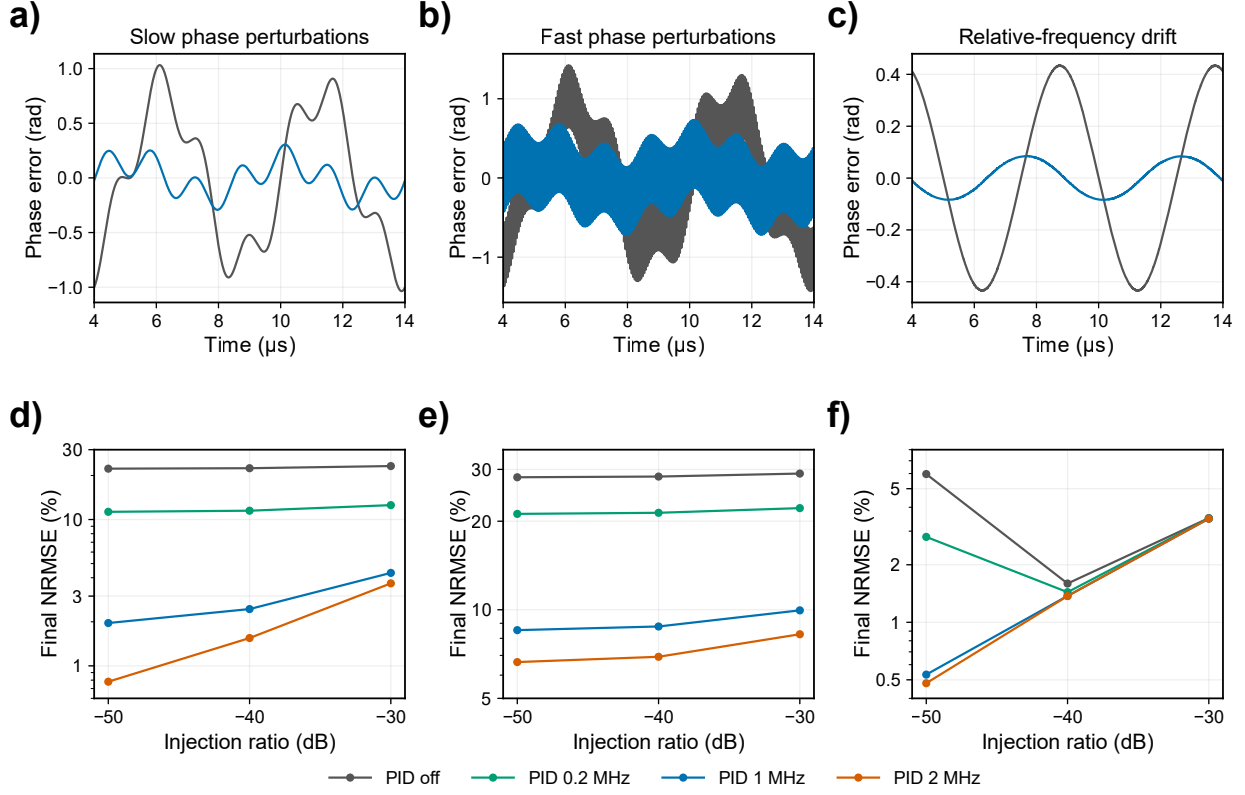


FIG. 9. **Post-remodulation phase PID under prescribed phase and frequency perturbations.** **a–c)** Phase error of the 5 ns-averaged carrier coherence at -50 dB injection, with PID off (gray) and on at $f_c = 1$ MHz (blue). **a)** Common phase $0.3 \sin(2\pi 0.5 \text{ MHz } t)$ and differential phase $0.8 \sin(2\pi 0.2 \text{ MHz } t) + 0.25 \sin(2\pi 0.7 \text{ MHz } t)$, in radians. **b)** The same perturbations with an additional 0.4-rad, 20 MHz differential phase. **c)** Relative detuning $\Delta\nu = 30 \text{ MHz} \sin(2\pi 0.2 \text{ MHz } t)$. Perturbations ramp on from 0.5 to 0.7 μs . **d–f)** Corresponding final accumulated-result NRMSE for 1024-symbol windows versus injection ratio, comparing PID off and $f_c = 0.2, 1, 2$ MHz; vertical scales are logarithmic. All panels use $\alpha = 0$, no output reflection, and sample-resolved differential detection and accumulation. Controller labels specify a design parameter, not a measured closed-loop bandwidth.

F. Comparison with Fiber Measurements

Figure 10 compares unmodulated and modulated fiber measurements with simulations at $\alpha = 2$ and normalized pump setting 1.944 (labelled “threshold”), corresponding to injected-laser output near 0 dBm. The archived experimental external ratio (−15 dB) and simulated effective ratio (−40 dB) are not directly equivalent. Their 25 dB offset provides a model-dependent effective power-coupling estimate of approximately −25 dB, not an independent measurement of the dimensional coefficient κ .

The unmodulated maps show a detuning-dependent low-response region and residual oscillation branches. In the modulated measurement, reference subtraction and optical-power normalization reduce the background source contribution. Both modulated maps show weaker transfer within the stable region, although the detuning of minimum transfer is not quantitatively reproduced. This is a qualitative laser-response comparison, not an experimental dot-product demonstration. Common color limits do not imply identical absolute calibration of RF spectra and transfer functions.

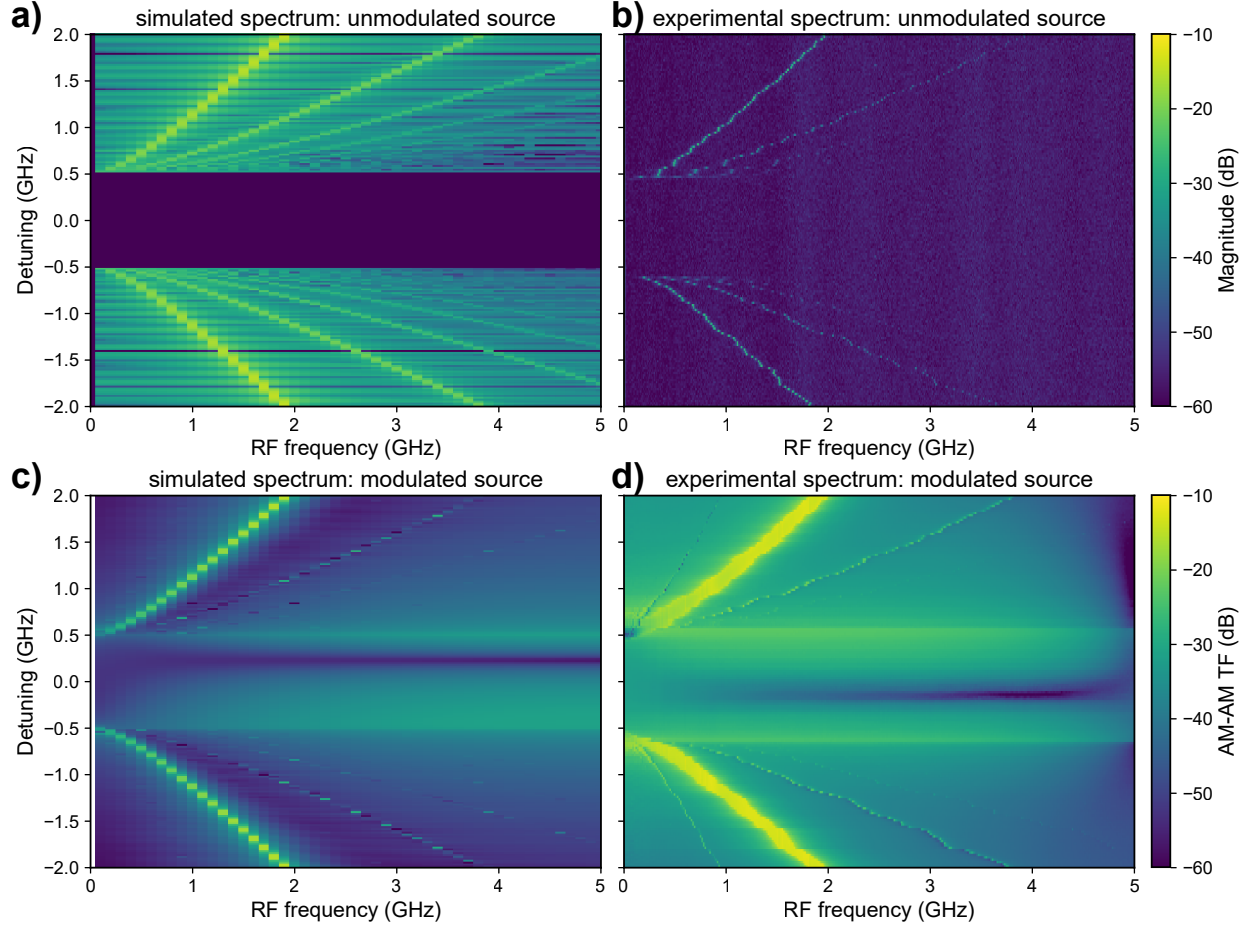


FIG. 10. Simulation and experiment comparison heatmaps. The first row shows unmodulated injection: **a)** simulated RF FFT spectrum of the injected-laser output intensity and **b)** experimental injected-laser RF spectrum measured in SVA spectrum mode. The second row shows modulated injection: **c)** simulated AM-to-AM transfer function and **d)** experimental AM-to-AM transfer function measured in VNA mode after reference subtraction and optical-power normalization. The horizontal axis is RF spectral frequency in (a,b) and applied RF modulation frequency in (c,d); the vertical axis is optical detuning. All maps use common displayed color limits of -60 to -10 dB, with spectral magnitude and transfer-function normalization as indicated by the color bars. Simulations use $\alpha = 2$, threshold = 1.944, and $R_{\text{inj}} = -40$ dB; measurements use the external -15 dB condition.

REFERENCES

- ¹B. Kelleher, D. Goulding, B. Baselga Pascual, S. P. Hegarty, and G. Huyet, Physical Review E **85**, 046212 (2012).
- ²J. Pausch, C. Otto, E. Tylaite, N. Majer, E. Schöll, and K. Lüdge, New Journal of Physics **14**, 053018 (2012).
- ³E. K. Lau, L. J. Wong, and M. C. Wu, IEEE Journal of Selected Topics in Quantum Electronics **15**, 618 (2009).
- ⁴Z. Liu, J.-Y. Kim, D. S. Wu, D. J. Richardson, and R. Slavík, Journal of Lightwave Technology **33**, 34 (2015).
- ⁵Z. Liu, J. Kakande, B. Kelly, J. O'Carroll, R. Phelan, D. J. Richardson, and R. Slavík, Nature Communications **5**, 5911 (2014).