



DDP


Domestic Pumps



DDP 60/65



DDP 60E

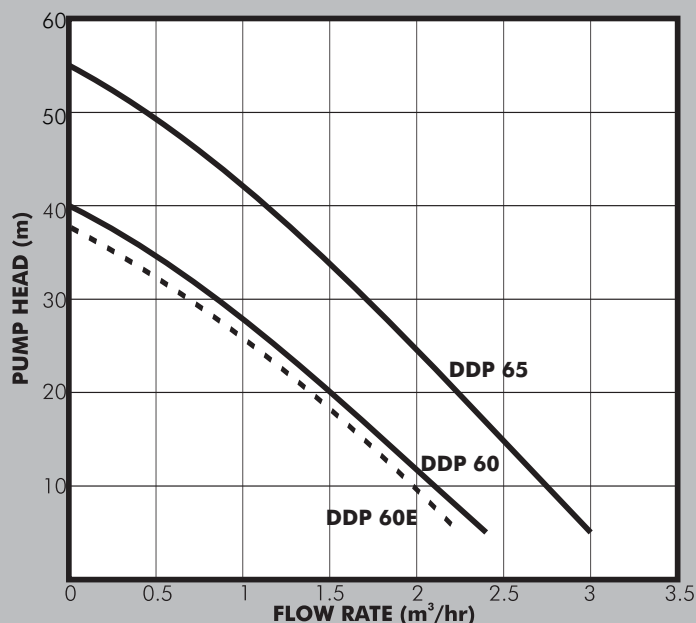

PUMPS

The Dayliff DDP peripheral pump is specially designed for all small scale domestic and commercial water supply uses. It is of high specification peripheral featuring copper windings, a high capacity motor and stainless steel housing inserts to ensure free impeller movement. The pump body is manufactured from cast iron and impeller from brass.

DDPE60E is of lighter construction and does not feature stainless steel housing inserts.

MOTORS

Pumps are close coupled to reliable TEFC electric motors designed for continuous operation and are provided with a thermal cutout to protect against electrical overload. They can be connected directly to the mains power supply through a 10A fuse or MCB.

Enclosure Class: IP44

Insulation Class: F

Speed: 2900rpm

Voltage: 1x240V

OPERATING CONDITIONS

Pumped Liquid: Thin, clean, chemically non-aggressive liquids without solid particles or fibres

Max. Fluid Temperature: +60°C

Max. Ambient Temperature: +40°C

Max. Suction Lift: 7m at sea level

PUMP DATA

Model	Motor		DN1 (")	DN2 (")	Dimensions (mm)			Weight (kg)
	(kW)	Current (A)			L	W	H	
DDP 60E	0.37	1.8	1	1	254	118	150	4.4
DDP 60	0.37	2.5	1	1	265	118	151	5.3
DDP 65	0.75	5.2	1.5	1.5	305	136	181	10

