

滑移装载机和翻斗车

SKID STEER AND DUMP TRUCK



S360



T460



T470



S490

滑移装载机 V1000
SKID STEER LOADER V1000



液压先导操作
Hydraulic Pilot Operation



垂直举升
Vertical Lifting



离车安全锁
Vehicle Exit Safety Lock



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	V1000
基本性能参数	
操作质量	1892kg
铲斗容量	0.19m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	500kg
最大载荷	650kg
行驶速度	0-6km/h
车体宽度	960mm
额定压力	17Mpa-20Mpa
铲斗宽度	1240mm
最大装载高度	2102mm
最大卸载高度	1522mm
最大操作高度	2794mm
至铲斗销高度	2140mm
铲斗在最高时翻转角度	63°
最小高度	1548mm
离去角	29°
离地间隙	200mm
卸载距离	498mm
履带接地长	1080mm
尺寸	
外形尺寸	2691*1240*1548mm
含铲斗长度	2691mm
不含铲斗长度	1981mm
履带型号	230*72*45
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	40L

Model	V1000
Basic performance parameters	
Operating weight	1892kg
Bucket capacity	0.19m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	500kg
Maximum load	650kg
Travel speed	0-6km/h
Vehicle width	960mm
Rated pressure	17Mpa-20Mpa
Bucket width	1240mm
Max loading height	2102mm
Max dumping height	1522mm
Max operating height	2794mm
Height to bucket pin	2140mm
Max height bucket dump angle	63°
Min height	1548mm
Departure angle	29°
Ground clearance	200mm
Dumping distance	498mm
Track contact length	1080mm
Dimensions	
Overall dimensions	2691*1240*1548mm
Length including bucket	2691mm
Length excluding bucket	1981mm
Track contact length	230*72*45
Engine	
Brand	Yanmar/Kubota
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	40L

滑移装载机 V800
SKID STEER LOADER V800



可升级双液压先导操作
Upgradable Dual Hydraulic Pilot Control



LED大灯
LED headlight





久保田 D1105发动机
KUBOTA D1105 Engine

产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	V800
基本性能参数	
操作质量	1729kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	420kg
最大载荷	500kg
行驶速度	0-4km/h
车体宽度	911mm
额定压力	16Mpa
铲斗宽度	1020mm
最大装载高度	2000mm
最大卸载高度	1704mm
最大操作高度	2873mm
至铲斗销高度	2195mm
铲斗在最高时翻转角度	32°
最小高度	1573mm
离去角	39°
离地间隙	225mm
卸载距离	371mm
履带接地长	1200mm
尺寸	
外形尺寸	2651*1020*1573mm
含铲斗长度	2651mm
不含铲斗长度	2084mm
履带型号	180*72*45
发动机	
品牌	久保田
型号	D1105
额定功率	17.1(18.2)kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	33L

Model	V800
Basic performance parameters	
Operating weight	1729kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	420kg
Maximum load	500kg
Travel speed	0-4km/h
Vehicle width	911mm
Rated pressure	16Mpa
Bucket width	1020mm
Max loading height	2000mm
Max dumping height	1704mm
Max operating height	2873mm
Height to bucket pin	2195mm
Max height bucket dump angle	32°
Min height	1573mm
Departure angle	39°
Ground clearance	225mm
Dumping distance	371mm
Track contact length	1200mm
Dimensions	
Overall dimensions	2651*1020*1573mm
Length including bucket	2651mm
Length excluding bucket	2084mm
Track contact length	180*72*45
Engine	
Brand	Kubota
Model	D1105
Rated power	17.1(18.2)kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	33L

滑 移 装 载 机 C1200
SKID STEER LOADER C1200



操作简单
Easy operation



上盘可更换多种形式
Versatile machine



油缸保护锁
Hydraulic cylinder safety lock



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE


◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.



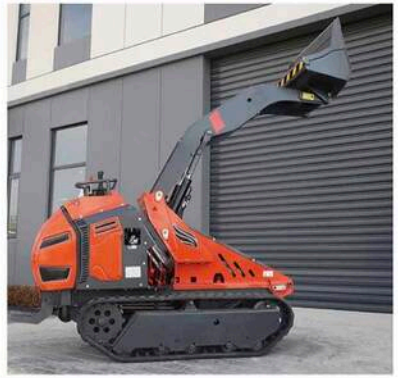



型号	C1200
基本性能参数	
操作质量	1825kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	5.1KN
额定载荷	440kg
最大载荷	500kg
行驶速度	0-7km/h
车体宽度	865mm
额定压力	18.8Mpa
铲斗宽度	1045mm
最大装载高度	1980mm
最大卸载高度	1550mm
最大操作高度	2606mm
至铲斗销高度	2155mm
铲斗在最高时翻转角度	63°
最小高度	1499mm
离去角	34°
离地间隙	200mm
卸载距离	833mm
履带接地长	1664mm
尺寸	
外形尺寸	2867*1045*1499mm
含铲斗长度	2867mm
不含铲斗长度	2034mm
履带型号	200*49*72
发动机	
品牌	久保田
型号	D1105
额定功率	18.5kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	32L

Model	C1200
Basic performance parameters	
Operating weight	1825kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	5.1KN
Rated load	440kg
Maximum load	500kg
Travel speed	0-7km/h
Vehicle width	865mm
Rated pressure	18.8Mpa
Bucket width	1045mm
Max loading height	1980mm
Max dumping height	1550mm
Max operating height	2606mm
Height to bucket pin	2155mm
Max height bucket dump angle	63°
Min height	1499mm
Departure angle	34°
Ground clearance	200mm
Dumping distance	833mm
Track contact length	1664mm
Dimensions	
Overall dimensions	2867*1045*1499mm
Length including bucket	2867mm
Length excluding bucket	2034mm
Track contact length	200*49*72
Engine	
Brand	Kubota
Model	D1105
Rated power	18.5kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	32L

滑移装载机 C1200
SKID STEER LOADER



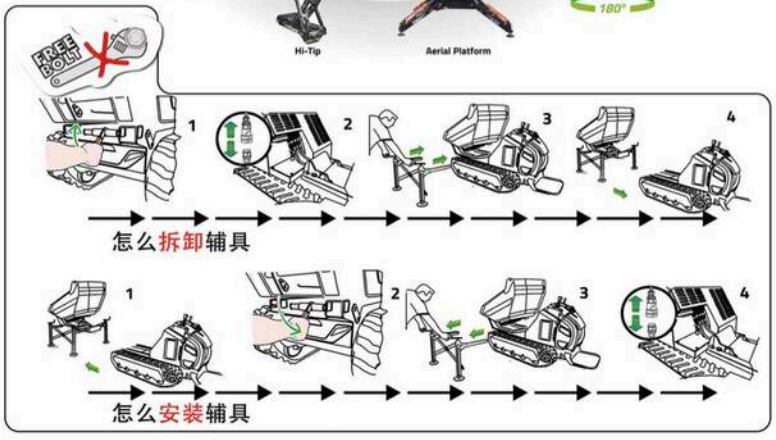

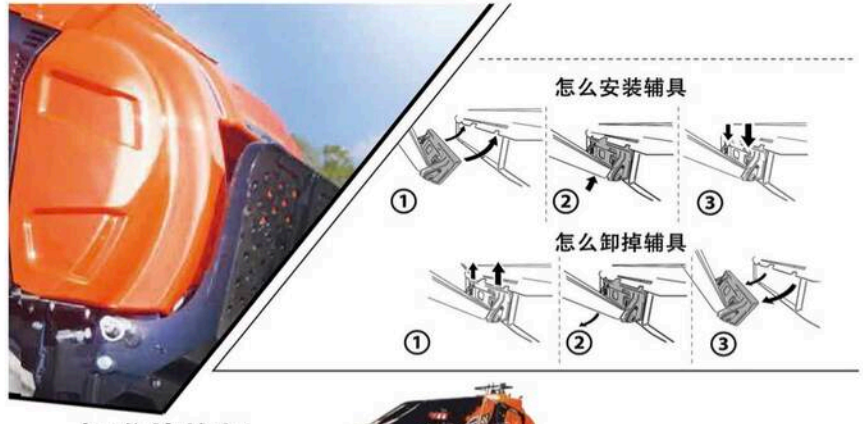




滑 移 装 载 机 S370
SKID STEER LOADER S370



操作简单
Easy operation



平衡臂
Counterbalance arm



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S370
基本性能参数	
操作质量	1000kg
铲斗容量	0.07m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	180kg
最大载荷	210kg
行驶速度	0-6km/h
车体宽度	982mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1840mm
最大卸载高度	1373mm
最大操作高度	2030mm
至铲斗销高度	1925mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	122mm
卸载距离	83mm
轴距	650mm
尺寸	
外形尺寸	2138*1050*1300mm
含铲斗长度	2138mm
不含铲斗长度	1528mm
轮胎型号	18*8.5-8
发动机	
品牌	百利通/科普/润通
型号	XR13.5/192FH/R420D
额定功率	9.92/7.6(7)/7.9kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	19L+6.6L


Model	S370
Basic performance parameters	
Operating weight	1000kg
Bucket capacity	0.07m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	180kg
Maximum load	210kg
Travel speed	0-6km/h
Vehicle width	982mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1840mm
Max dumping height	1373mm
Max operating height	2030mm
Height to bucket pin	1925mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	122mm
Dumping distance	83mm
Wheelbase	650mm
Dimensions	
Overall dimensions	2138*1050*1300mm
Length including bucket	2138mm
Length excluding bucket	1528mm
Tire model	18*8.5-8
Engine	
Brand	B&S/KOOP/Rato
Model	XR13.5/192FH/R420D
Rated power	9.92/7.6(7)/7.9kw
Cylinder	1
Intake method	Naturally Aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	19L+6.6L

滑 移 装 载 机 T470
SKID STEER LOADER



操作简单
Easy operation

平衡臂
Counterbalance arm



派士乐三联泵
Paisile Triple Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T470
基本性能参数	
操作质量	1291kg
铲斗容量	0.12m³
爬坡能力	25°
最大崛起力	5.1KN
额定载荷	240kg
最大载荷	400kg
行驶速度	0-5km/h
车体宽度	1024mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	2024mm
最大卸载高度	1376mm
最大操作高度	2561mm
至铲斗销高度	2071mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	25°
离地间隙	195mm
卸载距离	231mm
履带接地长	1300mm
尺寸	
外形尺寸	2337*1050*1300mm
含铲斗长度	2337mm
不含铲斗长度	1750mm
履带型号	180*72*38
发动机	
品牌	润通/科普/百利通
型号	R740/292F/先锋23
额定功率	16.8/15/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	21L

Model	T470
Basic performance parameters	
Operating weight	1291kg
Bucket capacity	0.12m³
Climbing ability	25°
Maximum breakout force	5.1KN
Rated load	240kg
Maximum load	400kg
Travel speed	0-5km/h
Vehicle width	1024mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	2024mm
Max dumping height	1376mm
Max operating height	2561mm
Height to bucket pin	2071mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	25°
Ground clearance	195mm
Dumping distance	231mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2337*1050*1300mm
Length including bucket	2337mm
Length excluding bucket	1750mm
Track model	180*72*35
Engine	
Brand	Rato/KOOP/B&S
Model	R740/292F/Vanguard23
Rated power	16.8/15/17kw
Cylinder	2
Intake method	Naturally aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	21L

滑 移 装 载 机 S490
SKID STEER LOADER S490



工程加厚轮胎
Heavy-duty
Reinforced Tires

百利通发动机
B&S engine



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S490
基本性能参数	
操作质量	1200kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	250kg
最大载荷	350kg
行驶速度	0-6km/h
车体宽度	1089mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1650mm
最大卸载高度	1382mm
最大操作高度	2466mm
至铲斗销高度	1877mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	15°
离地间隙	200mm
卸载距离	550mm
轴距	940mm
尺寸	
外形尺寸	2573*1150*1300mm
含铲斗长度	2573mm
不含铲斗长度	2100mm
轮胎型号	23*8.5-12
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292F/R740/Vanguard23
额定功率	8kw,72V,200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	10L

Model	S490
Basic performance parameters	
Operating weight	1200kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	250kg
Maximum load	350kg
Travel speed	0-6km/h
Vehicle width	1089mm
Rated pressure	16Mpa
Bucket width	1150mm
Max loading height	1650mm
Max dumping height	1382mm
Max operating height	2466mm
Height to bucket pin	1877mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	15°
Ground clearance	200mm
Dumping distance	550mm
Wheelbase	940mm
Dimensions	
Overall dimensions	2573*1150*1300mm
Length including bucket	2573mm
Length excluding bucket	2100mm
Tire model	23*8.5-12
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292F/R740/Vanguard23
Rated power	8kw,72V,200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	10L

滑移装载机 T490
SKID STEER LOADER T490



高稳定性三角橡胶履带
High-stability Triangular Rubber Tracks

后掀背发动机机仓
Rear hatch engine compartment



高品质行走马达
High-quality Travel Motor



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T490
基本性能参数	
操作质量	1305kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	250kg
最大载荷	350kg
行驶速度	0-5km/h
车体宽度	1089mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1700mm
最大卸载高度	1402mm
最大操作高度	2489mm
至铲斗销高度	1900mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	15°
离地间隙	220mm
卸载距离	580mm
履带接地长	1330mm
尺寸	
外形尺寸	2535*1150*1300mm
含铲斗长度	2535mm
不含铲斗长度	2100mm
履带型号	180*72*45
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/Vanguard23
额定功率	8kw,72V,200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	10L

Model	T490
Basic performance parameters	
Operating weight	1305kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	250kg
Maximum load	350kg
Travel speed	0-5km/h
Vehicle width	1089
Rated pressure	16Mpa
Bucket width	1150mm
Max loading height	1700mm
Max dumping height	1402mm
Max operating height	2489mm
Height to bucket pin	1900mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	15°
Ground clearance	220mm
Dumping distance	580mm
Track contact length	1330mm
Dimensions	
Overall dimensions	2535*1150*1300mm
Length including bucket	2535mm
Length excluding bucket	2100mm
Track contact length	180*72*45
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw,72V,200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	10L

滑 移 装 载 机 S390
SKID STEER LOADER S390



工程加厚轮胎
Heavy-duty
Reinforced Tires



百利通发动机
B&S engine



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S390
基本性能参数	
操作质量	989kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	260kg
最大载荷	290kg
行驶速度	0-6km/h
车体宽度	959mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1600mm
最大卸载高度	1376mm
最大操作高度	2460mm
至铲斗销高度	1872mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	193mm
卸载距离	600mm
轴距	800mm
尺寸	
外形尺寸	2281*1050*1300mm
含铲斗长度	2281mm
不含铲斗长度	1880mm
轮胎型号	23*8.5-12
发动机	
品牌	科普/润通/百利通
型号	192FH/R420D/XR13.5
额定功率	7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	5L

Model	S390
Basic performance parameters	
Operating weight	989kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	260kg
Maximum load	290kg
Travel speed	0-6km/h
Vehicle width	959mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1600mm
Max dumping height	1376mm
Max operating height	2460mm
Height to bucket pin	1872mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	193mm
Dumping distance	600mm
Wheelbase	800mm
Dimensions	
Overall dimensions	2281*1050*1300mm
Length including bucket	2281mm
Length excluding bucket	1880mm
Tire model	23*8.5-12
Engine	
Brand	KOOP/Rato/B&S
Model	192FH/R420D/XR13.5
Rated power	7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	5L

滑 移 装 载 机 T390
SKID STEER LOADER



高稳定性三角橡胶履带
High-stability Triangular Rubber Tracks



人体工程学座椅
Ergonomic seat



一体式加厚大臂
One-piece reinforced boom



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T390
基本性能参数	
操作质量	1070kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	250kg
最大载荷	300kg
行驶速度	0-5km/h
车体宽度	955mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1830mm
最大卸载高度	1404mm
最大操作高度	2488mm
至铲斗销高度	1899mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	40°
离地间隙	219mm
卸载距离	526mm
履带接地长	1300mm
尺寸	
外形尺寸	2282*1050*1300mm
含铲斗长度	2282mm
不含铲斗长度	1880mm
履带型号	180*72*45
发动机	
品牌	科普/润通/百利通
型号	192FH/R420D/XR13.5
额定功率	7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	5L

Model	T390
Basic performance parameters	
Operating weight	1070kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	250kg
Maximum load	300kg
Travel speed	0-5km/h
Vehicle width	955mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1830mm
Max dumping height	1404mm
Max operating height	2488mm
Height to bucket pin	1899mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	40°
Ground clearance	219mm
Dumping distance	526mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2282*1050*1300mm
Length including bucket	2282mm
Length excluding bucket	1880mm
Track model	180*72*45
Engine	
Brand	KOOP/Rato/B&S
Model	192FH/R420D/XR13.5
Rated power	7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	5L

滑 移 装 载 机 T750
SKID STEER LOADER



久保田D1105发动机
KubotaD1105 engine



液压先导操作
Hydraulic pilot operation



减震脚踏板
Shock-absorbing pedal



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE


◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.



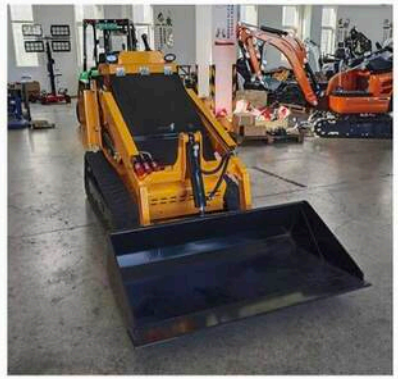

型号	T750
基本性能参数	
操作质量	1635kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	5.5KN
额定载荷	410kg
最大载荷	525kg
行驶速度	0-5km/h
车体宽度	985
额定压力	18Mpa
铲斗宽度	1270mm
最大装载高度	2230mm
最大卸载高度	1826mm
最大操作高度	2880mm
至铲斗销高度	2340mm
铲斗在最高时翻转角度	63°
最小高度	1550mm
离去角	18°
离地间隙	230mm
卸载距离	373mm
履带接地长	1300mm
尺寸	
外形尺寸	2836*1270*1550mm
含铲斗长度	2836mm
不含铲斗长度	2100mm
履带型号	180*72*45
发动机	
品牌	电动/莱动/洋马/久保田
型号	磷酸铁锂/385/3TNV80/D1105
额定功率	6+8kw,72V,200ah/18.8/15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	30L

Model	T750
Basic performance parameters	
Operating weight	1635kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	5.5KN
Rated load	410kg
Maximum load	525kg
Travel speed	0-5km/h
Vehicle width	985
Rated pressure	18Mpa
Bucket width	1270mm
Max loading height	2230mm
Max dumping height	1826mm
Max operating height	2880mm
Height to bucket pin	2340mm
Max height bucket dump angle	63°
Min height	1550mm
Departure angle	18°
Ground clearance	230mm
Dumping distance	373mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2836*1270*1550mm
Length including bucket	2836mm
Length excluding bucket	2100mm
Track model	180*72*45
Engine	
Brand	Electric/Laidong/Yanmar/Kubota
Model	Lithium iron phosphate/385/3TNV80/D1105
Rated power	6+8kw,72V,200ah/18.8/15.2(17.8)/17.1kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	30L

滑 移 装 载 机 S480
SKID STEER LOADER S480



工程加厚轮胎
Heavy-duty
Reinforced Tires

高效液压油冷却器
High-efficiency
hydraulic oil cooler



进口三缸发动机
Imported Three-Cylinder Engine



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S480
基本性能参数	
操作质量	1240kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	350kg
最大载荷	450kg
行驶速度	0-6km/h
车体宽度	1110mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1370mm
最大操作高度	2290mm
至铲斗销高度	1835mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	125mm
卸载距离	261mm
轴距	760mm
尺寸	
外形尺寸	2194*1050*1300mm
含铲斗长度	2194mm
不含铲斗长度	1770mm
轮胎型号	18*8.5-8
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	13L

Model	S480
Basic performance parameters	
Operating weight	1240kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	350kg
Maximum load	450kg
Travel speed	0-6km/h
Vehicle width	1110mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1370mm
Max operating height	2290mm
Height to bucket pin	1835mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	125mm
Dumping distance	261mm
Wheelbase	760mm
Dimensions	
Overall dimensions	2194*1050*1300mm
Length including bucket	2194mm
Length excluding bucket	1770mm
Tire model	18*8.5-8
Engine	
Brand	Yanmar/Kubato
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Naturally aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	13L

滑 移 装 载 机 T480
SKID STEER LOADER T480



高稳定性三角橡胶履带
High-stability Triangular Rubber Tracks

高效液压油冷却器
High-efficiency hydraulic oil cooler



进口三缸发动机
Imported Three-Cylinder Engine



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T480
基本性能参数	
操作质量	1321kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	350kg
最大载荷	450kg
行驶速度	0-5km/h
车体宽度	1040mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1401mm
最大操作高度	2110mm
至铲斗销高度	1870mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	157mm
卸载距离	295mm
履带接地长	900mm
尺寸	
外形尺寸	2169*1120*1300mm
含铲斗长度	2169mm
不含铲斗长度	1850mm
履带型号	180*72*35
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	13L

Model	T480
Basic performance parameters	
Operating weight	1321kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	350kg
Maximum load	450kg
Travel speed	0-5km/h
Vehicle width	1040mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1401mm
Max operating height	2110mm
Height to bucket pin	1870mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	157mm
Dumping distance	295mm
Track contact length	900mm
Dimensions	
Overall dimensions	2169*1120*1300mm
Length including bucket	2169mm
Length excluding bucket	1850mm
Track contact length	180*72*35
Engine	
Brand	Yanmar/Kubato
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Naturally aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	13L

滑 移 装 载 机 S460
SKID STEER LOADER S460



工程加厚轮胎
Heavy-duty
Reinforced Tires

百利通发动机
B&S engine



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S460
基本性能参数	
操作质量	1060kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	300kg
最大载荷	400kg
行驶速度	0-6km/h
车体宽度	1110mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1370mm
最大操作高度	2290mm
至铲斗销高度	1835mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	125mm
卸载距离	261mm
轴距	760mm
尺寸	
外形尺寸	2194*1050*1300mm
含铲斗长度	2194mm
不含铲斗长度	1770mm
轮胎型号	18*8.5-8
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/Vanguard23
额定功率	8kw,72V,200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	10L

Model	S460
Basic performance parameters	
Operating weight	1060kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	300kg
Maximum load	400kg
Travel speed	0-6km/h
Vehicle width	1110mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1370mm
Max operating height	2290mm
Height to bucket pin	1835mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	125mm
Dumping distance	261mm
Wheelbase	760mm
Dimensions	
Overall dimensions	2194*1050*1300mm
Length including bucket	2194mm
Length excluding bucket	1770mm
Tire model	18*8.5-8
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw,72V,200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	10L

滑 移 装 载 机 T460
SKID STEER LOADER T460



高稳定性三角橡胶履带
High-stability Triangular Rubber Tracks



高效液压油冷却器
High-efficiency hydraulic oil cooler



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T460
基本性能参数	
操作质量	1120kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	300kg
最大载荷	400kg
行驶速度	0-5km/h
车体宽度	1040mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1401mm
最大操作高度	2110mm
至铲斗销高度	1870mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	157mm
卸载距离	295mm
履带接地长	900mm
尺寸	
外形尺寸	2169*1050*1300mm
含铲斗长度	2169mm
不含铲斗长度	1850mm
履带型号	180*72*35
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/先锋23
额定功率	8kw,72V,200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	10L

Model	T460
Basic performance parameters	
Operating weight	1120kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	300kg
Maximum load	400kg
Travel speed	0-5km/h
Vehicle width	1040mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1401mm
Max operating height	2110mm
Height to bucket pin	1870mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	157mm
Dumping distance	295mm
Track contact length	900mm
Dimensions	
Overall dimensions	2169*1120*1300mm
Length including bucket	2169mm
Length excluding bucket	1850mm
Track contact length	180*72*35
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw,72V,200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	10L

滑 移 装 载 机 S360
SKID STEER LOADER S360



工程加厚轮胎
Heavy-duty
Reinforced Tires



百利通发动机
B&S engine



大流量双联泵
High-flow Dual Pump



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S360
基本性能参数	
操作质量	880kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	200kg
最大载荷	300kg
行驶速度	0-6km/h
车体宽度	1000mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1367mm
最大操作高度	2400mm
至铲斗销高度	1840mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	21°
离地间隙	130mm
卸载距离	258mm
轴距	710mm
尺寸	
外形尺寸	2130*1050*1300mm
含铲斗长度	2130mm
不含铲斗长度	1726mm
轮胎型号	18*8.5-8
发动机	
品牌	电动/科普/润通/百利通
型号	铅酸电池/192FH/R420D/XR13.5
额定功率	6kw,72V,125ah/7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	5L

Model	S360
Basic performance parameters	
Operating weight	880kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	200kg
Maximum load	300kg
Travel speed	0-6km/h
Vehicle width	1000mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1367mm
Max operating height	2400mm
Height to bucket pin	1840mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	21°
Ground clearance	130mm
Dumping distance	258mm
Wheelbase	710mm
Dimensions	
Overall dimensions	2130*1050*1300mm
Length including bucket	2130mm
Length excluding bucket	1726mm
Tire model	18*8.5-8
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lead-acid battery/192FH/R420D/XR13.5
Rated power	6kw,72V,125ah/7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	5L

滑移装载机 T360
SKID STEER LOADER T360



高稳定性三角橡胶履带
High-stability Triangular Rubber Tracks



高效液压油冷却器
High-efficiency hydraulic oil cooler



高品质行走马达
High-quality Travel Motor



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T360
基本性能参数	
操作质量	941kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	200kg
最大载荷	300kg
行驶速度	0-6km/h
车体宽度	910mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1386mm
最大操作高度	2400mm
至铲斗销高度	1857mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	173mm
卸载距离	250mm
履带接地长	900mm
尺寸	
外形尺寸	2092*1050*1300mm
含铲斗长度	2092mm
不含铲斗长度	1726mm
履带型号	180*72*35
发动机	
品牌	电动/科普/润通/百利通
型号	铅酸电池/192FH/R420D/XR13.5
额定功率	6kw,72V,125ah/7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	5L

Model	T360
Basic performance parameters	
Operating weight	941kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	200kg
Maximum load	300kg
Travel speed	0-6km/h
Vehicle width	910mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1386mm
Max operating height	2400mm
Height to bucket pin	1857mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	173mm
Dumping distance	250mm
Track contact length	900mm
Dimensions	
Overall dimensions	2092*1050*1300mm
Length including bucket	2092mm
Length excluding bucket	1726mm
Track model	180*72*35
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lead-acid battery/192FH/R420D/XR13.5
Rated power	6kw,72V,125ah/7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	5L

滑移装载机 S25
SKID STEER LOADER S25



实心轮胎
Solid tire



油缸承重3吨
The hydraulic cylinder has a load capacity of 3 tons.



带有油缸锁
hydraulic cylinder lock



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S25
基本性能参数	
操作质量	1665kg
铲斗容量	0.22m³
爬坡能力	25°
最大崛起力	14.5KN
额定载荷	450kg
最大载荷	850kg
行驶速度	0-12km/h
车体宽度	900mm
额定压力	18Mpa
铲斗宽度	1000mm
最大装载高度	2284mm
最大卸载高度	1890mm
最大操作高度	3155mm
至铲斗销高度	2398mm
铲斗在最高时翻转角度	22°
最小高度	1836mm
离去角	20°
离地间隙	245mm
卸载距离	550mm
轴距	722mm
尺寸	
外形尺寸	2607*1000*1836mm
含铲斗长度	2607mm
不含铲斗长度	1887mm
轮胎型号	570*155
发动机	
品牌	久保田
型号	D1105-E4B
额定功率	18.2kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	24L

Model	S25
Basic performance parameters	
Operating weight	1665kg
Bucket capacity	0.22m³
Climbing ability	25°
Maximum breakout force	14.5KN
Rated load	450kg
Maximum load	850kg
Travel speed	0-12km/h
Vehicle width	900mm
Rated pressure	18Mpa
Bucket width	1000mm
Max loading height	2284mm
Max dumping height	1890mm
Max operating height	3155mm
Height to bucket pin	2398mm
Max height bucket dump angle	22°
Min height	1836mm
Departure angle	20°
Ground clearance	245mm
Dumping distance	550mm
Wheelbase	722mm
Dimensions	
Overall dimensions	2607*1000*1836mm
Length including bucket	2607mm
Length excluding bucket	1887mm
Tire model	570*155
Engine	
Brand	KUBATA
Model	D1105-E4B
Rated power	18.2kw
Cylinder	3
Intake method	自然吸气
Emission standard	EPA/ERUO5
Fuel tank capacity	24L

滑 移 装 载 机 S55
SKID STEER LOADER



油缸保护锁
Hydraulic cylinder safety lock



液压先导操作
Hydraulic pilot operation



空调驾驶室
Air-conditioned cab



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	S55
基本性能参数	
操作质量	3845kg
铲斗容量	0.4m³
爬坡能力	25°
最大崛起力	25KN
额定载荷	890kg
最大载荷	⩾1780kg
行驶速度	0-12km/h
液压流量	55L/Min
液压压力	21Mpa
铲斗宽度	1800±2%mm
最大装载高度	2846±5%mm
最大卸载高度	2384±5%mm
最大操作高度	3790mm
至铲斗销高度	3020mm
铲斗在最高时翻转角度	63°
最小高度	2095±5%mm
尾部长度	1160±5%mm
离地间隙	185±2%mm
卸载距离	520±1%mm
轴距	1200mm
尺寸	
外形尺寸	3450*1800*2095mm
含铲斗长度	3450mm
不含铲斗长度	2700mm
轮胎型号	10-10.5
发动机	
品牌	洋马/康明斯
型号	4TNV80/HFC4DA1-2C3
额定功率	35.5/36.8kw
气缸	4
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	80L

Model	S55
Basic performance parameters	
Operating weight	3845kg
Bucket capacity	0.4m³
Climbing ability	25°
Maximum breakout force	25KN
Rated load	890kg
Maximum load	⩾1780kg
Travel speed	0-12km/h
Hydraulic flow rate	55L/Min
Hydraulic pressure	21Mpa
Bucket width	1800±2%mm
Max loading height	2846±5%mm
Max dumping height	2384±5%mm
Max operating height	3790mm
Height to bucket pin	3020mm
Max height bucket dump angle	63°
Min height	2095±5%mm
Tail length	1160±5%mm
Ground clearance	185±2%mm
Dumping distance	520±1%mm
Wheelbase	1200mm
Dimensions	
Overall dimensions	3450*1800*2095mm
Length including bucket	3450mm
Length excluding bucket	2700mm
Tire model	10-10.5
Engine	
Brand	Yanmar/Cummins
Model	4TNV80/HFC4DA1-2C3
Rated power	35.5/36.8kw
Cylinder	4
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	80L

滑移装载机 T500
SKID STEER LOADER T500



大流量双联泵
High-flow Dual Pump



百利通发动机
B&S engine





加粗油缸
Thickened hydraulic cylinder

产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T500
基本性能参数	
操作质量	500kg
货箱容量	0.22m³
爬坡能力	20°
最大载荷	500kg
行驶速度	1.7-3.5km/h
最小回转半径	95mm
履带中心距	509mm
最小离地间隙	85mm
履带接地长	811mm
货箱翻转角度	86°
铲斗翻转角度	109°
行走马达	
品牌	北方液压
排量	200cc
最大工作压力	20Mpa
最大扭矩	805Nm
尺寸	
外形尺寸	1735*844*1255mm
整车高度	1255mm
整车宽度	844mm
整车长度	1735mm
发动机	
品牌	科普/润通/百利通
型号	178F/R210/RX6.5
额定功率	4.2/4.8/4.78kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	3.1L

Model	T500
Basic performance parameters	
Operating weight	500kg
Cargo box capacity	0.22m³
Climbing ability	20°
Maximum load	500kg
Travel speed	1.7-3.5km/h
Minimum turning radius	95mm
Track center distance	509mm
Minimum ground clearance	85mm
Track contact length	811mm
Cargo box tilting angle	86°
Bucket tilting angle	109°
Travel motor	
Brand	Northern Hydraulics
Displacement	200cc
Maximum working pressure	20Mpa
Maximum torque	805Nm
Dimensions	
Overall dimensions	1735*844*1255mm
Overall height	1255mm
Overall width	844mm
Overall length	1735mm
Engine	
Brand	Koop/Rato/B&S
Model	178F/R210/RX6.5
Rated power	4.2/4.8/4.78kw
Cylinder	1
Intake method	Naturally aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	3.1L

滑移装载机 T550
SKID STEER LOADER T550



操作简单
Easy operation



加粗动力头
Bold power head



带有滚筒辅助轮
With roller auxiliary wheels



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	T550
基本性能参数	
操作质量	642kg
货箱容量	0.145m³
爬坡能力	20°
最大载荷	200kg
行驶速度	0.8-1.7km/h
最小回转半径	1420mm
履带中心距	825mm
最小离地间隙	85mm
履带接地长	825mm
货箱翻转角度	90°
搅拌桶直径	600mm
进料口直径	423mm
搅拌通深度	612mm
铲斗举升高度	1622mm
铲斗举升长度	1767mm
卸载离地高度	232mm
液压系统	
行走马达	200ml/r
回转马达	200ml/r
液压双泵	2.7+2.7ml/r
尺寸	
外形尺寸	2155*800*1228mm
整车高度	1228mm
整车宽度	800mm
整车长度	2155mm
发动机	
品牌	科蕾/润通/百利通
型号	178F/R210/RX6.5
额定功率	4.2/4.8/4.78kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	3.1L

Model	T550
Basic performance parameters	
Operating weight	642kg
Cargo box capacity	0.145m³
Climbing ability	20°
Maximum load	200kg
Travel speed	0.8-1.7km/h
Minimum turning radius	1420mm
Track center distance	825mm
Minimum ground clearance	85mm
Track contact length	825mm
Cargo box tilting angle	90°
Mixing drum diameter	600mm
Feed inlet diameter	423mm
Mixing drum depth	612mm
Bucket lifting height	1622mm
Bucket lifting length	1767mm
Unloading height from ground	232mm
Hydraulic system	
Travel motor	200ml/r
Slewing motor	200ml/r
Hydraulic dual pump	2.7+2.7ml/r
Dimensions	
Overall dimensions	2155*800*1228mm
Overall height	1228mm
Overall width	800mm
Overall length	2155mm
Engine	
Brand	Koop/Rato/B&S
Model	178F/R210/RX6.5
Rated power	4.2/4.8/4.78kw
Cylinder	1
Intake method	Naturally aspirated
Emission standard	EPA/ERUO5
Fuel tank capacity	3.1L

滑移装载机 翻斗车
SKID STEER LOADER



液压先导操作
Hydraulic Pilot Operation



180° 回转
180 degree rotation



洋马发动机
Yanmar engine



产品用途 PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场合。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in situations where the working site is small, the ground is uneven, and the work content changes frequently. It is suitable for infrastructure construction, industrial applications, dock loading and unloading, urban streets, residential buildings, barns, livestock sheds, airport runways, etc. It can also be used as auxiliary equipment for large-scale engineering construction machinery.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.





型号	V1000
基本性能参数	
空载重量	1510kg
铲斗容量	0.66m³
爬坡能力	30°
载重能力	1500kg
最高速度	9km/h
转弯半径	2260mm
底盘类型	刚性
悬挂系统	无
制动系统类型	静液制动加湿式驻车制动
轮胎规格	10/75-15.3
车斗回转角度	±90°
倾翻角度	83°
驾驶室类型	无
安全配置	标配防倒架、警示灯等
附件	可选小料斗
尺寸	
外形尺寸	3216*1429*2421mm
长度	3216mm
宽度	1429mm
高度	2421mm
发动机	
品牌	洋马
型号	3TNV80
额定功率	20.2HP
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERUO5
燃油箱容积	36L

Model	V1000
Basic performance parameters	
Tare weight	1510kg
Bucket Capacity	0.66m³
Climbing ability	30°
Load Capacity	1500kg
Maximum Speed	9km/h
Turning Radius	2260mm
Chassis Type	Rigidity
Suspension System	No
Brake System Type	Hydrostatic + Wet Parking Brake
Tire Specifications	10/75-15.3
Dump body turning angle	±90°
Dumping Angle	83°
Cabin Type	No
Safety Features	Std. Anti-tipping Frame & Warning Light
Attachments/Accessories	Opt. Small Hopper
Dimensions	
Overall dimensions	3216*1429*2421mm
Length	3216mm
Width	1429mm
Height	2421mm
Engine	
Brand	Yanmar
Model	3TNV80
Rated power	20.2HP
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERUO5
Fuel tank capacity	36L

滑移装载机辅具
ACCESSORIES

- 一机多用
- One Machine,multi-usage
- 快速更换多种辅具
- Quick and easy replacement of accessories

① 

松土器 Ripper

② 

货叉 Pallet Fork

③ 

破碎锤 Breaker

④ 

抓叉 Hydraulic grapple

⑤ 

清扫器 Sweeper

⑥ 

螺旋钻 Auger

⑦ 

抓铲 Crab bucket

⑧ 

直挖 Direct excavation

⑨ 

四合一铲斗 4 in 1 buket

⑩ 

除雪机 Snow blower

⑪ 

平土器 Leveler

⑫ 

旋耕机 Rotary tiller

13



搅拌罐 Mixer

14



搅拌斗 Mixing Bucket

19



草坪松土器Lawn aerator

20



土壤调节器 Soil conditioner

15



提升装置 Lifting device

16



牵引装置 Pulling device

21



割灌机 Brush cutter

22



割草机 lawn mower

17



开沟器 Trencher

18



劈柴机 Log splitter

23



回填机 Trench filler

24



拓荒机 Mulcher



小型工程机械

CONSTRUCTION MACHINERY



06Q



12Q



15Q



17Q

小 型 挖 掘 机 06Q
SMALL EXCAVATOR



产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

众诚发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗

ZHONGCHENGengine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	06Q
重量	
整机重量	660kg
尺寸	
运输长度	2287mm
运输宽度	700mm
运输高度	2130mm
最大挖掘半径	2254mm
最大挖掘深度	1091mm
最大挖掘高度	2114mm
最大卸载高度	1386mm
最大挖掘力	3.5KN
驱动	
发动机品牌	众城/隆鑫
发动机型号	TR306/G300FDA
最大功率	6.3kw(8.5HP)/6.8kw(9.2HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	06Q
WEIGHT	
Qverall weight	660kg
SIZE	
Total length	2287mm
Total width	700mm
Total height	2130mm
Max. digging radius	2254mm
Max. digging depth	1091mm
Max. digging height	2114mm
Counterweight ground clearance	1386mm
Max. digging force	3.5KN
DRIVE	
Engine brand	ZONGCHENG/LONCIN
Engine model	TR306/G300FDA
Maximum power	6.3kw(8.5HP)/6.8kw(9.2HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 10
SMALL EXCAVATOR





科普汽油发动机
Koop gasoline engine



加固销轴
Reinforced pin shaft



操作简单
Easy operation



侧开门，便捷检修
Side access door for convenient maintenance

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

科普发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗

ZHONGCHENGengine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	10
重量	
整机重量	730kg
尺寸	
运输长度	2784mm
运输宽度	940mm
运输高度	2209mm
最大挖掘半径	2830mm
最大挖掘深度	1722mm
最大挖掘高度	2452mm
最大卸载高度	1821mm
最大挖掘力	7.2KN
驱动	
发动机品牌	华普瑞/科普/百利通
发动机型号	192FA/XR13.5
最大功率	7.6kW (10HP)/9.92kw(13.5HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	10
WEIGHT	
Qverall weight	730kg
SIZE	
Total length	2784mm
Total width	940mm
Total height	2209mm
Max. digging radius	2830mm
Max. digging depth	1722mm
Max. digging height	2452mm
Counterweight ground clearance	1821mm
Max. digging force	7.2KN
DRIVE	
Engine brand	HUAPURUI/Koop/B&S
Engine model	192FA/XR13.5
Maximum power	7.6kW (10HP)/9.92kw(13.5HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 10Q
SMALL EXCAVATOR





变量柱塞泵
Variable piston pump



后翻式座椅
Rear-tilting seat



操作简单
Easy operation



内置油管
Built-in oil pipe

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

百利通/科普发动机/进口油缸、油管内置NOK密封圈/柱塞泵/后掀式座椅/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

Briggs & Stratton/KOOP engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/plunger pump/Rear-tilting seat/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	10Q	MODEL	10Q
重量		WEIGHT	
工作重量	1000kg	Operating weight	1000kg
尺寸		SIZE	
运输长度	2889mm	Total length	2889mm
运输宽度	930mm	Total width	930mm
运输高度	2190mm	Total height	2190mm
最大挖掘半径	3063mm	Max. digging radius	3063mm
最大挖掘深度	1736mm	Max. digging depth	1736mm
最大挖掘高度	2701mm	Max. digging height	2701mm
最大卸载高度	1848mm	Counterweight ground clearance	1848mm
最大挖掘力	6KN	Max. digging force	6KN
驱动		DRIVE	
发动机品牌	百利通/科普	Engine brand	R&S/KOOP
发动机型号	XR13.5/192F	Engine model	XR13.5/192F
最大功率	9.92kw(13.5HP)/7.6kw(10HP)	Maximum power	9.92kw(13.5HP)/7.6kw(10HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-1.8km/h	Walking speed	0-1.8km/h
爬坡能力	30°	Climbing angle	30°

小型挖掘机 12Q
SMALL EXCAVATOR





坐落式安全锁
Mounted Safety Lock



LED液晶显示器
LED LCD



脚踏式破碎
Foot-operated Crusher

可加装钢履带
Steel tracks can be installed.

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

科普192发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

KOOP192F engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/-adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	12Q	MODEL	12Q
重量		WEIGHT	
工作重量	1250kg	Operating weight	1250kg
尺寸		SIZE	
运输长度	2981mm	Total length	2981mm
运输宽度	930-1105mm	Total width	930-1105mm
运输高度	2287mm	Total height	2287mm
最大挖掘半径	3057mm	Max. digging radius	3057mm
最大挖掘深度	1717mm	Max. digging depth	1717mm
最大挖掘高度	2717mm	Max. digging height	2717mm
最大卸载高度	1866mm	Counterweight ground clearance	1866mm
最大挖掘力	9KN	Max. digging force	9KN
驱动		DRIVE	
发动机品牌	科普/百利通	Engine brand	KOOP/B&S
发动机型号	192F/XR13.5	Engine model	192F/XR13.5
最大功率	7.6kw(10HP)/9.92kw(13.5HP)	Maximum power	7.6kw(10HP)/9.92kw(13.5HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-1.5km/h	Walking speed	0-1.5km/h
爬坡能力	30°	Climbing angle	30°

小型挖掘机 15Q
SMALL EXCAVATOR





坐落式安全锁
Mounted Safety Lock



LED液晶显示器
LED LCD



脚踏式破碎
Foot-operated Crusher

可加装钢履带
Steel tracks can be installed.

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

久保田D722/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

Kubota D722 engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/Twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	15Q	MODEL	15Q
重量		WEIGHT	
工作重量	1350kg	Operating weight	1350kg
尺寸		SIZE	
运输长度	2981mm	Total length	2981mm
运输宽度	930-1105mm	Total width	930-1105mm
运输高度	2287mm	Total height	2287mm
最大挖掘半径	3057mm	Max. digging radius	3057mm
最大挖掘深度	1717mm	Max. digging depth	1717mm
最大挖掘高度	2717mm	Max. digging height	2717mm
最大卸载高度	1866mm	Counterweight ground clearance	1966mm
最大挖掘力	9KN	Max. digging force	9KN
驱动		DRIVE	
发动机品牌	久保田	Engine brand	Kubota
发动机型号	D722	Engine model	D722
最大功率	10.2kw(13.9HP)	Maximum power	10.2kw(13.9HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-6km/h	Walking speed	0-6km/h
爬坡能力	30°	Climbing angle	30°

小 型 挖 掘 机 17B
SMALL EXCAVATOR





变量柱塞泵
Variable piston pump



可掀式发动机舱
Rear-tilting seat



LED液晶显示器
LED LCD



大臂油缸上置油缸
Top-mounted Boom Cylinder

可加装钢履带
Steel tracks can be installed.

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

莱动385B/进口油缸、油管内置NOK密封圈/后掀式发动机舱/泰丰变量柱塞泵/泰丰多路阀/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

LAIDONG KM385B engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/Hinged Engine Compartment Hood/Taifeng Variable Displacement Piston Pump / Taifeng Multi-way Valve/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	17Q	MODEL	17Q
重量		WEIGHT	
工作重量	1700kg	Operating weight	1700kg
尺寸		SIZE	
运输长度	3390mm	Total length	3390mm
运输宽度	1100mm	Total width	1100mm
运输高度	2400mm	Total height	2400mm
最大挖掘半径	3680mm	Max. digging radius	3680mm
最大挖掘深度	2340mm	Max. digging depth	2340mm
最大挖掘高度	3245mm	Max. digging height	3245mm
最大卸载高度	2320mm	Counterweight ground clearance	2320mm
最大挖掘力	13.5KN	Max. digging force	13.5KN
驱动		DRIVE	
发动机品牌	莱动	Engine brand	LAIDONG
发动机型号	380	Engine model	KM385B
最大功率	18.1kw(24HP)	Maximum power	18.1kw(24HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-1.8km/h	Walking speed	0-1.8km/h
爬坡能力	30°	Climbing angle	30°

小 型 挖 掘 机 17Q
SMALL EXCAVATOR





变量柱塞泵
Variable piston pump



可掀式发动机舱
Rear-tilting seat



LED液晶显示器
LED LCD



大臂油缸上置油缸
Top-mounted Boom Cylinder

可加装钢履带
Steel tracks can be installed.

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

莱动385B/进口油缸、油管内置NOK密封圈/后掀式发动机舱/泰丰变量柱塞泵/泰丰多路阀/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

LAIDONG KM385B engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/Hinged Engine Compartment Hood/Taifeng Variable Displacement Piston Pump / Taifeng Multi-way Valve/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	17Q	MODEL	17Q
重量		WEIGHT	
工作重量	1700kg	Operating weight	1700kg
尺寸		SIZE	
运输长度	3390mm	Total length	3390mm
运输宽度	1100mm	Total width	1100mm
运输高度	2400mm	Total height	2400mm
最大挖掘半径	3680mm	Max. digging radius	3680mm
最大挖掘深度	2340mm	Max. digging depth	2340mm
最大挖掘高度	3245mm	Max. digging height	3245mm
最大卸载高度	2320mm	Counterweight ground clearance	2320mm
最大挖掘力	13.5KN	Max. digging force	13.5KN
驱动		DRIVE	
发动机品牌	莱动	Engine brand	LAIDONG
发动机型号	KM385B	Engine model	KM385B
最大功率	18.1kw(24HP)	Maximum power	18.1kw(24HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-1.8km/h	Walking speed	0-1.8km/h
爬坡能力	30°	Climbing angle	30°

小型挖掘机 18Q
SMALL EXCAVATOR





坐落式安全锁
Mounted Safety Lock



LED液晶显示器
LED LCD



脚踏式破碎
Foot-operated Crusher

可加装钢履带
Steel tracks can be installed.

产品用途 PRODUCT APPLICATION

运用于路面修复、混凝土破碎、埋设电缆、自来水管道的铺设、园林栽培及河道河沟清淤工程、建筑工程等各种作业环境。具备挖掘、破碎、清沟、钻孔、推土等多功能。

It is used to restore the ground, break the concrete, and for cable casting, water pipe laying, planting, cleaning of river/ditch and construction project. It has several functions: excavation, breaking, ditch cleaning, drilling, bulldozing and ect.

性能特点 FEATURE

◆小巧灵活，便于小地形、空间狭窄作业；
Compact and flexible, convenient for small terrain and narrow space operations.

◆操作简单便捷，运输方便；
Simple and convenient operation, convenient transportation.

◆采用优质加厚钢材，运用喷塑工艺处理，防锈耐腐；
Use thicker high-quality steel, apply plastic molding process, prevent rust and anti-corrosion.

◆采用国际知名品牌减速机，运行平稳，可靠性高；
The use of internationally renowned brand reducers provides smooth operation and high reliability.

◆360度车身自由旋转，灵动机身为户外工作带来便利。
The 360-degree body rotates freely, and the smart body facilitates outdoor work.

标准配置/STANDARD CONFIGURATION

莱动385B/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

LAIDONG KM385B engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustabledriving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading,engineering forcible entry,excavate barren hills,small earthwork,-municipal projects,break concrete,dredging river and other working environment.

型号	18Q	MODEL	18Q
重量		WEIGHT	
工作重量	1500kg	Operating weight	1500kg
尺寸		SIZE	
运输长度	3249mm	Total length	3249mm
运输宽度	1120mm	Total width	1120mm
运输高度	2314mm	Total height	2314mm
最大挖掘半径	3396mm	Max. digging radius	3396mm
最大挖掘深度	1991mm	Max. digging depth	1991mm
最大挖掘高度	2928mm	Max. digging height	2928mm
最大卸载高度	2090mm	Counterweight ground clearance	2090mm
最大挖掘力	9KN	Max. digging force	9KN
驱动		DRIVE	
发动机品牌	莱动/久保田	Engine brand	LAIDONG/KUBOTA
发动机型号	KM385B/D722	Engine model	KM385B/D722
最大功率	18.1kw(24HP)/10.2kw(13.9HP)	Maximum power	18.1kw(24HP)/10.2kw(13.9HP)
行走特性		WALKING CHARACTERISTICS	
行走速度	0-6km/h	Walking speed	0-6km/h
爬坡能力	30°	Climbing angle	30°

属具

·一机多用 ·快速替换

① 

200 挖斗

200 Digging bucket

② 

400 挖斗

400 Digging bucket

③ 

500/600/800/1000mm

平面斗

Flat bucket

④ 

600/800mm

倾斜斗

Tilting bucket

⑤ 

贝壳斗

Shell bucket

⑥ 

筛斗

Sieve bucket

⑦ 

推雪铲

Pushing snow shovel

⑧ 

挖渠斗

V Ditch bucket

⑨ 

旋转挖斗

Rotating Excavator bucket

⑩ 

倾斜快换

Tilt quick coupler

⑪ 

快换

Quick coupler

⑫ 

半自动快换

Semi automatic quick coupler

⑬



360°旋转抓木器

360° rotating wooden gripper

⑭



抓木器

Grab wooden objects

⑲



一体式液压拇指夹

Integrated hydraulic thumb clamp

⑳



液压拇指夹

Hydraulic thumb clamp

⑮



拖车

Trailer

⑯



拖车2

Trailer2

㉑



双钩松土器

Double hooksoil loosening device

㉒



松土器

Soil loosening tool

⑰



拖车3

Trailer3

⑱



拇指夹

Hydraulic thumb clamp

㉓



螺旋钻

Spiral drill

㉔



破碎锤

Breaking hammer

25



劈柴机
Chopping machine

26



钻木器
Diamond wood

31



平板夯
Flat rammer

32



货叉
Forks for goods

27



开沟器
Trencher

28



铣刨机
Milling machine

33



爬梯
Climbing stairs

34



扫雪机
Snow sweeper

29



切割器
Cutter

30



耙子
Rake

35



扫地机
Sweeping machine

36



割草机
Lawn mower

锂 电 割 草 机 550E
LITHIUM-ION BATTERY LAWN MOWER



磷酸铁锂电池
LFP Battery





双升降电缸
Dual Lifting Electric Cylinders

双导轨履带
Dual-Guide Rail Track



① 高速/低速	High/low speed
②上下移动刀片	Move the blade up and down
③ 天线	Antenna
④ 通道1	Channel 1
⑤ 定速巡航	Constant speed
⑥ 割草	Mow the lawn
⑦ 指示灯	Indicator light
⑧ 前进/后退	Forward and backward
⑨ 左右旋转	Rotate left and right
⑩ 通道2	Channel 2
⑪ 通道3	Channel 3
⑫ 通道4	Channel 4
⑬ 通道5	Channel 5
⑭ 遥控开关	On-off switch
⑮ 开关显示器	Display screen







标准配置/STANDARD CONFIGURATION

远程遥控/双导轨履带/双升降电缸

Remote Control/Dual-Guide Rail Track/Dual Lifting Electric Cylinders

机器优点/MACHINE ADVANTAGES

可以长期大角度斜坡工作，锂电免维护，无须定期更换润滑油，环保，低噪音。

Can work on large-angle slopes for a long time,Lithium battery, maintenance-free,No need for regular lubricating oil replacement ,Environmentally friendly,Low noise


型号	550E
基本性能参数	
整机质量	110kg
整机长度	1000mm
整机宽度	850mm
整机高度	440mm
最大离地高度	80mm
刀片最高	67mm
行驶速度	0-5km/h
最小高度	40mm
割台升降行程	30mm
履带接地长	550mm
尺寸	
外形尺寸	850*1000*440mm
推铲长度	1100mm
防撞梁长度	1000mm
履带型号	120*50*40
电机	
工作电机	2000w
行走电机	350w*2
电池	42AH*48V
备用电池	快换
充电时长	7H
快充时长	5H
遥控距离	150m

Model	550E
Basic performance parameters	
Overall Machine Weight	110kg
Overall Machine Length	1000mm
Overall Machine Width	850mm
Overall Machine Height	440mm
Maximum Ground Clearance	80mm
Maximum Blade Height	67mm
Travel Speed	0-5km/h
Minimum Height	40mm
Cutting Platform Lifting Stroke	30mm
Track Ground Contact Length	550mm
Dimensions	
Overall dimensions	2138*1050*1300mm
Push Shovel Length	1100mm
Anti-Collision Beam Length	1000mm
Track Model	120*50*40
Motor	
Working Motor	2000w
Travel Motor	350w*2
Battery	42AH*48V
Backup Battery	Quick Change
Charging Duration	7H
Quick Charging Duration	5H
Remote Control Distance	150m

汽 油 割 草 机 550
LAWN MOWER



汽油发动机
Gasoline Engine

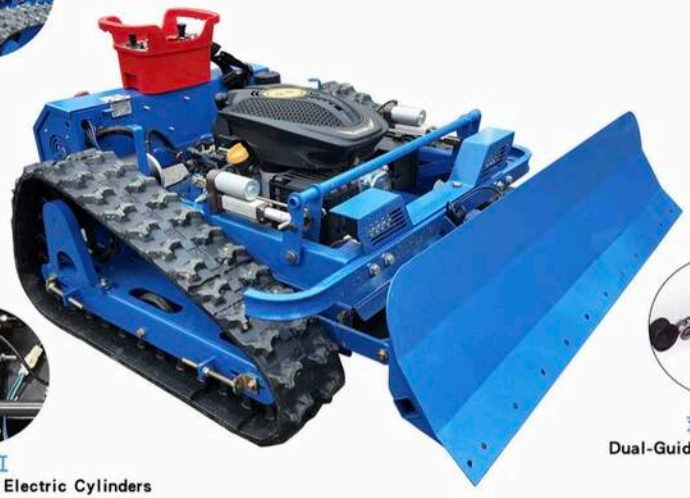



双升降电缸
Dual Lifting Electric Cylinders



双导轨履带
Dual-Guide Rail Track



① 高速/低速	High/low speed
②上下移动刀片	Move the blade up and down
③ 天线	Antenna
④ 通道1	Channel 1
⑤ 定速巡航	Constant speed
⑥ 割草	Mow the lawn
⑦ 指示灯	Indicator light
⑧ 前进/后退	Forward and backward
⑨ 左右旋转	Rotate left and right
⑩ 通道2	Channel 2
⑪ 通道3	Channel 3
⑫ 通道4	Channel 4
⑬ 通道5	Channel 5
⑭ 遥控开关	On-off switch
⑮ 开关显示器	Display screen







标准配置/STANDARD CONFIGURATION

电启动发动机\遥控器启动\遥控器熄火\远程紧急停止
Electric Start Engine\Remote Control Start\Remote Control Stop\Remote Emergency Stop

机器优点/MACHINE ADVANTAGES

燃油款割草机的核心优势是动力强、续航无束缚，适配复杂场景和高强度作业。
The core advantages of fuel-powered lawn mowers lie in their strong power, unrestricted endurance, and suitability for complex scenarios and high-intensity operations.

型号	550
基本性能参数	
整机质量	140kg
整机长度	900mm
整机宽度	930mm
整机高度	520mm
最大离地高度	20-150mm
刀片最高	150mm
行驶速度	0-4km/h
最小高度	20mm
割台升降行程	20-150mm
割幅宽度	530mm
包装尺寸	950*990*670mm
爬坡能力	45°
标配动力	RV225
燃油油箱	2L
油耗	1.2L/H
机油容量	0.6L

Model	550
Basic performance parameters	
Overall Machine Weight	140kg
Overall Machine Length	900mm
Overall Machine Width	930mm
Overall Machine Height	520mm
Maximum Ground Clearance	20-150mm
Maximum Blade Height	150mm
Travel Speed	0-4km/h
Minimum Height	20mm
Cutting Platform Lifting Stroke	20-150mm
Cutting Width	530mm
Package Dimensions	950*990*670mm
Gradeability	45°
Standard Power	RV225
Fuel Tank	2L
Fuel Consumption	1.2L/H
Oil Capacity	0.6L