BOB-LIFT

BOBLIFTLOADER.COM



COMPACT EQUIPMENT CATALOGUE · 2026

MINI SKID STEER LOADERS AND MINI DUMPERS.

18 models built to order in Xuzhou, China: eight mini skid steer loaders, two tracked mini dumpers and eight wheeled site dumpers, with full specifications and 24 loader attachments.

XUZHOU BOB-LIFT CONSTRUCTION MACHINERY CO., LTD.

ABOUT

SMALL MACHINES, BUILT BY PEOPLE YOU CAN TALK TO.

BOB-LIFT Loader is the mini skid steer loader and mini dumper line of Xuzhou BOB-LIFT Construction Machinery Co., Ltd. Our loaders are welded, painted and assembled by our own team at our factory in Xuzhou, Jiangsu.

You deal directly with the company that builds the machine: one team answers your questions before the order, builds the machine to your configuration, and supports it with parts and remote guidance after delivery.

Own factory in Xuzhou, China
37,000 m²

Countries and regions served
200+

Whole-machine warranty
12 months

Ready to ship
8–30 working days



Finished machines in our Xuzhou assembly hall, painted in the colours customers ordered.

CONTENTS

About BOB-LIFT Loader 02
The range at a glance 03
Mini skid steer loaders 04
- BL-T360-H · Tracked Stand-on 05
- BL-T460-H · Tracked Stand-on 06
- BL-T750-H · Tracked Stand-on 07
- BL-T1000-H · Tracked Stand-on 08
- BL-S390-C · Wheeled Seated 09
- BL-T390-C · Tracked Seated 10
- BL-S490-C · Wheeled Seated 11
- BL-T490-C · Tracked Seated 12

Loader attachments 13
Mini dumpers 14
- BL-T500-HD · 500 kg Tracked dumper 15
- BL-T200-HJ · Tracked Mini Mixer Dumper 16
- FC10 · 1 Ton Wheeled dumper 17
- FY15 · 1.5 Ton Wheeled dumper 18
- FY20-2 · 2 Ton Wheeled dumper with Front Bucket 19
- FY20-4 · 2 Ton Wheeled dumper 20
- FY30 · 3 Ton Wheeled dumper 21
- FJZ30 · 3 Ton Wheeled dumper with Front Bucket 22
- FY40 · 4 Ton Wheeled dumper 23
- FY50 · 5 Ton Wheeled dumper 24

Wheeled dumpers compared 25
Buying, shipping & support 26
Contact 27

THE RANGE AT A GLANCE.

Two families, eighteen models. Start with the narrowest opening on your site and the heaviest load you move, then open the model's page for the full specification.

MINI SKID STEER LOADERS

MODEL	TYPE	RATED LOAD	BUCKET / HOPPER	POWER	WIDTH	WEIGHT
BL-T360-H	Tracked Stand-on Mini Skid Steer Loader	200 kg	0.15 m³	7.6 kW	930 mm	650 kg
BL-T460-H	Tracked Stand-on Mini Skid Steer Loader	300 kg	0.15 m³	16.8 kW	1082 mm	730 kg
BL-T750-H	Tracked Stand-on Mini Skid Steer Loader	410 kg	0.15 m³	18.8 kW	985 mm	1,500 kg
BL-T1000-H	Tracked Stand-on Mini Skid Steer Loader	500 kg	0.19 m³	17.8 kW	960 mm	1,800 kg
BL-S390-C	Wheeled Seated Mini Skid Steer Loader	260 kg	0.1 m³	7.9 kW	959 mm	850 kg
BL-T390-C	Tracked Seated Mini Skid Steer Loader	250 kg	0.1 m³	7.9 kW	959 mm	850 kg
BL-S490-C	Wheeled Seated Mini Skid Steer Loader	250 kg	0.1 m³	16.8 kW	1089 mm	1,200 kg
BL-T490-C	Tracked Seated Mini Skid Steer Loader	250 kg	0.1 m³	16.8 kW	1089 mm	1,200 kg

MINI DUMPERS · TRACKED

MODEL	TYPE	RATED LOAD	BUCKET / HOPPER	POWER	WIDTH	WEIGHT
BL-T500-HD	500 kg Tracked Mini Dumper	500 kg	1050 × 730 × 730 mm hopper	4.8 kW	880 mm	410 kg
BL-T200-HJ	Tracked Mini Mixer Dumper	—	200 L	4.8 kW	880 mm	465 kg

MINI DUMPERS · WHEELED

MODEL	TYPE	RATED LOAD	BUCKET / HOPPER	POWER	WIDTH	WEIGHT
FC10	1 Ton Wheeled Mini Dumper	1,000 kg	0.5 m³	12.1 kW	1500 mm	800 kg
FY15	1.5 Ton Wheeled Mini Dumper	1,500 kg	0.6 m³	13.2 kW	1500 mm	830 kg
FY20-2	2 Ton Wheeled Mini Dumper with Front Bucket	2,000 kg	0.8 m³	17 kW	1600 mm	900 kg
FY20-4	2 Ton Wheeled Mini Dumper	2,000 kg	1.5 m³	27.5 kW	1700 mm	2,100 kg
FY30	3 Ton Wheeled Mini Dumper	3,000 kg	1.5 m³	37 kW	1700 mm	2,200 kg
FJZ30	3 Ton Wheeled Mini Dumper with Front Bucket	3,000 kg	1.5 m³	37 kW	1700 mm	3,920 kg
FY40	4 Ton Wheeled Mini Dumper	4,000 kg	1.6 m³	40 kW	1700 mm	2,400 kg
FY50	5 Ton Wheeled Mini Dumper	5,000 kg	2 m³	65 kW	1800 mm	2,600 kg

Figures from the BOB-LIFT technical sheet (loaders, tracked dumpers) and the BOB-LIFT mini dumper brochure (wheeled dumpers). Width is machine width for loaders and overall width for dumpers. Specifications may change; confirm your configuration with our team.



FAMILY 01

MINI SKID STEER LOADERS.

Eight loaders, from the 930 mm stand-on BL-T360-H to the 1,800 kg BL-T1000-H. Choose stand-on or seated, rubber tracks or tires, and a petrol, diesel or electric drive. Each one takes its tools through a quick-attach plate and auxiliary hydraulic lines.

HOW MODEL NAMES WORK

BL	T / S	390	H / C
BOB-LIFT	Tracks / tires	Model size	Stand-on / seated

So the BL-T390-C is the 390-size seated loader on rubber tracks, and the BL-S390-C is the same size on tires. The number is a size class, not a load or a power figure.

WHERE THEY WORK

Renovation and indoor work	Hydraulic breaker, 4-in-1 bucket, grapple bucket
Gardens and landscaping	Auger, leveller, rotary tiller, hydraulic grapple
Farms, greenhouses and barns	4-in-1 bucket, pallet forks, hydraulic grapple
Streets and public spaces	Hydraulic breaker, sweeper, snow blower
Yards and warehouses	Pallet forks, grapple bucket, sweeper
Alongside bigger machines	Backhoe, trencher, trench filler



Stand-on controls: key start and switches at hand.



Auxiliary hydraulic couplers for powered attachments.



Rubber tracks spread the weight on soft ground.

Photographs on this page: BL-T360-H / BL-T460-H stand-on body.

BL-T360-H

TRACKED STAND-ON MINI SKID STEER LOADER



200 kg
RATED LOAD

320 kg
LIFTING CAPACITY

7.6 kW
ENGINE POWER

930 mm
MACHINE WIDTH

The BL-T360-H is the smallest mini skid steer loader in the BOB-LIFT range, and the narrowest at 930 mm. It passes garden gates, side passages and doorways that keep larger machines out. Landscapers, gardeners and small renovation crews use it to move soil, gravel and rubble where a wheelbarrow would take all day.

Its closest neighbour is the BL-T460-H. It keeps the same stand-on layout and bucket size, but adds a two-cylinder 16.8 kW engine, a 300 kg rated load and an electric version. It is also 152 mm wider, at 1,082 mm. Pick the BL-T360-H when the narrowest opening on your site decides the machine. Pick the BL-T460-H when you need more power and the extra width fits.

BL-T360-H SPECIFICATIONS

PERFORMANCE	
Rated load	200 kg
Lifting capacity	320 kg
Bucket capacity	0.15 m³
Travel speed	0–6 km/h
Hydraulic pressure	17 MPa
Gradeability	30°
Machine weight	650 kg

ENGINE	
Engine options	Zongshen / Rato / Briggs & Stratton / KOOP
Engine power	7.6 kW
Engine type	1-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	1640 mm
Length with bucket	1906 mm
Length without bucket	1466 mm
Machine width	930 mm
Bucket width	906 mm
Overall height	1226 mm

BUILD	
Operator station	Stand-on
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 6 × 20GP 14 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t360-h-mini-skid-steer-loader/

BL-T460-H

TRACKED STAND-ON MINI SKID STEER LOADER



300 kg
RATED LOAD

375 kg
LIFTING CAPACITY

16.8 kW
ENGINE POWER

1082 mm
MACHINE WIDTH

The BL-T460-H is a stand-on mini skid steer loader with the compact body of our smallest model and twice the cylinders. It is built for landscaping and site-preparation contractors who still work in domestic gardens, but need a machine that keeps going through a full day of digging, grading and attachment work.

Against the BL-T360-H, you gain 100 kg per load and an electric option, but need an opening of about 1.1 m instead of 0.93 m. If you need more reach as well, the BL-T750-H steps up to a 410 kg rated load, diesel power and a 2,230 mm working height.

BL-T460-H SPECIFICATIONS

PERFORMANCE	
Rated load	300 kg
Lifting capacity	375 kg
Bucket capacity	0.15 m³
Travel speed	0–6 km/h
Hydraulic pressure	17 MPa
Gradeability	30°
Machine weight	730 kg

ENGINE	
Engine options	Zongshen / Rato / Briggs & Stratton / KOOP / electric version
Engine power	16.8 kW
Engine type	2-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	1640 mm
Length with bucket	1876 mm
Length without bucket	1445 mm
Machine width	1082 mm
Bucket width	1106 mm
Overall height	1267 mm

BUILD	
Operator station	Stand-on
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 6 × 20GP 14 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t460-h-mini-skid-steer-loader/

BL-T750-H

TRACKED STAND-ON MINI SKID STEER LOADER



410 kg
RATED LOAD

550 kg
LIFTING CAPACITY

18.8 kW
ENGINE POWER

985 mm
MACHINE WIDTH

The BL-T750-H is a diesel mini skid steer loader for contractors who load trucks, spread aggregate and run heavier attachments, yet need a machine under a metre wide. Its 2,230 mm working height is the tallest in our range, so it tips cleanly into skips and the beds of small trucks.

Compared with the BL-T460-H, the BL-T750-H adds 110 kg of rated load, diesel engines and almost 600 mm of working height. The BL-T1000-H goes further, with a 500 kg rated load and a larger 0.19 m³ bucket in a body 25 mm narrower.

BL-T750-H SPECIFICATIONS

PERFORMANCE	
Rated load	410 kg
Lifting capacity	550 kg
Bucket capacity	0.15 m³
Travel speed	0–5 km/h
Hydraulic pressure	18 MPa
Gradeability	25°
Machine weight	1,500 kg

ENGINE	
Engine options	Laidong / Yanmar / Kubota / electric version
Engine power	18.8 kW
Engine type	3-cylinder, 4-stroke
Fuel	Diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	2230 mm
Length with bucket	2836 mm
Length without bucket	2100 mm
Machine width	985 mm
Bucket width	1270 mm
Overall height	1550 mm

BUILD	
Operator station	Stand-on
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 4 × 20GP 10 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t750-h-mini-skid-steer-loader/

BL-T1000-H

TRACKED STAND-ON MINI SKID STEER LOADER



500 kg
RATED LOAD

450 kg
LIFTING CAPACITY

17.8 kW
ENGINE POWER

960 mm
MACHINE WIDTH

The BL-T1000-H is the largest stand-on mini skid steer loader BOB-LIFT builds. It suits rental fleets, groundworks contractors and farms that want full-size output from a compact machine. It carries the biggest bucket in our range, 0.19 m³, and the highest hydraulic pressure, 20 MPa.

Against the BL-T750-H, the BL-T1000-H offers a larger bucket, 90 kg more rated load and higher hydraulic pressure in a slightly narrower body. The BL-T750-H reaches higher and also comes as an electric version. If your operators prefer to sit, look at the seated BL-T490-C.

BL-T1000-H SPECIFICATIONS

PERFORMANCE

Rated load	500 kg
Lifting capacity	450 kg
Bucket capacity	0.19 m³
Travel speed	0–6 km/h
Hydraulic pressure	20 MPa
Gradeability	25°
Machine weight	1,800 kg

ENGINE

Engine options	Yanmar / Kubota
Engine power	17.8 kW
Engine type	3-cylinder, 4-stroke
Fuel	Diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS

Working height	2102 mm
Length with bucket	2591 mm
Length without bucket	1981 mm
Machine width	960 mm
Bucket width	1240 mm
Overall height	1548 mm

BUILD

Operator station	Stand-on
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 5 × 20GP 11 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t1000-h-mini-skid-steer-loader/

BL-S390-C

WHEELED SEATED MINI SKID STEER LOADER



260 kg
RATED LOAD

350 kg
LIFTING CAPACITY

7.9 kW
ENGINE POWER

959 mm
MACHINE WIDTH

The BL-S390-C is a seated mini skid steer loader on rubber tires, made for hard ground. Yards, warehouses, paved courtyards, car parks and farm concrete are where it works best. The seat keeps the operator comfortable through long shifts of loading, sweeping and pallet work.

The BL-S390-C shares its body and dimensions with the tracked BL-T390-C. Choose the wheeled model for firm, finished surfaces, where it is 1 km/h quicker and rated 10 kg higher. Choose the tracked model for soil, lawns and mud. For more power on wheels, the BL-S490-C has a two-cylinder engine and lifts 100 kg more.

BL-S390-C SPECIFICATIONS

PERFORMANCE	
Rated load	260 kg
Lifting capacity	350 kg
Bucket capacity	0.1 m³
Travel speed	0–6 km/h
Hydraulic pressure	16 MPa
Gradeability	25°
Machine weight	850 kg

ENGINE	
Engine options	Zongshen / Rato / Briggs & Stratton / KOOP / electric version
Engine power	7.9 kW
Engine type	1-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	1600 mm
Length with bucket	2281 mm
Length without bucket	1880 mm
Machine width	959 mm
Bucket width	1050 mm
Overall height	1300 mm

BUILD	
Operator station	Seated
Running gear	Rubber tires
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 6 × 20GP 12 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-s390-c-mini-skid-steer-loader/

BL-T390-C

TRACKED SEATED MINI SKID STEER LOADER



Pictured: the wheeled BL-S390-C. The BL-T390-C has the same seated layout on rubber tracks; ask us for photographs of the tracked version.

250 kg
RATED LOAD

350 kg
LIFTING CAPACITY

7.9 kW
ENGINE POWER

959 mm
MACHINE WIDTH

The BL-T390-C is a tracked mini skid steer loader with a seat, in a body under a metre wide. Gardeners, small farms and landscapers who spend long days on the machine choose it for soft or uneven ground. There the tracks spread the weight and hold traction on lawns, soil and slopes.

Its wheeled twin, the BL-S390-C, has the same body for paved and concrete surfaces. Compared with the stand-on BL-T360-H, the T390-C is 29 mm wider but gives you a seat and a 50 kg higher rated load. For more lifting capacity while seated, see the BL-T490-C.

BL-T390-C SPECIFICATIONS

PERFORMANCE

Rated load	250 kg
Lifting capacity	350 kg
Bucket capacity	0.1 m³
Travel speed	0–5 km/h
Hydraulic pressure	16 MPa
Gradeability	25°
Machine weight	850 kg

ENGINE

Engine options	Zongshen / Rato / Briggs & Stratton / KOOP / electric version
Engine power	7.9 kW
Engine type	1-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS

Working height	1600 mm
Length with bucket	2281 mm
Length without bucket	1880 mm
Machine width	959 mm
Bucket width	1050 mm
Overall height	1300 mm

BUILD

Operator station	Seated
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 6 × 20GP 12 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t390-c-mini-skid-steer-loader/

BL-S490-C

WHEELED SEATED MINI SKID STEER LOADER



250 kg
RATED LOAD

450 kg
LIFTING CAPACITY

16.8 kW
ENGINE POWER

1089 mm
MACHINE WIDTH

The BL-S490-C is the larger of our wheeled, seated mini skid steer loaders. It is aimed at yards, depots, warehouses and farm buildings with concrete or paved floors. A two-cylinder engine and 450 kg lifting capacity give it more reserve for forks, sweepers and bucket work than the smaller S390-C.

The tracked BL-T490-C shares its engine and capacities, reaches 50 mm higher and suits soft ground. Compared with the BL-S390-C, the S490-C lifts 100 kg more and has twice the engine power, but it is 130 mm wider.

BL-S490-C SPECIFICATIONS

PERFORMANCE	
Rated load	250 kg
Lifting capacity	450 kg
Bucket capacity	0.1 m³
Travel speed	0–5 km/h
Hydraulic pressure	16 MPa
Gradeability	15°
Machine weight	1,200 kg

ENGINE	
Engine options	Zongshen / Rato / Briggs & Stratton / KOOP / electric version
Engine power	16.8 kW
Engine type	2-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	1650 mm
Length with bucket	2573 mm
Length without bucket	2100 mm
Machine width	1089 mm
Bucket width	1150 mm
Overall height	1300 mm

BUILD	
Operator station	Seated
Running gear	Rubber tires
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 4 × 20GP 10 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-s490-c-mini-skid-steer-loader/

BL-T490-C

TRACKED SEATED MINI SKID STEER LOADER



Pictured: the wheeled BL-S490-C. The BL-T490-C has the same seated layout on rubber tracks; ask us for photographs of the tracked version.

250 kg
RATED LOAD

450 kg
LIFTING CAPACITY

16.8 kW
ENGINE POWER

1089 mm
MACHINE WIDTH

The BL-T490-C is a seated, tracked mini skid steer loader with a two-cylinder engine. It is built for farms, landscaping firms and groundworks crews who want the comfort of a seat and the grip of tracks. Typical jobs are bucket work, grading and attachments on soil, grass and loose material.

Choose the BL-T490-C over the BL-T390-C when you need 100 kg more lifting capacity and twice the engine power, and can accept a body 130 mm wider. Its wheeled twin, the BL-S490-C, is the better choice on concrete and paving. If you would rather stand, the BL-T750-H offers diesel power and more reach.

BL-T490-C SPECIFICATIONS

PERFORMANCE	
Rated load	250 kg
Lifting capacity	450 kg
Bucket capacity	0.1 m³
Travel speed	0–5 km/h
Hydraulic pressure	16 MPa
Gradeability	15°
Machine weight	1,200 kg

ENGINE	
Engine options	Zongshen / Rato / Briggs & Stratton / KOOP / electric version
Engine power	16.8 kW
Engine type	2-cylinder, 4-stroke
Fuel	Gasoline / diesel
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Working height	1700 mm
Length with bucket	2535 mm
Length without bucket	2100 mm
Machine width	1089 mm
Bucket width	1150 mm
Overall height	1300 mm

BUILD	
Operator station	Seated
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel
Bucket material	Manganese steel

Per container 4 × 20GP 10 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/bl-t490-c-mini-skid-steer-loader/

ONE LOADER. MANY JOBS.

Our loaders take their tools through a quick-attach plate and auxiliary hydraulic lines, so the bucket comes off and a fork, auger or sweeper goes on in minutes. Attachments are quoted with your loader and matched to its hydraulics.

DIG & TRENCH



4-in-1 bucket
Dig, grab, level and doze



Backhoe
Small excavations and pits



Auger
Holes for posts and planting



Trencher
Narrow trenches for cables and pipes



Trench filler
Backfill trenches after the pipe is in

LIFT & CARRY



Pallet forks
Pallets, bagged cement, bales



Hydraulic grapple
Straw, branches and loose debris



Grapple bucket
Rubble, logs and awkward loads



Lifting jib
Lift and place with a chain or sling



Tow hitch
Move trailers around the site

BREAK & CLEAR



Hydraulic breaker
Concrete, paving and frozen ground



Ripper
Loosen compacted soil and roots



Mulcher
Clear scrub and small trees



Brush cutter
Cut back overgrown ground



Log splitter
Split firewood on the spot

GROUND & LAWN



Leveller
Grade and spread loose material



Rotary tiller
Turn soil for beds and planting



Soil conditioner
Prepare a seed bed in one pass



Lawn aerator
Open up compacted turf



Lawn mower
Mow large areas of grass

SWEEP, SNOW & MIX



Sweeper
Yards, roads and light snow



Snow blower
Clear paths and drives



Concrete mixer
Mix small batches on site



Mixing bucket
Mix and pour in one attachment

Hydraulic flow differs from model to model, so not every attachment suits every loader. We confirm the match when we quote your machine.



FAMILY 02

MINI DUMPERS.

Ten dumpers for the work between A and B: two tracked machines under 0.9 m wide for gardens and narrow access, and eight wheeled site dumpers from 1 to 5 tonnes for farms and building sites.

TRACKS OR WHEELS

The tracked BL-T500-HD and BL-T200-HJ are 880 mm wide and pass through garden gates. The wheeled site dumpers are 1.5 to 1.8 m wide and travel at up to 22 or 28 km/h.

TWO OR FOUR-WHEEL DRIVE

The FC10, FY15 and FY20-2 are 4×2 for firm tracks and yards. The FY20-4, FY30, FJZ30, FY40 and FY50 drive all four wheels for loose ground and ramps.

SELF-LOADING

The FY20-2 and FJZ30 carry a front loading bucket, so they can fill their own hopper. The BL-T200-HJ mixes 200 L of concrete and carries it to the pour.

GARDENS AND HOMESTEADS

Soil, gravel, mulch and firewood along garden paths and side passages.

BL-T500-HD · FC10 · FY15

FARMS AND ORCHARDS

Feed, manure and bagged fertiliser between sheds, yards and fields.

FC10 · FY15 · FY20-2

BUILDING SITES

Sand, gravel, bricks and spoil from the stockpile to the work face.

FY50 · FY40 · FY30

With a roof or cab, the FY20-4 to FY50 and FJZ30 stand 2.65–2.75 m tall, above a container door. Ask how they ship.

BL-T500-HD

500 KG TRACKED MINI DUMPER



500 kg
RATED LOAD

4.8 kW
ENGINE POWER

100°
TIPPING ANGLE

880 mm
MACHINE WIDTH

The BL-T500-HD is a tracked mini dumper for jobs where a wheelbarrow is too slow and a site dumper is too wide. At 880 mm wide it follows garden paths, side passages and gateways. Its rubber tracks carry the load over lawns, soft soil and mud. Homeowners, landscapers and small builders use it for soil, gravel, mulch, rubble and firewood.

It shares its 880 mm track frame and engine with the BL-T200-HJ, which carries a 200 L mixing drum instead of a hopper. When the route is wider than about 1.5 m and the ground is firm, the wheeled FC10 carries twice the load per trip, much faster.

BL-T500-HD SPECIFICATIONS

PERFORMANCE

Rated load	500 kg
Hopper size	1050 × 730 × 730 mm
Travel speed	0–5 km/h
Hydraulic pressure	16 MPa
Gradeability	20°
Tipping	Hydraulic
Tipping angle	100°
Machine weight	410 kg

ENGINE

Engine options	Rato / Briggs & Stratton
Engine power	4.8 kW
Engine type	1-cylinder, 4-stroke
Fuel	Gasoline
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS

Dimensions (L × W × H)	2050 × 880 × 1300 mm

BUILD

Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel

Per container 6 × 20GP 12 × 40HQ
Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/500kg-tracked-mini-dumper/

BL-T200-HJ

TRACKED MINI MIXER DUMPER



200 L
DRUM CAPACITY

4.8 kW
ENGINE POWER

100°
TIPPING ANGLE

880 mm
MACHINE WIDTH

The BL-T200-HJ is a tracked mini dumper with a 200 L concrete mixing drum: it mixes the batch and carries it to the pour in one machine. On an 880 mm wide rubber-track chassis, it reaches footings, fence posts, slabs and repairs along garden paths and through gateways, where a truck mixer cannot go. It suits small builders, landscapers and property owners who pour little and often.

For carrying rather than mixing, the BL-T500-HD uses the same track width and engine with a 500 kg tipping hopper. On small pours the two work well together. One mixes, while the other brings sand and gravel to it and takes the spoil away.

BL-T200-HJ SPECIFICATIONS

PERFORMANCE	
Drum capacity	200 L
Travel speed	0–5 km/h
Hydraulic pressure	16 MPa
Gradeability	20°
Tipping	Hydraulic
Tipping angle	100°
Machine weight	465 kg

ENGINE	
Engine options	Rato / Briggs & Stratton
Engine power	4.8 kW
Engine type	1-cylinder, 4-stroke
Fuel	Gasoline
Starting	Electric start
Emission standard	EPA & EURO 5

DIMENSIONS	
Dimensions (L × W × H)	2250 × 880 × 1470 mm
Drum length	510 mm
Drum opening diameter	360 mm
Loading bucket length	480 mm
Loading bucket opening width	540 mm

BUILD	
Running gear	Rubber tracks
Controls	Joystick operation
Body material	Manganese steel

Per container 6 × 20GP 12 × 40HQ
Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/tracked-mini-mixer-truck/

FC10

1 TON WHEELED MINI DUMPER



1,000 kg
RATED LOAD

0.5 m³
HOPPER CAPACITY

12.1 kW
ENGINE POWER

4×2
DRIVE

The FC10 is the entry point to our wheeled mini dumpers: a 1,000 kg payload on a frame 1.5 m wide. It is sized for farms, orchards, smallholdings and small building sites. Typical loads are feed, manure, sand, gravel and bricks, moved along farm tracks and yards.

The FY15 has the same footprint but carries 1,500 kg in a 0.6 m³ hopper, with a slightly stronger engine. Choose the FC10 for lighter loads and the lowest machine weight. For narrow garden access, the tracked BL-T500-HD is only 880 mm wide.

FC10 SPECIFICATIONS

PERFORMANCE	
Rated load	1,000 kg
Hopper capacity	0.5 m³
Max travel speed	22 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×2
Brakes	Oil brake
Machine weight	800 kg

ENGINE	
Engine model	ZS1100
Engine power	12.1 kW
Starting	Electric start
Operating voltage	12 V

DIMENSIONS	
Dimensions (L × W × H)	2600 × 1500 × 1450 mm
Height with roof / cab	2150 mm
Wheelbase	1500 mm
Min. ground clearance	200 mm

Per container 2 × 20GP 4 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/1-ton-mini-dumper/

FY15

1.5 TON WHEELED MINI DUMPER



1,500 kg
RATED LOAD

0.6 m³
HOPPER CAPACITY

13.2 kW
ENGINE POWER

4×2
DRIVE

The FY15 is a 1.5 ton mini dumper on the same compact 1.5 m wide frame as our 1-ton FC10. It suits orchards, livestock farms, nurseries and small contractors who move heavier material, such as wet soil, manure or aggregate. It means fewer trips without stepping up to a larger site dumper.

Compared with the FC10, it adds 500 kg of payload and 0.1 m³ of hopper volume. If you also need to load material yourself, the FY20-2 adds a front bucket and a 2,000 kg rating.

FY15 SPECIFICATIONS

PERFORMANCE	
Rated load	1,500 kg
Hopper capacity	0.6 m³
Max travel speed	22 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×2
Brakes	Oil brake
Machine weight	830 kg

ENGINE	
Engine model	ZS1105
Engine power	13.2 kW
Starting	Electric start
Operating voltage	12 V

DIMENSIONS	
Dimensions (L × W × H)	2600 × 1500 × 1450 mm
Height with roof / cab	2150 mm
Wheelbase	1500 mm
Min. ground clearance	200 mm

Per container 2 × 20GP 4 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/1-5-ton-mini-dumper/

FY20-2

2 TON WHEELED MINI DUMPER WITH FRONT BUCKET



2,000 kg
RATED LOAD

0.8 m³
HOPPER CAPACITY

17 kW
ENGINE POWER

4×2
DRIVE

The FY20-2 is a self-loading mini dumper. Its front bucket fills its own hopper, so loading never waits for a second machine or a crew with shovels. It suits farms moving manure and feed, landscapers handling soil and gravel, and small sites where one machine has to load, carry and tip.

The FY20-4 has the same 2,000 kg rating in a larger 1.5 m³ hopper with four-wheel drive, but no front bucket. For bigger self-loading jobs on rough ground, the FJZ30 raises the payload to 3,000 kg on 4×4.

FY20-2 SPECIFICATIONS

PERFORMANCE	
Rated load	2,000 kg
Hopper capacity	0.8 m³
Max travel speed	22 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×2
Brakes	Oil brake
Machine weight	900 kg

ENGINE	
Engine model	L24
Engine power	17 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	3000 × 1600 × 1480 mm
Height with roof / cab	2180 mm
Wheelbase	1500 mm
Min. ground clearance	200 mm

Per container 1 × 20GP 3 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/2-ton-mini-dumper-with-bucket/

FY20-4

2 TON WHEELED MINI DUMPER



2,000 kg
RATED LOAD

1.5 m³
HOPPER CAPACITY

27.5 kW
ENGINE POWER

4×4
DRIVE

The FY20-4 is our smallest four-wheel-drive site dumper. It carries 2,000 kg in a 1.5 m³ hopper and drives all four wheels, so it keeps moving on loose fill, wet ground and ramps where a two-wheel-drive mini dumper would spin. Builders, drainage crews and landscapers use it to shuttle sand, gravel, spoil and bricks from the stockpile to the work face.

Against the two-wheel-drive FY20-2, it trades the front bucket for almost twice the hopper volume and 4×4 traction. The FY30 steps up to 3,000 kg and a top speed of 28 km/h.

FY20-4 SPECIFICATIONS

PERFORMANCE	
Rated load	2,000 kg
Hopper capacity	1.5 m³
Max travel speed	22 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×4
Brakes	Oil brake
Machine weight	2,100 kg

ENGINE	
Engine model	ZN490B
Engine power	27.5 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	4200 × 1700 × 1800 mm
Height with roof / cab	2650 mm
Wheelbase	2090 mm
Min. ground clearance	200 mm

Per container 1 × 20GP 2 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/2-ton-mini-dumper/

FY30

3 TON WHEELED MINI DUMPER



3,000 kg
RATED LOAD

1.5 m³
HOPPER CAPACITY

37 kW
ENGINE POWER

4×4
DRIVE

The FY30 is the all-round site dumper in our range, a 3 ton mini dumper with four-wheel drive. It is built for building sites, road and drainage work, quarries and large farms, where material travels long distances over rough ground and the time per trip matters.

Compared with the FY20-4, the FY30 carries 1,000 kg more and travels faster, in a body 300 mm longer. For a third more payload, see the FY40. If the dumper must load itself, the FJZ30 pairs the same 3,000 kg rating with a front bucket.

FY30 SPECIFICATIONS

PERFORMANCE	
Rated load	3,000 kg
Hopper capacity	1.5 m³
Max travel speed	28 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×4
Brakes	Oil brake
Machine weight	2,200 kg

ENGINE	
Engine model	YN25GB
Engine power	37 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	4500 × 1700 × 1800 mm
Height with roof / cab	2700 mm
Wheelbase	2130 mm
Min. ground clearance	200 mm

Per container 1 × 20GP 2 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/3-ton-mini-dumper/

FJZ30

3 TON WHEELED MINI DUMPER WITH FRONT BUCKET



3,000 kg
RATED LOAD

1.5 m³
HOPPER CAPACITY

37 kW
ENGINE POWER

4×4
DRIVE

The FJZ30 is our heavy self-loading mini dumper. It combines a front bucket with a 3,000 kg rated hopper and four-wheel drive. One operator can load, carry and tip on building sites, farms and quarries without waiting for a loader. Contractors on scattered sites and farms handling manure, soil and aggregate get the most from it.

The FY30 shares the 3,000 kg rating and engine without the front bucket, and is much lighter. For lighter self-loading work on firm ground, the two-wheel-drive FY20-2 carries 2,000 kg.

FJZ30 SPECIFICATIONS

PERFORMANCE	
Rated load	3,000 kg
Hopper capacity	1.5 m³
Max travel speed	28 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×4
Brakes	Oil brake
Machine weight	3,920 kg

ENGINE	
Engine model	YN25GB
Engine power	37 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	4500 × 1700 × 1800 mm
Height with roof / cab	2700 mm
Wheelbase	2280 mm
Min. ground clearance	250 mm

Per container 1 × 20GP 2 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/3-ton-mini-dumper-with-bucket/

FY40

4 TON WHEELED MINI DUMPER



4,000 kg
RATED LOAD

1.6 m³
HOPPER CAPACITY

40 kW
ENGINE POWER

4×4
DRIVE

The FY40 is a 4 ton mini dumper for contractors who measure the day in tonnes moved. It carries 4,000 kg per trip on four-wheel drive. Road building, drainage and pipe-laying jobs, landscaping contracts and quarry yards with long hauls between loading and tipping points are where it earns its keep.

Against the FY30, the FY40 adds 1,000 kg of rated load, a slightly larger hopper and more clearance. The FY50 is the next step, with a 5,000 kg rating, a 2 m³ hopper and a 65 kW engine. Our team can help you weigh payload against site size before you choose.

FY40 SPECIFICATIONS

PERFORMANCE	
Rated load	4,000 kg
Hopper capacity	1.6 m³
Max travel speed	28 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×4
Brakes	Oil brake
Machine weight	2,400 kg

ENGINE	
Engine model	YN25GB
Engine power	40 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	4500 × 1700 × 1800 mm
Height with roof / cab	2700 mm
Wheelbase	2130 mm
Min. ground clearance	240 mm

Per container 1 × 20GP 2 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/4-ton-mini-dumper/

FY50

5 TON WHEELED MINI DUMPER



5,000 kg
RATED LOAD

2 m³
HOPPER CAPACITY

65 kW
ENGINE POWER

4×4
DRIVE

The FY50 is the largest mini dumper BOB-LIFT builds: 5,000 kg per trip in a 2 m³ hopper, on four-wheel drive. It is meant for heavy contracting such as road and drainage projects, quarries, large construction sites and bulk landscaping. One FY50 load can replace several trips of a smaller machine.

Compared with the FY40, it carries 1,000 kg more in a hopper 0.4 m³ larger, and is 100 mm wider at 1,800 mm. If your routes are tighter or your loads lighter, the FY30 is easier to place on smaller sites.

FY50 SPECIFICATIONS

PERFORMANCE	
Rated load	5,000 kg
Hopper capacity	2 m³
Max travel speed	28 km/h
Gradeability	21°
Tipping	Hydraulic
Drive	4×4
Brakes	Oil brake
Machine weight	2,600 kg

ENGINE	
Engine model	YN33GBZ
Engine power	65 kW
Starting	Electric start
Operating voltage	24 V

DIMENSIONS	
Dimensions (L × W × H)	4500 × 1800 × 1850 mm
Height with roof / cab	2750 mm
Wheelbase	2210 mm
Min. ground clearance	200 mm

Per container 1 × 20GP 2 × 40HQ

Estimated; confirmed with your order.

Full details, photos and quote
bobliftloader.com/product/5-ton-mini-dumper/

COMPARE

WHEELED SITE DUMPERS, SIDE BY SIDE.

All eight tip hydraulically, start electrically, brake with oil brakes and are rated for a 21° gradient. The table shows where they differ.

	FC10	FY15	FY20-2	FY20-4	FY30	FJZ30	FY40	FY50
Rated load	1,000 kg	1,500 kg	2,000 kg	2,000 kg	3,000 kg	3,000 kg	4,000 kg	5,000 kg
Hopper capacity	0.5 m³	0.6 m³	0.8 m³	1.5 m³	1.5 m³	1.5 m³	1.6 m³	2 m³
Engine model	ZS1100	ZS1105	L24	ZN490B	YN25GB	YN25GB	YN25GB	YN33GBZ
Engine power	12.1 kW	13.2 kW	17 kW	27.5 kW	37 kW	37 kW	40 kW	65 kW
Drive	4×2	4×2	4×2	4×4	4×4	4×4	4×4	4×4
Max travel speed	22 km/h	22 km/h	22 km/h	22 km/h	28 km/h	28 km/h	28 km/h	28 km/h
Machine weight	800 kg	830 kg	900 kg	2,100 kg	2,200 kg	3,920 kg	2,400 kg	2,600 kg
Wheelbase	1500 mm	1500 mm	1500 mm	2090 mm	2130 mm	2280 mm	2130 mm	2210 mm
Min. ground clearance	200 mm	200 mm	200 mm	200 mm	200 mm	250 mm	240 mm	200 mm
Dimensions (L × W × H)	2600×1500×1450 mm	2600×1500×1450 mm	3000×1600×1480 mm	4200×1700×1800 mm	4500×1700×1800 mm	4500×1700×1800 mm	4500×1700×1800 mm	4500×1800×1850 mm
Height with roof / cab	2150 mm	2150 mm	2180 mm	2650 mm	2700 mm	2700 mm	2700 mm	2750 mm
Operating voltage	12 V	12 V	24 V	24 V	24 V	24 V	24 V	24 V

Figures from the BOB-LIFT mini dumper brochure. Dimensions are length × width × height in millimetres for the open-seat version.

SUPPORT

FROM ORDER TO DELIVERY. AND AFTER.

Minimum order	Payment	Ready to ship	Whole-machine warranty
1 unit	**T/T**	**8–30** working days	**12** months

FIVE STEPS TO YOUR SITE

01
Tell us the job

The narrowest opening on your site, the heaviest load and the ground you will work on. A few photos of the route help.

02
Quote & configuration

We suggest a model and confirm its engine, running gear, colour and attachments, then quote on the trade terms you need.

03
Place the order

One machine is enough to order. Payment is by T/T bank transfer.

04
Built to order

Your machine is built at our Xuzhou factory, typically in 8 to 30 working days. Quantity and configuration decide the date, which we confirm with your order.

05
Shipping

We quote EXW, FOB, CFR, CIF and the other common Incoterms, and ship by container.

COVERED FOR TWELVE MONTHS

Every BOB-LIFT loader and dumper carries a 12-month warranty that covers the whole machine. Each machine ships with a set of original wear parts, and you can order more from the same team at any time with your model and serial number.

Send us the details. The model, the serial number and a photo or short video of the problem.

Remote guidance. Our team talks you through the diagnosis and the fix over WhatsApp, video or email.

Parts on the way. We ship the replacement parts to you.




The team that builds the machines also answers for them after delivery.

MACHINES PER CONTAINER

MODEL	20GP	40HQ	MODEL	20GP	40HQ	MODEL	20GP	40HQ
BL-T360-H	6	14	BL-S490-C	4	10	FY20-2	1	3
BL-T460-H	6	14	BL-T490-C	4	10	FY20-4	1	2
BL-T750-H	4	10	BL-T500-HD	6	12	FY30	1	2
BL-T1000-H	5	11	BL-T200-HJ	6	12	FJZ30	1	2
BL-S390-C	6	12	FC10	2	4	FY40	1	2
BL-T390-C	6	12	FY15	2	4	FY50	1	2

Container figures are approximate, worked out from each model's published dimensions for open-seat versions, with loader buckets taken off and packed alongside. We confirm the loading plan with your order.

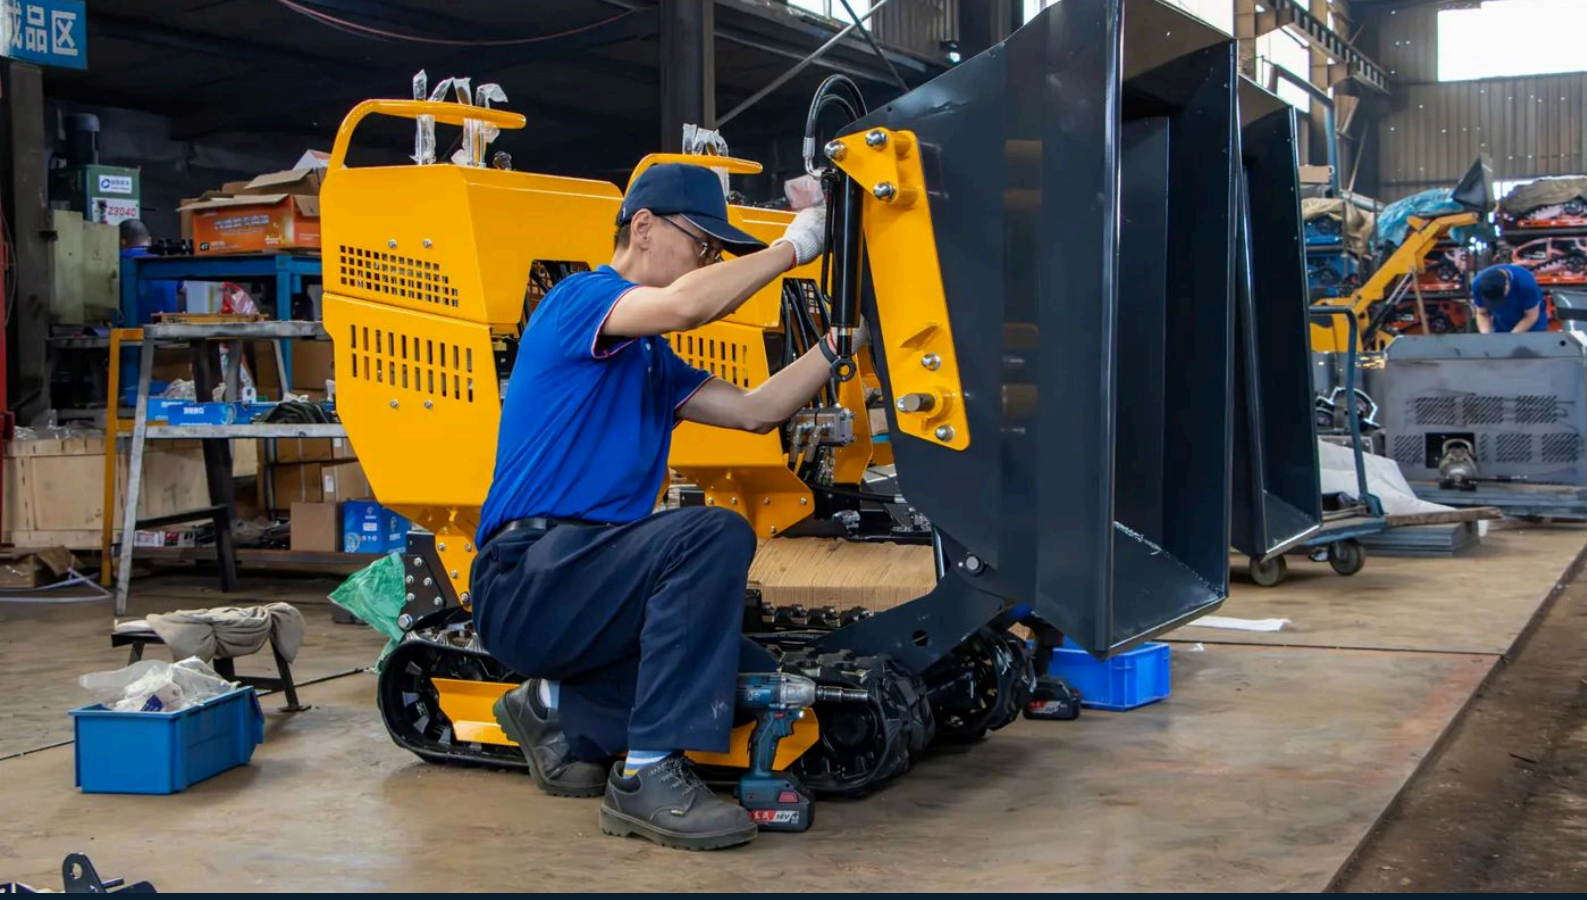

LET'S GET TO WORK

TELL US ABOUT YOUR SITE.

A question, a project or a new partnership: send us the job and the narrowest opening on your site, and we will suggest the machine.

WEBSITE	**bobliftloader.com/contact**
EMAIL	**info@boblift.com**
WHATSAPP & PHONE	**+86 158 5249 9415**
BUSINESS COOPERATION	**business@boblift.com**
FACTORY	No. 79, Zone B, Jingluotuo Industrial Park, Yunlong District, Xuzhou, Jiangsu, China

BOB-LIFT

Xuzhou BOB-LIFT Construction Machinery Co., Ltd.
Specifications in this catalogue may change without notice. Edition 2026-10.