



The friendly Operating System for the IoT


phyNODE MCU: NXP KW2xD, Cortex-M4 Memory: 64 kB RAM, 512 kB ROM Radio: IEEE802.15.4, 2,4GHz (integrated) App: 14 kB RAM, 43 kB ROM

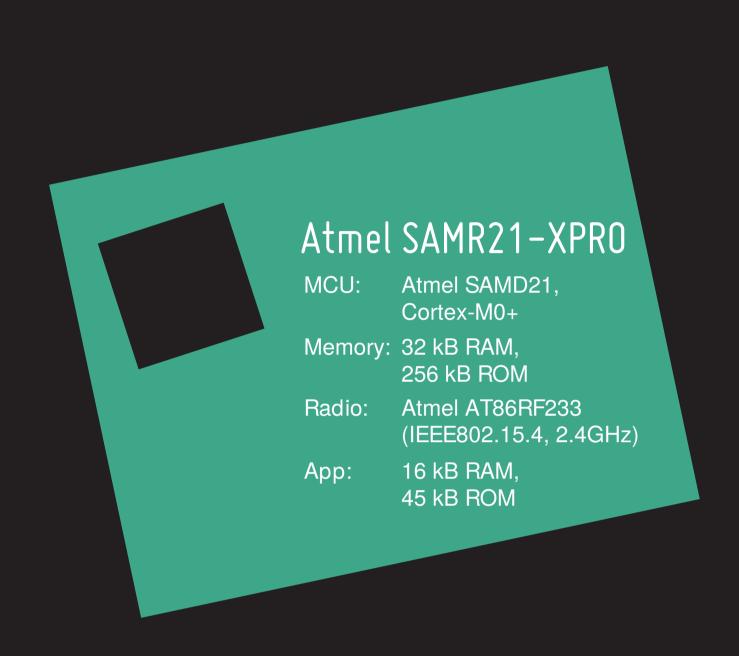

IoT Friendly

Use open standards designed for the Internet of Things. In this Demo:

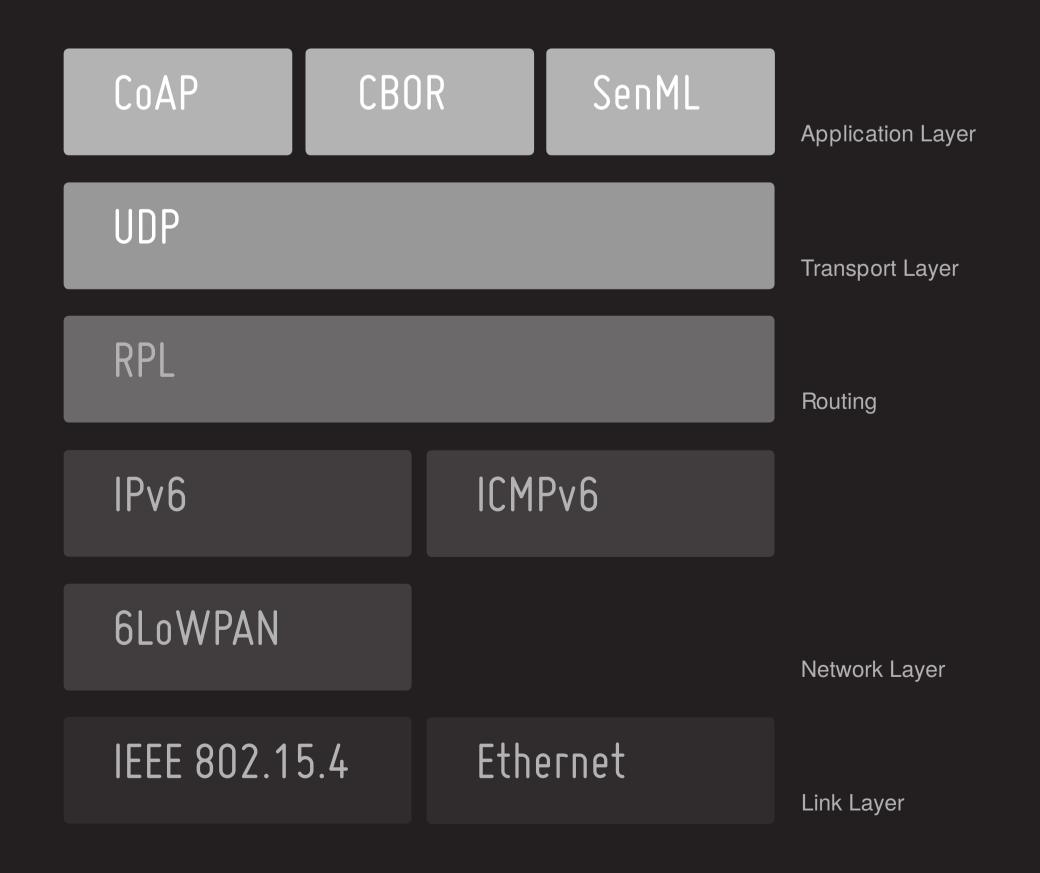

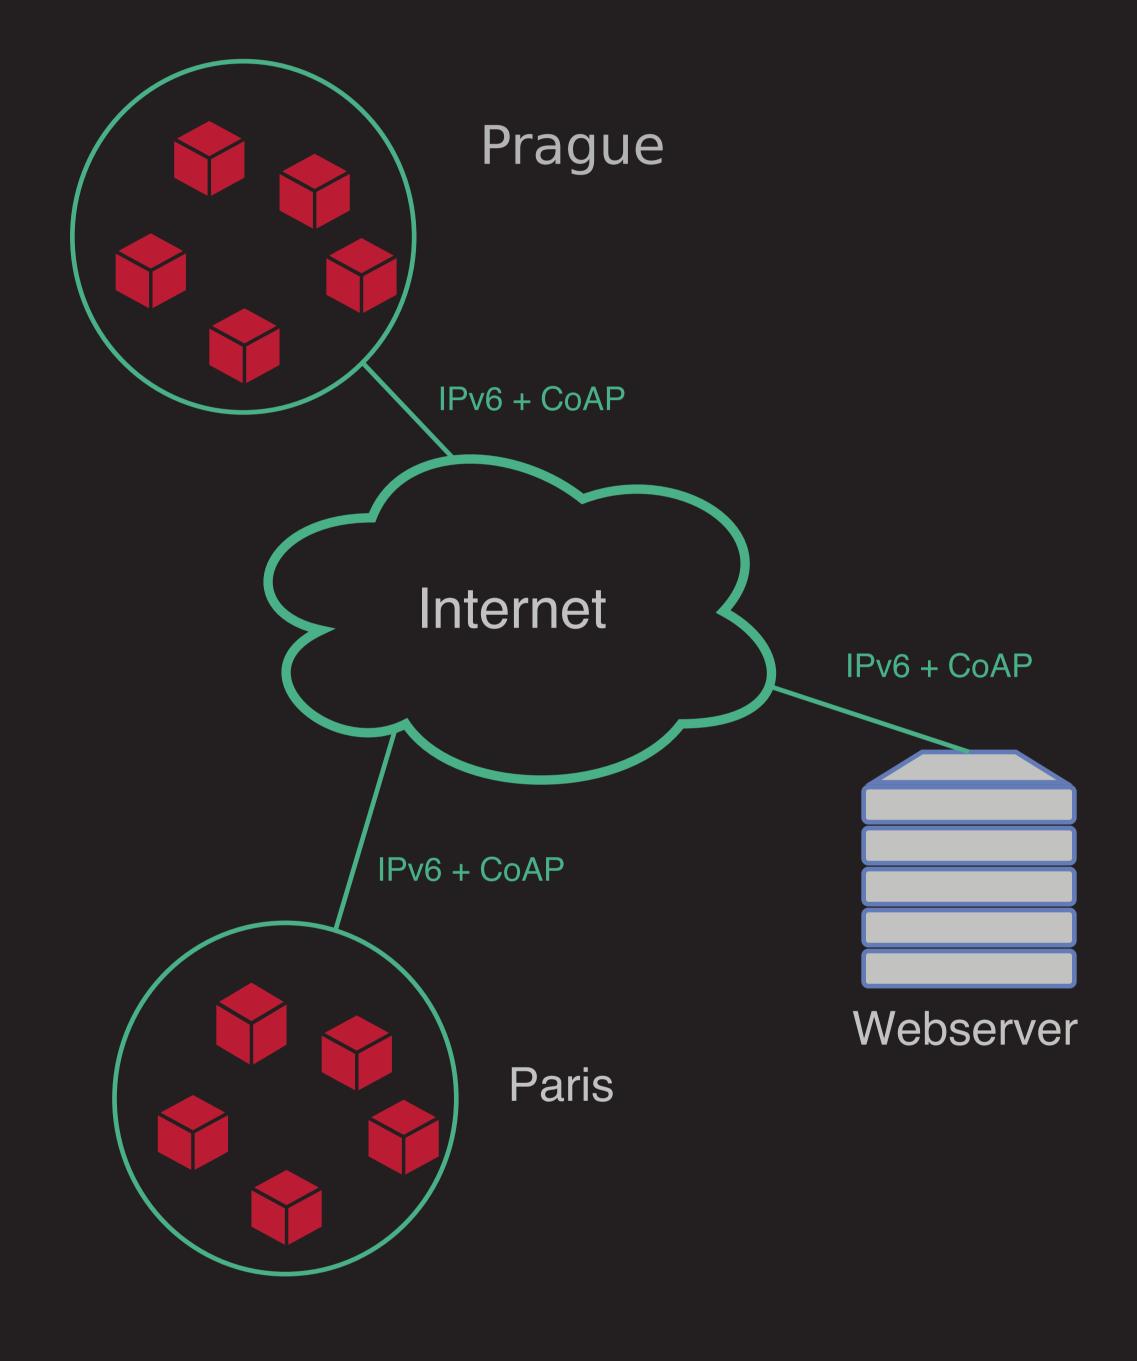

IoT-Lab M3

MCU: STM32F103RE,
Cortex-M3

Memory: 64 kB RAM,
512 kB ROM

Radio: Atmel AT86RF231
(IEEE802.15.4, 2.4GHz)

App: 16 kB RAM, 44 kB ROM



