

KIWI Project

openSUSE - KIWI Image System Cookbook

Project, Design and Implementation
by Marcus Schaefer (ms@suse.de)

*



Author: Marcus Schaefer
Date: February 9, 2010
Version: 4.15

Contents

1	Introduction	7
2	Basic workflow	9
2.1	Boot process	11
2.2	Boot parameters	11
2.3	Common and Distribution specific code	12
3	KIWI image description	13
3.1	config.xml	15
3.1.1	image element	15
3.1.2	description element	16
3.1.3	profiles element	16
3.1.4	preferences element	17
3.1.5	users element	29
3.1.6	drivers element	29
3.1.7	repository element	30
3.1.8	packages element	32
4	Creating Appliances with KIWI	35
4.1	History	35
4.2	The KIWI model	35
5	Maintenance of Operating System Images	39
6	System to image migration	41
6.1	Create a clean repository set first	41
6.2	Watch the packaged but modified files	42
6.3	Watch the unpackaged files	42
6.4	Checklist	42
6.5	Turn my system into an image...	43
7	Installation Source	45
7.1	Adapt the example's config.xml	45
7.2	Create a local installation source	45
8	ISO image - Live Systems	47
8.1	Building the suse-live-iso example	47
8.2	Using the image	47
8.3	Flavours	48

8.3.1	Split mode	49
9	USB image - Live-Stick System	51
9.1	Building the suse-live-stick example	51
9.2	Using the image	52
9.3	Flavours	53
9.3.1	Split stick	53
9.3.2	LVM support	54
10	VMX image - Virtual Disks	57
10.1	Building the suse-vm-guest example	57
10.2	Using the image	58
10.3	Flavours	58
10.3.1	VMware support	58
10.3.2	LVM support	59
11	PXE image - Thin Clients	61
11.1	Setting up the required services	61
11.1.1	atftp server	61
11.1.2	DHCP server	62
11.2	Building the suse-pxe-client example	62
11.3	Using the image	63
11.4	Flavours	64
11.4.1	The pxe client Control File	64
11.4.2	The pxe client Configuration File	64
11.4.3	User another than tftp as download protocol	69
11.4.4	RAM only image	70
11.4.5	union image	70
11.4.6	split image	70
11.4.7	root tree over NFS	71
11.4.8	root tree over NBD	71
11.4.9	root tree over AoE	72
12	OEM image - Preload Systems	73
12.1	Building the suse-oem-preload example	73
12.2	Using the image	74
12.3	Flavors	75
12.3.1	Influencing the oem partitioning	75
12.3.2	LVM support	75
13	XEN image - Paravirtual Systems	77
13.1	Building the suse-xen-guest example	77
13.2	Using the image	78
13.3	Flavours	78
14	EC2 image - Amazon Elastic Compute Cloud	79
14.1	Building the suse-ec2-guest example	79

14.2 Using the image	80
15 KIWI testsuite	83
15.1 testsuite packages	83
15.2 Creating a test	83
Index	85
16 Appendix - Kiwi man pages	87

1 Introduction

The openSUSE KIWI Image System provides a complete operating system image solution for Linux supported hardware platforms as well as for virtualisation systems like Xen, VMWare, etc. The KIWI architecture was designed as a two level system. The first stage, based on a valid **software package source**, creates a so called **unpacked image** according to the provided image description. The second stage creates from a required unpacked image an operating system image. The result of the second stage is called a **packed image** or short an image. The



Figure 1.1: Image Serving Architecture

Because this document contains conceptual information about an image system, it is important to understand what an operating system image is all about. A normal installation process is starting from a given installation source and installs single pieces of software until the system is complete. During this process there may be manual user intervention required. However an operating system image represents an already completed *installation* encapsulated as a file and optionally includes the configuration for a specific task. Such an operating system starts working as soon as the image has been brought to a system storage device no matter if this is a volatile or non volatile storage. The process of creating an image takes place without user interaction. This means all requirements of the encapsulated system has to be fulfilled before the image is created. All of this information is stored in the **image description**.

2 Basic workflow

Contents

2.1 Boot process	11
2.2 Boot parameters	11
2.3 Common and Distribution specific code	12

The creation of an image with KIWI is always divided into two basic steps. These are the **prepare** and the **create** step. the create step requires the prepare step to be exited successfully. Within this first prepare step kiwi builds of a new root tree or, in kiwi-speak, a new unpacked image. The building of a new root tree consists of the creation of the directory specified to hold it and the installation of the selected packages on it. The installation of software packages is driven by a packagemanager. KIWI supports the smart and zypper package managers. The prepare step executes the following major stages:

- **Root directory creation**

To prevent accidental deletion of an existing root tree, kiwi will stop with an error message if this folder already exists, unless the option `-force-new-root` is used in which case the existing root will be deleted.

- **Package installation**

First the selected package manager (smart by default) is instructed to use the repositories specified in the image description file. Then the packages specified in the 'bootstrap' section are installed. These packages are installed externally to the target root system (i.e. not chroot'ed) and establish the initial environment so the rest of the process may run chroot'ed. Essential packages in this section are filesystem and glibc-locale. In practice you only need to specify those two, since the rest of the packages will be pulled because of the dependency system. To save space in your image you could schedule a set of packages for deletion after the package installation phase is over by listing them in the 'delete' section.

- **User defined script config.sh**

At the end of the preparation stage the optional script named config.sh is called. This script should be used to configure the system which means for example the activation of services. For a detailed description what functions are already available to configure the system please refer to the KIWI::config.sh manual page

- **Managing the new root tree**

At this point you can make changes on your unpacked image so it fits your

purpose better. Bear in mind that changes at this point will be discarded and not repeated automatically if you rerun the 'prepare' phase unless you include them in your original config.xml file and/or config.sh script. Please also note that the image description has been copied into the new root below the directory **<new-root>/image**. Any subsequent create step will read the image description information from the new root tree and not from the original image description location. According to this if you need to change the image description data after the prepare call has finished you need to change it inside the new root tree as well as in your original description directory to prevent losing the change when your root tree will be removed later for some reason.

After the prepare step has finished successfully a subsequent building of an image file or, in kiwi-speak, a new packed image follows. The building of an image requires a successfully prepared new root tree in the first place. Using this tree multiple image types can be created. So to speak it's possible to create a VMware image and a XEN image from the same prepared root tree. The create step executes the following major stages:

- **User defined script images.sh**

At the beginning of the creation stage the optional script named images.sh is called. This script has no distinctive use case like config.sh but is most often used to remove packages which were pulled in by a dependency but are not really required for the later use of the operating system. For a detailed description what functions are already available to images.sh please refer to the KIWI::images.sh manual page

- **Create the requested image type**

What image type(s) a kiwi image supports depends on what types has been setup in the main image description file config.xml. At least one type must be setup. The following picture shows what image types are currently supported by kiwi:



Figure 2.1: Image Types

Detailed information including a step by step guidance how to call kiwi and how to make use of the result image can be found in the image type specific sections

later in this document.

2.1 Boot process

Today's Linux systems are using a special boot image to control the boot process. This boot image is called **initrd**. The Linux kernel loads this initial ramdisk which is a compressed cpio archive into RAM and calls `init` or if present the program named `linuxrc`. The KIWI image system also takes care for the creation of this boot image. Each image type has its own special boot code and shares the common parts in a set of module functions. The image descriptions for the boot images are provided by KIWI and thus the user has in almost all cases no need to take care for the boot image.



Figure 2.2: Boot process

Furthermore KIWI automatically creates this boot image along with the requested image type. It does that by calling itself in a `prepare` and `create` call. There is no difference in terms of the description of such a boot image compared to the system image description. The system image description is the one the user creates and this image represents the later operating system whereas the boot image only lives temporarily in RAM as long as the system image will be activated. The boot image descriptions are stored in `/usr/share/kiwi/image/*boot` and can be built in the same way as the system image. The boot image without a corresponding system image doesn't make sense though.

2.2 Boot parameters

When booting an image created by kiwi using one of the provided boot images there are some useful kernel parameters mainly meant for debugging purposes. Please note the following parameters are only useful if the kiwi `initrd` is used. In

case of any other initrd code written by yourself or simply because kiwi replaced itself with the distribution specific mkinitrd tool the parameters might not have any effect.

- **kiwidebug=1**

If the boot process encounters a fatal error the system normally reacts with a reboot after 120 seconds. This so called exception can be influenced by the kiwidebug parameter. If set to 1 the system will stop and provide the user with a shell prompt instead of a reboot. Within that shell some basic standard commands are available which could help to find the cause of the problem

- **kiwistderr=/dev/...**

While the system boots kiwi writes messages to tty1 and tty3. The tty1 messages are highlevel information whereas the tty3 messages represents the shell debug output and any error messages from the commands called. With the kiwistderr parameter one can combine both message sets and specify where to write them to. It's very common to set /dev/console as possible alternative to the default logging behaviour

2.3 Common and Distribution specific code

KIWI has been developed to be usable for any Linux distribution. By design of a Linux distribution there are differences between each of them. With KIWI we provide on one hand the code which is common to all Linux distributions according to standards and on the other hand there is also code where we have to distinguish between the distribution type.

In case of such specific tasks which are almost all in the area of booting, KIWI provides a set of functions which all have to come with a distribution prefix. As this project uses SUSE Linux as base distribution all required distribution specific tasks has been implemented for SUSE and could be missing for other distributions. The existing implementation for SUSE turns out to be adapted to other distributions very easily though.

A look into the code therefore will show you functions which are prefixed by "suse" as well as scripts whose names starts with "suse-". At any time you see such a script or function you can be assured that this is something distribution specific and needs to be adapted if you plan to use KIWI with another distribution than SUSE. For example the boot workflow is controlled by a program called linuxrc which is in KIWI a script represented by suse-linuxrc. Another example would be the function called suseStripKernel which is able to remove everything but a specified list of kernel drivers from the SUSE kernel.

The prefixed implementation allows us to integrate all the distribution specific tasks into one project but this of course requires the help and knowledge of the people who are familiar with their preferred linux distribution.

3 KIWI image description

Contents

3.1 config.xml	15
3.1.1 image element	15
3.1.2 description element	16
3.1.3 profiles element	16
3.1.4 preferences element	17
3.1.5 users element	29
3.1.6 drivers element	29
3.1.7 repository element	30
3.1.8 packages element	32

In order to be able to create an image with kiwi a so called image description must be created. The image description is represented by a directory which has to contain at least one file named **config.xml** or alternatively ***.kiwi**. A good start for such a description can be found in the examples provided in `/usr/share/doc/packages/kiwi/examples`.



Figure 3.1: Image description directory

The following additional information is optional for the process of building an image but most often mandatory for the functionality of the later operating system.

- **images.sh**

Optional configuration script while creating the packed image. This script is called at the beginning of the image creation process. It is designed to clean-up the image system. Affected are all the programs and files only needed while the unpacked image exists.

- **config.sh**

Optional configuration script while creating the unpacked image. This script is called at the end of the installation but **before** the package scripts have run. It is designed to configure the image system, such as the activation or deactivation of certain services (insserv). The call is not made until after the switch to the image has been made with **chroot**.

- **root/**

Subdirectory that contains special files, directories, and scripts for adapting the image environment **after** the installation of all the image packages. The entire directory is copied into the root of the image tree using `cp -a`.

- **config-yast-firstboot.xml**

Configuration file for the control of the yast2 firstboot service. Similar to the autoyast approach yast also provides a boot time service called firstboot. Unfortunately there is no GUI available to setup the firstboot but a good documentation in `/usr/share/doc/packages/yast2-firstboot`. Once you have created such a firstboot file in your image description directory KIWI will process on the file and setup your image as follows:

1. KIWI enables the firstboot service
2. While booting the image YaST is started in firstboot mode
3. The firstboot service handles the instructions listed in the `config-yast-firstboot.xml`
4. If the process finished successfully the environment is cleaned and firstboot won't be called at next reboot.

- **config-yast-autoyast.xml**

Configuration file which has been created by autoyast. To be able to create such an autoyast profile you should first call:

```
yast2 autoyast
```

Once you have saved the information from the autoyast UI as `config-yast-autoyast.xml` file in your image description directory KIWI will process on the file and setup your image as follows:

1. While booting the image YaST is started in autoyast mode automatically
2. The autoyast description is parsed and the instructions are handled by YaST. In other words the **system configuration** is performed
3. If the process finished successfully the environment is cleaned and autoyast won't be called at next reboot.

- **config-cdroot.tgz**

Archive which is used for ISO images only. The data in the archive is uncompressed and stored in the CD/DVD root directory. This archive can be used, for example, to integrate a license file or readme information directly readable from the CD or DVD.

- **config-cdroot.sh**

Along with the config-cdroot.tgz one can provide a script which allows to manipulate the extracted data.

- **config/**

Optional Subdirectory that contains Bash scripts that are called after the installation of all the image packages, primarily in order to remove the parts of a package that are not needed for the operating system. The name of the Bash script must resemble the package name listed in the config.xml

3.1 config.xml

The mandatory image definition file is divided into different sections which describes information like the image name and type as well as the packages and patterns the image should consist of. The following information explains the basic structure of the XML document. When KIWI is called the XML structure is validated by a RelaxNG based schema. For details on attributes and values please refer to the schema documentation file at `/usr/share/doc/packages/kiwi/kiwi.rng.html`.

3.1.1 image element

```
<image schemaversion="3.5" name="iname"
      displayname="text"
      inherit="path" kiwirevision="number"
      id="10 digit number">
  ...
</image>
```

The image definition starts with an image tag and requires the schema format at version 2.0. The attribute name specifies the name of the image which is also used for the file names created by KIWI. Because we don't want spaces in file names the name attribute must not have any spaces in its name.

- The optional attribute `displayname` allows setup of the boot menu title for isolinux and grub. So you can have *suse-SLED-foo* as the image name but something like *my cool Image* as the boot display name.
- The optional attribute `inherit` allows to inherit the packages information from another image description.
- The optional attribute `kiwirevision` allows to specify a kiwi SVN revision number which is known to build a working image from this description. If the kiwi SVN revision is less than the specified value the process will exit. The currently used SVN revision can be queried by calling `kiwi --version`

- The optional attribute `id` allows to set an identification number which appears as file `/etc/ImageID` within the image.

Inside the **image** section the following mandatory and optional subelements exists. The simplest image description must define the elements **description**, **preferences**, **repository** and **packages** (at least one of `type="bootstrap"`).

3.1.2 description element

```
<description type="system">  
  <author>an author</author>  
  <contact>mail</contact>  
  <specification>short info</specification>  
</description>
```

The mandatory description section contains information about the creator of this image description. The attribute **type** could be either of the value `"system"` which indicates this is a system image description or at value `"boot"` for boot image descriptions.

3.1.3 profiles element

```
<profiles>  
  <profile name="name" description="text"/>  
  ...  
</profiles>
```

The optional profiles section lets you maintain one image description while allowing for variation of the sections **packages** and **drivers** that are included. A separate profile element must be specified for each variation. The profile child element, which has **name** and **description** attributes, specifies an alias name used to mark sections as belonging to a profile, and a short description explaining what this profile does.

To mark a set of **packages/drivers** as belonging to a profile, simply annotate them with the **profiles** attribute. It is also possible to mark sections as belonging to multiple profiles by separating the names in the **profiles** attribute with a comma. If a **packages/drivers** tag does not have a **profiles** attribute, it is assumed to be present for all profiles.

3.1.4 preferences element

```
<preferences profiles="name">
  <version>1.1.2</version>
  <packagemanager>smart</packagemanager>
  <type image="name" ...>
    <ec2config|lvmvolumes|oemconfig|pxedeploy|size|split|
      vmwareconfig|xenconfig>
  </type>
</preferences>
```

The mandatory preferences section contains information about the supported image type(s), the used packagemanager, the version of this image and optional attributes. The image version must be a three-part version number of the format: **Major.Minor.Release**. In case of changes to the image description the following rules should apply:

- For smaller image modifications that do not add or remove any new packages, only the release number is incremented. The **config.xml** file remains unchanged.
- For image changes that involve the addition or removal of packages the minor number is incremented and the release number is reset.
- For image changes that change the size of the image file the major number is incremented.

By default kiwi use the **smart** packagemanager but it is also possible to use the SUSE packagemanager called **zypper**.

In general the specification of one <preferences> section is sufficient. However, it's possible to specify multiple <preferences> sections and distinguish between the sections via the **profiles** attribute. Data may also be shared between different profiles. Using profiles it is possible to, for example, configure specific preferences for OEM image generation. Activation of a given <preferences> during image generation is triggered by the use of the `--add-profile` command line argument. For each <preferences> block at least one **type** element must be defined. It is possible to specify multiple <type> elements in any <preferences> block. To set a given <type> description as the default image use the boolean attribute **primary** and set its value to **true**. The image type to be created is determined by the value of the **image** attribute. The following list describes the supported types and possible values of the image attribute:

- **image="cpio"**
Use the cpio image type to specify the generation as a boot image (intrd). When generating a boot image it is possible to specify a specific boot pro-

file and boot kernel using the optional **bootprofile="default"** and **bootkernel="std"** attributes.

A boot image should group the various supported kernels into profiles. If the user chooses not to use the profiles supplied by Kiwi it is required that one profile named **std** be created. This profile will be used if no other bootkernel is specified. Further it is required to create a profile named **default**. This profile is used when no bootprofile is specified.

It is recommended that special configurations that omit drivers, use special drivers and/or special packages be specified as profiles.

The bootprofile and bootkernel attribute are respected within the definition of a system image. Use the attribute and value **type="system"** of the <description> element to specify the creation of a system image. The values of the bootprofile and bootkernel attributes are used by Kiwi when generating the boot image.

- **image="ec2"**

Setting the image attribute value to ec2 causes the generation of an Amazon Machine Image (AMI) for the AWS (Amazon Web Services) Elastic Compute Cloud (EC2). The AMI is an image comparable to a VMware or Xen guest image. It can be transferred to the AWS Simple Storage Service and used within the AWS infrastructure. Configuration of the AMI is accomplished with the optional **ec2config** element, specified as a child of the <type> element.

- **image="iso"**

Specify the key-value pair image=iso to generate a live system suitable for deployment on optical media (CD or DVD). Use the **boot="isoboot/suse-*** attribute when generating this image type to select the appropriate boot image for optical media. In addition the optional **flags** attribute may be set to the following values with the effects described below:

- **clirc**: Creates a fuse based compressed read-only filesystem which allows write operations into a cow file.
- **compressed**: Compressed filesystem with squashfs and use a link list to mount the system read-write. An additional split section controls the read-write information.
- **dmsquash**: Creates an ext3 image file and encapsulates this image file within a squashfs filesystem. On boot the root tree is mounted via a device mapper snapshot device to allow full write access over the complete tree.
- **unified**: Compressed filesystem with squashfs mounted with an aufs based overlay mount to allow read-write access.

If the flags attribute is not used the filesystem will not be compressed and no union filesystem is used. In this case it is recommended to specify a **split** section as a child of this type element. The specification of a split block is also recommended when flags=compressed is used.

- **image="oem"**

Use this type to create a virtual disk system suitable in a preload setting. In addition specify the attributes **filesystem**, and **boot="oemboot/suse-***" to control the filesystem used for the virtual and to specify the proper boot image. Using the optional **format** attribute and setting the value to "iso" or "usb" will create self installing images suitable for optical media or a USB stick, respectively. Booting from the media will deploy the OEM preload image onto the selected storage device of the system. It is also possible to configure the system to use logical volumes. Use the optional **lvm** attribute and specify the logical volume configuration with the **lvmvolumes** child element. The default volume group name is kiwiVG. Further configuration of the image is performed using the appropriate ***config** child block.

- **image="pxe"**

Creating a network boot image is supported by Kiwi with the image=pxe type. When specifying the creation of a network boot image use the **filesystem** and **boot="netboot/suse-***" attributes to specify the filesystem of the image and the proper boot image. To compress the image file set the **compressed** boolean attribute to true. This setting will compress the image file and has no influence on the filesystem used within the image. The compression is often use to support better transfer times when the pxe image is pushed to the boot server over a network connection. The pxe image layout is controlled by using the **pxedeploy** child element.

- **image="split"**

The split image support allows the creation of an image as split files. Using this technique one can assign different filesystems and different read-write properties to the different sections of the image. The **oem,pxe,usb** and **vmx** types can be created as a split system image. Use the **boot="oem|netboot|usb|vmx/suse-***" attribute to select the underlying type of the split image. The attributes **fsreadwrite**, **fsreadonly** are used to controll the read-write properties of the filesystem specified as the attributes value. Use the appropriate ***config** child block to specify the properties of the underlying image. For example when building a OEM based split image use the **<oemconfig>** child section.

- **image="usb"**

Use the usb value to create a USB stick image. Set the **filesystem** attribute to the desired supported filesystem for the image and use the **boot="usbboot/suse-***" attribute to select the USB boot image for the system. For a USB image you may also select GRUB or Syslinux as a bootloader by setting the optional **bootloader** attribute to grub or syslinux, respectively. The USB image may also be created with LVM support. The same rules as indicated for the OEM image apply.

- **image="vmx"**

Creation of a virtual disk system is enabled with the vmx value of the image attribute. Set the filesystem of the virtual disk with the **filesystem** attribute and select the appropriate boot image by setting **boot="vmxboot/suse-***". The optional **format** attribute is used to specify one of the virtualization for-

mats supported by qemu, such as vmdk (also the VMware format) or qcow2. For the virtual disk image the optional **vga** attribute may be used to configure the kernel framebuffer device. Acceptable values can be found in the Linux kernel documentation for the framebuffer device (Documentation/fb/vesafb.txt). Kiwi also supports the selection of the bootloader for the virtual disk according to the rules indicated for the USB system. Last but not least the virtual disk system may also be created with a LVM based layout by using the **lvm** attribute. The previously indicated rules apply. Use the **vmware-config** or **xenconfig** child elements to specify appropriate configuration of the virtual disk system.

- **image="xen"**

Use this type to create a Xen para-virtual guest image. The **filesystem** and **boot="xenboot/suse-*** attributes specify the filesystem type used and select the proper boot image, respectively. Use the **xenconfig** child element to specify configuration options of the Xen guest image.

All of the mentioned types can specify the **boot** attribute which tells kiwi to call itself to build the requested boot image (initrd). It is possible to tell kiwi to check for an already built boot image which is a so called **prebuilt boot image**. To activate searching for an appropriate prebuilt boot image the type section also provides the attribute **checkprebuilt="true|false"**. If specified kiwi will search for a prebuilt boot image in a directory named `/usr/share/kiwi/image/*boot/*-prebuilt`. Example: If the boot attribute was set to `isoboot/suse-10.3` and `checkprebuilt` is set to `true` kiwi will search the prebuilt boot image in `/usr/share/kiwi/image/isoboot/suse-10.3-prebuilt`. The directory kiwi searches for the prebuilt boot images can also be specified at the commandline with the `--prebuiltbootimage` parameter.

Within the preferences section there are the following optional attributes:

- **rpm-check-signatures**

Specifies whether RPM should check the package signature or not

- **rpm-excludedocs**

Specifies whether RPM should skip installing package documentation

- **rpm-force**

Specifies whether RPM should be called with `-force`

- **keytable**

Specifies the name of the console keymap to use. The value corresponds to a map file in `/usr/share/kbd/keymaps`. The `KEYTABLE` variable in `/etc/sysconfig/keyboard` file is set according to the keyboard mapping.

- **timezone**

Specifies the time zone. Available time zones are located in the `/usr/share/zoneinfo` directory. Specify the attribute value relative to `/usr/share/zoneinfo`. For example, specify `Europe/Berlin` for `/usr/share/zoneinfo/Europe/Berlin`. KIWI uses this value to configure the timezone in `/etc/localtime` for the image

- **locale**

Specifies the name of the locale to use, which defines the contents of the RC_LANG system environment variable in /etc/sysconfig/language

- **boot-theme**
Specifies the name of the gfxboot and bootsplash theme to use
- **defaultdestination**
Used if the `--destdir` option is not specified when calling KIWI
- **defaultroot**
Used if the option `--root` is not specified when calling KIWI
- **defaultbaseroot**
Used if the option `--base-root` is not specified when calling KIWI. It's possible to prepare and create an image using a predefined non empty root directory as base information. This could speedup the build process a lot if the base root path already contains most of the image data.

The `<type>` element may contain child elements to provide specific configuration information for the given type. The following lists the supported child elements:

- **ec2config**
The optional `ec2config` block is used to specify information relevant only to AWS EC2 images. The following information can be provided:

```
<ec2config>      <ec2accountnr>Your AWS account
number</ec2accountnr>      <ec2certfile>Path
to the AWS cert-*.pem file</ec2certfile>
      <ec2privatekeyfile>Path to the AWS pk-*.pem
file
</ec2privatekeyfile> </ec2config>
```

- **size**
Specifies the size of the image with a numerical value in Megabytes or Gigabytes. Use the "unit" attribute to assign the unit **M** for Megabytes or **G** for Gigabytes. KIWI extends the image size automatically if the specified value is too small. If the actual size is more than 100MB larger than the specified size, KIWI aborts with an error message. KIWI does not automatically reduce the image size if the specified value is too large, because the extra space might be needed to, for example, run custom scripts. If no size is specified, KIWI uses the required size plus approximately 30% free space. The optional "additive" attribute can be set to tell kiwi to use the required size for the image plus the given size as additional free space. The "additive" attribute is a bool attribute and can be set to either true or false.

```
<size unit="M">1000</size>
```

- **vmwareconfig**

The optional **vmwareconfig** section is used if the image description includes a **packages** section of type **vmware**. In this case kiwi is able to create the guest configuration file required to run the image within VMware. The guest configuration file can also be created by the VMware toolkit itself but with the pre-created guest configuration created by kiwi it is possible to provide an all in one bundle ready to run in VMware. The following general information can be provided to create the VMware (.vmx) configuration file:

```
<vmwareconfig arch="arch" memory="MB"
    HWversion="number"
    guestOS="suse|sles"
    usb="true|false"/>
    <vmwarenic driver="name"
        interface="number" mode="mode"/>
    <vmwaredisk controller="ide|scsi"
        id="number"/>
    <vmwarecdrom controller="ide|scsi"
        id="number"/>
</vmwareconfig>
```

- **arch**

The virtualized architecture. Can be one of ix86 or x86_64 By default ix86 is used.

- **memory**

The mandatory memory attribute specified how much memory in MB should be allocated for the virtual machine

- **HWversion**

The VMware hardware version number. By default version 3 is used

- **guestOS**

The guestOS identifier. By default suse is used on ix86 and suse-64 for x86_64. At the moment only the suse and sles guestOS types are supported

- **usb**

The bool value **usb** specifies whether the guest machine should provide a virtual USB controller or not.

The following information can be provided to setup the VMware virtual main storage device and CD/DVD drive connection.

- **controller**

The mandatory controller attribute can be either ide or scsi disk

- **id**

The mandatory id attribute specifies the disk id. If only one disk is set the id value should be set to 0

The following information can be provided to setup the VMware virtual network interface

- **driver**

The mandatory driver to use for the virtual network card. Possible values are vlane, e1000 or vmxnet. vmxnet requires the vmware tools to be part of the image

- **interface**

The mandatory network interface number. If only one interface is set the value should be set to 0

- **mode**

The network mode used to communicate outside the VM. In many cases the bridged mode is used.

- **xenconfig**

The optional xenconfig section is used if the image description includes a packages section of type **xen**. In this case kiwi is able to create the guest configuration file required to run the image within Xen. According to this it's possible to provide an all in one bundle ready to run in Xen. The following general information can be provided to create the Xen (.xenconfig) configuration file:

```
<xenconfig memory="MB"
  <xendisk device="/dev/..."/>
  <xenbridge name="eth0" mac="addr"/>
</vmwareconfig>
```

- **memory**

The mandatory memory attribute specified how much memory in MB should be allocated for the para virtual machine

The following information can be provided to setup the Xen para virtual main storage device as part of a **xendisk** section

- **device**

The mandatory device which should appear in the para virtual instance

The default Xen configuration uses bridging within domain 0 to allow all domains to appear on the network as individual hosts. In order to create the bridge which can be used by the Xen virtual network interface(s) the script `"/etc/xen/scripts/network-bridge start"` can be called to create a bridge as shown in the following picture:

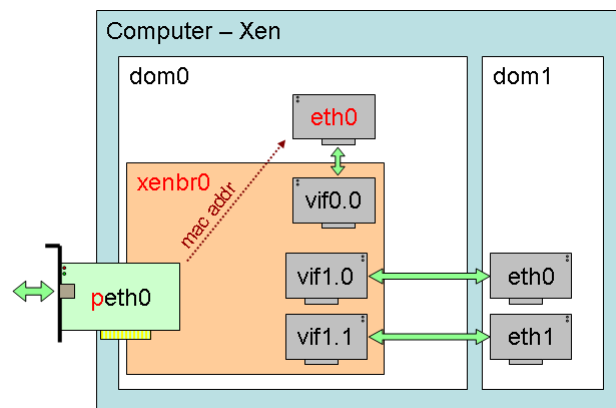


Figure 3.2: Illustration on network-bridge and vif-bridge

Additional information on how to setup networking with Xen can be found here: <http://wiki.xensource.com/xenwiki/XenNetworking> The following information can be provided to setup the Xen network bridge as part of one ore more **xenbridge** section(s).

- **name**
The name of the network interface which is the bridge between the physical device (peth) and the virtual device(s) (vif).
- **mac**
The optional mac address value for the virtual interface inside the DOM(x).

- **pxedeploy**

The optional **pxedeploy** section is only useful if you build the **pxe** image type. For this type an additional network boot infrastructure needs to be set up. To ease the process of setting up such a boot server kiwi provides a package called **kiwi-pxeboot**. This package sets up the basic pxe boot environment like kiwi expects it. The package will setup a directory structure in `/srv/tftpboot`. The result files of the kiwi image build process needs to be copied to that location. A detailed explanation of what file needs to be copied and where is provided in the PXE Image chapter later in this document. Among the image files itself it is required to provide an information how KIWI should handle the machine it should be install with the created image. Information like which image should be used or how to partition the machine needs to be provided in a file called `config.<MAC-Address>` below the directory `/srv/tftpboot/KIWI`. The reason for the **pxedeploy** section is to allow KIWI to create that file according to the information provided in the image description.


```

<pxedeploy server="IP" blocksize="4096">
  <timeout>seconds</timeout>
  <commandline>kernel-options</commandline>
  <kernel>kernel-file</kernel>
  <initrd>initrd-file</initrd>
  <partitions device="/dev/sda">
    <partition type="swap" number="1" size="MB"/>
    <partition type="L" number="2" size="MB"
      mountpoint="/" target="true"/>
    <partition type="fd" number="3"/>
  </partitions>
  <union ro="dev" rw="dev" type="aufs|unionfs"/>
  <configuration source="/KIWI/../../file" dest="/../../file"
    arch="...">
    <configuration .../>
  </configuration>
</pxedeploy>

```

- The server and blocksize attributes specify the TFTP server which controls the download of image files. KIWI also supports other protocols than tftp but in order to do that the variables **kiwiserver** and **kiwiservertype** must be set as kernel parameter when the client boots.
- The optional timeout section specifies the grub timeout in seconds which is used when the KIWI initrd configures and installs the grub boot loader on the machine after the first deployment to allow standalone boot.
- The optional commandline section specifies the kernel options which should be passed to the kernel by the grub bootloader. the KIWI initrd includes this kernel options when installing the grub for standalone boot
- The optional kernel and initrd sections specifies the KIWI kernel and initrd files on the boot server. In case of a special boot method which is not supported by the distribution standard mkinitrd the KIWI initrd needs to stay on the system and needs to be used for local boot as well. So if your system image makes use of the split type or your pxedeploy section includes any union information the kernel and initrd sections must be provided.
- The partitions section is required if you want to install the system image on a disk or any other permanent storage device. Each partition is specified by one partition subtag which defines the type (see `sfdisk -list-type`), partition number, size, optional mountpoint, and optional information on if this partition is the system image target partition. With the KIWI netboot boot image, the first partition is always the swap partition, while the second partition is used, by default, for the system

image. With the optional target flag, you can specify a partition other than the second partition to install the system image on. If size is set to "image", KIWI calculates the required size for this partition in order to have enough space for the later image.

- The optional union section is used if the system image is based on a read-only filesystem such as squashfs and should be mounted read-write by using an overlay filesystem like aufs or by a device. mapper setup with the dmsquash type. In this case, KIWI creates an additional write partition, then combines both partitions with the given overlay filesystem or device map. Currently, there are two such filesystems: unionfs and aufs (aufs is the preferred file system). The partition that holds the read-only system image must be set as the ro attribute value, and the partition that serves as the write partition must be set the rw attribute value.
- The optional configuration section can be used to integrate a network client's configuration files which are stored remotely on the server. The source attribute specifies the path on the server used by a TFTP client program to download the file, and the dest attribute specifies the target relative to the root (/) of the network client. Each file is specified by one configuration section and can be bound to a specific set of architectures separated by comma.

- **split**

The optional split section is used if your image type is split or iso combined with the attribute compressed. The split section controls which files of your splitted image should be writable and whether they are persistantly writable or only temporarily. In case of an iso image all data specified can only be temporarily writable by design of the live system image type.

The split section distinguishes between directory and files. The information of "/etc" would make /etc a writable directory however none of the files *within* /etc are affected. They remain symbolic links to the real files in the read-only area. The main advantage to putting just a directory in the read-write area is that any new files created there are stored on the disk instead of tmpfs. If all the files in /etc should also be part of the read-write area and according to this put a complete directory including all its files into the read-write area two lines are required as shown above.

```

<split>
  <temporary>
    <!-- read/write access to: -->
    <file name="/var"/>
    <file name="/var/*/"/>
    <!-- but not on this file: -->
    <except name="/etc/shadow"/>
  </temporary>
  <persistent>
    <!-- persistent read/write access to: -->
    <file name="/etc"/>
    <file name="/etc/*/"/>
    <!-- but not on this file: -->
    <except name="/etc/passwd"/>
  </persistent>
</split>

```

- **lvmvolumes**

With the optional **lvmvolumes** section you can set one or more top level directories into a separate volume. For example you want to put /usr and /var into different volumes add the following lvmvolumes section:

```

<lvmvolumes>
  <volume name="usr" freespace="100M"/>
  <volume name="var" size="200M"/>
</lvmvolumes>

```

The optional freespace attribute let you add additional free space for that volume. If you don't set any freespace the volume will be about 80% to 90% full. The optional size attribute let you specify the absolute size for that volume. If both freespace and size are set size is preferred. If the given size is too small the value will be ignored.

- **oemconfig** By default the oemboot process will create/modify a swap, /home and / partition. It is possible to influence the behavior by the oem-* elements explained below. KIWI uses this information to create the file **/config.oempartition** as part of the automatically created oemboot boot image. The format of the file is a simple key=value format and created by the KIWIConfig.sh function named baseSetupOEMPartition().

```
<oemconfig>
  <oem-systemsize>2000</oem-systemsize>
  <oem-...
</oemconfig>
```

- **<oem-reboot>true|false</oem-reboot>**
This allows to reboot the oem system after initial deployment. This value is represented by the variable OEM_REBOOT in config.oempartition
- **<oem-swapsize>number in MB</oem-swapsize>**
Set the size of the swap partition. This value is represented by variable OEM_SWAPSIZE in config.oempartition
- **<oem-systemsize>number in MB</oem-systemsize>**
Set the size of the / partition. This value is represented by the variable OEM_SYSTEMSIZE in config.oempartition
- **<oem-home>true|false</oem-home>**
Specify if a home partition should be create. This value is represented by the variable OEM_WITHOUTHOME in config.oempartition.
- **<oem-swap>true|false</oem-swap>**
Specify if a spaw partition should be create. This value is represented by the variable OEM_WITHOUTSWAP in config.oempartition.
- **<oem-boot-title>text</oem-boot-title>**
By default the string **OEM** will be appended to the boot manager menu when KIWI creates the grub configuration during first deployment. The oem-boot-title value allows to set a custom name which is used instead of OEM. This value is represented by the variable OEM_BOOT_TITLE in config.oempartition.
- **<oem-recovery>true|false</oem-recovery>**
If this element is set to true KIWI will create a recovery archive from the prepared root tree. The archive will appear as */recovery.tar.bz2* within the initial image file. During first boot of the image a single recovery partition will be created and the recovery archive will be moved into that partition. An additional boot menu entry will be created which allows to restore the original root tree information. The user information on the /home partition or in the /home directory are not affected by that recovery process
- **<oem-kiwi-initrd>true|false</oem-kiwi-initrd>**
If this element is set to true the initial oemboot boot image (initrd) will **not** be replaced by the system (mkinitrd) created initrd. This option makes sense if the target storage device for the image is not a fixed disk but for example an USB stick. In that case it might be required to re-detect the storage location on first boot which is done as part of the oemboot boot image

3.1.5 users element

```
<users group="users" id="number">
  <user pwd="..." home="dir"
    name="user" id="number"
    pwdformat="encrypted" | "plain"
    realname="string" shell="path"/>
  ...
</users> ...
```

The optional users element specifies the users to be added to the image. The group attribute specifies the group the users belong to. If this group does not exist, it is created. A user element must be specified for each group. The user child element specifies the users belonging to that group, and the name, pwd and home attributes specifies the username, the password, and the path to the home directory. An encrypted password can be created using the kiwi --createpassword tool. If a plain text password is given use the optional pwdformat attribute to indicate a plain text password and Kiwi will encrypt the given password.

3.1.6 drivers element

```
<drivers type="type" profiles="name">
  <file name="filename"/>
  ...
</drivers>
```

The optional drivers element is only useful for boot images (initrd). As a boot image doesn't need to contain the complete kernel one can save a lot of space if only the required drivers are part of the image. Therefore the drivers section exists. If present only the drivers which matches the file names or glob patterns will be included into the boot image. The type attribute specifies one of the following driver types:

- **drivers**
Each file is specified relative to the /lib/modules/<Version>/kernel directory.
- **netdrivers**
Each file is specified relative to the /lib/modules/<Version>/kernel/drivers directory.
- **scsidrivers**

Each file is specified relative to the `/lib/modules/<Version>/kernel/drivers`

- **usbdrivers**

Each file is specified relative to the `/lib/modules/<Version>/kernel/drivers` directory.

According to the driver type the specified files are searched in the corresponding directory. The information about the drivernames is provided as environment variable named like the value of the type attribute and is processed by the function **suseStripKernel**. According to this along with a boot image description a script called **images.sh** must exist which calls this function in order to allow the driver information to have any effect.

3.1.7 repository element

```
<repository type="type"
  status="replaceable"
  alias="name"
  priority="number">
  <source path="URL"/>
</repository>
...
```

The mandatory repository section specifies the source URL and type used by the package manager. The type attribute specifies the repository type which must be supported by the package manager. At the moment KIWI supports the package managers smart and zypper whereas smart has support for more repository types compared to zypper. Therefore the possible values for the type attribute has beend copied from smart. The following table shows the possible repo types:

type	smart	zypper
apt-deb	yes	no
apt-rpm	yes	no
deb-dir	yes	no
mirrors	yes	no
red-carpet	yes	yes
rpm-dir	yes	yes
rpm-md	yes	yes
slack-site	yes	no
up2date-mirrors	yes	no
urpmi	yes	no
yast2	yes	yes

Within the repository section there are the following optional attributes:

- **status="replaceable"**

This attribute makes only sense for boot image descriptions. It indicates that the repository is allowed to become replaced by the repositories defined in the system image descriptions. Because kiwi automatically builds the boot image if required it should create that image from the same repositories which are used to build the system image to make sure both fit together. Therefore it is required to allow the repository to become overwritten which is indicated by the status attribute.

- **alias="name"**

Specifies an alternative name used to identify the source channel. If not set the source attribute value is used and builds the alias name by replacing each "/" with a "_". An alias name should be set if the source argument doesn't really explain what this repository contains

- **priority="number"**

Specifies the repository priority assigned to all packages available in this repository. For **smart** the following applies: If the exact same package is available in more than one channel, the repository with the **highest** priority number is used. The value 0 means **no priority is set**. For **zypper** the following applies: If the exact same package is available in more than one channel, the repository with the **lowest** priority number is used. The value 99 means **no priority is set**.

The source child element contains the path attribute, which specifies the location (URL) of the repository. The path specification can be any of the following, and can include the %arch macro which is expanded to the architecture of the image building host.

- **this://<path>**

A relative path name, which is relative to the image description directory being referenced.

- **iso://<path/to/iso file>**

A path to a local .iso file which is then loopback mounted and used as a local path based repository. Alternatively one can do the loop mount himself and point a standard local path to the mounted directory

- **http://<url>**

A http protocol based network location

- **https://<url>**

A https protocol based network location

- **ftp://<url>**

A ftp protocol based network location

- **opensuse://<Project-Name>**

A special http based network location which is created from the given openSUSE buildservice project name. The result is pointing to an rpm-md repository on the openSUSE buildservice. For example:
path="opensuse://openSUSE:10.3/standard"

- **file:///local/path**

A local path which should be an absolute path description. The file:// prefix is optional and could also be omitted.

- **obs://\$dir1/\$dir2**

A special buildservice path whereas \$dir1 and \$dir2 represents the build-service project location. If this type is used as part of a boot attribute kiwi evaluates it to this://images/\$dir1/\$dir2 and if used as part of a repository source path attribute it evaluates to this://repos/\$dir1/\$dir2

Multiple repository sections are allowed and combined by the used package manager. By default the package manager will always use the latest packages available.

3.1.8 packages element

```
<packages type="type" profiles="name"
    patternType="type"
    patternPackageType="type"
    <package name="name" arch="arch"/>
    <package name="name" replaces="name"/>
    <package name="name"
        bootinclude="true" bootdelete="true"/>
    <archive name="name"
        bootinclude="true"/>
    <package .../>
    <opensusePattern name="name"/>
    <opensusePattern .../>
    <opensuseProduct name="name"/>
    <opensuseProduct .../>
    <ignore name="name"/>
    <ignore .../>
</packages>
```

The mandatory packages element specifies the list of packages and pattern names to be used with the image. There are five different types of package sets or patterns, specified with the type attribute:

- **image**

Image packages, list of packages used to finish the image installation. All packages which make up the image are listed here

- **bootstrap**

Bootstrap packages, list of packages used to start creating a new operating

system root tree. Basic components which are required to chroot into that system, such as glibc, are listed here.

- **delete**

Delete packages, list of packages stored for later deletion. The package names are available in the `$delete` environment variable of the `/.profile` file created by KIWI. The `baseGetPackagesForDeletion()` function returns the contents of this environment variable, and can be used to delete the packages while ignoring requirements or dependencies. According to this a `config.sh` or `images.sh` script needs to be provided such as the following code snippet shows:

```
rpm -e --nodeps --noscripts \  
    $(rpm -q 'baseGetPackagesForDeletion' | grep -v "is not installed")
```

- **xen**

Xen required packages, list of packages used when the image needs support for Xen-based virtualization.

- **vmware**

VMware required packages, list of packages used when the image needs support for VMware- or generic based full virtualization.

Using patterns

Using a pattern name enhances the package list with a number of additional packages belonging to this pattern. Support for patterns is SUSE-specific, and available with openSUSE 10.1 or later. The optional `patternType` and `patternPackageType` attributes specify which pattern references or packages should be used in a given pattern. The values of these attributes are only evaluated if the KIWI pattern solver is used. If the new (up to SUSE 11.0) `satsolver` pattern solver is used these values are ignored because the `satsolver` can't handle that at the moment. Allowed values for the `pattern*` attributes are:

- **onlyRequired**

Incorporates only patterns and packages that are required by the given pattern

- **plusSuggested**

Incorporates patterns and packages that are required and suggested by the given pattern

- **plusRecommended**

Incorporates patterns and packages that are required and recommended by the given pattern.

By default, only required patterns and packages are used. The result list of packages is solved into a clean conflict free list of packages by the package manager. This for example means that including a suggested package may include required and recommended packages as well according to the dependencies. If a pattern contains unwanted packages, you can use the `ignore` element to specify an ignore

list, with the name attribute containing the package name. Please note that you can't ignore a package if it is required by a package dependency of another package in your list. The packagemanager will automatically pull in the package even if you have ignored it.

Architecture restrictions

To restrict a package to a specific architecture, use the **arch** attribute to specify a comma separated list of allowed architectures. Such a package is only installed if the build systems architecture (uname -m) matches one of the specified values of the arch attribute.

Image type specific packages

If a package is only required for a specific type of image and replaces another package you can use the **replaces** attribute to tell kiwi to install the package by replacing another one. For example you can specify the kernel package in the type=image section as

```
1 <package name="kernel-default" replaces="kernel-xen"/>
```

and in the type=xen section as

```
1 <package name="kernel-xen" replaces="kernel-default"/>
```

The result is the xen kernel if you request a xen image and the default kernel in any other case.

Packages to become included into the boot image

The optional attributes **bootinclude** and **bootdelete** can be used to mark a package inside the system image description to become part of the corresponding boot image (initrd). This feature is most often used to specify bootsplash and/or graphics boot related packages inside the system image description but they are required to be part of the boot image as the data is used at boot time of the image. If the bootdelete attribute is specified along with the bootinclude attribute this means that the selected package will be marked as a *to become deleted* package and is removed by the contents of the images.sh script of the corresponding boot image description

Data not available as packages to become included

With the optional **archive** element it's possible to include any kind of data into the image. The archive elements expects the name of a tarball which must exist as part of the system image description. kiwi then picks up the tarball and installs it into the image. If the **bootinclude** attribute is set along with the archive element the data will also become installed into the boot image.

4 Creating Appliances with KIWI

Contents

4.1 History	35
4.2 The KIWI model	35

4.1 History

Traditionally, many computing functions were written as software applications running on top of a general-purpose operating system. The consumer (whether home computer user or the IT department of a company) bought a computer, installed the operating system or configured a pre-installed operating system, and then installed one or more applications on top of the operating system. An e-mail server was just an e-mail application running on top of Linux, Unix, Microsoft Windows, or some other operating system, on a computer that was not designed specifically for that application.

4.2 The KIWI model

With KIWI we started to use a different model. Instead of installing firewall software on top of a general purpose computer/operating system, the designers/engineers built images that are designed specifically for the task. These are so called appliances. When building appliances with KIWI the following proceeding has proven to work reliably. Nevertheless the following is just a recommendation and can be adapted to special needs and environments.

1. First you should choose an appropriate image description template from the provided kiwi examples and add/adapt repository and/or package names according to the distribution you want to build an image for
2. Allow the image to create an in-place git repository to allow tracking of non binary changes. This is done by adding the following into your config.sh script

```
baseSetupPlainTextGITRepository
```

3. Prepare the preliminary version of your new appliance by calling **kiwi –prepare** Refer to chapter 9 (USB image - Live-Stick System) for details.
4. Decide for a testing environment. In my opinion a real hardware based test machine which allows to boot from USB is a good and fast approach. According to this make sure you have a usb type in your config.xml

```
<type filesystem="ext3"  
    boot="usbboot/suse-...">usb</type>
```

5. Create the preliminary live stick image of your new appliance by calling **kiwi –create** After successful creation of the image files find an USB stick which is able to store your appliance and plug it into a free USB port on your image build machine. Use the **kiwi –bootstick ...** call to deploy the image on the stick. Refer to chapter 9 (USB image - Live-Stick System) for details.
6. Plug in the stick on your test machine and boot it
7. After your test system has successfully booted from stick login into your appliance and start to tweak the system according to your needs. This includes all actions required to make the appliance work as you wish. Before you start take care for the following:
 - Create an initial package list. This can be done by calling:

```
rpm -qa | sort > /tmp/deployPackages
```

- Check the output of the command **git status** and include everything which is unknown to git and surely will not be changed by you and will not become part of the image description overlay files to the `/.gitignore` files

After the initial package list exists and the git repository is clean you can start to configure the system. You never should install additional software just by installing an unmanaged archive or build and install from source. It's very hard to find out what binary files had been installed and it's also not architecture safe. If there is really no other way for the software to become part of the image you should address this issue directly in your image description and the config.sh script but not after the initial deployment has happened.

8. As soon as your system works as expected your new appliance is ready to enter the final stage. At this point you have done several changes to the system but they are all tracked and should now become part of your image description. To include the changes into your image description the following process should be used:

- Check the differences between the currently installed packages and the initial deployment list. This can be done by calling:

```
rpm -qa | sort > /tmp/appliancePackages  
diff -u /tmp/deployPackages /tmp/appliancePackages
```

Add those packages which are labeled with (+) to the **<packages type="image">** section of your config.xml file and remove those packages which has been removed (-) appropriately. If there are packages which has been removed against the will of the package manager make sure you address the uninstallation of these packages in your config.sh script. If you have installed packages from repositories which are not part of your config.xml file you should also add these repositories in order to allow kiwi to install the packages

- Check the differences made in the configuration files. This can be easily done by calling:

```
git diff > /tmp/appliancePatch
```

The created patch should become part of your image description and you should make sure the patch is applied when preparing the image. According to this the command:

```
patch -p0 < appliancePatch
```

needs to be added as part of your config.sh script

- Check for new non binary files added. This can be done by calling:

```
git status
```

All files not under version control so far will be listed by the command above. Check the contents of this list make sure to add all files which are not created automatically to become part of your image description. To do this simply clone (copy) these files with respect to the filesystem structure as overlay files in your image description *root/* directory

9. All your valuable work is now stored in one image description and can be re-used in all KIWI supported image types. Congratulation ! To make sure the appliance works as expected prepare a new image tree and create an image from the new tree. If you like you can deactivate the creation of the git repository which will save you some space on the filesystem. If this

appliance is a server I recommend to leave the repository because it allows you to keep track of changes during the live time of this appliance.

5 Maintenance of Operating System Images

Creating an image often results in an appliance solution for a customer and gives you the freedom of a working solution at that time. But software develops and you don't want your solution to become outdated. Because of this together with an image people always should think of **image-maintenance**. The following paragraph just reflects ideas how to maintain images created by kiwi:

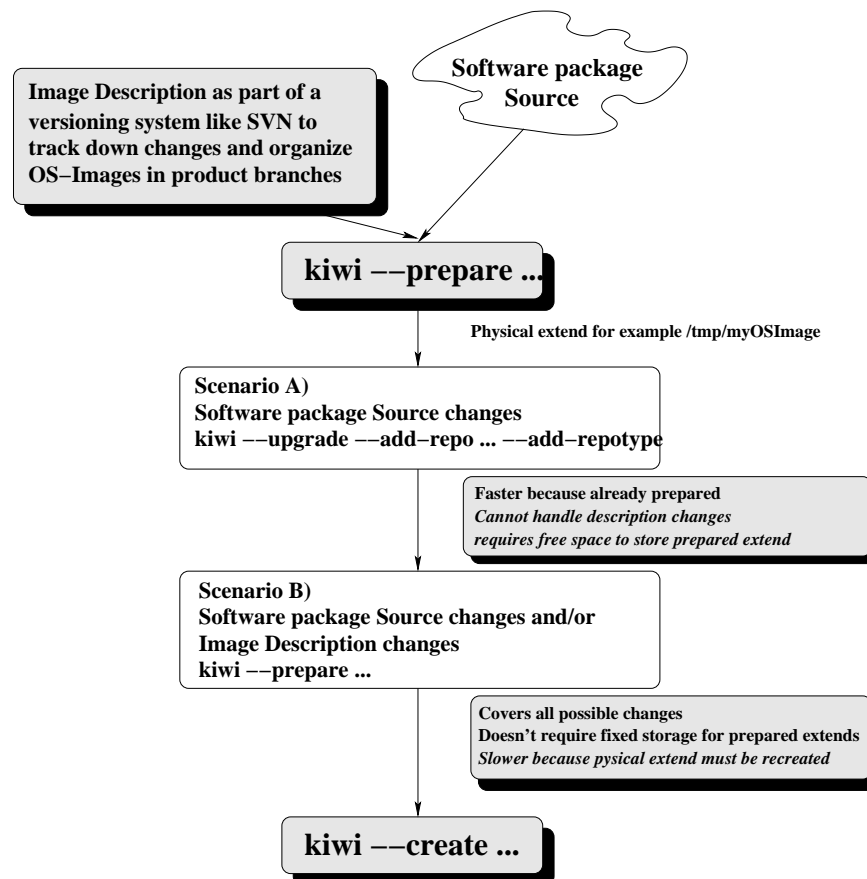


Figure 5.1: Image maintenance scenarios

The picture above shows two possible scenarios which requires an image to become updated. The first reason for updating an image are changes to the software, for example a new kernel should be used. If this change doesn't require additional software or changes in the configuration the update can be done by kiwi itself using its **upgrade** option. In combination with **upgrade** kiwi allows to add an additional repository which may be needed if the updated software is not part of the

original repository. An important thing to know is that this additional repository is **not** stored into the original config.xml file of the image description.

Another reason for updating an image beside software updates are configuration changes or enhancements, for example an image should have replaced its browser with another better browser or a new service like apache should be enabled. In principal it's possible to do all those changes manually within the physical extend but concerning maintenance this would be a nightmare. Why, because it will leave the system in an unversioned condition. Nobody knows what has changed since the very first preparation of this image. So in short **don't modify physical extends manually**. Changes to the image configuration should be done within the image description. The image description itself should be part of a versioning system like subversion. All changes can be tracked down then and maybe more important can be assigned to product tags and branches. As a consequence an image must be prepared from scratch and the old physical extend could be removed.

6 System to image migration

Contents

6.1 Create a clean repository set first	41
6.2 Watch the packaged but modified files	42
6.3 Watch the unpackaged files	42
6.4 Checklist	42
6.5 Turn my system into an image...	43

KIWI provides an experimental module which allows you to turn your running system into an image description. This migration allows you to clone your currently running system into an image. The process has the following limitations at the moment:

- Works for SUSE systems only (with zypper on board)
- You can't rely on the result to be a 100% ready to use copy of your system. This means some manual postprocessing might be necessary

When calling KIWI's migrate mode it will try to find the base version of your operating system and assigns a predefined repository to recreate the data which exists in terms of packages. The code inspect your system and creates a list of packages and patterns which represents your system so far. Of course there are normally some data which doesn't belong to any package. These are your configurations your user data and all other stuff. KIWI collects all this information and would copy it as overlay files as part of the image description. The process will skip all remote mounted filesystems and concentrate only on local filesystems.

6.1 Create a clean repository set first

When starting with the migration it is useful to let kiwi know about all the repositories from which packages has been installed to the system. In a first step call:

```
kiwi --migrate mySys --destdir /tmp/migrated \
```

This will create an HTML report where you can check which packages and patterns could be assigned to the given base repository. In almost all cases there will be information about packages which couldn't be assigned. You should go to that list and think of the repository which contains that packages (pacman, etc...). If

something is missing add it either to the zypper list on your system or use the kiwi options `--add-repo ... --add-repotype`

Continue calling the following command until your list is clean You should continue the migration if you have a clean list of solved packages without any package skipped except you know that this package can't be provided or is not worth to become part of the migration.

```
kiwi --migrate mySys --destdir /tmp/migrated --no-files \
  [ --skip package ... ]\
```

6.2 Watch the packaged but modified files

now watch the packaged but modified files in `/tmp/mysys/root-modified` and remove all files you don't need. If you are ready with this task copy the root-modified files over to the `root/` directory

6.3 Watch the unpackaged files

now watch the unpackaged files in `root-nopackage`. This is most likely the hardest part of the migration. remove all files and directories you don't need and after that copy the tree over to the `root/` directory

6.4 Checklist

After that call you should walk through the following check list

- change author and contact in `config.xml`
- set appropriate name for your image in `config.xml`
- add/modify default type (oem) set in `config.xml` if needed
- make sure your X11 configuration is appropriate according to the new target. A failsafe version was created in `/tmp/mysys/root/etc/X11/xorg.conf.install` -> fbdev based
- make sure `yast2` is installed to be able to reconfigure the system. if `yast2` is not installed these tasks needs to be done else. Otherwise `yast` second stage is started on first boot of the migrated image

6.5 Turn my system into an image...

After the process has finished you should check the size of the image description. The description itself shouldn't be that big. The size of a migrated image description mainly depends on how many overlay files exists in the root/ directory. You should really make sure whether you need them all or not. Now let's try to create a clone image from the description. The most appropriate image type to do this is the virtual disk image (vmx)

```
kiwi -p /tmp/migrated --root /tmp/mySys  
kiwi --create /tmp/mySys -d /tmp/myResult
```

If everything worked well you can test the created virtual disk image in any full virtual operating system environment like QEMU or VMware. Once created the image description can serve for all image types kiwi supports.

7 Installation Source

Contents

7.1 Adapt the example's config.xml	45
7.2 Create a local installation source	45

Before you start to use any of the examples provided in the following chapters your build system has to have a valid installation source for the distribution you are about to create an image for. By default all examples will connect to the network to find the installation source. It depends on your network bandwidth how fast an image creation process is and in almost all cases it is better to prepare a local installation source first.

7.1 Adapt the example's config.xml

If you can make sure you have a local installation source it's important to change the path attribute inside of the `<repository>` element of the appropriate example to point to your local source directory. A typically default repository element looks like the following:

```
<repository type="yast2">
  <!--<source path="/image/CDs/full-11.0-i386"/>-->
  <source path="opensuse://openSUSE:11.0/standard/" />
</repository>
```

7.2 Create a local installation source

The following describes how to create a local SUSE installation source which is stored below the path: `/images/CDs` If you are using the local path as described in this document you only need to flip the given path information inside of the example config.xml file.

1. find your SUSE standard installation CDs or the DVD and make them available to the build system. Most linux systems auto-mount a previously inserted media automatically. If this is the case you simply can change the directory to the auto mounted path below `/media`. If your system doesn't mount the device automatically you can do this with the following command:

```
mount -o loop /dev/<drive-device-name> /mnt
```

2. You don't have a DVD but a CD set ? No problem all you need to do is copy the contents of **all** CDs into one directory. It's absolutely important that you first start with the **last** CD and copy the first CD at last. In case of CDs you should have a bundle of 4 CDs. Copy them in the order 4 3 2 1
3. Once you have access to the media copy the contents of the CDs / DVD to your hard drive. You need at least 4GB free space available. The following is intended to create a SUSE 11.0 installation source:

```
mkdir -p /image/CDs/full-11.0-i386/  
cp -a /mnt/* /image/CDs/full-11.0-i386/
```

Remember if you have a CD set start with number 4 first and after that unplug the CD and insert the next one to repeat the copy command until all CDs are copied into to /image

8 ISO image - Live Systems

Contents

8.1 Building the suse-live-iso example	47
8.2 Using the image	47
8.3 Flavours	48
8.3.1 Split mode	49

A live system image is an operating System on CD or DVD. In principal one can treat the CD/DVD as the hard disk of the system with the restriction that you can't write data on it. So as soon as the media is plugged into the computer the machine is able to boot from that media. After some time one can login to the system and work with it like on any other system. All write actions takes place in RAM space and therefore all changes will be lost as soon as the computer shuts down.

8.1 Building the suse-live-iso example

The latest example provided with kiwi is based on openSUSE 11.0 and includes the base + kde patterns.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.0
kiwi --prepare ./suse-live-iso \
    --root /tmp/myiso --add-profile KDE
```

```
kiwi --create /tmp/myiso \
    --type iso -d /tmp/myiso-result
```

8.2 Using the image

There are two ways to use the generated ISO image:

- Burn the .iso file on a CD or DVD with your preferred burn program. Plug in the CD or DVD into a test computer and (re)boot the machine. Make sure the computer boot from the CD drive as first boot device.
- Use a virtualisation system to test the image directly. Testing an iso can be done with any full virtual system for example:

```
cd /tmp/myiso-result
qemu -cdrom \
    ./suse-11.0-live-iso.i686-2.5.1.iso -m 256
```

8.3 Flavours

KIWI supports different filesystems and boot methods along with the ISO image type. The provided example by default uses a squashfs compressed root filesystem. By design of this filesystem it is not possible to write data on it. To be able to write on the filesystem another filesystem called aufs is used. aufs is an overlay filesystem which allows to combine two different filesystems into one. In case of a live system aufs is used to combine the squashfs compressed read only root tree with a tmpfs RAM filesystem. The result is a full writable root tree whereas all written data lives in RAM and is therefore not persistent. squashfs and/or aufs does not exist on all versions of SUSE and therefore the flags attribute in config.xml exists to be able to have the following alternative solutions:

- **flags="unified"**
Compressed and unified root tree as explained above
- **flags="compressed"**
Does filesystem compression with squashfs but don't use an overlay filesystem for write support. A symbolic link list is used instead and thus a split element is required in config.xml. See the Split mode section below for details.
- **flags="dmsquash"**
Creates an ext3 image file and puts that into a squashfs filesystem. On boot the root tree is mounted via a device mapper snapshot device to allow full write access over the complete tree. No other overlay filesystem is required.
- **flags="clirc"**
Creates a fuse based clicfs image and allows write operations into a cow file. In case of an ISO the write happens into a ramdisk.
- **flags not set**
If no flags attribute is set no compressed filesystem and no overlay filesystem will be used. The root tree will be directly part of the ISO filesystem and the paths: /bin, /boot, /lib, /lib64, /opt, /sbin and /usr will be read-only.

8.3.1 Split mode

If no overlay filesystem is in use but the image filesystem is based on a compressed filesystem KIWI allows to setup which files and directories should be writable in a so called split section. In order to allow to login into the system at least the /var directory should be writable because the PAM authentication requires to be able to report any login attempt to /var/log/messages which therefore needs to be writable. The following split section can be used if the flag compressed is used:

```
<split>
  <temporary>
    <file name="/var"/>
    <file name="/var/*"/>
    <file name="/boot"/>
    <file name="/boot/*"/>
    <file name="/etc"/>
    <file name="/etc/*"/>
    <file name="/home"/>
    <file name="/home/*"/>
  </temporary>
</split>
```


9 USB image - Live-Stick System

Contents

9.1 Building the suse-live-stick example	51
9.2 Using the image	52
9.3 Flavours	53
9.3.1 Split stick	53
9.3.2 LVM support	54

A live USB stick image is a system on USB stick which allows you to boot and run from this device without using any other storage device of the computer. It is urgently required that the BIOS of the system which you plug the stick in supports booting from USB stick. Almost all new BIOS systems support that. The USB stick serves as OS system disk in this case and you can read and write data onto it.

9.1 Building the suse-live-stick example

The latest example provided with kiwi is based on openSUSE 11.0 and makes use of the default plus x11 pattern. The operating system is stored on a standard ext3 filesystem.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.0
kiwi --prepare ./suse-live-stick \
    --root /tmp/mystick
```

There are two possible image types which allows you to drive the stick. Both are added into the config.xml of this example image description. If you already have access to the stick you want to run the image on the first approach should be preferred over the second one.

- The first image type named "usb" creates all required images for booting the OS but requires you to plug in the stick and let kiwi deploy the data onto this stick.

```
kiwi --create /tmp/mystick --type usb \  
-d /tmp/mystick-result
```

- The second image type named "oem" allows you to create a virtual disk which represents a virtual disk geometry including all partitions and boot information in one file. You simply can "dd" this file on the stick.

```
kiwi --create /tmp/mystick --type oem \  
-d /tmp/mystick-result
```

9.2 Using the image

To make use of the created images they need to be deployed on the USB stick. For the first image type (usb) you need kiwi itself to be able to deploy the image on the stick. The reason for this is that the usb image type has created the boot and the system image but there is no disk geometry or partition table available. kiwi creates a new partition table on the stick and imports the created images as follows:

```
kiwi --bootstick \  
/tmp/mystick-result/  
initrd-usbboot-suse-11.0.i686-2.1.1.splash.gz \  
--bootstick-system \  
/tmp/mystick-result/  
suse-11.0-live-stick.i686-1.1.2
```

In case of the second image type (oem) you only need a tool which allows you to dump data onto a device. On Linux the most popular tool to do this is the **dd** command. The oem image is represented by the file with the .raw extension. As said this is a virtual disk which already includes partition information. But this partition information does not match the real USB stick geometry which means the kiwi boot image (oemboot) has to adapt the disk geometry on first boot. To deploy the image on the stick call:

```
dd if=/tmp/mystick-result/\
   suse-11.0-live-stick.i686-1.1.2.raw \
   of=/dev/<stick-device> bs=32k
```

Testing of the live stick can be done with a test machine which boots from USB or with a virtualisation system. If you test with a virtualisation system for example qemu you should be aware that the USB stick looks like a normal disk to the system. The kiwi boot process searches for the USB stick to be able to mount the correct storage device but in a virtual environment the disk doesn't appear as a USB stick. So if your virtualisation solution doesn't provide a virtual BIOS which allows booting from USB stick you should test the stick on real hardware

9.3 Flavours

USB sticks weren't designed to serve as storage devices for operating systems. By design of these nice little gadgets their storage capacity is limited to only a few G-bytes. According to this KIWI supports compressed filesystems with USB sticks too:

- **filesystem="squashfs"**
This will compress the image using the squashfs filesystem. The boot process will automatically use aufs as overlay filesystem to mount the complete tree read-write. For the write part an additional ext2 partition will be created on the stick. The support for this compression layer requires squashfs and aufs to be present in the distribution KIWI has used to build the image
- **filesystem="dmsquash"**
Creates an ext3 image file and puts that into a squashfs filesystem. On boot the root tree is mounted via a device mapper snapshot device to allow full write access over the complete tree.
- **filesystem="clifs"**
Creates a fuse based clicfs image and allows write operations into a cow file.

9.3.1 Split stick

If there is no overlay filesystem available it is also possible to define a split section in config.xml and use the split support to split the image into a compressed read-only and a read-write portion. To create a split stick the types needs to be adapted as follows:

- **type setup for split usb type:**

```
<type image="split" fsreadwrite="ext3" fsreadonly="squashfs"  
  boot="usbboot/suse-11.0"/>
```

- **type setup for split oem type:**

```
<type image="split" fsreadwrite="ext3" fsreadonly="squashfs"  
  boot="oemboot/suse-11.0"/>
```

For both types a split section inside the type section is required which defines the read-write data. A good starting point is to set /var, /home and /etc as writable data.

```
<split>  
  <persistent>  
    <!-- allow read/write access to: -->  
    <file name="/var"/>  
    <file name="/var/*"/>  
    <file name="/etc"/>  
    <file name="/etc/*"/>  
    <file name="/home"/>  
    <file name="/home/*"/>  
  </persistent>  
</split>
```

If no split section is added the default split section from /usr/share/kiwi/modules/KIWISplit.txt is used

9.3.2 LVM support

kiwi also provides support for LVM (Logical Volume Management). In this mode the disk partition table will include one lvm partition and one standard ext2 boot partition. kiwi creates the kiwiVG volume group and adds logical volumes as they are needed and configured according to the image type and filesystem. After boot of the system the user has full control over the volume group and is free to change/resize/increase the group and the volumes inside. Support for LVM has been added for all image types which are disk based. This includes vmx,oem and usb. In order to use LVM for the usb type just add the `--lvm` option as part of the

kiwi kiwi --bootstick deployment or add the attribute **lvm="true"** as part of the **type** section in your config.xml file.

The optional **lvmvolumes** section can be used to set one or more top level directories into a separate volume. See the *KIWI image description* chapter for a detailed explanation.

10 VMX image - Virtual Disks

Contents

10.1 Building the suse-vm-guest example	57
10.2 Using the image	58
10.3 Flavours	58
10.3.1 VMware support	58
10.3.2 LVM support	59

A VMX image is a virtual disk image for use in full virtualisation systems like QEMU or VMware. The image is a file containing the system represented by the configured packages in config.xml as well as partition data and bootloader information. The size of this virtual disk can be specified by using the <size> element in the config.xml file or by adding the `--bootvm-disksize` command line argument.

10.1 Building the suse-vm-guest example

The vm-guest example provided with kiwi is based on recent openSUSE releases, one example configuration per release. The example uses base pattern and the virtual disk is formatted using the distribution default filesystem.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.2
kiwi --prepare ./suse-vm-guest \
    --root /tmp/myvm
```

```
kiwi --create /tmp/myvm \
    --type vmx -d /tmp/myvm-result
```

10.2 Using the image

The generated virtual disk image serves as the hard disk of the selected virtualization system (QEMU, VMware, etc.). The virtual hard disk format differs across virtualization environments. Some virtualization environments support multiple virtual disk formats. Using the QEMU virtualization environment the created image may be tested with the following command:

```
cd /tmp/myvm-result  
qemu suse-11.2-vm-guest.i686-1.1.2.raw -m 256
```

10.3 Flavours

Kiwi always generates a file in the .raw format. The .raw file is a disk image with a structure equivalent to the structure of a physical hard disk. Individual virtualization systems have specific formats to facilitate improved I/O performance to the virtual disk, represented by the image file, or additional specified virtual hard disk files. Kiwi will generate a specific format when the format attribute of the type element is specified.

```
<type image='vmx'... format='name' />
```

The following table lists the supported virtual disk formats

Name	Description
vvfat	Disk format DOS FAT32
vpc	Virtual PC read only disk
bochs	Disk format for Bochs emulator
dmg	Disk format for Mac OS X
cloop	Compressed loop
vmdk	Disk format for VMware
ovf	Open Virtual Format requires VMwares ovftool
qcow2	QEMU virtual disk format
qcow	QEMU virtual disk format
cow	QEMU virtual disk format

10.3.1 VMware support

A VMware image is accompanied by a guest configuration file. This file includes information about the hardware to be represented to the guest image by the VMware virtualization environment as well as specification of resources such as memory.

Within the config.xml file it is possible to specify the VMware configuration settings. In addition it is possible to include selected packages in the created image that are specific to the VMware image generation. The following config.xml snippet provides general guidance on the elements in config.xml.

```
<packages type="vmware">
  <!-- packages you need in VMware only -->
</packages>
<type.....>
  <vmwareconfig memory="512">
    <vmwaredisk controller="ide" id="0"/>
  </vmwareconfig>
</type>
```

Given the specification above Kiwi will create a VMware guest configuration specifying the availability of 512 MB of RAM and an IDE disk controller interface for the VM guest. For additional information about the configuration settings please refer to the **vmwareconfig** section.

The guest configuration can be loaded through VMware user interface and may be modified through the GUI. The configuration file has the .vmx extension as shown in the example below.

```
/tmp/myvm-result/suse-11.2-vm-guest.i686-1.1.2.vmx
```

Using the **format="vmdk"** attribute of the <type> element will create the VMware formatted disk image (.vmdk file) and the required VMware guest configuration (.vmx) file.

In addition it is possible to create an image for the Xen virtualization framework. By adding the **bootprofile** and **bootkernel** attributes to the <type> element with values of 'xen' and 'xenboot', respectively. Please refer to the [13](#) (Xen image) chapter for additional details.

10.3.2 LVM support

Kiwi also provides support for LVM (Logical Volume Management). In this mode the disk partition table will include one lvm partition and one standard ext2 boot partition. Kiwi creates the kiwiVG volume group and adds logical volumes as they are needed and configured according to the image type and filesystem. After boot of the system the user has full control over the volume group and is free to change/resize/increase the group and the volumes inside. Support for LVM has been added for all image types which are disk based. This includes vmx,oem and

usb. In order to use LVM for the vmx type just add the `--lvm` option as part of the Kiwi create step or add the attribute **lvm="true"** as part of the **type** section in your `config.xml` file.

```
kiwi --create /tmp/myvm --type vmx \  
    -d /tmp/myvm-result --lvm
```

With the optional **lvmvolumes** section you can set one or more top level directories into a separate volume. See the *KIWI image description* chapter for a detailed explanation.

11 PXE image - Thin Clients

Contents

11.1 Setting up the required services	61
11.1.1 atftp server	61
11.1.2 DHCP server	62
11.2 Building the suse-pxe-client example	62
11.3 Using the image	63
11.4 Flavours	64
11.4.1 The pxe client Control File	64
11.4.2 The pxe client Configuration File	64
11.4.3 User another than tftp as download protocol	69
11.4.4 RAM only image	70
11.4.5 union image	70
11.4.6 split image	70
11.4.7 root tree over NFS	71
11.4.8 root tree over NBD	71
11.4.9 root tree over AoE	72

A pxe image consists of a boot image and a system image like all other image types too. But with a pxe image the image files are available separately and needs to be copied at specific locations of a network boot server. PXE is a boot protocol implemented in most BIOS implementations which makes it so interesting. The protocol sends DHCP requests to assign an IP address and after that it uses tftp to download kernel and boot instructions.

11.1 Setting up the required services

Before you start to build pxe images with kiwi you should have setup the boot server. The boot server requires the services **atftp** and **DHCP** to run

11.1.1 atftp server

In order to setup the atftp server the following steps are required

1. install the packages atftp and kiwi-pxeboot

2. edit the file `/etc/sysconfig/atftpd` and set/modify the following variables:
 - `ATFTPD_OPTIONS="--daemon --no-multicast"`
 - `ATFTPD_DIRECTORY="/srv/tftpboot"`
3. run `atftpd` by calling the command: **`rcatftpd start`**

11.1.2 DHCP server

In contrast to the `atftp` server setup the following DHCP server setup can only serve as an example. Please note that according to your network structure the IP addresses, ranges and domain settings needs to be adapted in order to allow the DHCP server to work within your network. If you already have a DHCP server running in your network you should make sure that the filename and next-server information is provided by your server. The following steps describe how to setup a new DHCP server instance:

1. install the package `dhcp-server`
2. create the file `/etc/dhcpd.conf` and include the following statements:

```
option domain-name "example.org";
option domain-name-servers 192.168.100.2;
option broadcast-address 192.168.100.255;
option routers 192.168.100.2;
option subnet-mask 255.255.255.0;
default-lease-time 600;
max-lease-time 7200;
ddns-update-style none; ddns-updates off;
log-facility local7;

subnet 192.168.100.0 netmask 255.255.255.0 {
    filename "pxelinux.0";
    next-server 192.168.100.2;
    range dynamic-bootp 192.168.100.5 192.168.100.20;
}
```
3. edit the file `/etc/sysconfig/dhcpd` and setup the network interface the server should listen on:
 - `DHCPD_INTERFACE="eth0"`
4. run the `dhcp` server by calling: **`rcdhcpd start`**

11.2 Building the suse-pxe-client example

The example provided with `kiwi` is based on `openSUSE 11.0` and creates an image for a Wyse VX0 terminal with a 128MB flash card and 512MB of RAM. The image makes use of the `squashfs` compressed filesystem and its root tree is deployed as unified (`aufs`) based system.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.0
kiwi --prepare ./suse-pxe-client \
    --root /tmp/mypxe
```

```
kiwi --create /tmp/mypxe --type pxe \
    -d /tmp/mypxe-result
```

11.3 Using the image

In order to make use of the image all related image parts needs to be copied onto the boot server. According to the example the following steps needs to be performed:

1. Change working directory

```
cd /tmp/mypxe-result
```

2. Copy of the boot and kernel image

```
cp initrd-netboot-suse-11.0.i686-2.1.1.splash.gz \
    /srv/tftpboot/boot/initrd
cp initrd-netboot-suse-11.0.i686-2.1.1.kernel \
    /srv/tftpboot/boot/linux
```

3. Copy of the system image and md5 sum

```
cp suse-11.0-pxe-client.i686-1.2.8 \
    /srv/tftpboot/image
cp suse-11.0-pxe-client.i686-1.2.8.md5 \
    /srv/tftpboot/image
```

4. Copy of the image boot configuration

Normally the boot configuration applies to one client which means it is required to obtain the MAC address of this client. If the boot configuration should be used globally the KIWI generated file can be copied as config.default

```
cp suse-11.0-pxe-client.i686-1.2.8.config \
    /srv/tftpboot/KIWI/config.<MAC>
```

5. Check the PXE configuration file

The PXE configuration controls which kernel and initrd are loaded and which kernel parameters are set. When installing the kiwi-pxeboot package a default configuration is added. To make sure the configuration is valid according to this example the file `/srv/tftpboot/pxelinux.cfg/default` should provide the following information:

```
DEFAULT KIWI-Boot
```

```
LABEL KIWI-Boot
    kernel boot/linux
    append initrd=boot/initrd vga=0x314
    IPAPPEND 1
```

```
LABEL Local-Boot
    localboot 0
```

6. connect the client to the network and boot

11.4 Flavours

All the different PXE boot based deployment methods are controlled by the `config.<MAC>` (or `config.default`) file. When a new client boots up and there is no client configuration file the new client is registered by uploading a control file to the tftp server. The following sections inform about the control and the configuration file.

11.4.1 The pxe client Control File

This section describes the netboot client control file:

```
hwtype.<MAC Address>
```

The control file is primarily used to set up new netboot clients. In this case, there is no configuration file corresponding to the client MAC address available. Using the MAC address information, the control file is created, which is uploaded to the TFTP server's upload directory `/var/lib/tftpboot/upload`.

11.4.2 The pxe client Configuration File

This section describes the netboot client configuration file:

```
config.<MAC Address>
```

The configuration file contains data about image, configuration, synchronization, or partition parameters. The configuration file is loaded from the TFTP server directory `/var/lib/tftpboot/KIWI` via TFTP for previously installed netboot clients. New netboot clients are immediately registered and a new configuration file with the corresponding MAC address is created. The standard case for the deployment

of a pxe image is one image file based on a read-write filesystem which is stored onto a local storage device of the client. Below, find an example to cover this case.

```
DISK=/dev/sda
PART=5;S;x,x;L;/
IMAGE=/dev/sda2;suse-11.0-pxe-client.i686;1.2.8;192.168.100.2;4096
```

The following format is used:

```
IMAGE=device;name;version;srvip;bsize;compressed,...,
CONF=src;dest;srvip;bsize,..., src;dest;srvip;bsize
PART=size;id;Mount,...,size;id;Mount
DISK=device
```

- **IMAGE**

Specifies which image (name) should be loaded with which version (version) and to which storage device (device) it should be linked, e.g., **/dev/ram1** or **/dev/hda2**. The netboot client partition (device) **hda2** defines the root file system "/" and **hda1** is used for the swap partition. The numbering of the hard disk device should not be confused with the RAM disk device, where **/dev/ram0** is used for the initial RAM disk and can not be used as storage device for the second stage system image. SUSE recommends to use the device **/dev/ram1** for the RAM disk. If the hard drive is used, a corresponding partitioning must be performed.

- **srvip**

Specifies the server IP address for the TFTP download. Must always be indicated, except in PART.

- **bsize**

Specifies the block size for the TFTP download. Must always be indicated, except in PART. If the block size is too small according to the maximum number of data packages (32768), **linuxrc** will automatically calculate a new blocksize for the download.

- **compressed**

Specifies if the image file on the TFTP server is compressed and handles it accordingly. To specify a compressed image download only the keyword "**compressed**" needs to be added. If **compressed** is not specified the standard download workflow is used. **Note:** The download will fail if you specify "**compressed**" and the image isn't compressed. It will also fail if you don't specify "**compressed**" but the image is compressed. The name of the compressed image has to contain the suffix **.gz** and needs to be compressed with the **gzip** tool. Using a compressed image will automatically **deactivate** the multicast download option of **atftp**.

- **CONF**

Specifies a comma-separated list of source:target configuration files. The

source (src) corresponds to the path on the TFTP server and is loaded via TFTP. The download is made to the file on the netboot client indicated by the target (dest).

- **PART**

Specifies the partitioning data. The comma-separated list must contain the size (size), the type number (id), and the mount point (Mount). The size is measured in MB by default. Additionally all size specifications supported by the `sfdisk` program are allowed as well. The type number specifies the ID of the partition. Valid ID's are listed via the `sfdisk -list-types` command. The mount specifies the directory the partition is mounted to.

- The first element of the list must define the swap partition.
- The second element of the list must define the **root** partition.
- The swap partition must not contain a mount point. A lowercase letter **x** must be set instead.
- If a partition should take all the space left on a disk one can set a lower **x** letter as size specification.

- **DISK**

Specifies the hard disk. Used only with PART and defines the device via which the hard disk can be addressed, e.g., **/dev/hda**.

- **RELOAD_IMAGE**

If set to a non-empty string, forces the configured image to be loaded from the server even if the image on the disk is up-to-date. Used mainly for debugging purposes, this option only makes sense on diskful systems.

- **RELOAD_CONFIG**

If set to an non-empty string, forces all config files to be loaded from the server. Used mainly for debugging purposes, this option only makes sense on diskful systems.

- **COMBINED_IMAGE**

If set to an non-empty string, indicates that the both image specified needs to be combined into one bootable image, whereas the first image defines the read-write part and the second image defines the read-only part.

- **KIWI_INITRD**

Specifies the kiwi initrd to be used for local boot of the system. The variables value must be set to the name of the initrd file which is used via PXE network boot. If the standard tftp setup suggested with the kiwi-pxeboot package is used all initrd files resides in the **boot/** directory below the tftp server path **/var/lib/tftpboot**. Because the tftpserver do a chroot into the tftp server path you need to specify the initrd file as the following example shows: **KIWI_INITRD=/boot/<name-of-initrd-file>**

- **UNIONFS_CONFIG**

For netboot and usbboot images there is the possibility to use unionfs or aufs as container filesystem in combination with a compressed system image. The recommended compressed filesystem type for the system image is

squashfs. In case of a usb-stick system the usbboot image will automatically setup the unionfs/aufs filesystem. In case of a PXE network image the netboot image requires a config.<MAC> setup like the following example shows: **UNIONFS_CONFIG=/dev/sda2,/dev/sda3,aufs**. In this example the first device /dev/sda2 represents the read/write filesystem and the second device /dev/sda3 represents the compressed system image filesystem. The container filesystem aufs is then used to cover the read/write layer with the read-only device to one read/write filesystem. If a file on the read-only device is going to be written the changes inodes are part of the read/write filesystem. Please note the device specifications in UNIONFS_CONFIG must correspond with the IMAGE and PART information. The following example should explain the interconnections:

```
IMAGE=/dev/sda3;image/myImage;1.1.1;192.168.1.1;4096
PART=200;S;x,300;L;/,x;L;x
UNIONFS_CONFIG=/dev/sda2,/dev/sda3,aufs
DISK=/dev/sda
```

As the second element of the PART list must define the **root** partition it's absolutely important that the first device in UNIONFS_CONFIG references this device as read/write device. The second device of UNIONFS_CONFIG has to reference the given IMAGE device name.

- **KIWI_KERNEL_OPTIONS**

Specifies additional command line options to be passed to the kernel when booting from disk. For instance, to enable a splash screen, you might use 'vga=0x317 splash=silent'.

- **KIWI_BOOT_TIMEOUT**

Specifies the number of seconds to wait at the grub boot screen when doing a local boot. The default is 10.

- **NBDROOT**

Mount the system image root filesystem remotely via NBD (Network Block Device). This means there is a server which exports the root directory of the system image via a specified port. The kernel provides the block layer, together with a remote port that uses the nbd-server program. For more information on how to set up the server, see the nbd-server man pages. The kernel on the remote client can set up a special network block device named /dev/nb0 using the nbd-client command. After this device exists, the mount program is used to mount the root filesystem. To allow the KIWI boot image to use that, the following information must be provided:

```
NBDROOT=NBD.Server.IP.address;\
      NBD-Port-Number;/dev/NBD-Device;\
      NBD-Swap-Port-Number;/dev/NBD-Swap-Device;\
      NBD-Write-Port-Number;/dev/NBD-Write-Device
```

The NBD-Device, NBD-Swap-Port-Number, NBD-Swap-Device, NBD-Write-Port-Number and NBD-Write-Device variables are optional. If the nbd root device is not set, the default values (/dev/nb0 , port 2000) applies and if

the nbd swap device is not set the default values (/dev/nb1, port 9210) applies. The swap space over the network using a network block device is only established if the client has less than 48 MB of RAM. The optional NBD-Write-Port-Number and NBD-Write-Device specifies a write COW location for the root filesystem. aufs is used as overlay filesystem in this case.

- **AOEROOT**

Mount the system image root filesystem remotely via AoE (ATA over Ethernet). This means there is a server which exports a block device representing the the root directory of the system image via the AoE subsystem. The block device could be a partition of a real or a virtual disk. In order to use the AoE subsystem I recommend to install the *aoetools* and *vblade* packages from here first:

<http://download.opensuse.org/repositories/system:/aoetools>

Once installed the following example shows how to export the local /dev/sdb1 partition via AoE:

```
vbladed 0 1 eth0 /dev/sdb1
```

Some explanation about this command, each AoE device is identified by a couple Major/Minor, with major between 0-65535 and minor between 0-255. AoE is based just over Ethernet on the OSI models so we need to indicate which ethernet card we'll use. In this example we export /dev/sdb1 with a major value of 0 and minor of 1 on the eth0 interface. We are ready to use our partition on the network! To be able to use the device kiwi needs the information which AoE device contains the root filesystem. In our example this is the device /dev/etherd/e0.1. According to this the AOEROOT variable must be set as follows:

```
AOEROOT=/dev/etherd/e0.1
```

kiwi is now able to mount and use the specified AoE device as the remote root filesystem. In case of a compressed read-only image with aufs or clicfs the AOEROOT variable can also contain a device for the write actions:

```
AOEROOT=/dev/etherd/e0.1,/dev/ram1
```

Writing to RAM is the default but you also can set another device like another aoe location or a local device for writing the data

- **NFSROOT**

Mount the system image root filesystem remotely via NFS (Network File System). This means there is a server which exports the root filesystem of the network client in such a way that the client can mount it read/write. In order to do that, the boot image must know the server IP address and the path name where the root directory exists on this server. The information must be provided as in the following example:

```
NFSROOT=NFS.Server.IP.address;/path/to/root/tree
```

Optionally you can set a UNIONFS_CONFIG variable which defines an aufs based overlay NFS directory or device like:

```
UNIONFS_CONFIG=/tmp/kiwi-11.1-cow,nfs,aufs # write to NFS directory
UNIONFS_CONFIG=/dev/ram1,nfs,aufs # write to RAM
```

This way you can keep the original root tree clean from any modifications

- **KIWI_INITRD**

Specifies the KIWI initrd to be used for a local boot of the system. The value must be set to the name of the initrd file which is used via PXE network boot. If the standard TFTP setup suggested with the kiwi-pxeboot package is used, all initrd files reside in the `/srv/tftpboot/boot/` directory. Because the TFTP server does a chroot into the TFTP server path, you must specify the initrd file as follows:

```
KIWI_INITRD=/boot/name-of-initrd-file
```

- **KIWI_KERNEL**

Specifies the kernel to be used for a local boot of the system. The same path rules as described for KIWI_INITRD applies for the kernel setup:

```
KIWI_KERNEL=/boot/name-of-kernel-file
```

- **ERROR_INTERRUPT**

Specifies a message which is displayed during first deployment. Along with the message a shell is provided. This functionality should be used to send the user a message if it's clear the boot process will fail because the boot environment or something else influences the pxe boot process in a bad way.

11.4.3 User another than tftp as download protocol

By default all downloads controlled by the kiwi linuxrc code are performed by an `atftp` call and therefore uses the `tftp` protocol. With PXE the download protocol is fixed and thus you can't change the way how the kernel and the boot image (initrd) is downloaded. As soon as linux takes over control the following download protocols `http`, `https` and `ftp` are supported too. KIWI makes use of the **curl** program to support the additional protocols.

In order to select one of the additional download protocols the following kernel parameters needs to be setup:

- **kiwiserver**

Name or IP address of the server who implements the protocol

- **kiwiservertype**

Name of the download protocol which could be one of `http`, `https` or `ftp`

To setup this parameters edit the file `/srv/tftpboot/pxelinux.cfg/default` on your PXE boot server and change the **append** line accordingly. Please note all downloads except for kernel and initrd are now controlled by the given server and protocol. You need to make sure that this server provides the same directory and file structure as initially provided by the kiwi-pxeboot package.

11.4.4 RAM only image

If there is no local storage and no remote root mount setup the image can be stored into the main memory of the client. Please be aware that there should be still enough RAM space available for the operating system after the image has been deployed into RAM. Below, find an example:

- use a read-write filesystem in config.xml, for example **filesystem="ext3"**
- sample config.<MAC>

```
IMAGE=/dev/ram1;suse-11.0-pxe-client.i686;\
1.2.8;192.168.100.2;4096
```

11.4.5 union image

As used in the suse-pxe-client example it is possible to make use of the aufs or unionfs overlay filesystems to combine two filesystems into one. In case of thin clients there is often the need for a compressed filesystem due to space limitations. Unfortunately all common compressed filesystems provides only read-only access. Combining a read-only filesystem with a read-write filesystem is a solution for this problem. In order to use a compressed root filesystem make sure your config.xml's filesystem attribute contains either squashfs or dmsquash. Below, find an example:

```
DISK=/dev/sda
PART=5;S;x,62;L;/,x;L;x,
IMAGE=/dev/sda2;suse-11.0-pxe-client.i386;\
1.2.8;192.168.100.2;4096
UNIONFS_CONFIG=/dev/sda3,/dev/sda2,aufs
KIWI_INITRD=/boot/initrd
```

11.4.6 split image

As an alternative to the UNIONFS_CONFIG method it is also possible to create a split image and combine the two portions with the COMBINED_IMAGE method. This allows to use different filesystems without the need for an overlay filesystem to combine them together. Below find an example:

- add a split type in config.xml, for example
<type fsreadonly="squashfs" fsreadwrite="ext3" boot="netboot/suse-11.0">split</type>

- add a split section to describe the writable portion, for example:

```
<split>
  <persistent>
    <!-- allow read/write access to: -->
    <file name="/var"/>
    <file name="/var/*"/>
    <file name="/etc"/>
    <file name="/etc/*"/>
    <file name="/home"/>
    <file name="/home/*"/>
  </persistent>
</split>
```

- sample config.<MAC>

```
IMAGE=/dev/sda2;suse-11.0-pxe-client.i686;\
1.2.8;192.168.100.2;4096,\
/dev/sda3;suse-11.0-pxe-client-read-write.i686;\
1.2.8;192.168.100.2;4096
PART=200;S;x,500;L;/,x;L;
DISK=/dev/sda
COMBINED_IMAGE=yes
KIWI_INITRD=/boot/initrd
```

11.4.7 root tree over NFS

Instead of installing the image onto a local storage device of the client it is also possible to let the client mount the root tree via an NFS remote mount. Below find an example:

- Export the kiwi prepared tree via NFS
- sample config.<MAC>

```
NFSROOT=192.168.100.7;/tmp/kiwi.nfsroot
```

11.4.8 root tree over NBD

As an alternative for root over NFS it is also possible to let the client mount the root tree via a special network block device. Below find an example:

- Use nbd-server to export the kiwi prepared tree

- sample config.<MAC>

```
NBDR00T=192.168.100.7;2000;/dev/nbd0
```

11.4.9 root tree over AoE

As an alternative for root over NBD it is also possible to let the client mount the root device via a special ATA over Ethernet network block device. Below find an example:

- Use the vbladed command to bind a block device to an ethernet interface. The block device can be a disk partition or a loop device (losetup) but not a directory like with NBD
- sample config.<MAC>

```
AOER00T=/dev/etherd/e0.1
```

This would require the command **"vbladed 0 1 eth0 blockdevice"** to be called first

12 OEM image - Preload Systems

Contents

12.1 Building the suse-oem-preload example	73
12.2 Using the image	74
12.3 Flavors	75
12.3.1 Influencing the oem partitioning	75
12.3.2 LVM support	75

An oem image is a virtual disk image representing all partitions and bootloader information in the same fashion it exists on a physical disk. The image format matches the format of the VMX image type. All flavors discussed previously for the VMX image type apply to the OEM image type.

The basic idea behind an oem image is to provide the virtual disk data for OEM vendors to support easy deployment of the system to physical storage media. The deployment can be performed from any OS including Windows as long as a tool to dump data onto a disk device exists and is used. The oem image type may also be used to deploy an image on a USB stick. A USB stick is simply a removable physical storage device.

12.1 Building the suse-oem-preload example

The OEM example provided with kiwi is based on recent openSUSE releases, one example configuration per release, and includes the default and x11 patterns. The image type is a split type utilizing the distributions default filesystem format for the read-write partition and the squashfs filesystem for the read-only partition. Using the additional **format** attribute with the **iso** value creates an installable ISO image. When booting from the ISO image the OEM disk image will be deployed to the storage media on the booting machine (after confirmation by the user).

The commands provided below use the openSUSE 11.2 based example built for the x86 architecture.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.2
kiwi --prepare ./suse-oem-preload \
    --root /tmp/myoem
```

```
kiwi --create /tmp/myoem --type split \  
-d /tmp/myoem-result
```

12.2 Using the image

The virtual disk image created by kiwi with the commands shown above can be tested using virtualization software such as QEMU, VMware, or VirtualBox. The virtual disk is represented by the file with the .raw extension, whereas the file with the .iso extension represents the installation disk for this oem image. The ISO image is bootable (*filename.iso*) and can be burned to optical media. It is recommended to test the image on a bare test system. The following command shows how to use qemu to test the oem disk image (*filename.raw*).

```
cd /tmp/myoem-result  
qemu suse-11.2-oem-preload.i686-1.1.2.raw \  
-m 512
```

or using the **dd** command you can dump the image onto a test hard disk or USB stick and upon reboot select the appropriate device as the boot device in the BIOS:

```
cd /tmp/myoem-result  
dd if=suse-11.2-oem-preload.i686-1.1.2.raw \  
of=/dev/<device> bs=32k
```

Please note, when testing an oem image using the virtual disk image, i.e. the .raw file, the geometry of the disk image is not changed and therefore retains the disk geometry of the host system. This implies that the re-partitioning performed for a physical disk install during the oem boot workflow will be skipped.

You can test the installation procedure in a virtual environment using the .iso file. In this case the re-partitioning code in the boot image will be executed. The following commands show this procedure using QEMU.

```
qemu-img create -f qcow2 /tmp/test-oem-preload.img  
qemu /tmp/test-oem-preload.img \  
-cdrom /tmp/myoem-result/suse-11.2-oem-preload.i686-1.1.2.iso \  
-boot d
```

12.3 Flavors

As indicated above the use of the **format** attribute for the oem image supports the creation of an installation image. The installation image can be created in two formats, one suitable for CD/DVD media and a second suitable for a USB stick. The self installing image deploys the oem image onto the selected storage device. The installation process is a simple image dump using the dd command. During this process the target system remains in terminal mode. The following configuration snippets show the use of the **format** attribute to create the ISO or USB installation image format respectively.

- `<type image="name" ... format="iso"/>`
Creates a .iso file which can be burned in CD or DVD. This represents an installation CD
- `<type image="name" ... format="usb"/>`
Creates a .raw.install file which can be dumped (dd) on a USB stick. This represents an installation Stick

12.3.1 Influencing the oem partitioning

By default the oemboot process will create/modify a swap, /home and / partition. It is possible to influence the behavior with the oem-* elements. See the *KIWI image description* chapter for details.

12.3.2 LVM support

Kiwi also provides support for LVM (Logical Volume Management). In this mode the disk partition table will include one lvm partition and one standard ext2 boot partition. Kiwi creates the kiwiVG volume group, unless the lvmgroup attribute has been set, and adds logical volumes to the group as based on the configuration given by the **lvmvolumes** block for this type. The filesystem for the volume group is determined by the filesystem attribute of the type element. After booting the system the user has full control over the volume group and is free to change (re-size/increase) the group and the volumes inside. Support for LVM has been added for all disk based image types. This includes the vmx, oem and usb image types. In order to use LVM for the oem type just add the `--lvm` command line option when executing the create step or add the attribute **lvm="true"** to of the **type** element in your config.xml file.

```
kiwi --create /tmp/myoem --type oem \  
-d /tmp/myoem-result --lvm
```

With the optional **lvmvolumes** section you can specify to have one or more top level directories in a separate volume. See the *KIWI image description* chapter for

a detailed explanation.

13 XEN image - Paravirtual Systems

Contents

13.1 Building the suse-xen-guest example	77
13.2 Using the image	78
13.3 Flavours	78

Xen is a free software virtual machine monitor. It allows several guest operating systems to be executed on the same computer hardware at the same time.

A Xen system is structured with the Xen hypervisor as the lowest and most privileged layer.[1] Above this layer are one or more guest operating systems, which the hypervisor schedules across the physical CPUs. The first guest operating system, called in Xen terminology "domain 0" (dom0), is booted automatically when the hypervisor boots and given special management privileges and direct access to the physical hardware. The system administrator logs into dom0 in order to start any further guest operating systems, called "domain U" (domU) in Xen terminology.

A xen image is a filesystem based image file which requires the Xen dom0 running or the project called Xenner which emulates the capabilities of the domain 0. The image created with kiwi can only be used together with the xen tools.

13.1 Building the suse-xen-guest example

The latest example provided with kiwi is based on openSUSE 11.0 and includes the base pattern.

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.0
kiwi --prepare ./suse-xen-guest \
    --root /tmp/myxen
```

```
kiwi --create /tmp/myxen \
    --type xen -d /tmp/myxen-result
```

13.2 Using the image

In order to run a domain U the Xen tool **xm** needs to be called in conjunction with the KIWI generated domain U configuration file

```
xm create -c \  
    /tmp/myxen-result/  
    suse-11.0-xen-guest.i686-1.1.2.xenconfig
```

13.3 Flavours

With KIWI you can provide the information required to create a guest configuration as part of the config.xml file. Additionally you can group special packages which you may only need in this para virtual environment.

```
<packages type="xen">  
    <!-- packages you need in Xen only -->  
    <package name="kernel-xen"/>  
    <package name="xen"/>  
</packages>  
<type ....>  
    <xenconfig memory="512" domain="domU">  
        <xendisk device="/dev/sda"/>  
    </xenconfig>  
</type>
```

If this information is present KIWI will create a Xen domain U (or domain 0) configuration with 512 MB of RAM and expects the disk at /dev/sda. Additional information to setup the Xen guest machine properties are explained in the **xenconfig** section. The KIWI Xen domain U configuration is stored in the file:

```
/tmp/myxen-result/  
    suse-11.0-xen-guest.i686-1.1.2.xenconfig
```

14 EC2 image - Amazon Elastic Compute Cloud

Contents

14.1 Building the suse-ec2-guest example	79
14.2 Using the image	80

The Amazon Elastic Compute Cloud (Amazon EC2) web service provides you with the ability to execute arbitrary applications in our computing environment. To use Amazon EC2 you simply:

1. Create an Amazon Machine Image (AMI) containing all your software, including your operating system and associated configuration settings, applications, libraries, etc. Such an AMI can be created by the kiwi ec2 image type. In order to do that kiwi makes use of the tools provided by Amazon. Your build system should have these tools installed. Due to license issues we are not allowed to distribute the tools which means you need to download, install and setup them from here:
<http://docs.amazonwebservices.com/AmazonEC2/gsg/2006-06-26>
2. Upload this AMI to the Amazon S3 (Amazon Simple Storage Service) service. This gives us reliable, secure access to your AMI.
3. Register your AMI with Amazon EC2. This allows us to verify that your AMI has been uploaded correctly and to allocate a unique identifier for it.
4. Use this AMI ID and the Amazon EC2 web service APIs to run, monitor, and terminate as many instances of this AMI as required. Currently, Amazon provides command line tools and Java libraries but you may also directly access the SOAP-based API.

Please note while instances are running, you are billed for the computing and network resources that they consume. You should start creating an ec2 with kiwi after you can make sure your system is prepared for ec2 which means if you call the command **ec2-describe-images -a** you will get a valid output.

14.1 Building the suse-ec2-guest example

One example provided with kiwi is based on openSUSE 11.0 and includes the base pattern plus the vim editor.

Before you run kiwi you need to include some of your ec2 account information into the image description config.xml file. The box below shows the values you need to adapt:

```
<type image="ec2 primary="true"
  ec2accountnr="12345678911"
  ec2privatekeyfile="Path to EC2 private key file"
  ec2certfile="Path to EC2 public certificate file"
/>
```

After that call kiwi as follows:

```
cd /usr/share/doc/packages/kiwi/examples
cd suse-11.1
kiwi --prepare ./suse-ec2-guest \
  --root /tmp/myec2
```

```
kiwi --create /tmp/myec2 \
  --type ec2 -d /tmp/myec2-result
```

14.2 Using the image

The generated image needs to be transferred over to Amazon which is done by the ec2-upload-bundle tool. You can do this by calling:

```
ec2-upload-bundle -b myImages \
  -a <AWS Key ID> -s <AWS secret Key ID> \
  -m /tmp/myec2/\
    suse-11.1-ec2-guest.i686-1.1.2.ami.manifest.xml
```

After this is done the image needs to be registered in order to receive a so called AMI id which starts with **ami-** followed by a random key sequence. To register call:


```
ec2-register myImages/\
suse-11.1-ec2-guest.i686-1.1.2.ami.manifest.xml
```

The result is the AMI id which you need to run an instance from your image. The command `ec2-describe-images` allows you to review your registered images. Since you will be running an instance of a public AMI, you will need to use a public/private keypair to ensure that only you will have access. One half of this keypair will be embedded into your instance, allowing you to login securely without a password using the other half of the keypair. Every keypair you generate requires a name. Be sure to choose a name that is easy to remember, perhaps one that describes the image's content. For our example we'll use the name `gsg-keypair`.

```
ec2-add-keypair gsg-keypair
```

The private key returned needs to be saved in a local file so that you can use it later. Using your favorite text editor, create a file named `id_rsa-gsg-keypair` and paste everything between (and including) the `—BEGIN RSA PRIVATE KEY—` and `—END RSA PRIVATE KEY—` lines into it. To review your keypairs call:

```
ec2-describe-keypairs
```

We are almost done now but to be able to run an instances you also need to specify which kernel and boot image (initrd) should be used to run the instance. Kernels are registered as `aki-...` images and `initrd`'s are registered as `ari-...` images at Amazon. You will need to select a `aki/ari` image that matches your `ami`. The following table shows which Distributions are supported at the moment:

Distro	ARI id	AKI id	Arch
SLES11	ari-c31effaa	aki-c11effa8	ix86
SLES11	ari-cd1effa4	aki-cb1effa2	x86_64
openSUSE 11.1	n/a	n/a	ix86
openSUSE 11.1	n/a	n/a	x86_64

For this example we need the id's provided for openSUSE 11.1. Unfortunately there are no public ID's available at the moment. As soon as they are the following command are required to fire up your new `ec2` instance:

```
ec2-run-instances ami-... \
--kernel aki-... --ramdisk ari-... \
-k gsg-keypair
```

To check the state of your instance(s) call the following command:

```
ec2-describe-instances
```

If you see your instance at the status: **running** you can login into it. If you can't make sure you have allowed port 22 to be available

```
ec2-authorize default -p 22
```

Congratulations ! You made it and can now use Amazons storage and computing power.

15 KIWI testsuite

Contents

15.1 testsuite packages	83
15.2 Creating a test	83

The KIWI test suite is useful to perform basic quality checks on the image root directory. The test cases are stored in subdirectories below `/usr/share/kiwi/tests`. To run the testsuite call kiwi as follows:

```
kiwi --testsuite <image-root> \  
[ --test name --test name ... ]
```

If not test names are set the default tests rpm and ldd run. The name of a test corresponds with the name of the directory the test is implemented in.

15.1 testsuite packages

If a test requires special software to be installed but this software is not an essential part of the image itself it can be specified as testsuite packages in the system image `config.xml` as follows:

```
<packages type="testsuite">  
  <package name="..."/>  
</packages>
```

The testsuite packages are installed when calling kiwi with the testsuite option and are removed after the tests has finished.

15.2 Creating a test

The test itself is defined by a xml description "test-case.xml" and its template definition file `/usr/share/kiwi/modules/KIWISchemaTest.rnc` The following example shows the basic structure of the rpm test:

```
<test_case
  name="rpm"
  summary="check rpm database and verify all rpms"
  description="check if rpm db is present, run rpm's build-in Verify method"

  <requirements>
    <req type="directory">/var/lib/rpm</req>
    <req type="file">/var/lib/rpm/__db.000</req>
    <req type="file">/var/lib/rpm/Packages</req>
  </requirements>

  <test type="binary" place="extern">
    <file>rpm.sh</file>
    <params>CHROOT</params>
  </test>
</test_case>
```

There are basically two sections called "requirements" and "test". In requirements you define what files/directories or packages has to be present in your image to run the test. For example if you need to check the rpm database, the database has to be present within the image. All requirements are checked, and if any of them fail the test won't be executed and an error message is printed. There are three types of requirements:

- **file**
Existence of a file
- **directory**
Existence of a directory
- **rpm-package**
Existence of a package

The test section defines the test script. It could be a binary, shell script or any other kind of executable. Scripts are expected to be in the same directory as where the xml definition for the test resides. There are two types of scripts, extern and intern.

- external scripts are executed outside of the image and are preferred. Their first parameter should be CHROOT. This parameter is changed to the real path of the image chroot directory.
- internal scripts are executed inside image using the "chroot" command. Files are copied into the image and deleted after execution.

A test script always has to return 0 in case of a test to pass, or 1 if any error occur. All messages printed to standard and error output are stored and printed out of the test has failed.

Index

Appendix, [84](#)

configuration files

config.<MAC Address>, [64](#)

hwtype.<MAC Address>, [64](#)

KIWI images

appliance, [34](#)

description, [12](#)

ec2, [78](#)

iso, [46](#)

maintenance, [38](#)

migration, [40](#)

oem, [72](#)

pxe, [60](#)

testing, [82](#)

usb, [49](#)

vmx, [55](#)

workflow, [7](#)

xen, [76](#)

KIWI Setup of installation sources

instsourcesetup, [43](#)

16 Appendix - Kiwi man pages

The following pages will show you the man page of kiwi and the functions which can be used within config.sh and index.sh

- `man kiwi`
- `man kiwi::config.sh`
- `man kiwi::index.sh`

Name

kiwi — Creating Operating System Images

Synopsis

```
kiwi { -l|--list }
```

```
kiwi { -o|--clone } image-path { -d } destination
```

```
kiwi { -b|--build } image-path { -d } destination
```

Basics

KIWI is a complete imaging solution that is based on an image description. Such a description is represented by a directory which includes at least one `config.xml` file and may as well include other files like scripts or configuration data. The `kiwi-templates` package provides example descriptions based on a JeOS system. JeOS means Just enough Operating System. KIWI provides image templates based on that axiom which means a JeOS is a small, text only based image including a predefined remote source setup to allow installation of missing software components at a later point in time.

Detailed description of the kiwi image system exists in the system design document in file:///usr/share/doc/packages/kiwi/kiwi.pdf. KIWI always operates in two steps. The `kiwi --build` option just combines both steps into one to make it easier to start with kiwi. The first step is the preparation step and if that step was successful, a creation step follows which is able to create different image output types. If you have started with an example and want to add you own changes it might be a good idea to clone of from this example. This can be done by simply copying the entire image description or you can let kiwi do that for you by using the `kiwi --clone` command.

In the preparation step, you prepare a directory including the contents of your new filesystem based on one or more software package source(s) The creation step is based on the result of the preparation step and uses the contents of the new image root tree to create the output image. If the image type ISO was requested, the output image would be a file with the suffix `.iso` representing a live system on CD or DVD. Other than that kiwi is able to create images for virtual and para-virtual (Xen) environments as well as for USB stick, PXE network clients and OEM customized Linux systems.

Image Preparation and Creation

```
kiwi { -p|--prepare } image-path  
[ -r|--root image-root]
```

```
kiwi { -c|--create } image-root  
{ -d|--destdir destination } [--type image-type]
```


Image Upgrade

If the image root tree is stored and not removed, it can be used for upgrading the image according to the changes made in the repositories used for this image. If a distributor provides an update channel for package updates and an image `config.xml` includes this update channel as repository, it is useful to store the image root tree and upgrade the tree according to changes on the update channel. Given that the root tree exists it's also possible to add or remove software and recreate the image of the desired type

```
kiwi { -u | --upgrade } image-root [--add-packagename]
```

System to Image Migration

The migration module allows you to migrate your currently running system into an image description. The module will check for files not managed by a package manager and also inspects your system for package pattern and file consistency according to the currently active repositories. The system requires the zypper backend in order to work properly. By default a HTML based report file is created which contains important information about the system. You are free to ignore that information but with the risk that the migrated image does not represent the same system which is running at the moment. If the perform option is set an image description is created with the collected information. The less issues left in the report the better is the result. In most cases a manual fine tuning is required. This includes the repository selection and the unmanaged files along with the configuration details of your currently running operating system. You should understand the module as a helper to migrate running servers into images. The implementation is still under construction so expect better migration results in future releases :)

```
kiwi { -m | --migrate } name --destdir destination-path [--exclude directory...] [--perform]
```

Image Postprocessing Modes

The KIWI post-processing modes are used for special image deployment tasks, like installing the image on a USB stick. So to say they are the third step after preparation and creation. kiwi calls the postprocessing modules automatically according to the specified output image type and attributes but it's also possible to call them manually.

```
kiwi --bootstick initrd [--bootstick-system systemImage] [--bootstick-device device]
```

```
kiwi --bootvm initrd --bootvm-system systemImage [--bootvm-disksize size] [--bootvm-format format]
```

```
kiwi --bootcd initrd
```

```
kiwi --installed initrd --installed-system vmx-system-image
```

```
kiwi --installstick initrd --installstick-system vmx-system-image
```

Testsuite

The KIWI test suite is useful to perform basic quality checks on the image root directory. The test cases are stored in subdirectories below `/usr/share/kiwi/tests`.

```
kiwi --testsuite image-root [--test name...]
```

Helper Tools

The helper tools provide optional functions like creating a crypted password string for the users section of the `config.xml` file or signing the image description with an md5sum hash as well as adding splash data to the boot image used by the bootloader and the testsuite mode which allows testing the integrity of the new root tree.

```
kiwi --createpassword
```

```
kiwi --createhash image-path
```

```
kiwi { -i | --info } ImagePath [--select  
repo-patterns|patterns|types|sources|size|profiles|packages ]
```

```
kiwi --setup-splash initrd
```

The following list describes the helper tools more detailed

```
[--createpassword]
```

Create a crypted password hash and prints it on the console. The user can use the string as value for the `pwd` attribute in the XML users section

```
[--createhash image-path]
```

Sign your image description with a md5sum. The result is written to a file named `.checksum.md` and is checked if kiwi creates an image from this description

```
[ -i | --info image-path --select selection ]
```

List general information about the image description. So far you can get information about the available patterns in the configured repositories with *repo-patterns*, a list of used patterns for this image with *patterns*, a list of supported image types with *types*, a list of source URL's with *sources*, an estimation about the install size and the size of the packages marked as to be deleted with *size*, a list of profiles with *profiles*, and a list of solved packages to become installed with *packages*.

```
[--setup-splash initrd]
```

Create splash screen from the data inside the `initrd` and re-create the `initrd` with the splash screen attached to the `initrd` cpio archive. This enables the kernel to load the splash screen at boot time. If splashy is used only a link to the original `initrd` will be created

Global Options

```
[--base-root base-path]
```

Refers to an already prepared root tree. Kiwi will use this tree to skip the first stage of the prepare step and run the second stage directly.

kiwi

[--base-root-mode *copy/union/recycle*]

Specifies the overlay mode for the base root tree. This can be either a copy of the tree, a union mount or the tree itself. The last mode (recycle) will modify the base root tree which might make it obsolete as base root for other kiwi calls

[--add-profile *profile-name*]

Use the specified profile. A profile is a part of the XML image description and therefore can enhance each section with additional information. For example adding packages.

[--set-repo *URL*]

Set/Overwrite repo URL for the first listed repo. The change is temporary and will not be written to the XML file.

[--set-repotype *type*]

Set/Overwrite repo type for the first listed repo. The supported repo types depends on the packagemanager. Commonly supported are rpm-md, rpm-dir and yast2. The change is temporary and will not be written to the XML file.

[--set-repoalias *name*]

Set/Overwrite alias name for the first listed repo. Alias names are optional free form text. If not set the source attribute value is used and builds the alias name by replacing each '/' with a '_'. An alias name should be set if the source argument doesn't really explain what this repository contains. The change is temporary and will not be written to the XML file.

[--set-repoprio *number*]

Set/Overwrite priority for the first listed repo. Works with the smart packagemanager only. The Channel priority assigned to all packages available in this channel (0 if not set). If the exact same package is available in more than one channel, the highest priority is used.

[--add-repo *URL*, --add-repotype *type* --add-repoalias *name* --add-repoprio *number*]

Add the given repository and type for this run of an image prepare or upgrade process. Multiple --add-repo/--add-repotype options are possible. The change will not be written to the config.xml file

[--ignore-repos]

Ignore all repositories specified so far, in XML or elsewhere. This option should be used in conjunction with subsequent calls to --add-repo to specify repositories at the commandline that override previous specifications.

[--logfile *Filename* | *terminal*]

Write to the log file *Filename* instead of the terminal.

[--gzip-cmd *cmd*]

Specify an alternate command to run when compressing boot and system images. Command must accept **gzip** options.

[--log-port *PortNumber*]

Set the log server port. By default port 9000 is used. If multiple KIWI processes runs on one system it's recommended to set the logging port per process.

[--package-manager *smart/zypper*]

Set the package manager to use for this image. If set it will temporarily overwrite the value set in the xml description.

[--target-arch *i586/x86_64/armv5tel/ppc*]

Set a special target-architecture. This overrides the used architecture for the image-packages in zypp.conf. When used with smart this option doesn't have any effect.

[--debug]

Prints a stack trace in case of internal errors

[--verbose *1/2/3*]

Controls the verbosity level for the instsource module

Image Preparation Options

`[-r|--root RootPath]`

Set up the physical extend, chroot system below the given root-path path. If no `--root` option is given, KIWI will search for the attribute `defaultroot` in `config.xml`. If no root directory is known, a `mktmp` directory will be created and used as root directory.

`[--force-new-root]`

Force creation of new root directory. If the directory already exists, it is deleted.

Image Upgrade/Preparation Options

`[--add-package package]`

Add the given package name to the list of image packages multiple `--add-package` options are possible. The change will not be written to the xml description.

`[--del-package package]`

Removes the given package by adding it the list of packages to become removed. The change will not be written to the xml description.

Image Creation Options

`[-d|--destdir DestinationPath]`

Specify destination directory to store the image file(s) If not specified, KIWI will try to find the attribute `defaultdestination` which can be specified in the `preferences` section of the `config.xml` file. If it exists its value is used as destination directory. If no destination information can be found, an error occurs.

`[-t|--type Imagetype]`

Specify the output image type to use for this image. Each type is described in a `type` section of the preferences section. At least one type has to be specified in the `config.xml` description. By default, the types specifying the `primary` attribute will be used. If there is no primary attribute set, the first type section of the preferences section is the primary type. The types are only evaluated when kiwi runs the `--create` step. With the option `--type` one can distinguish between the types stored in `config.xml`

`[-s|--strip]`

Strip shared objects and executables only make sense in combination with `--create`

`[--prebuiltbootimage Directory]`

Search in *Directory* for pre-built boot images.

`[--isochekc]`

in case of an iso image the checkmedia program generates a md5sum into the iso header. If the `--isochekc` option is specified a new boot menu entry will be generated which allows to check this media

`[--lvm]`

Use the logical volume manager to control the disk. The partition table will include one lvm partition and one standard ext2 boot partition. Use of this option makes sense for the create step only and also only for the image types: vmx, oem and usb

`[--fs-blocksize number]`

When calling kiwi in creation mode this option will set the block size in bytes. For ISO images with the old style ramdisk setup a blocksize of 4096 bytes is required

`[--fs-journalsize number]`

kiwi

When calling kiwi in creation mode this option will set the journal size in mega bytes for ext[23] based filesystems and in blocks if the reiser filesystem is used

`[--fs-inodesize number]`

When calling kiwi in creation mode this option will set the inode size in bytes. This option has no effect if the reiser filesystem is used

`[--fs-inoderatio number]`

Set the bytes/inode ratio. This option has no effect if the reiser filesystem is used

`[--fs-max-mount-count number]`

When calling kiwi in creation mode this option will set the number of mounts after which the filesystem will be checked. Set to 0 to disable checks. This option applies only to ext[234] filesystems.

`[--fs-check-interval number]`

When calling kiwi in creation mode this option will set the maximal time between two filesystem checks. Set to 0 to disable time-dependent checks. This option applies only to ext[234] filesystems.

`[--partitioner fdisk/parted]`

Select the tool to create partition tables. Supported are fdisk (sfdisk) and parted. By default fdisk is used

`[--check-kernel]`

Activates check for matching kernels between boot and system image. The kernel check also tries to fix the boot image if no matching kernel was found.

For More Information

More information about KIWI, its files can be found at:

http://en.opensuse.org/Build_Service/KIWI/Cookbook

 KIWI wiki

`config.xml`

 The configuration XML file that contains every aspect for the image creation.

`file:///usr/share/doc/packages/kiwi/kiwi.pdf`

 The system design document which describes some details about the building process.

`file:///usr/share/doc/packages/kiwi/schema/kiwi.xsd.html`

 The KIWI RelaxNG XML Schema documentation.

`file:///usr/share/doc/packages/kiwi/schema/test.xsd.html`

 The KIWI RelaxNG XML Schema documentation.

Name

KIWI::config.sh — Configuration File for KIWI image description

Description

The kiwi image description allows to have an optional config.sh script in place. This script should be designed to take over control of adding the image operating system configuration. Configuration in that sense means stuff like activating services, creating configuration files, prepare an environment for a firstboot workflow, etc. What you shouldn't do in config.sh is breaking your systems integrity by for example removing packages or pieces of software. Something like that can be done in images.sh. config.sh is called *after* the user and groups have been set up. If there are SUSE Linux related YaST xml information these are validated before config.sh is called too. If you exit config.sh with an exit code != 0 kiwi will exit with an error too.

Example 1. Template

```
#=====
# Functions...
#-----
test -f /.kconfig && . /.kconfig
test -f /.profile && . /.profile

#=====
# Greeting...
#-----
echo "Configure image: [$kiwi_iname]..."

#=====
# Call configuration code/functions
#-----
...

#=====
# Exit safely
#-----
exit
```

Common functions

The .kconfig file allows to make use of a common set of functions. Those which are SUSE Linux specific starts with the name *suse*. Those which are common to all linux systems starts with the name *base*. The following list describes which functions are available for config.sh

[baseCleanMount]

Umount the system filesystems /proc /dev/pts /sys

[baseDisableCtrlAltDel]

Disable the Ctrl-Alt-Del key sequence setting in /etc/inittab

[baseGetPackagesForDeletion]

Return the name(s) of packages which will be deleted

[baseGetProfilesUsed]

Return the name(s) of profiles used to build this image

[baseSetRunlevel {value}]

Set the default run level

[baseSetupBoot]

Set up the linuxrc as init

[baseSetupBusyBox {-f}]

activates busybox if installed for all links from the busybox/busybox.links file - you can choose custom apps to be forced into busybox with the "-f" option as first parameter example:

baseSetupBusyBox -f /bin/zcat /bin/vi

[baseSetupInPlaceGITRepository]

Create an in place git repository of the root directory. This process may take some time and you may expect problems with binary data handling

[baseSetupInPlaceSVNRepository {path_list}]

Create an in place subversion repository for the specified directories. A standard call could look like this baseSetupInPlaceSVNRepository /etc /srv /var/log

[baseSetupPlainTextGITRepository]

Create an in place git repository of the root directory containing all plain/text files.

[baseSetupUserPermissions]

Search all home directories of all users listed in /etc/passwd and change the ownership of all files to belong to the correct user and group

[baseStripAndKeep {list of info-files to keep}]

helper function for strip* functions read stdin lines of files to check for removing params: files which should be keep

[baseStripDocs {list of docu names to keep}]

remove all documentation, except one given as parameter

[baseStripInfos {list of info-files to keep}]

remove all info files, except one given as parameter

[baseStripLocales {list of locales}]

remove all locales, except one given as parameter

[baseStripMans {list of manpages to keep}]

remove all manual pages, except one given as parameter example: baseStripMans more less

[baseStripRPM]

remove rpms defined in config.xml under image=delete section

[baseStripTools {list of toolpath} {list of tools}]

helper function for suseStripInitrd function params: toolpath , tools

[baseStripUnusedLibs]

remove libraries which are not directly linked against applications in the bin directories

[baseUpdateSysConfig {filename} {variable} {value}]

update sysconfig variable contents

[Debug {message}]

Helper function to print a message if the variable DEBUG is set to 1

[Echo {echo commandline}]

Helper function to print a message to the controlling terminal

[Rm {list of files}]

Helper function to delete files and announce it to log

[Rpm {rpm commandline}]

Helper function to the rpm function and announce it to log

[suseActivateDefaultServices]

Call all postin scriptlets which among other things activates all required default services using suseInsertService

[suseActivateServices]

Check all services in /etc/init.d/ and activate them by calling suseInsertService

[suseCloneRunlevel {runlevel}]

Clone the given runlevel to work in the same way as the default runlevel 3.

[suseConfig]

Setup keytable language and timezone if specified in config.xml and call SuSEconfig afterwards

[suseInsertService {servicename}]

Recursively insert a service. If there is a service required for this service it will be inserted first. The suse insserv program is used here

[suseRemoveService {servicename}]

Remove a service and its dependant services using the suse insserv program

[suseService {servicename} {onloff}]

Activate/Deactivate a service by using the chkconfig program The function requires the service name and the value on or off as parameters

[suseServiceDefaultOn]

Activates the following services to be on by default using the chkconfig program: boot.rootfsck boot.cleanup boot.localfs boot.localnet boot.clock policykitd dbus consolekt haldaemon network atd syslog cron kbd

[suseSetupProductInformation]

This function will use zypper to search for the installed product and install all product specific packages. This function only makes sense if zypper is used as packagemanager

[suseStripPackager {-a}]

Remove smart o zypper packages and db files Also remove rpm package and db if "-a" given

Profile environment variables

The .profile environment file contains a specific set of variables which are listed below. Some of the functions above makes use of the variables.

[\$kiwi_compressed]

The value of the compressed attribute set in the type element in config.xml

[\$kiwi_delete]

A list of all packages which are part of the packages section with type='delete' in config.xml

[\$kiwi_drivers]

A comma seperated list of the driver entries as listed in the drivers section of the config.xml. Similar variables exists for the usbdrivers and scsidrivers sections

[\$kiwi_iname]

The name of the image as listed in config.xml

[\$kiwi_iversion]

The image version string major.minor.release

[\$kiwi_keytable]

The contents of the keytable setup as done in config.xml

[\$kiwi_language]

The contents of the locale setup as done in config.xml

[\$kiwi_profiles]

A list of profiles used to build this image

[\$kiwi_size]

The predefined size value for this image. This is not the computed size but only the optional size value of the preferences section in config.xml

[\$kiwi_timezone]

The contents of the timezone setup as done in config.xml

[\$kiwi_type]

kiwi::config.sh

The basic image type. Can be a simply filesystem image type of ext2 ext3 reiserfs squashfs cpio or one of the following complex image types: iso split usb vmx oem xen pxe

Name

KIWI::images.sh — Configuration File for KIWI image description

Description

The kiwi image description allows to have an optional images.sh script in place. This script is called at the beginning of the kiwi create step. It is allowed to remove software there to shrink down the size of the image. Most often images.sh is used for boot images because they need to be small. As images.sh is called in the create step you should be aware to design the script in a way that it can be called multiple times without shooting itself into its knee. As kiwi allows to create different image types from one previously prepared tree one needs to take into account that images.sh can be called more than one time. If you exit images.sh with an exit code != 0 kiwi will exit with an error too.

Example 1. Template

```
#=====
# Functions...
#-----
test -f /.kconfig && . /.kconfig
test -f /.profile && . /.profile

#=====
# Greeting...
#-----
echo "Configure image: [$kiwi_iname]..."

#=====
# Call configuration code/functions
#-----
...

#=====
# Exit safely
#-----
exit
```

Common functions

The .kconfig file allows to make use of a common set of functions. Those which are SUSE Linux specific starts with the name *suse*. Those which are common to all linux systems starts with the name *base*. The following list describes which functions are available for images.sh

[baseCleanMount]

Umount the system filesystems /proc /dev/pts /sys

[baseGetProfilesUsed]

Return the name(s) of profiles used to build this image

[baseGetPackagesForDeletion]

kiwi::images.sh

Return the list of packages setup in the packages type='delete' section of the config.xml used to build this image

[baseSetupOEMPartition]

Writes the file /config.oempartition depending on the following config.xml parameters: oem-reboot, oem-swapspace, oem-systemsize, oem-home, oem-swap, oem-boot-title, oem-recovery, oem-kiwi-initrd. kiwi takes the information from config.xml and creates the config.oempartition file as part of the automatically created boot image (initrd). The information must be available as part of the boot image because it controls the OEM repartition workflow on first boot of an OEM image. Detailed information about the meaning of each option can be found in the OEM chapter in the kiwi cookbook

[suseGFXBoot {theme} {loadertyp}]

This function requires the gfxboot and at least one bootsplash-theme-* package to be installed in order to work correctly. The function creates from this package data a graphics boot screen for the isolinux and grub boot loaders. Additionally it creates the bootsplash files for the resolutions 800x600 1024x768 and 1280x1024

[suseStripKernel]

This function removes all kernel drivers which are not listed in the *drivers sections of the config.xml file

[suseStripInitrd]

This function removes a whole bunch of tools binaries and libraries which are not required in order to boot a suse system with kiwi.

[Rm {list of files}]

Helper function to delete files and announce it to log

[Rpm {rpm commandline}]

Helper function to the rpm function and announce it to log

[Echo {echo commandline}]

Helper function to print a message to the controlling terminal

[Debug {message}]

Helper function to print a message if the variable DEBUG is set to 1

Profile environment variables

The .profile environment file contains a specific set of variables which are listed below. Some of the functions above makes use of the variables.

[\$kiwi_iname]

The name of the image as listed in config.xml

[\$kiwi_iversion]

The image version string major.minor.release

[\$kiwi_keytablee]

The contents of the keytable setup as done in config.xml

[\$kiwi_language]

The contents of the locale setup as done in config.xml

[\$kiwi_timezone]

The contents of the timezone setup as done in config.xml

[\$kiwi_delete]

A list of all packages which are part of the packages section with type='delete' in config.xml

[\$kiwi_profiles]

A list of profiles used to build this image

[\$kiwi_drivers]

A comma seperated list of the driver entries as listed in the drivers section of the config.xml. Similar

kiwi::images.sh

variables exists for the usbdrivers and scsidrivers sections

[`$kiwi_size`]

The predefined size value for this image. This is not the computed size but only the optional size value of the preferences section in config.xml

[`$kiwi_compressed`]

The value of the compressed attribute set in the type element in config.xml

[`$kiwi_type`]

The basic image type. Can be a simply filesystem image type of ext2 ext3 reiserfs squashfs cpio or one of the following complex image types: iso split usb vmx oem xen pxe