



1.3 EPD Driving Flow Chart

The flowchart below provides an overview of the necessary actions to update the EPD. The steps below refer to the detailed descriptions in the respective sections.

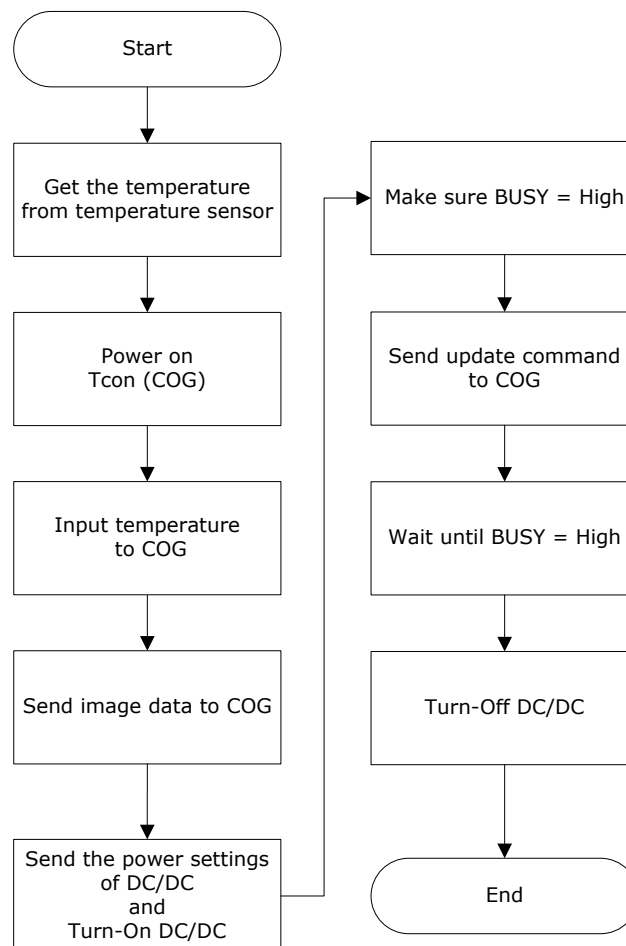

1.4 Overall Waveform

The diagram below provides a signal control overview during an EPD update cycle.

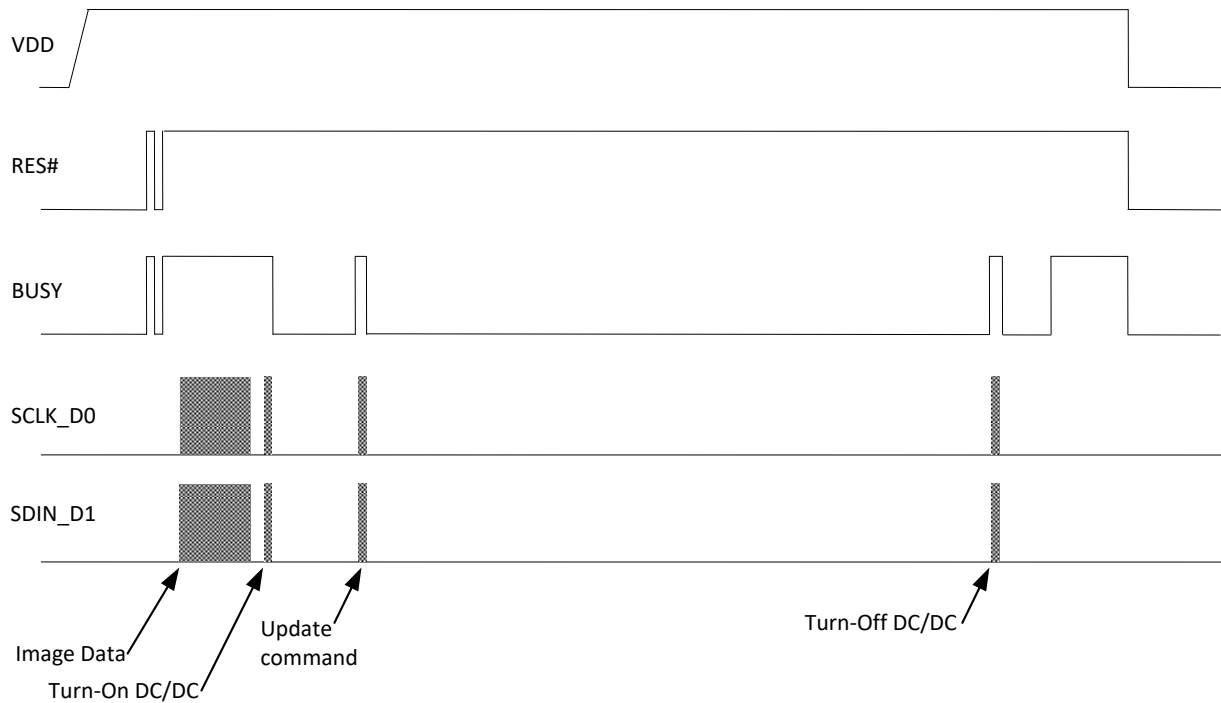

1.5 SPI Timing Format

SPI commands are used to communicate between the MCU and the COG Driver. The SPI format used differs from the standard in that two-way communications are not used, and CS is pulled high then low between clocks. When setting up the SPI timing, PDI recommends verify both the SPI command format and SPI command timing in this section.

The maximum clock speed of the display is 10MHz.

- Below is a description of the SPI Format:


SPI(0xI, 0xD0, 0xD1, 0xD2, ...)

Where:


I is the Register Index and the length is 1 byte

D0~n is the Register Data. The Data length is variable by different Register Index.


- SPI command signals and flowchart:

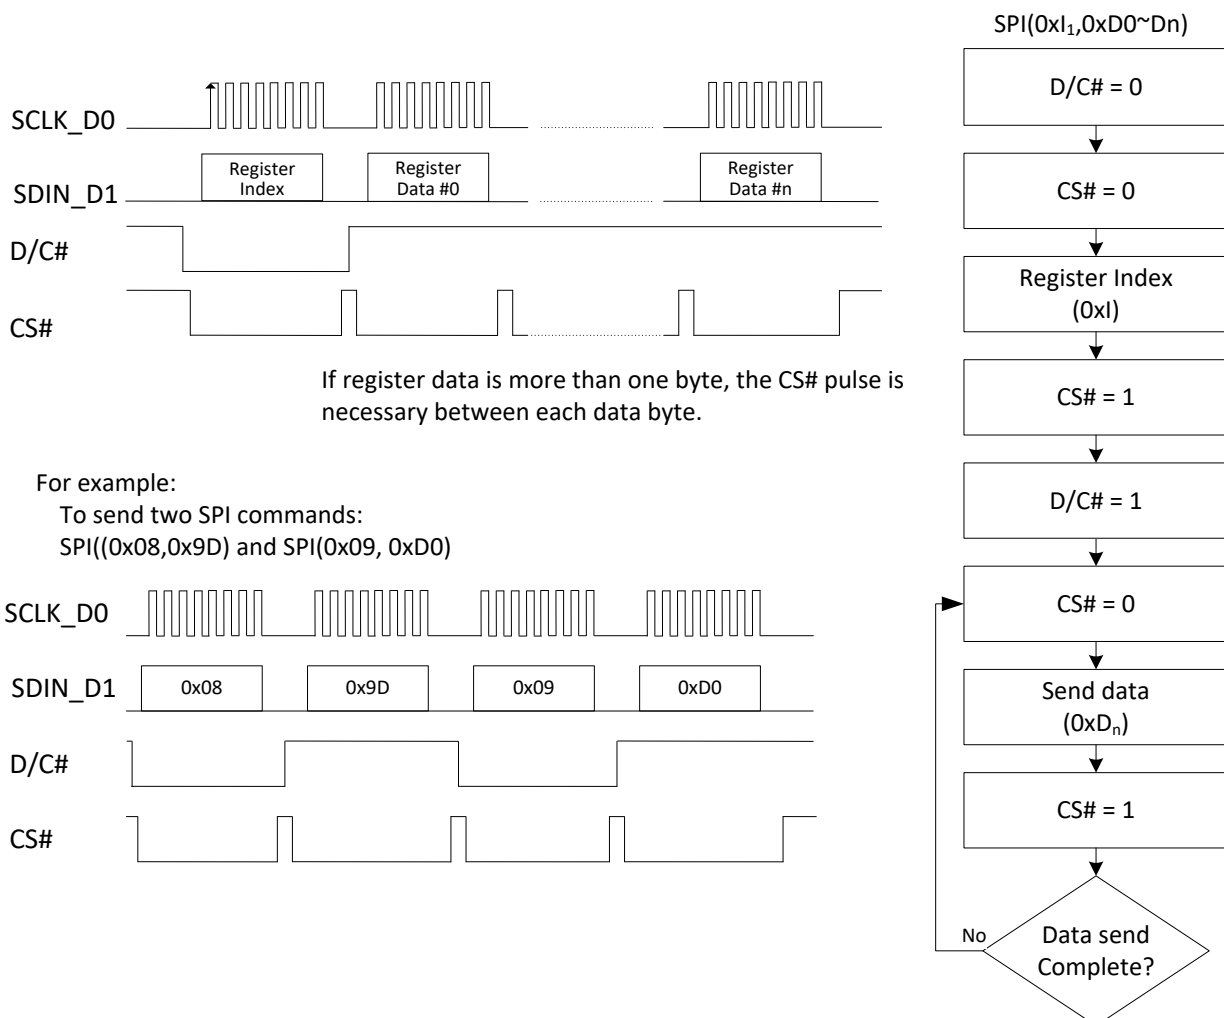

- SPI command timing

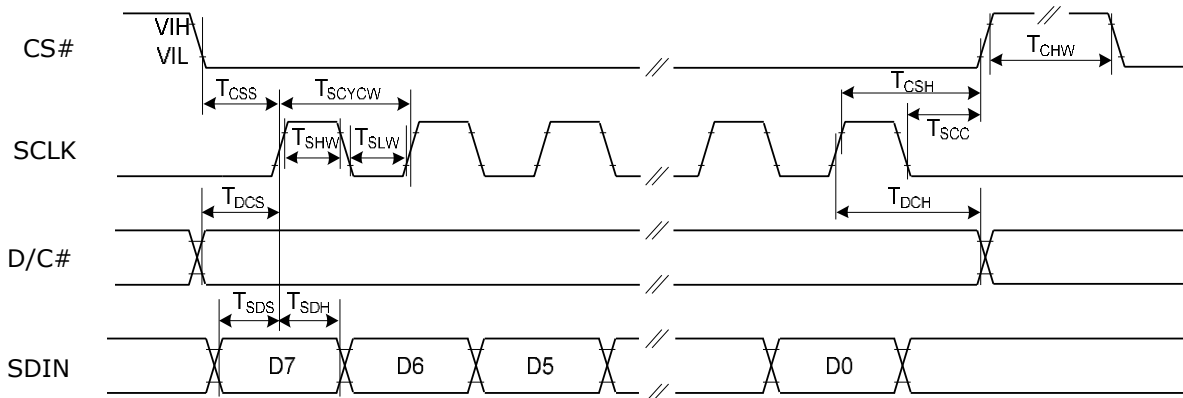

Write mode

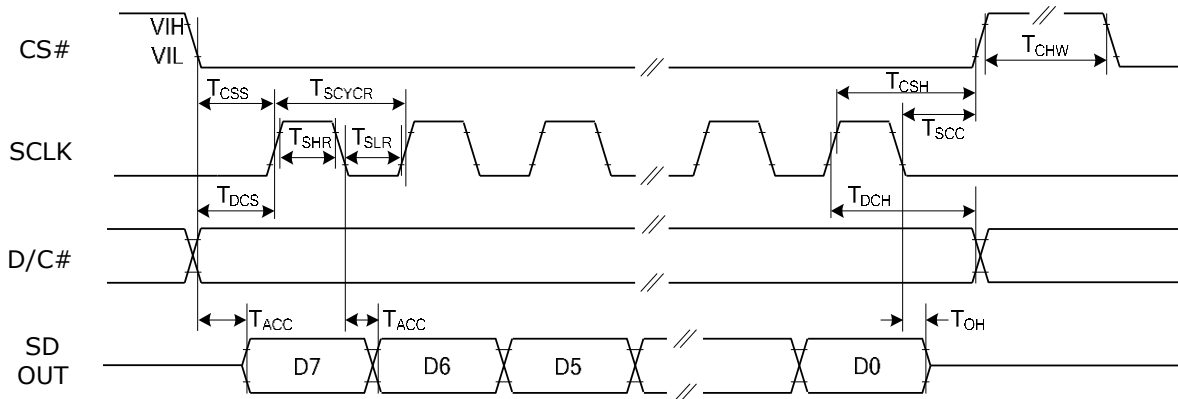


Read mode

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Chip Select Setup Time	t_{CSS}	60	-	-	ns	
Chip Select Hold Time	t_{CSH}	65	-	-	ns	
Chip Select Setup Time	t_{SCC}	20	-	-	ns	
Chip Select Setup Time	t_{CHW}	40	-	-	ns	
Serial Clock Cycle (Write)	t_{SCYCW}	100	-	-	ns	
SCLK "H" Pulse Width (Write)	t_{SHW}	35	-	-	ns	
SCLK "L" Pulse Width (Write)	t_{SLW}	35	-	-	ns	
Serial Clock Cycle (Read)	t_{SCYCR}	350	-	-	ns	
SCLK "H" Pulse Width (Read)	t_{SHR}	175	-	-	ns	
SCLK "L" Pulse Width (Read)	t_{SLR}	175	-	-	ns	
DC Setup Time	t_{DCS}	30	-	-	ns	
DC Hold Time	t_{DCH}	30	-	-	ns	
Data Setup Time	t_{SDS}	30	-	-	ns	
Data Hold Time	t_{SDH}	30	-	-	ns	
Access Time	t_{ACC}	-	-	250	ns	
Output Disable Time	t_{OH}	15	-	-	ns	

2. Power on COG driver

This flowchart describes power sequence for driver chip.

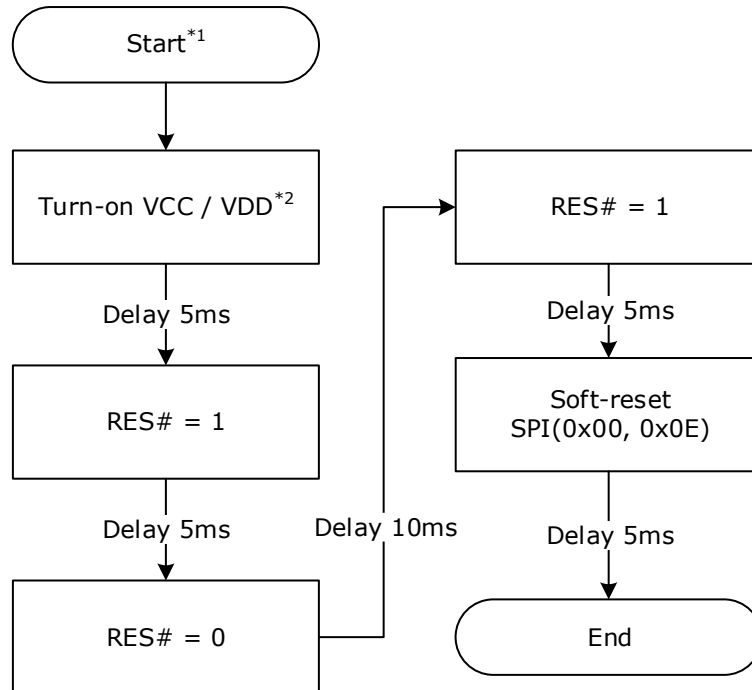

Note:


1. Start

Initial State:


VCC/VDD, RES#, CS#, SDIN, SCLK = 0

2. In order to the inrush current will cause other issue.

It is recommended to add soft-start when VCC/VDD is turned on. (as the circuit below)

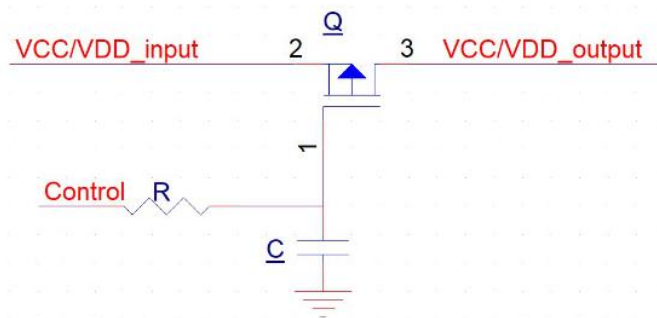

3. Set environment temperature and PSR

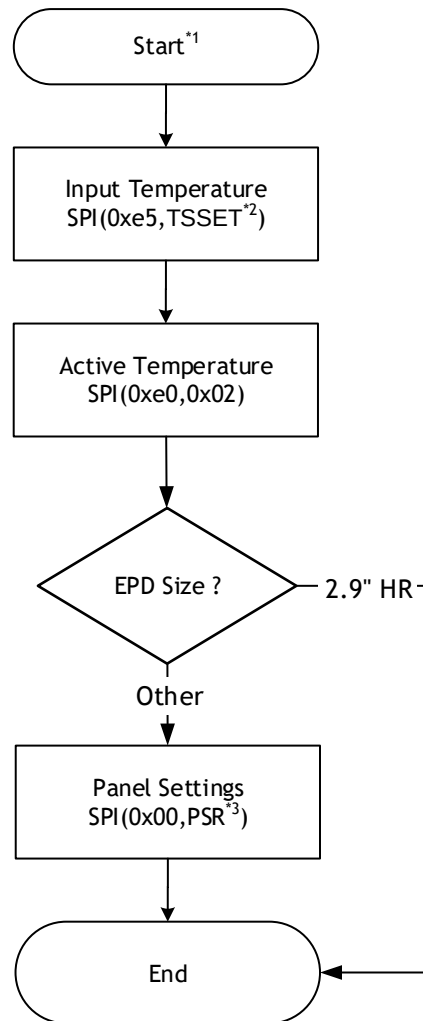

NOTE:

1. **start:** Follow the end of the power on sequence

2. **TSSET:** is the temperature value and unit is degree of Celsius.

The highest bit of the data represents positive/negative in temperature.

if it's positive, the data = (temperature value)

if it's negative, the data = (2's complement of temperature value)

example:

temperature value	data
25°C	0x19
5°C	0x05
-5°C	0xFB


3. **PSR:** there are 2 bytes' data to send.

3.7", 4.2", 4.37" : 0x0F, 0x89

Other Size : 0xCF, 0x8D


4. Input image to the EPD

This section describes how to send the image data into the COG driver which will update the display. EDP need to receive both First and Second frame data each updating. The index of the first frame is **0x10** and the second frame is **0x13**.

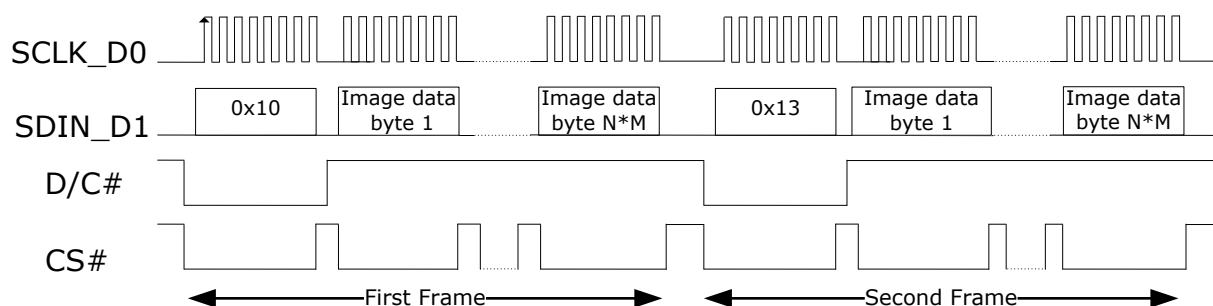

Note 1: $n=(N*M)/8$

The data of image frame, one bit represents 1 pixel. (e.g. the first byte represents the 1st ~ 8th pixels of the first line, the second byte represents the 9th ~ 16th pixels of the first line, and so on).

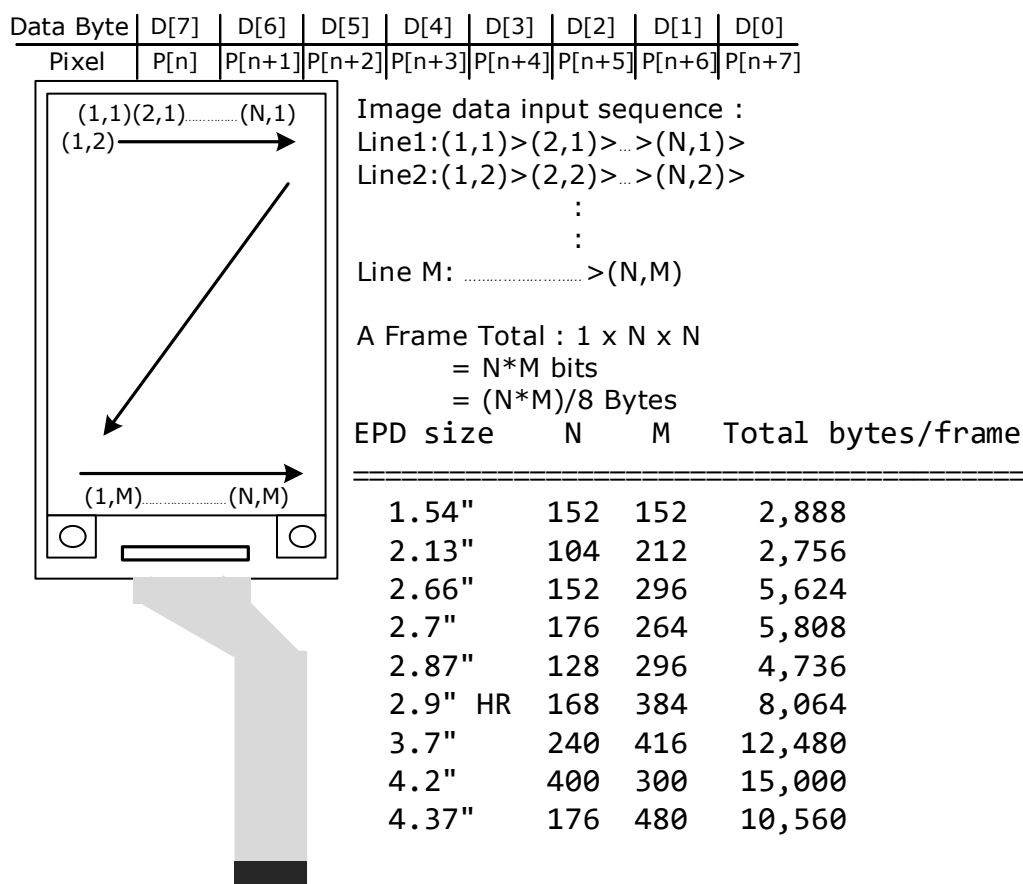

- First Frame


The frame is the "black" frame. The data "1" represents the black color pixel and the data "0" represents the white color pixel.

Data	Pixel Color
1	Black
0	White

- Second Frame

The second frame need to be fed K bytes 0x00. (K: reference Total bytes/frame on previous page.)


5. Send updating command

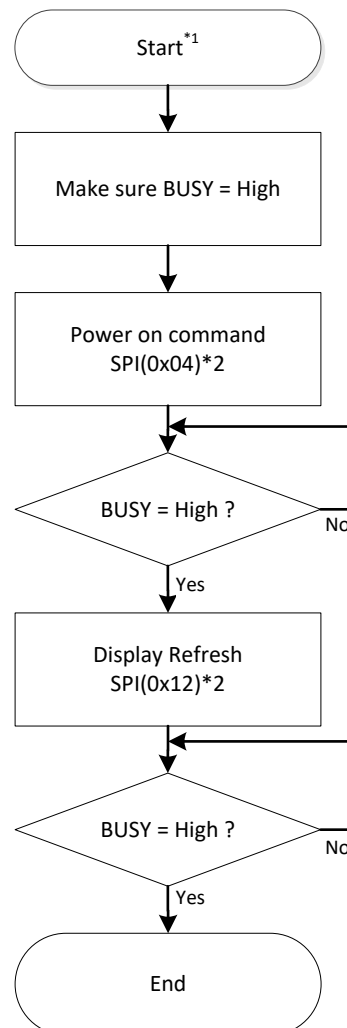

Note:

1. Start
Follow the end of the input image sequence
2. This register does not have data, just need send the index.

5. Turn-off DC/DC

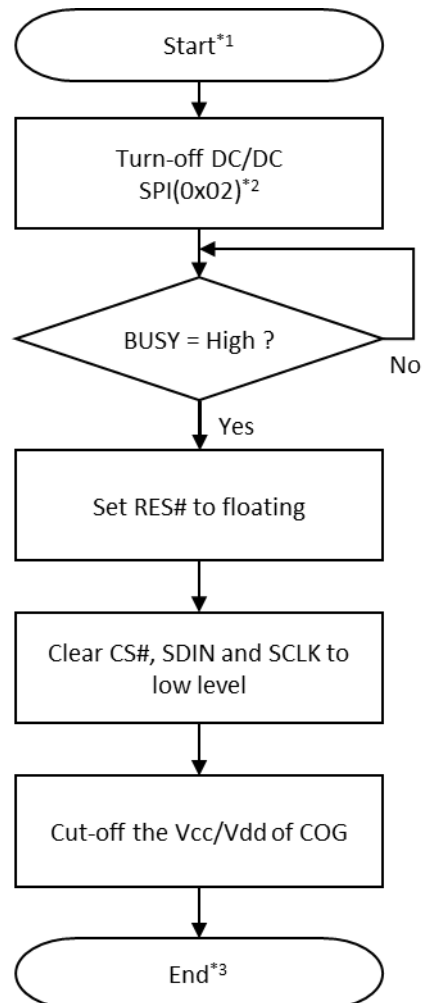

Note:

1. Start
Follow the end of the send updating command
2. This register does not have data, just need send the index.
3. Finished the all of the steps for update the EPD