
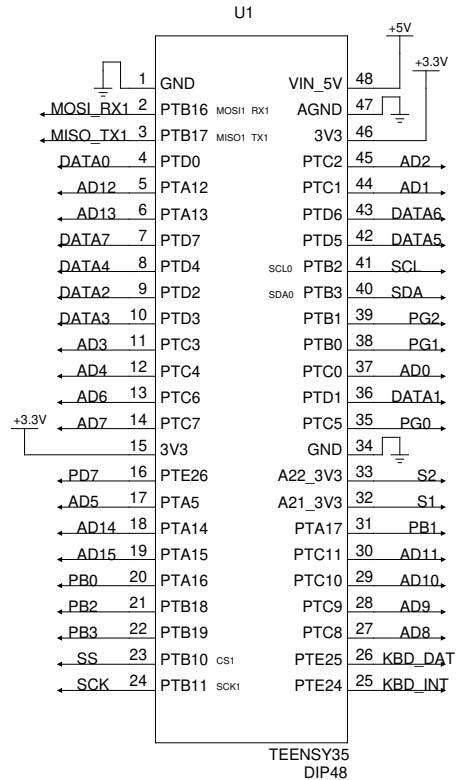


SIMPLIFIED SCHEMATICS

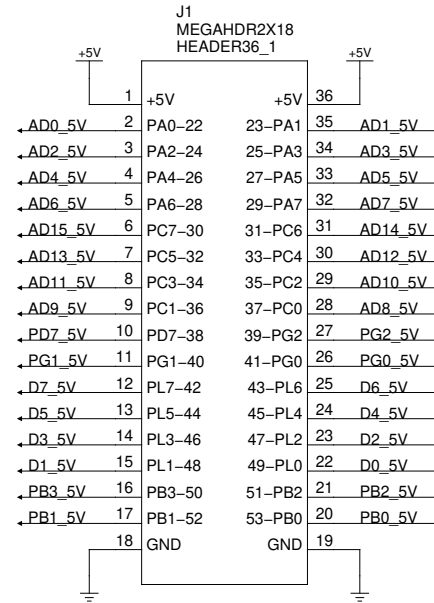

Example 6502 GPIO definitions

```
// #define GPIO?_PDIR (*(volatile uint32_t *)0x400FF0C0) // Port Data Output Register
// #define GPIO?_PSOR (*(volatile uint32_t *)0x400FF0C4) // Port Set Output Register
// #define GPIO?_PCOR (*(volatile uint32_t *)0x400FF0C8) // Port Clear Output Register
// #define GPIO?_PTOR (*(volatile uint32_t *)0x400FF0CC) // Port Toggle Output Register
// #define GPIO?_PDIR (*(volatile uint32_t *)0x400FF0D0) // Port Data Input Register
// #define GPIO?_PDDR (*(volatile uint32_t *)0x400FF0D4) // Port Data Direction Register
```

```
/* Digital Pin Assignments */
#define SET_DATA_OUT(D) (GPIOD_PDIR = (GPIOD_PDIR & 0xFFFFF00) | (D))
```

```
#define xDATA_IN ((byte) (GPIOD_PDIR & 0xFF))
#define ADDR_H ((word) (GPIOA_PDIR & 0b1111000000100000))
#define ADDR_L ((word) (GPIOC_PDIR & 0b0000111110111111))
#define ADDR ((word) (ADDR_H | ADDR_L))
```


```
#define MEGA_PD7 (24)
#define MEGA_PG0 (13)
#define MEGA_PG1 (16)
#define MEGA_PG2 (17)
#define MEGA_PB0 (28)
#define MEGA_PB1 ([39])
#define MEGA_PB2 (29)
#define MEGA_PB3 (30)
```

```
#define uP_RESET_N MEGA_PD7 // PD7
#define uP_RW_N MEGA_PG1 // PG1
#define uP_RDY MEGA_PG2 // PG2
#define uP_S0_N MEGA_PG0 // PG0
#define uP_IRQ_N MEGA_PB3 // PB3
#define uP_NMI_N MEGA_PB2 // PB2
#define uP_E MEGA_PB1 // PB1
#define uP_GPIO MEGA_PB0 // PB0
```

```
// Fast routines to drive signals high/low; faster than digitalWrite
//
#define CLK_E_HIGH (GPIOA_PSOR = 0x20000)
#define CLK_E_LOW (GPIOA_PCOR = 0x20000)
#define STATE_Rw_N ((byte) (GPIOB_PDIR & 0x01) )

#define xDATA_DIR_IN() (GPIOD_PDDR = (GPIOD_PDDR & 0xFFFFF00))
#define xDATA_DIR_OUT() (GPIOD_PDDR = (GPIOD_PDDR | 0x000000FF))
```

User Buttons

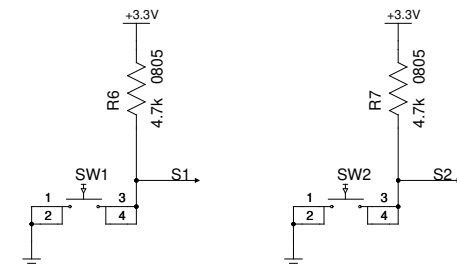

Released under the Creative Commons Attribution Share-Alike 4.0 License
<https://creativecommons.org/licenses/by-sa/4.0/>

TITLE RETROSHIELD TO TEENSY 3.5 ADAPTER

FILE: TEENSY.SCH

REVISION: REV 1 – 2019/08/26

PAGE 1 OF 1

DRAWN BY: ERTURK KOCALAR