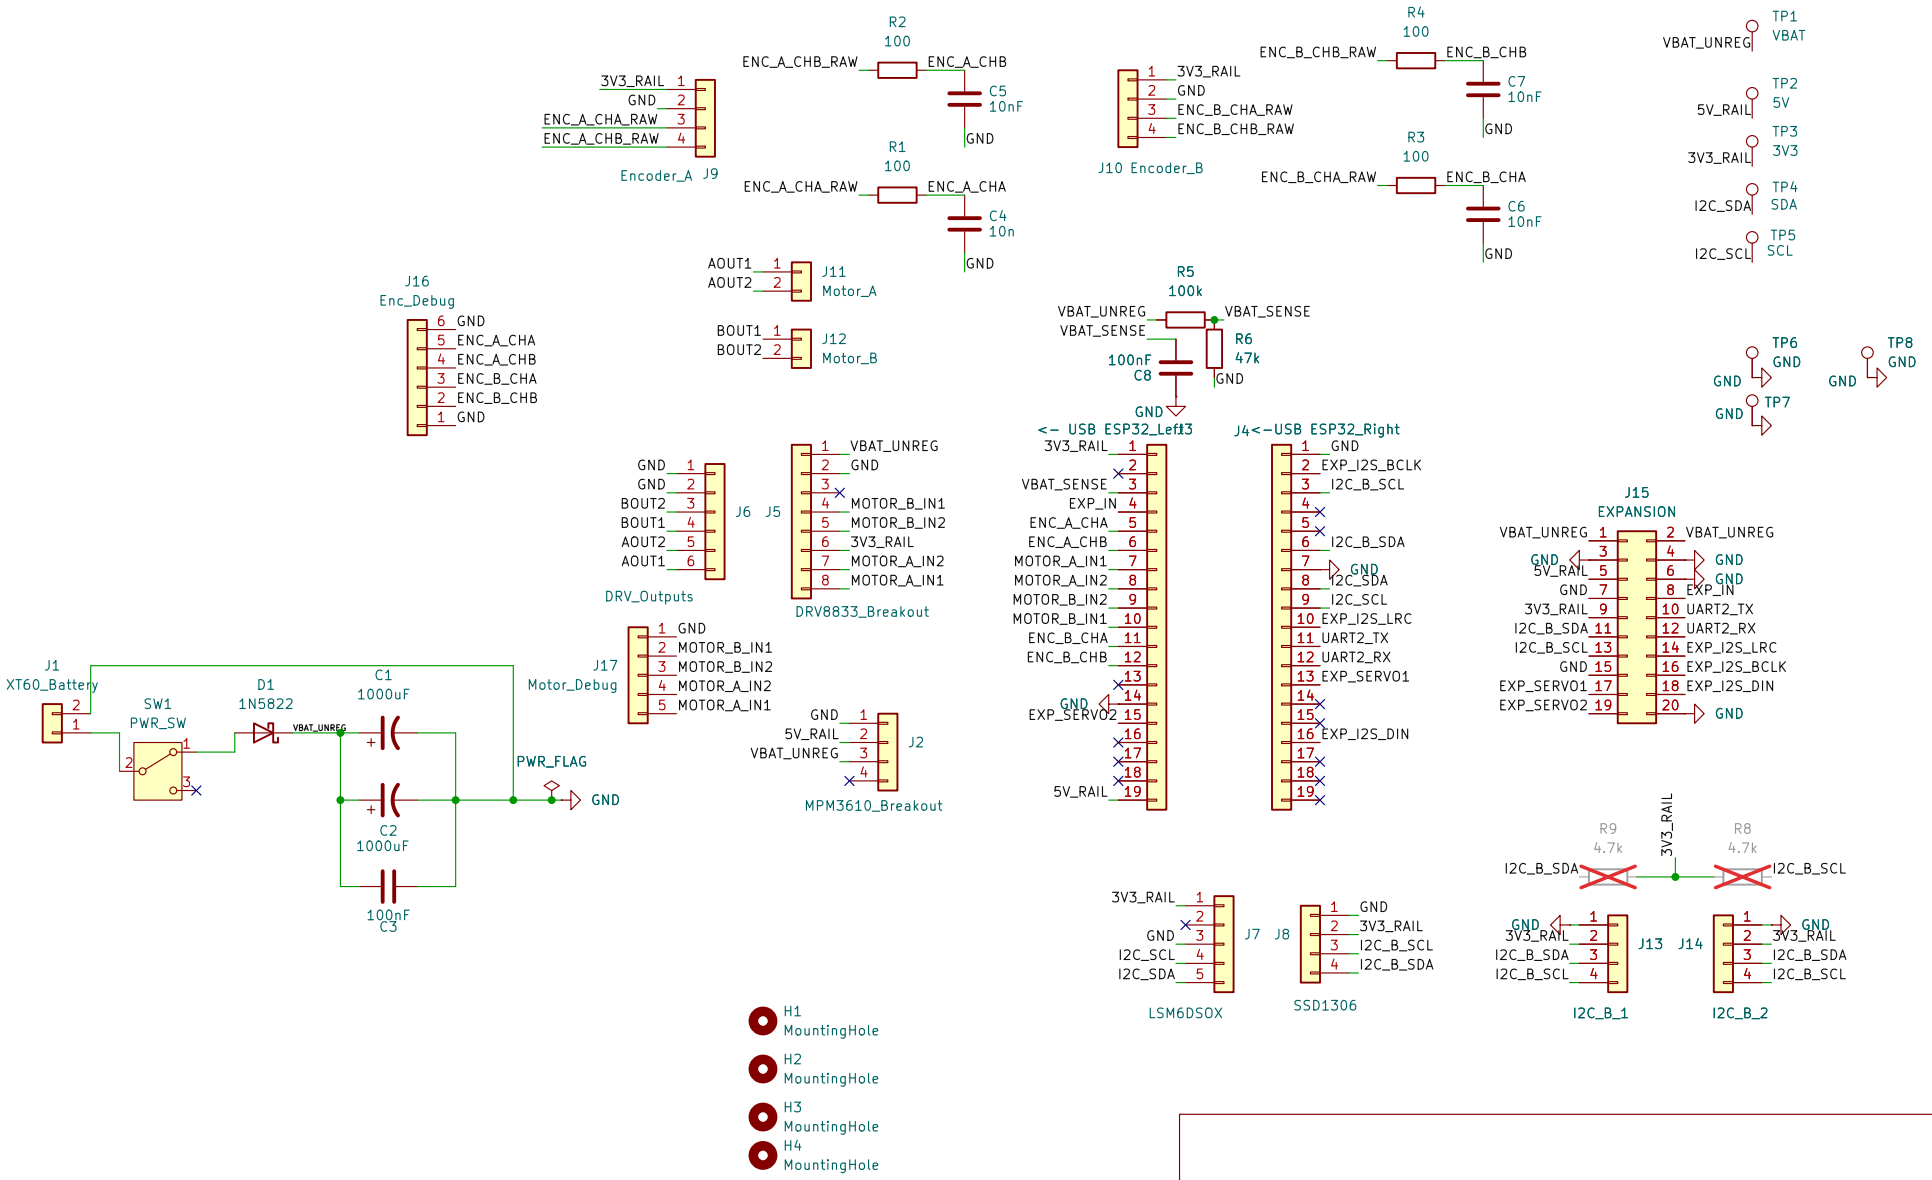

R2
100
ENC_A_CHB_RAW
ENC_A_CHB
C5
10nF
GND
3V3_RAIL 1
GND 2
ENC_A_CHA_RAW 3
ENC_A_CHB_RAW 4
Encoder_A J9
R1
100
ENC_A_CHA_RAW
ENC_A_CHA
C4
10n
GND
1 3V3_RAIL
2 GND
3 ENC_B_CHA_RAW
4 ENC_B_CHB_RAW
J10 Encoder_B
R4
100
ENC_B_CHB_RAW
ENC_B_CHB
C7
10nF
GND
R3
100
ENC_B_CHA_RAW
ENC_B_CHA
C6
10nF
GND
TP1
VBAT_UNREG
VBAT
TP2
5V_RAIL
5V
TP3
3V3_RAIL
3V3
TP4
I2C_SDA
SDA
TP5
I2C_SCL
SCL
J16
Enc_Debug
6 GND
5 ENC_A_CHA
4 ENC_A_CHB
3 ENC_B_CHA
2 ENC_B_CHB
1 GND
AOUT1 1
AOUT2 2
J11
Motor_A
BOUT1 1
BOUT2 2
J12
Motor_B
R5
100k
VBAT_UNREG
VBAT_SENSE
R6
47k
100nF
C8
GND
TP6
GND
TP8
GND
GND
TP7
GND
GND 1
GND 2
BOUT2 3
BOUT1 4
AOUT2 5
AOUT1 6
J6 J5
DRV_Outputs
1 VBAT_UNREG
2 GND
3
4 MOTOR_B_IN1
5 MOTOR_B_IN2
6 3V3_RAIL
7 MOTOR_A_IN2
8 MOTOR_A_IN1
DRV8833_Breakout
<- USB ESP32_Left13
3V3_RAIL 1
VBAT_SENSE 3
EXP_IN 4
ENC_A_CHA 5
ENC_A_CHB 6
MOTOR_A_IN1 7
MOTOR_A_IN2 8
MOTOR_B_IN2 9
MOTOR_B_IN1 10
ENC_B_CHA 11
ENC_B_CHB 12
GND
EXP_SERVO2 15
5V_RAIL 19
J4<-USB ESP32_Right
1 GND
2 EXP_I2S_BCLK
3 I2C_B_SCL
6 I2C_B_SDA
7 GND
8 I2C_SDA
9 I2C_SCL
10 EXP_I2S_LRC
11 UART2_TX
12 UART2_RX
13 EXP_SERVO1
16 EXP_I2S_DIN
J15
EXPANSION
VBAT_UNREG 1
GND 3
5V_RAIL 5
GND 7
3V3_RAIL 9
I2C_B_SDA 11
I2C_B_SCL 13
GND 15
EXP_SERVO1 17
EXP_SERVO2 19
2 VBAT_UNREG
4 GND
6 GND
8 EXP_IN
10 UART2_TX
12 UART2_RX
14 EXP_I2S_LRC
16 EXP_I2S_BCLK
18 EXP_I2S_DIN
20 GND
J1
XT60_Battery
SW1
PWR_SW
D1
1N5822
VBAT_UNREG
C1
1000uF
C2
1000uF
100nF
C3
PWR_FLAG
GND
J17
Motor_Debug
1 GND
2 MOTOR_B_IN1
3 MOTOR_B_IN2
4 MOTOR_A_IN2
5 MOTOR_A_IN1
GND 1
5V_RAIL 2
VBAT_UNREG 3
4
J2
MPM3610_Breakout
R9
4.7k
R8
4.7k
3V3_RAIL
I2C_B_SDA
I2C_B_SCL
3V3_RAIL 1
GND 3
I2C_SCL 4
I2C_SDA 5
J7 J8
LSM6DSOX
1 GND
2 3V3_RAIL
3 I2C_B_SCL
4 I2C_B_SDA
SSD1306
GND 1
3V3_RAIL 2
I2C_B_SDA 3
I2C_B_SCL 4
J13 J14
I2C_B_1
I2C_B_2
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
Sheet: /
File: balancing_robot_pcb.kicad_sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. 10.0.6
Id: 1/1