


The Aesthetic Bed by Esthetica is a versatile and professional treatment bed, designed to meet the needs of modern skin clinics, laser centers, and advanced spas. Combining smooth electric adjustments with ergonomic comfort, it provides therapists with precision and clients with ease and relaxation. Crafted with a durable powder-coated steel frame and upholstered in soft, skin-friendly fabric, the Aesthetic Bed blends functionality with refined aesthetics.



KEY FEATURES

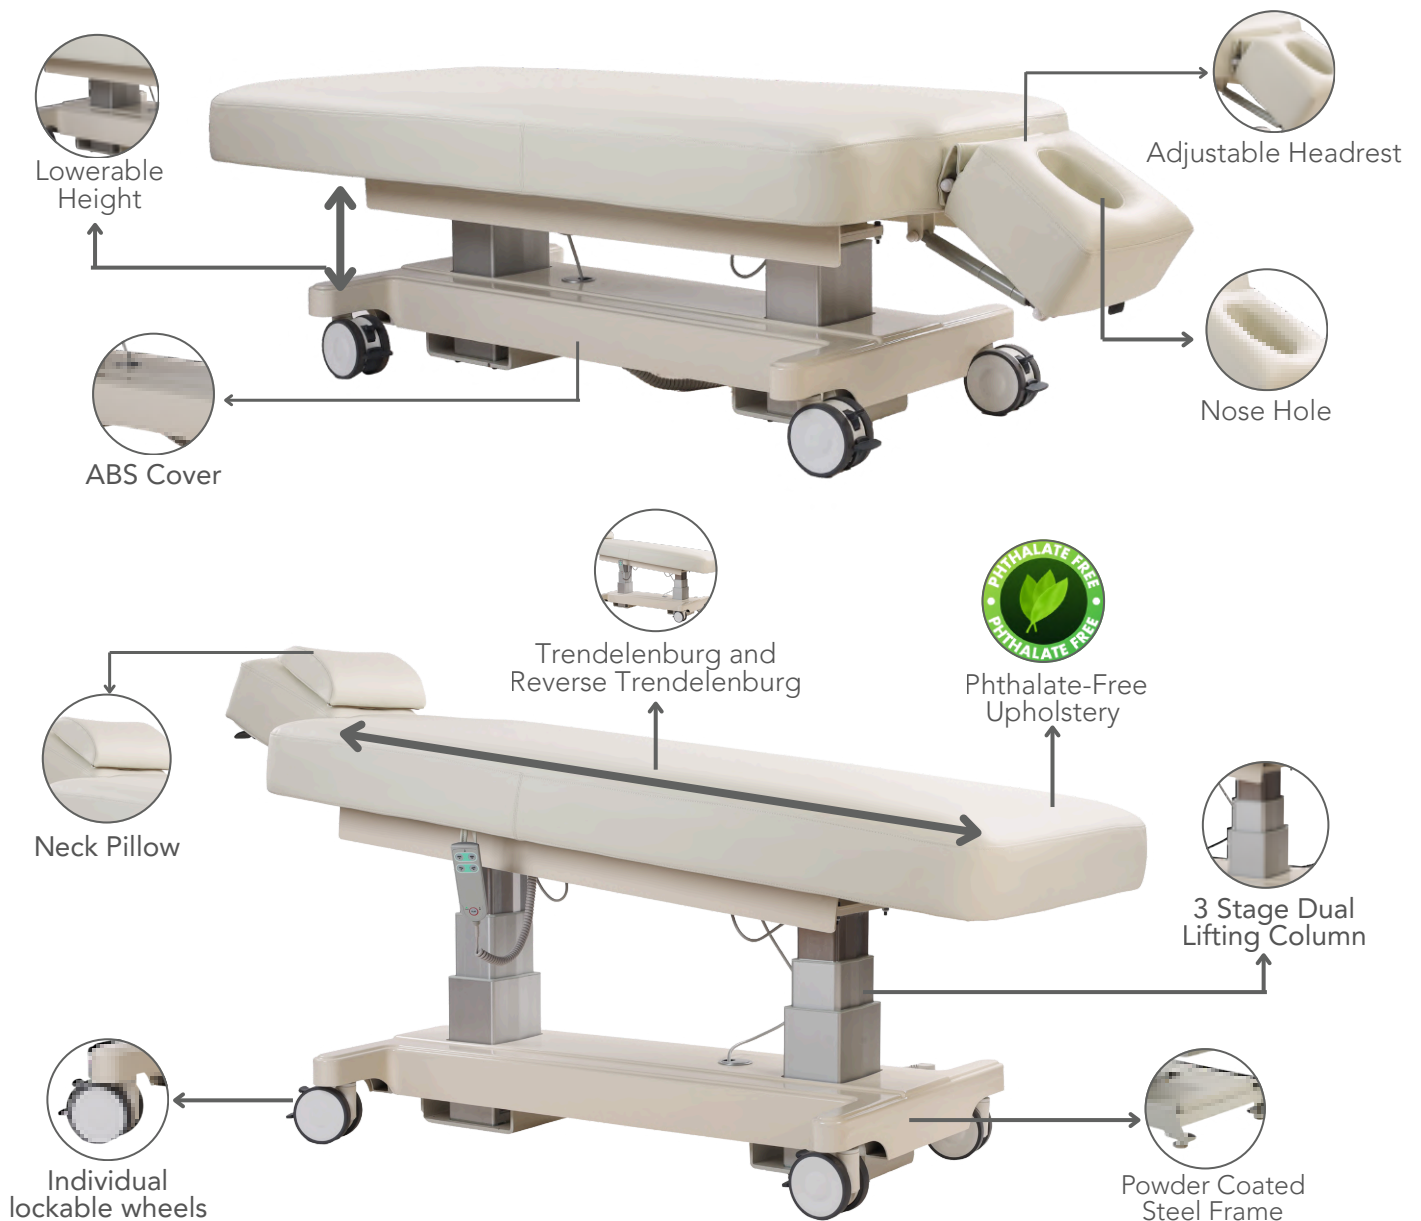


Trendelenburg Function

The Trendelenburg function tilts the bed head-down, improving facial blood circulation, enhancing treatment effectiveness, providing better practitioner access, ensuring client comfort and stability, and supporting procedures like facials and lymphatic drainage by aiding fluid movement.

Phthalate-Free Upholstery

Phthalate-Free Upholstery is designed for hospital environments, offering a safer surface for patients and healthcare workers. It resists stains and disinfectants, withstands frequent cleaning, and ensures durable, fire- and abrasion-resistant performance.



Cream



Beige



Brown



Mouse Grey

Adjustable Headrest

A tilting headrest can be raised or lowered, allowing upright or flat positioning for different treatments. It improves practitioner access and precision, enhances client comfort with proper neck support, increases bed versatility, and promotes easier breathing and relaxation during aesthetic procedures.

Easy Mobility

4-inch lockable castor wheels allow smooth movement of the aesthetic bed for easy positioning and cleaning, while locking ensures stability during treatments, enhancing safety, convenience, and flexibility in workspace arrangement without compromising client comfort or practitioner efficiency.

FEATURES

Headrest
Height
Trendelenburg
Castors Wheels

Reset Position

Electronically Adjustable
Manually Adjustable : +13° to -16° for treatment flexibility
Electronically Adjustable
4 x Individual lockable wheels



Reset

TECHNICAL SPECIFICATIONS

Length 2030 mm / 80 in
Width 800 mm / 31.49 in
Minimum Height 610 mm / 24 in
Maximum Height 990 mm / 39 in

ELECTRICAL PARAMETERS

Power in (Mains Power Supply) 100-240 V, 50-60HZ, 1.5 A
IPX Rating IPX 6
Operating Temperature 10-40°C
Shock Protection Class I

BASE & FRAME

Base Powder-coated mild steel frame
Safe Working Load 180 kgs
Patient Load Bearing capacity 150 kgs

SAFETY STANDARDS

General safety for medical electrical equipment IEC 60601-1 (under process)
EMI/EMC IEC 60601-2 (under process)

UPHOLSTERY


Type Veridura Phthalate-Free Upholstery
Thickness 1 mm
Tensile Strength ISO 1421, 869.22 N/ 5 cm
Colour Options Cream, Beige, Brown, Mouse Grey
Weight 726.7 g / sqmt
Abrasion ISO 5470-2 = 2,00,000 cycles / min

Features :



WARRANTY

3 years on motors

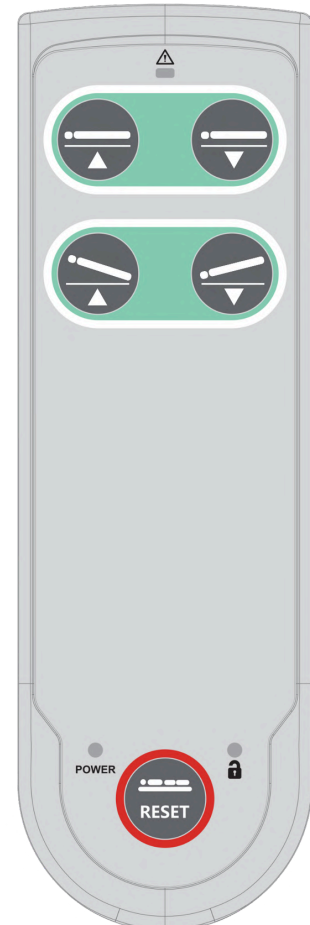

HANDSET