PPP tube power amplifier, 4x KT88 parallel push–pull (circlotron), mono block

Amplifier

Datei: amp.kicad_sch

Power Supply


Datei: supply.kicad_sch

Sheet: /
File: ppp.kicad_sch


Title: PPP power amplifier 4x KT88 (mono)

Size: A4	Date: 2026-10-20	**Rev: 1**
KiCad E.D.A. 9.0.8		Id: 1/3

PPP 4x KT88 – Amplifier

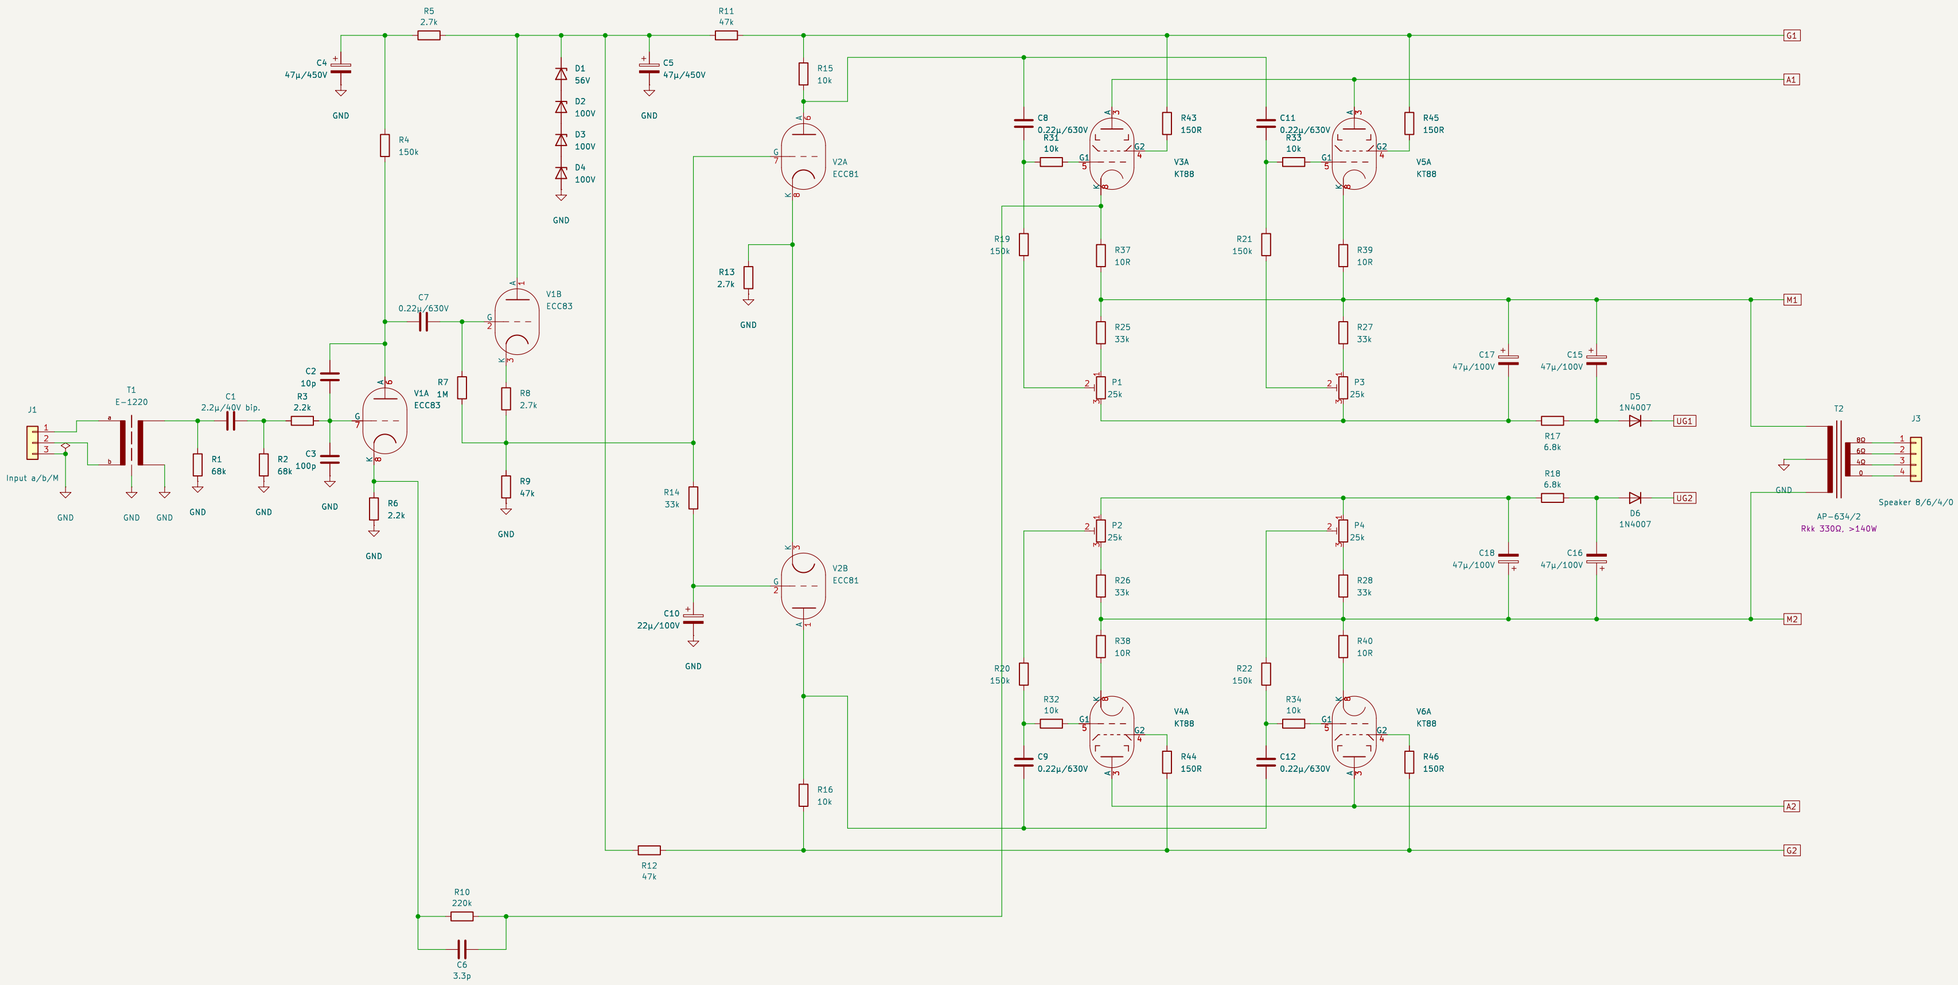

12.6V- heaters, centre grounded at the tubes: ECC83/ECC81 pin 9 and the KT88 string midpoints.
ECC83/ECC81: 12.6V across pins 4–5.
KT88 in series pairs V3+V4 and V5+V6 (one upper + one lower tube per string).

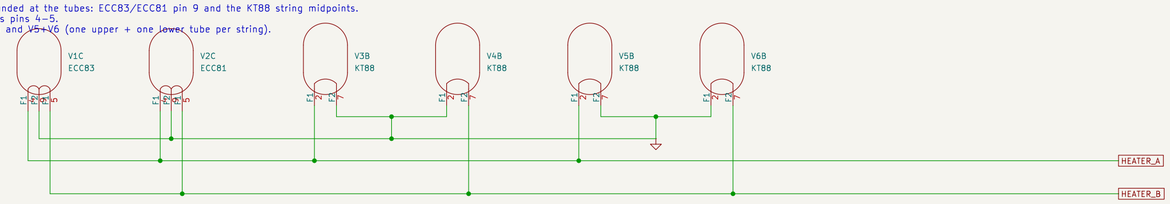


Original designators: V1=R81 (ECC83), V2=R82 (ECC81), V3..V6=R83..R86 (KT88 variant, original EL34: R87/R88 omitted). T1=Ü1 (E-1220), T2=Ü2 (AP-634/2).
Supply rails A1/G1/M1, A2/G2/M2 and UG1/UG2 come from the power supply sheet.
Upper tubes: anode A1, screen G1, cathode M1 (G1 is referenced to M1).
Lower tubes: anode A2, screen G2, cathode M2 (G2 is referenced to M2).
Ug1/Ug2: bias windings, floating on M1/M2: bias adjust P1..P4.

Sheet: /Amplifier/
File: amp.kicad_sch

Title: PPP power amplifier 4x KT88 – amplifier (mono)

Size: A2	Date: 2026-10-20	**Rev: 1**
KiCad E.D.A. 9.0.8		Id: 2/3

PPP 4x KT88 — Power supply

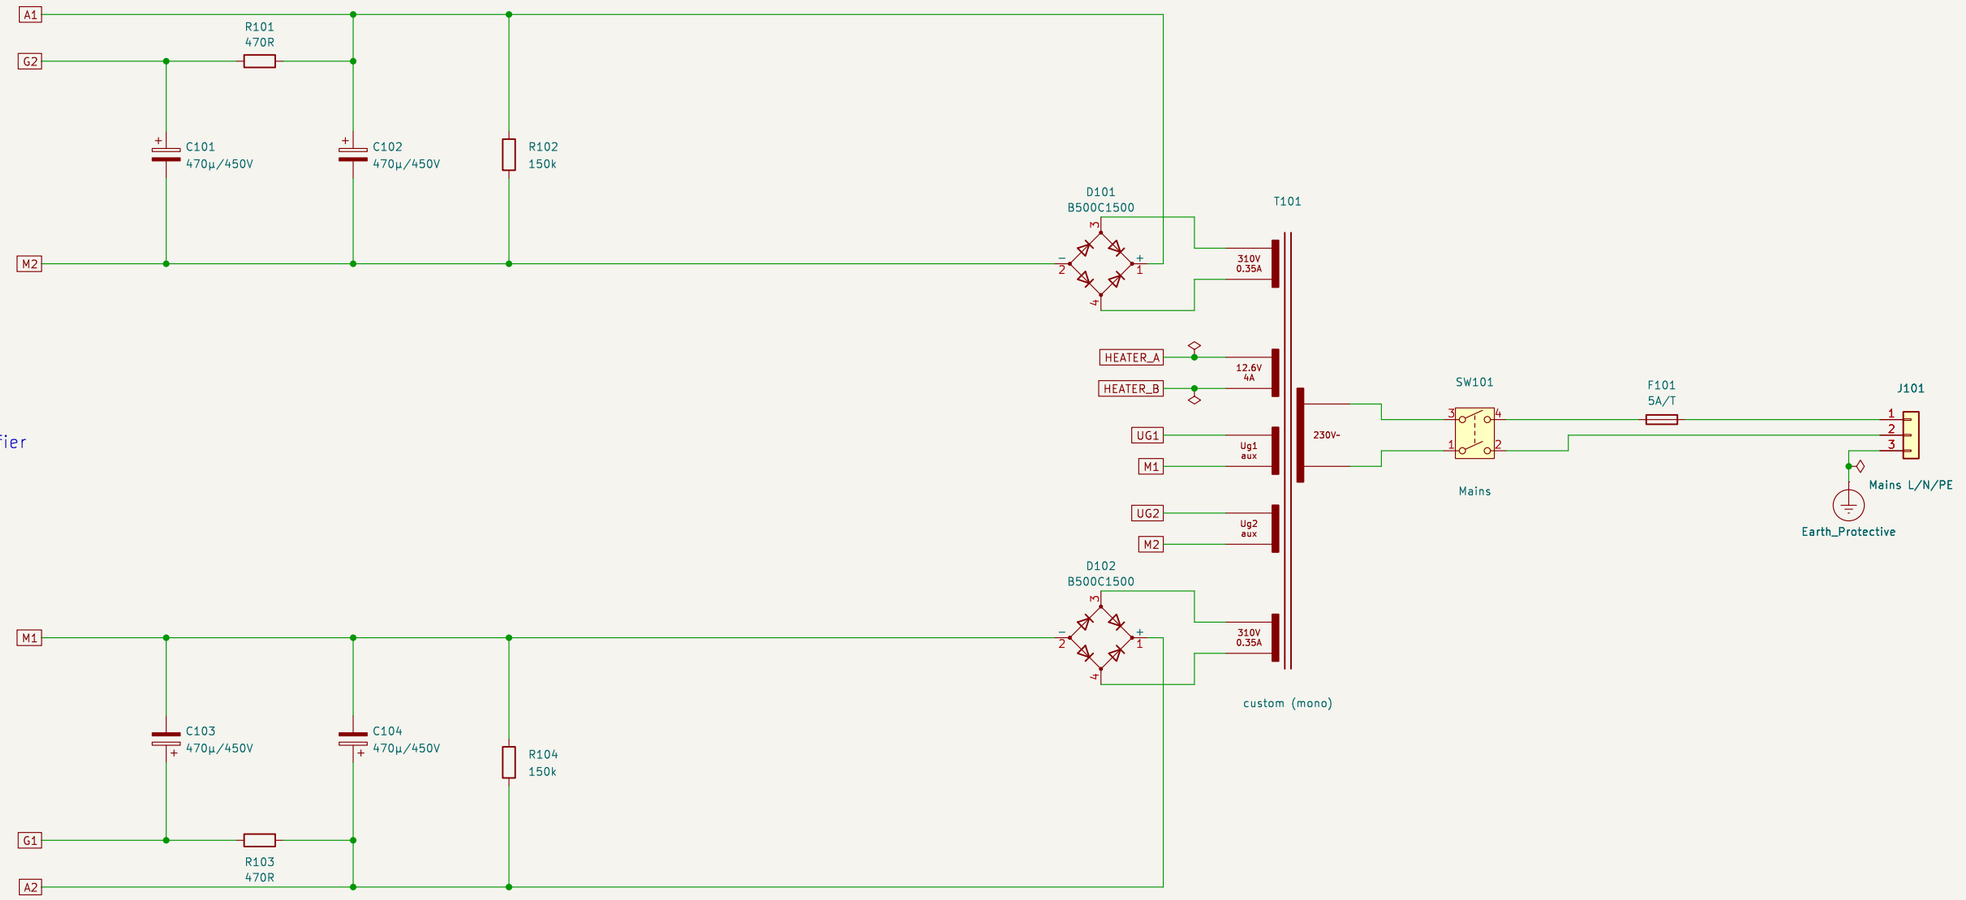

to amplifier

Custom mains transformer per monoblock (replaces the NTR-P/1): 2x 310V 0.35A, 12.6V 4A (no CT).
Aux windings Ug1/Ug2 added for the grid bias supplies (approx. 60V~ / 50mA, value TBD).
UG1 winding floats on M1, UG2 winding floats on M2.

Sheet: /Power Supply/	
File: supply.kicad_sch	
Title: PPP power amplifier 4x KT88 — power supply (mono)	
Size: A3	Date: 2026-10-20
KiCad E.D.A. 9.0.8	Id: 3/3