



The architecturally pleasing Legend Range has unique diffusers, which provide highly visible exit directions at all times.

Features

- Slim & elegant
- Versatile mounting – recessed, surface and wall mounted options available.
- Long service life – premium quality electronics and high temperature NiCad batteries ensures trouble free operation.
- Easy to maintain – the quick release diffuser enables easy access to the lamp.
- Test switch – allows easy function test of emergency operation. Multi functional LED indicates mains supply and charger are functioning as well as diagnostics for optional Nexus® computer controlled monitoring.
- Suspended version of Legend “LSS” – offers suspended exit lamp housing and a remote power pack that can be surface mounted or concealed in a ceiling recess or bulkhead.
- Recessed wall mounted version of Legend “LRW” – recess mounted into any wall or bulkhead.
- 24m viewing distance.
- Lumatec® cold cathode Legend offers advanced BBEB – battery backed electronic ballast, together with Lumatec® cold cathode long life lamp – results in energy savings up to 300% compared to traditional T5 and T8 fluorescent products.

Stanilite
LUMATEC®

Legend Ceiling Recessed

Part No.	Description
PLR110M	Recessed 1x10W Exit maintained – body only
PLR110-BLK	Recessed 1x10W Black Exit maintained, includes face plate, no diffuser
PLRC104M	Recessed Cold Cathode 1x4W Exit maintained – body only

Legend Ceiling Surface Mount

PLS110M	Ceiling Surface Mounted 1x10W Exit maintained – body only
PLSC104M	Ceiling Surface Mounted Cold Cathode 1x4W Exit maintained – body only

Legend Suspended

PLSS110M	Surface Mount Suspended 1x10W Exit maintained – body only
PLSS110M-BLK	Theatre Mask Surface Mount Suspended 1x10W Exit maintained – body only

Legend Wall Mount

PLSW110M	Wall Surface Mounted 1x10W Exit maintained – body only
PLSCW110M	Wall Surface Mounted Cantilever 1x10W Exit maintained – body only
PLRW110M	Wall Mount Flush 1x10W maintained Incl. PICTO Diffuser
PLRW110M2	Wall Mount Flush 1x10W maintained Incl. <PICTO diffuser
PLRW110M3	Wall Mount Flush 1x10W maintained Incl. PICTO> diffuser
PLRWM110M	Recessed Wall Mount 1x10W Exit maintained – body only

Legend Nexus®

Part No.	Description
PLRWNXS110M	Nexus Recessed Wall Mount Flush 1x10W Exit Incl. PICTO Diffuser
PLSWNXS110M	Nexus Surface Wall Mount 1x10W Exit maintained – body only
PLRNXS110M	Nexus Recessed 1x10W Exit maintained – body only
PLSNXS110M	Nexus Ceiling Surface Mounted 1x10W Exit maintained – body only
PLSSNXS110M	Nexus Surface Mount Suspended 1x10W Exit maintained – body only
PLSCWNXS110M	Nexus Wall Surface Mounted Cantilever 1x10W Exit maintained - body only
PLRCNXS104M	Nexus Recessed Cold Cathode 1x4W Exit maintained – body only
PLSCNXS104M	Nexus Surface Mounted Cold Cathode 1x4W Exit maintained – body only
PLRWNXSDR50K	Nexus Wall Mount Flush Cold Cathode 1x4W Exit Incl. PICTO Diffuser

Legend Pictograph Diffusers

31-PL1	Single Sided Diffuser – PICTO
31-PL2	Single Sided Diffuser – <PICTO
31-PL3	Single Sided Diffuser – PICTO>
31-PL5	Double Sided Diffuser – PICTO
31-PL6	Double Sided Diffuser – PICTO AOW

Legend Pictograph Theatre Mask Diffusers

31-PLT1	Single Sided Theatre Mask Diffuser – PICTO
31-PLT2	Single Sided Theatre Mask Diffuser – <PICTO
31-PLT3	Single Sided Theatre Mask Diffuser – PICTO>
31-PLT5	Double Sided Theatre Mask Diffuser – PICTO
31-PLT6	Double Sided Theatre Mask Diffuser – PICTO AOW

Note Theatre Mask range does not use inserts. Theatre mask exits do not have an emergency classification.



PICTO
Straight from here

<PICTO
Left from here

PICTO>
Right from here

Legend Exit Diffuser

Part No.	Description
31-EL1	Single Sided Diffuser EXIT
31-EL2	Single Sided Diffuser <EXIT
31-EL3	Single Sided Diffuser EXIT>
31-EL4	Single Sided Diffuser <EXIT>
31-EL5	Double Sided Diffuser EXIT
31-EL6	Double Sided Diffuser AOW EXIT
31-EL7	Double Sided Diffuser <EXIT>

Legend Exit Theatre Mask Diffuser

31-ELT1	Single Sided Theatre Mask Diffuser EXIT
31-ELT2	Single Sided Diffuser <EXIT
31-ELT3	Single Sided Diffuser EXIT>
31-ELT5	Double Sided Diffuser EXIT
31-ELT6	Double Sided Diffuser EXIT AOW

Note Theatre Mask range does not use inserts. Theatre mask exits do not have an emergency classification.

Technical Specifications

Photometric & Luminaires Spacings												
Product	Classification		Mounting Height in Metres									
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
PLR110M	C0	C8	6.8	7.2	7.4	7.7	7.9	8.0	8.2	8.3	8.2	7.8
	C90	C6.3	6.3	6.6	6.8	7.0	7.3	7.3	7.3	7.3	7.1	6.4
PLS110M	C0	C8	6.8	7.2	7.4	7.7	7.9	8.0	8.2	8.3	8.2	7.8
	C90	C6.3	6.3	6.6	6.8	7.0	7.3	7.3	7.3	7.3	7.1	6.4
PLRC104M	C0	D4	7.2	7.3	7.3	7.3	7.3	7.2	6.9	6.5	5.8	3.1
	C90	E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8	

*Nexus versions of the above have the same data.

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority. Parts & Accessories.


Power Consumption

240V AC 50HZ	
• 10W Legend Exit	9.2W
• 4W Lumatec Legend Exit	6.6W


Construction

• Visible Housing	White Powder Coated Zinc Steel
• Non Visible Housing	White Colour Bond
• Diffuser	Moulded Acrylic


Mounting Options

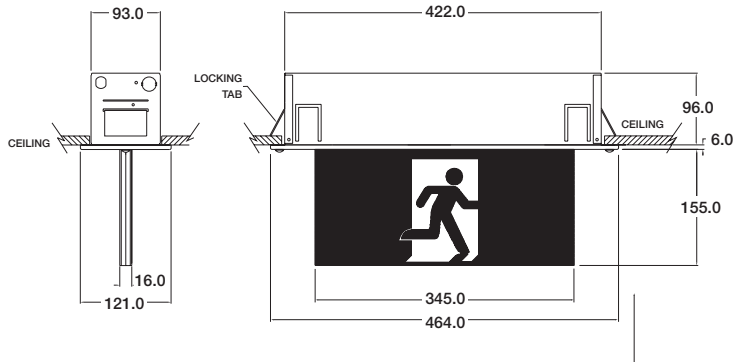


PLR – Recessed Mount

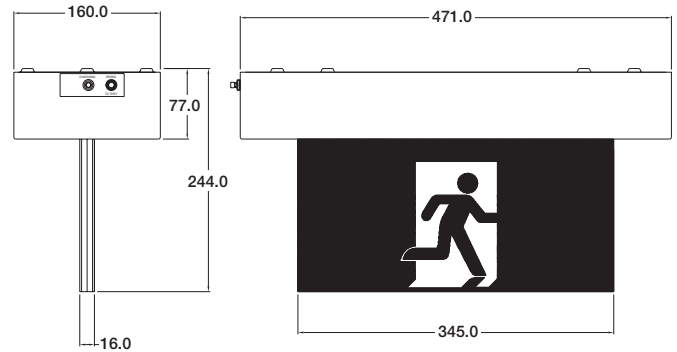


PLS – Surface Mount

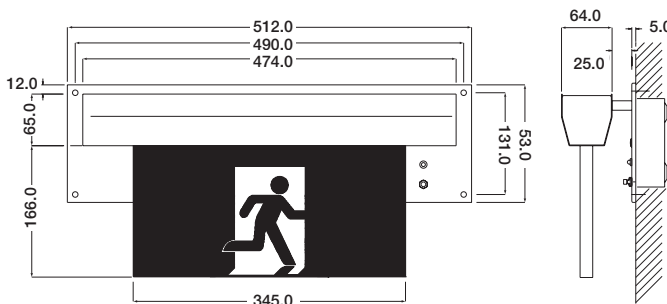


PLRWM – Recessed Wall Mount

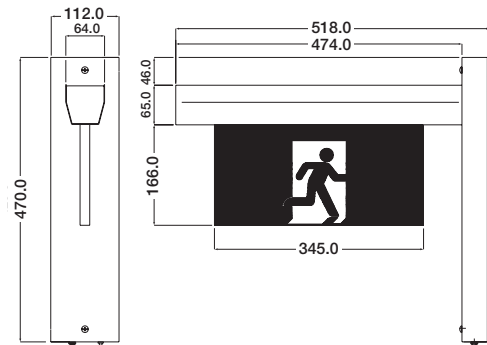

PLSCW – Cantilever Surface Wall Mount

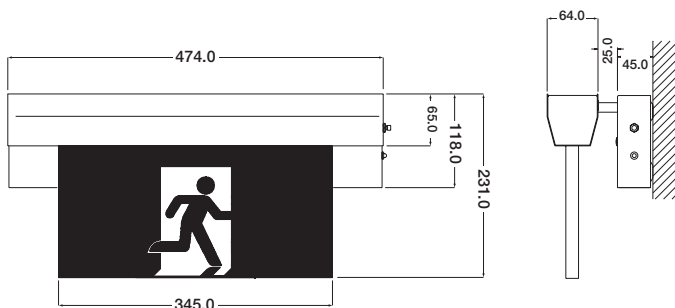


PLSW – Wall Mount

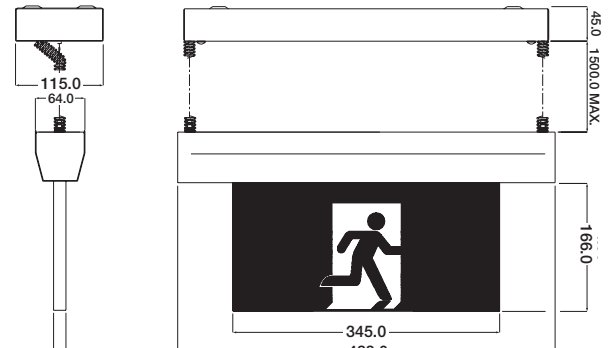

PLSS – Suspended

Parts & Accessories

Part No.	Description
Mounting Bracket	
02-LWMA001	Wall bracket to suit surface mounted Legend
Lamps & Batteries	
15-00215	Lamp to suit 10W Legend fittings
CCFL4-5	Lumatec 4W lamp to suit Cold Cathode Quickfits – pack of 5
03-01205	Battery 6 cell sub C to suit Legend 10W ceiling recessed
03-01207	Battery 6 cell sub C to suit Legend Lumatec CC ceiling recessed & ceiling surface mount
03-01015P	Battery 3 cell 4AH NiCad to suit Legend ceiling surface mount
03-01204	Battery 3 cell sub C to suit Legend wall mount



Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.