
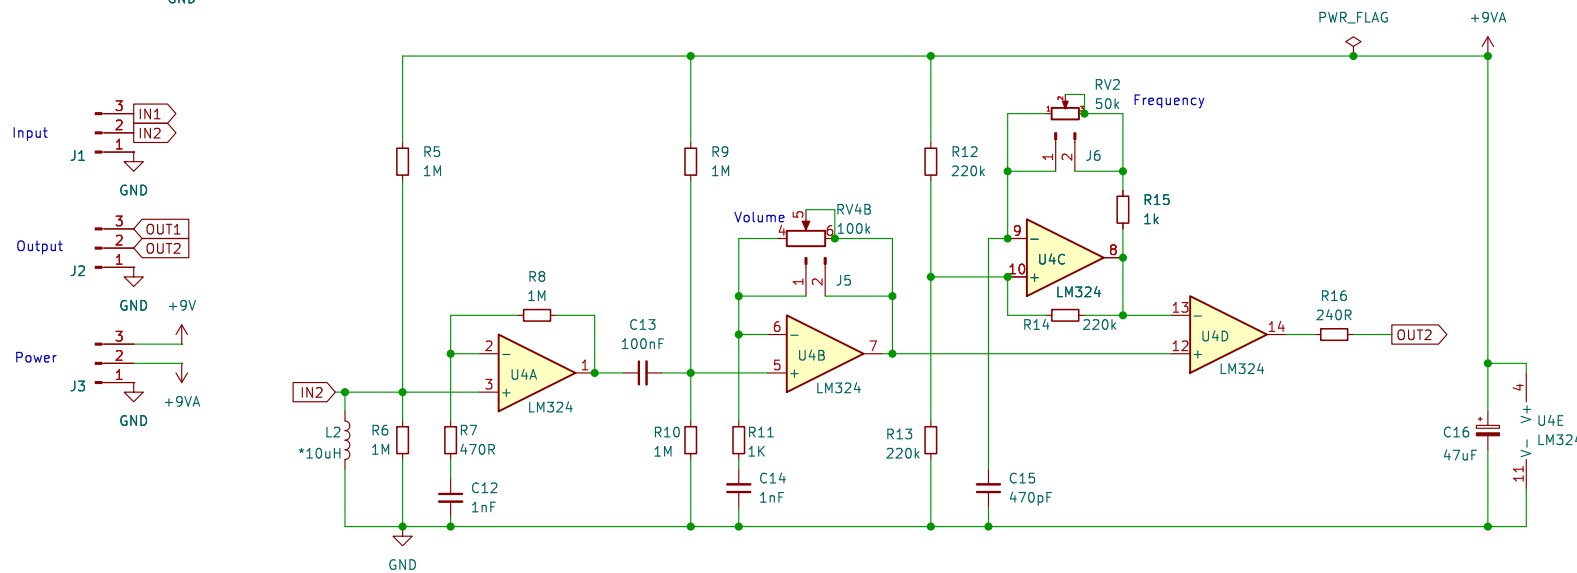
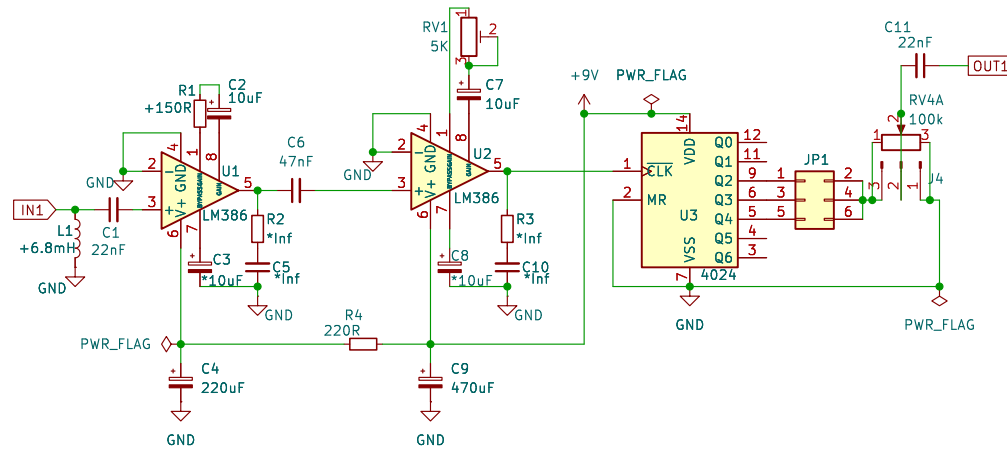


+ Component values depend on the microphone/transducer
 With a 40kHz Ultrasonic transducer, L1=6.8mH, R1=150R (or 220R)
 L1 may not be required with other transducers
 * These components are not normally used, but may be needed for stability
 L2 may be in the range 10uH to 6.8mH depending on the transducer
 RV4B may need a 47K resistor in parallel if there is too much feedback (volume or instability)

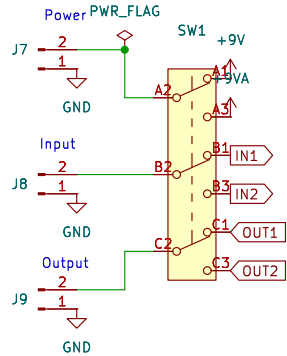

Sheet: /
 File: BatDetector.kicad_sch

Title:

Size: A4
 KiCad E.D.A. 9.0.0

Date:

Rev:

Id: 1/1