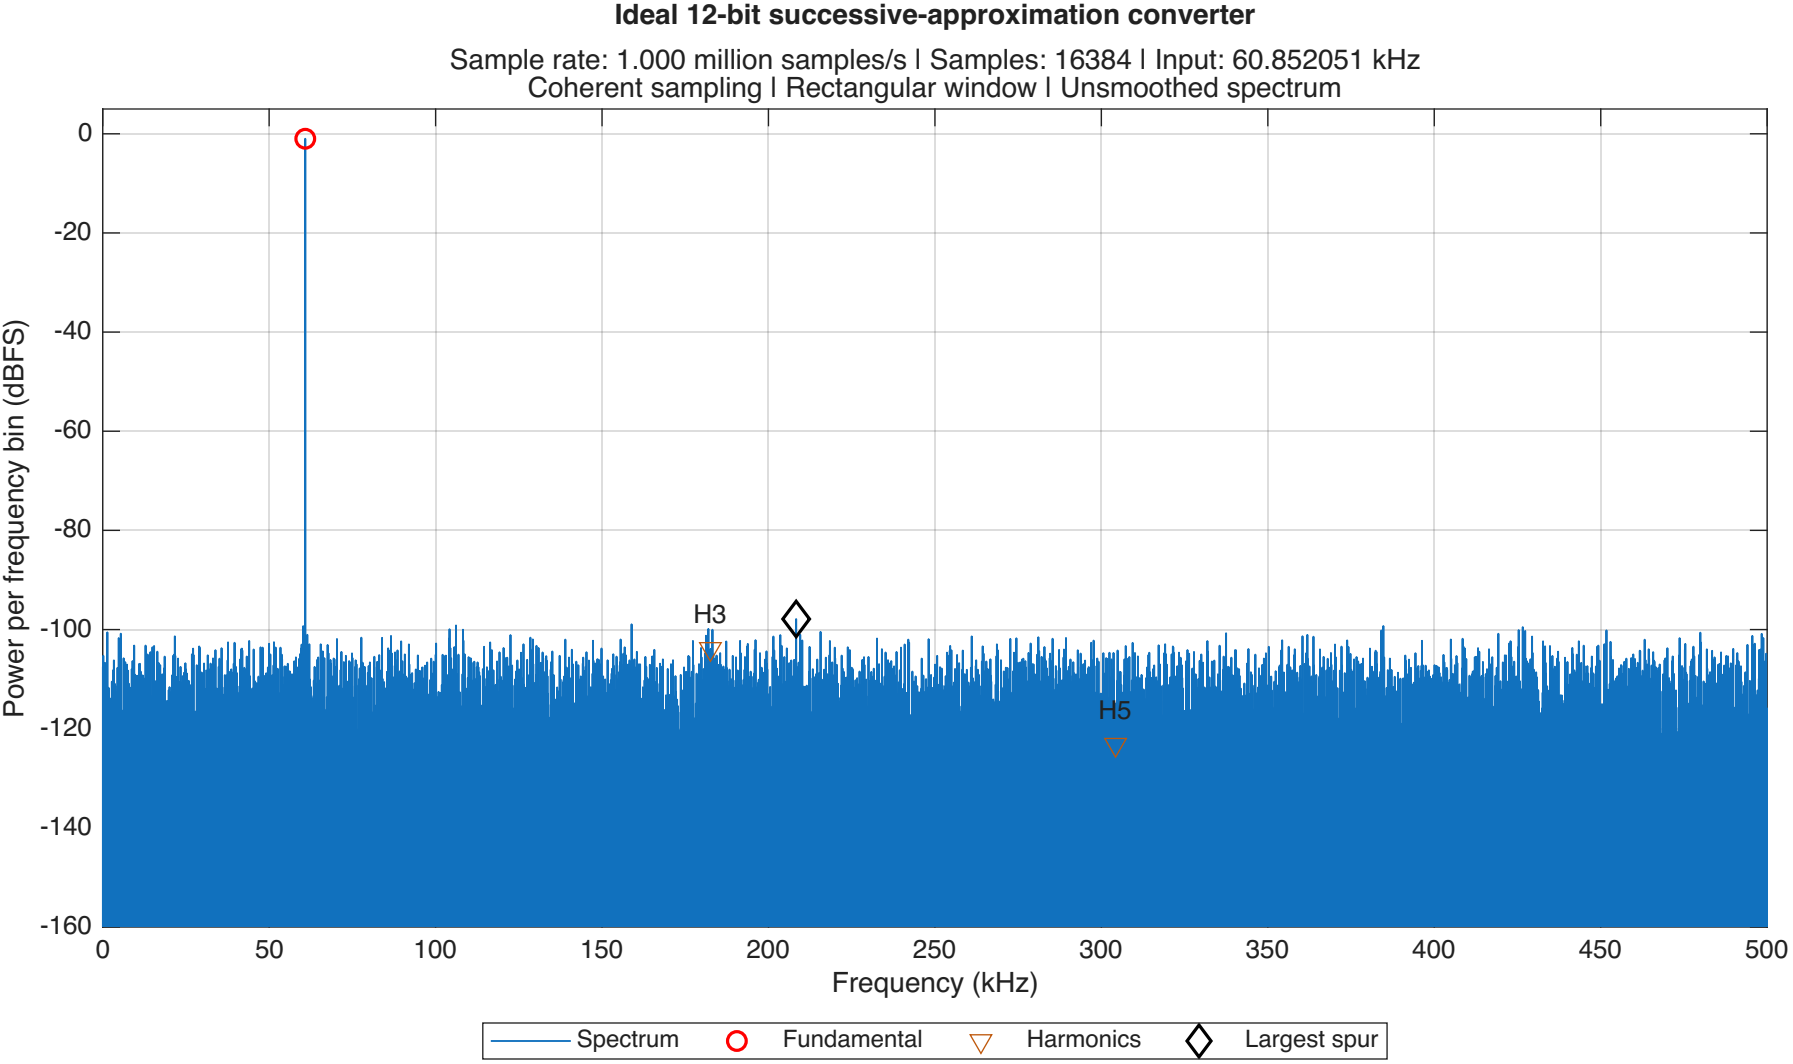


INPUT SETTINGS
Input amplitude: -1 dBFS
Sine minimum: 0.0543745 V
Sine maximum: 0.945625 V

PERFORMANCE
SNR: 73.04 dB
SINAD: 73.04 dB
THD: -102.85 dBc
SFDR: 96.88 dBc
ENOB: 12.006 bits
(ENOB is amplitude corrected)
Fundamental: -1.00 dBFS
Noise floor: -113.17 dBFS/bin

ANALYSIS CONDITIONS
Band: 0 to 500.000 kHz
DC excluded from metrics
Bin width: 61.0352 Hz
Noise bandwidth: 61.0352 Hz
Harmonic orders: 2 to 6
0 dBFS: full-scale sine power
Largest spur includes harmonics