

Secrecy Capacity Analysis Over $\alpha - \mu$ Fading Channels

Hongjiang Lei, *Member, IEEE*, Imran Shafique Ansari, *Member, IEEE*, Gaofeng Pan, *Member, IEEE*,
Basel Alomair, *Member, IEEE*, and Mohamed-Slim Alouini, *Fellow, IEEE*

Abstract—In this letter, we study the secrecy capacity of the classic Wyner's model over the $\alpha - \mu$ fading channels, where α and μ specify the nonlinearity and clustering of fading channels, respectively. The average secrecy capacity (ASC) is derived in closed-form by using the extended generalized bivariate Fox's H-function. Moreover, the asymptotic analysis of ASC in high signal-to-noise ratio (SNR) regime is conducted. The asymptotic results unveil that the ASC follows the scaling law of $\Theta(\ln \rho)$, where ρ stands for the ratio between the average powers of main channels and eavesdropping channels. Moreover, the ASC can be enhanced by increasing the transmit SNR, while there exists a ceiling of ASC as the SNRs at both sides are improved simultaneously. The accuracy of the analytical results is validated by Monte-Carlo simulations. The numerical results show that rigorous fading channels are beneficial to the secrecy performance, that is, serious nonlinearity (small α) and sparse clustering (small μ) will lead to the improvement of ASC.

Index Terms—Physical layer security, average secrecy capacity, $\alpha - \mu$ fading channel, extended generalized bivariate Fox's H-function.

I. INTRODUCTION

RECENTLY, the secrecy performance analysis of digital systems over fading channels has become a research focus. Considering the effect of outdated channel state information (CSI), the secrecy performance of multiple-input multiple-output (MIMO) wiretap channels with multiple eavesdroppers over non-identical Nakagami- m fading was investigated and the closed-form expressions for the exact and asymptotic secrecy outage probability (SOP) and average secrecy capacity (ASC) were derived in [1]. The closed-form expressions for the probability of zero secrecy capacity

with three different transmit antenna selection schemes were derived under Rayleigh fading environments in [2].

So far, most of the open literature on the secrecy performance analysis focused on particular fading channels, such as Rayleigh [3], [4], Nakagami- m [1], [5], [6], Weibull [7], [8], or log-normal [9]. Few works focus on the secrecy performance over generalized fading channels, except [10], [11], [12]. The secrecy outage performance of single-input single-output (SISO) and single-input multiple-output (SIMO) system were investigated in [10] and [11], respectively, in which the channels were assumed as generalized- K fading channels.

The α - μ fading channel accounts for the nonlinearity of a propagation medium as well as clusters of multipath waves with two physical fading parameters α and μ reflecting the nonlinearity and clustering, respectively [13]. Most of the small-scale fading channels are special cases of α - μ distribution, such as exponential, Rayleigh, Nakagami- m , Gamma, and Weibull. Furthermore, the probability density function (PDF) of some large-scale fading channels (such as log-normal channels) and composite fading channels (such as generalized- K channels) also can be approximated by the PDF of an α - μ distribution with the methods proposed in [14] and [15], respectively.

Although the SOP over α - μ fading channels was studied in [12] and the expressions for the SOP bound and the strictly positive secrecy capacity (SPSC) were derived, notice that the SOP and the SPSC are fundamental metrics to evaluate the secrecy performance of passive eavesdropping scenarios [1], [5] wherein the CSI of the eavesdropper's channel is not available at the source node. ASC is a metric to evaluate the secrecy performance of active eavesdropping scenarios wherein the transmitter is aware of the CSI of eavesdropper's channel [1], [3], [5]. Technically speaking, it is much more challenging to obtain a closed-form expression for the ASC relative to that of the SOP or SPSC, especially applicable to generalized fading channels.

Based on the open literature and to the best of the authors' knowledge, it is still an open area to study the secrecy capacity over α - μ fading channels. The main contributions of our work are listed as follows:

- 1) The secrecy capacity of the classic Wyner's model over α - μ fading channels is derived in closed-form, which enables the performance evaluation. Specifically, the numerical results unveil more secrecy capacity can be achieved under rigorous fading channels, that is, serious nonlinearity (small α) and sparse clustering (small μ) will lead to the improvement of ASC.
- 2) The asymptotic analysis of ASC in high signal-to-noise ratio (SNR) regime is further performed to extract more

Manuscript received January 12, 2017; accepted February 11, 2017. Date of publication February 15, 2017; date of current version June 8, 2017. This work was supported in part by the National Natural Science Foundation of China (NSFC) under Grant 61471076, 61401372, the Project of Fundamental and Frontier Research Plan of Chongqing under Grant cstc2015jcyjBX0085, and the Scientific and Technological Research Program of Chongqing Municipal Education Commission under Grant KJ1600413. The associate editor coordinating the review of this letter and approving it for publication was C. Zhong.

H. Lei is with the Chongqing Key Laboratory of Mobile Communications Technology, Chongqing University of Posts and Communications, Chongqing 400065, China, and also with the Computer, Electrical, and Mathematical Science and Engineering Division, King Abdullah University of Science and Technology, Thuwal 23955-6900, Saudi Arabia (e-mail: lei.hj@cqupt.edu.cn).

I. S. Ansari is with the Department of Electrical and Computer Engineering, Texas A&M University at Qatar, Doha, Qatar (e-mail: imran.ansari@qatar.tamu.edu).

G. Pan is with the Chongqing Key Laboratory of Nonlinear Circuits and Intelligent Information Processing, Southwest University, Chongqing 400715, China (e-mail: gfp@swu.edu.cn).

B. Alomair is with the National Center for Cybersecurity Technology, King Abdulaziz City for Science and Technology, Riyadh 11442, Saudi Arabia (e-mail: alomair@kacst.edu.sa).

M.-S. Alouini is with the Computer, Electrical, and Mathematical Sciences and Engineering Division, King Abdullah University of Science and Technology, Thuwal 23955-6900, Saudi Arabia (e-mail: slim.alouini@kaust.edu.sa).

Digital Object Identifier 10.1109/LCOMM.2017.2669976

insightful results. It is found that the ASC follows the scaling law of $\Theta(\ln \rho)$, where ρ is the ratio of the average power gains of the main channel to that of the eavesdropping channel. In addition, although ASC can be enhanced by increasing the transmit SNR, the asymptotic analysis proves that ASC is upper bounded as the transmit SNR approaches to infinity.

II. SYSTEM MODEL

We consider the classic Wyner's wiretap model, as assumed in [9], [10], and [12]. It is assumed that all the channels experience independent α - μ fading and the CSI of all the channels is available at S since active eavesdropping is considered in our work.

The PDF of SNR for α - μ fading channels is expressed as [12],

$$f_k(\gamma) = \eta_k \gamma^{\frac{\alpha_k \mu_k}{2} - 1} e^{-\lambda_k \gamma^{\frac{\alpha_k}{2}}}, \quad (1)$$

where $k \in \{D, E\}$, $\eta_k = \frac{\alpha_k \mu_k}{2\Gamma(\mu_k)} \bar{\gamma}_k^{-\frac{\alpha_k \mu_k}{2}}$, $\lambda_k = \mu_k \bar{\gamma}_k^{-\frac{\alpha_k}{2}}$, α_k and μ_k are the two physical fading parameters that reflect the nonlinearity and clustering. $\Gamma(c) = \int_0^\infty t^{c-1} e^{-t} dt$ is the well-known Gamma function, $\bar{\gamma}_k = \gamma_t \bar{Y}_k$ are the average SNRs, γ_t are transmit SNRs, and \bar{Y}_k are the average power gains. This model is one of the most general fading model and can span a wide range of multipath fading models, such as Rayleigh ($\alpha_k = 2, \mu_k = 1$), Nakagami- m ($\alpha_k = 2, \mu_k = m$), and Weibull ($\mu_k = 1$) fading [12], [13].

III. AVERAGE SECRECY CAPACITY ANALYSIS

In active eavesdropping scenarios, S can transmit confidential messages to guarantee perfect secrecy at an achievable rate since the CSI of the eavesdropper's channel is available, which is a fundamental assumption in physical layer security [1], [3], [5], [10]. The secrecy capacity, which is the maximum achievable secrecy rate, is essentially a fundamental secrecy performance metric. According to [3], the instantaneous secrecy capacity is defined as $C_s = [\ln(1 + \gamma_D) - \ln(1 + \gamma_E)]^+$, where $\ln(1 + \gamma_D)$ and $\ln(1 + \gamma_E)$ are the capacity of the main and eavesdropper channels, respectively, and $[x]^+ = \max\{x, 0\}$.

According to [10], ASC can be given as $\bar{C}_s = I_1 + I_2 - I_3$, where $I_1 = \int_0^\infty \ln(1 + \gamma_D) f_D(\gamma_D) F_E(\gamma_D) d\gamma_D$, $I_2 = \int_0^\infty \ln(1 + \gamma_E) f_E(\gamma_E) F_D(\gamma_E) d\gamma_E$, $I_3 = \int_0^\infty \ln(1 + \gamma_E) f_E(\gamma_E) d\gamma_E$, $F_k(\gamma) = \frac{1}{\Gamma(\mu_k)} \Upsilon\left(\mu_k, \lambda_k \gamma^{\frac{\alpha_k}{2}}\right)$ ($k \in \{D, E\}$) is the cumulative distribution function (CDF) of the SNR, and $\Upsilon(a, x) = \int_0^x e^{-t} t^{a-1} dt$ is the lower incomplete Gamma function (defined by [16, eq. (8.350.1)]).

Substituting (1) and $F_E(\gamma)$ into I_1 , and making use of (8) and (9) of [12], (11) of [17], we obtain

$$I_1 = \frac{\eta_D}{\Gamma(\mu_E)} \int_0^\infty \gamma_D^{\frac{\alpha_D \mu_D}{2} - 1} G_{2,2}^{1,2} \left[\gamma_D \left| \begin{matrix} 1, 1 \\ 1, 0 \end{matrix} \right. \right] \times G_{0,1}^{1,0} \left[\lambda_D \gamma_D^{\frac{\alpha_D}{2}} \left| \begin{matrix} - \\ 0 \end{matrix} \right. \right] G_{1,2}^{1,1} \left[\lambda_E \gamma_D^{\frac{\alpha_E}{2}} \left| \begin{matrix} 1, 1 \\ \mu_E, 0 \end{matrix} \right. \right] d\gamma_D, \quad (2)$$

where $G_{p,q}^{m,n}[\cdot]$ is Meijer's G -function, as defined by [16, eq. (9.301)].

By making use of [18, eq. (6.2.8)] and [19, eq. (2.3)], the closed-form of I_1 is obtained as (3), shown at the bottom of this page, and $H_{p_1, q_1; p_2, q_2; p_3, q_3}^{m_1, n_1; m_2, n_2; m_3, n_3}[\cdot]$ is the EGBFHF function,¹ as defined by eq. (2.57) of [20].

Similar to I_1 , the closed-form expression of I_2 is obtained as (4), shown at the bottom of this page.

Now, on utilizing [17, eqs. (11) and (21)], I_3 is obtained as

$$I_3 = \frac{\eta_E 2^{0.5} \alpha_E^{-1}}{(2\pi)^{\alpha_E - 0.5}} G_{2\alpha_E, 2+2\alpha_E}^{2+2\alpha_E, \alpha_E} \left[\frac{\lambda_E^2}{4} \left| \begin{matrix} \chi, \Delta(\alpha_E, 1 - \frac{\alpha_E \mu_E}{2}) \\ \Delta(2, 0), \chi, \chi \end{matrix} \right. \right], \quad (5)$$

where $\chi = \Delta(\alpha_E, -\frac{\alpha_E \mu_E}{2})$ and $\Delta(m, a) = \frac{a}{m}, \frac{a+1}{m}, \dots, \frac{a+m-1}{m}$.

Substituting (3), (4), and (5) into \bar{C}_s , the closed-form expression of ASC is obtained.

IV. ASYMPTOTIC AVERAGE SECRECY CAPACITY ANALYSIS

Although we have obtained the exact closed-form expression for ASC in section III, it is difficult to achieve more insights from the results. In order to get more insights, we analysis the secrecy capacity performance in the high transmit SNR regime, which implies $\gamma_t \rightarrow \infty$ in this section. The asymptotic expression ASC is given in *Lemma 1*.

Lemma 1: When $\gamma_t \rightarrow \infty$, we have $\bar{C}_s \approx \frac{1}{\Gamma(\mu_D)\Gamma(\mu_E)} \sum_{i=1}^N \omega_i g(t_i)$, where ω_i and t_i are the abscissas and weight factors for the Gaussian-Laguerre integration [21, eq. (25.4.45)], $\rho = \bar{Y}_D/\bar{Y}_E$, $g(t) = t^{\mu_D-1} \ln((t/\mu_D)^{2/\alpha_D} \bar{Y}_D) \Upsilon\left(\mu_E, \mu_E \rho^{\frac{\alpha_E}{2}} \left(\frac{t}{\mu_D}\right)^{\alpha_E/\alpha_D}\right) - t^{\mu_E-1} \ln(\bar{Y}_E(t/\mu_E)^{2/\alpha_E}) \Gamma(\mu_D, \mu_D \rho^{-\alpha_D/2} (t/\mu_E)^{\alpha_D/\alpha_E})$, and $\Gamma(a, x) = \int_x^\infty e^{-t} t^{a-1} dt$ is the upper incomplete Gamma function (defined by [16, eq. (8.350.2)]).

Proof: Based on the definition of ASC, we have

$$\bar{C}_s = \int_0^\infty f_E(\gamma_E) d\gamma_E \int_{\gamma_E}^\infty \ln\left(\frac{1+\gamma_D}{1+\gamma_E}\right) f_D(\gamma_D) d\gamma_D. \quad (6)$$

¹The EGBFHF function can be easily realized by utilizing the MATLAB (see [22]) or with the MATHEMATICA (see Table 1).

$$I_1 = \frac{\eta_D \lambda_D^{-\mu_D}}{\alpha_D \Gamma(\mu_E)} H_{1,0;1,2;1,1}^{1,0;1,2;1,1} \left[\begin{matrix} (1-\mu_D: \frac{2}{\alpha_D}, \frac{\alpha_E}{\alpha_D}) \\ - \end{matrix} \left| \begin{matrix} (1,1), (1,1) \\ (1,1), (0,1) \end{matrix} \right| \lambda_D^{-\frac{2}{\alpha_D}}, \lambda_E \lambda_D^{-\frac{\alpha_E}{\alpha_D}} \right] \quad (3)$$

$$I_2 = \frac{\eta_E \lambda_E^{-\mu_E}}{\alpha_E \Gamma(\mu_D)} H_{1,0;1,2;1,1}^{1,0;1,2;1,1} \left[\begin{matrix} (1-\mu_E: \frac{2}{\alpha_E}, \frac{\alpha_D}{\alpha_E}) \\ - \end{matrix} \left| \begin{matrix} (1,1), (1,1) \\ (1,1), (0,1) \end{matrix} \right| \lambda_E^{-\frac{2}{\alpha_E}}, \lambda_D \lambda_E^{-\frac{\alpha_D}{\alpha_E}} \right] \quad (4)$$

Substituting $\gamma_D = \gamma_t Y_D = \gamma_t \bar{Y}_D x$, $\gamma_E = \gamma_t Y_E = \gamma_t \bar{Y}_E y$, and (1) into (6), and after some algebra, we obtain

$$\begin{aligned} \bar{C}_s &= \Xi \int_0^\infty \int_{y/\rho}^\infty \ln \left(1 + \frac{\bar{Y}_D x - \bar{Y}_E y}{\gamma_t + \bar{Y}_E y} \right) \varphi(x, y) dx dy \\ &\stackrel{\gamma_t \rightarrow \infty}{\approx} \Xi \int_0^\infty \int_{y/\rho}^\infty \ln \left(\frac{x \bar{Y}_D}{y \bar{Y}_E} \right) \varphi(x, y) dx dy \\ &= \Xi (H_1 - H_2), \end{aligned} \quad (7)$$

where $\varphi(x, y) = x^{\frac{\alpha_D \mu_D}{2} - 1} y^{\frac{\alpha_E \mu_E}{2} - 1} e^{-\mu_D x} e^{-\mu_E y}$, $\Xi = \frac{\alpha_D \alpha_E \mu_D^{\mu_D} \mu_E^{\mu_E}}{4 \Gamma(\mu_D) \Gamma(\mu_E)}$, $H_1 = \int_0^\infty \int_{y/\rho}^\infty \ln(x \bar{Y}_D) \varphi(x, y) dx dy$, and $H_2 = \int_0^\infty \int_{y/\rho}^\infty \ln(y \bar{Y}_E) \varphi(x, y) dx dy$.

Now altering the order of integration, making use of [16, eq (3.351.1)], and with some algebraic manipulations, we obtain $H_1 = \frac{4\mu_D^{-\mu_D} \mu_E^{-\mu_E}}{\alpha_D \alpha_E} \sum_{i=1}^N \omega_i g_1(t_i)$, where ω_i and t_i are the abscissas and weight factors for the Gaussian-Laguerre integration [21, eq. (25.4.45)], and $g_1(t) = \Upsilon(\mu_E, \mu_E \rho^{\alpha_E/2} (t/\mu_D)^{\alpha_E/\alpha_D}) t^{\mu_D-1} \ln((t/\mu_D)^{2/\alpha_D} \bar{Y}_D)$.

Similarly, making use of [16, eq (3.351.2)], we have $H_2 = \frac{4\mu_D^{-\mu_D} \mu_E^{-\mu_E}}{\alpha_D \alpha_E} \sum_{i=1}^N \omega_i g_2(t_i)$, where $g_2(t) = \Gamma(\mu_D, \mu_D \rho^{-\alpha_D/2} (\frac{1}{\mu_E})^{\alpha_D/\alpha_E}) t^{\mu_E-1} \ln((t/\mu_E)^{2/\alpha_E} \bar{Y}_E)$. Substituting H_1 and H_2 into (7), the upper bound expression for ASC is derived. ■

Remark 1: Obviously, one can find that the ASC will be improved as γ_t increases as indicated by (7).

Remark 2: We rewrite eq. (7) as follows

$$\begin{aligned} \bar{C}_s &= \int_0^\infty \int_{y/\rho}^\infty \ln(x/y) \Xi \varphi(x, y) dx dy \\ &\quad + \ln \rho \int_0^\infty \int_{y/\rho}^\infty \Xi \varphi(x, y) dx dy. \end{aligned} \quad (8)$$

Note that both integrals in (8) are consistent, so it can be concluded that the ASC follows the scaling law of $\Theta(\ln \rho)$ in high SNR regime.

In the Section V, one will find that the ASC can be improved with γ_t , which means the transmitting power at S increases. From *Lemma 1*, it can be found that there exists a ceiling for the ASC when in the high γ_t region since the SNR at both D and E are improved simultaneously.

V. NUMERICAL RESULTS AND DISCUSSIONS

In this section, numerical and Monte-carlo simulations results are presented to verify our analytical results. Furthermore, the impact of both the fading parameters and the average SNRs on the secrecy performance are demonstrated. To the authors' best knowledge, the EGBFHF is not available in standard mathematical packages and MATLAB library. As the implementation in [22] is not a common case to evaluate EGBFHF function, an efficient Mathematica implementation of this function is offered for any general case (hence it also fits for the numerical evaluation of eqs. (3) and (4)), as shown in Table 1.² The main parameters used in simulations and

TABLE I
MATHEMATICA IMPLEMENTATION OF EXTENDED GENERALIZED BIVARIATE BIVARIATE FOX'S H-FUNCTION

```
ClearAll; Clear[H];
H::InconsistentCoeffs = "Inconsistent coefficients!";
H[{ast_, bst_}, {as_, bs_}, {at_, bt_}, {zs_, zt_}] := Module[{},
  Pas =
    Function[u, Product[Gamma[1 - as[[1, n, 1]] - uas[[1, n, 2]]], {n, 1, Length[as[[1]]]}];
  Qas = Function[u, Product[Gamma[as[[2, n, 1]] + uas[[2, n, 2]]], {n, 1, Length[as[[2]]]}];
  Pbs = Function[u, Product[Gamma[bs[[1, n, 1]] + ubs[[1, n, 2]]], {n, 1, Length[bs[[1]]]}];
  Qbs = Function[u, Product[Gamma[1 - bs[[2, n, 1]] - ubs[[2, n, 2]]], {n, 1, Length[bs[[2]]]}];
  Ms = Function[u, Pas[u] Pbs[u] / (Qas[u] Qbs[u])];
  Pat =
    Function[u, Product[Gamma[1 - at[[1, n, 1]] - uat[[1, n, 2]]], {n, 1, Length[at[[1]]]}];
  Qat = Function[u, Product[Gamma[at[[2, n, 1]] + uat[[2, n, 2]]], {n, 1, Length[at[[2]]]}];
  Pbt = Function[u, Product[Gamma[bt[[1, n, 1]] + ubt[[1, n, 2]]], {n, 1, Length[bt[[1]]]}];
  Qbt = Function[u, Product[Gamma[1 - bt[[2, n, 1]] - ubt[[2, n, 2]]], {n, 1, Length[bt[[2]]]}];
  Mt = Function[u, Pat[u] Pbt[u] / (Qat[u] Qbt[u])];
  Past = Function[{u, v}, Product[Gamma[
    1 - ast[[1, n, 1]] - uast[[1, n, 2]] - v ast[[1, n, 3]]], {n, 1, Length[ast[[1]]]}];
  Qast = Function[{u, v}, Product[Gamma[ast[[2, n, 1]] + uast[[2, n, 2]] + v ast[[2, n, 3]]], {n, 1, Length[ast[[2]]]}];
  Qbst = Function[{u, v}, Product[Gamma[1 - bst[[2, n, 1]] - ubst[[2, n, 2]] -
    v bst[[2, n, 3]]], {n, 1, Length[bst[[2]]]}];
  Mst = Function[{u, v}, Past[u, v] / (Qast[u, v] Qbst[u, v])];
  MT = Function[{u, v}, Ms[u] Mt[v] Mst[u, v]];
  Rs = -1/2; Rt = 1/2; Zs = zs; Zt = zt; W = 10;
  value = 1 / (2 \pi i) NIntegrate[MT[s, t] Zs^s Zt^-t, {s, Rs - I W, Rs + I W}, {t, Rt - I W, Rt + I W}];
  Return[value];];
```

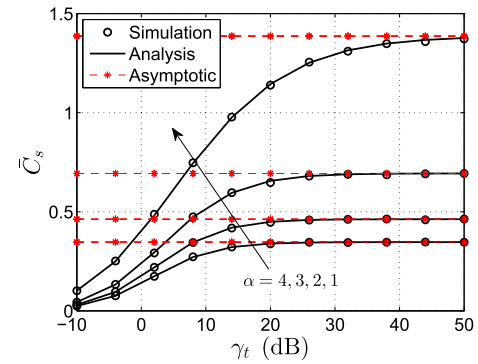


Fig. 1. ASC for various α .

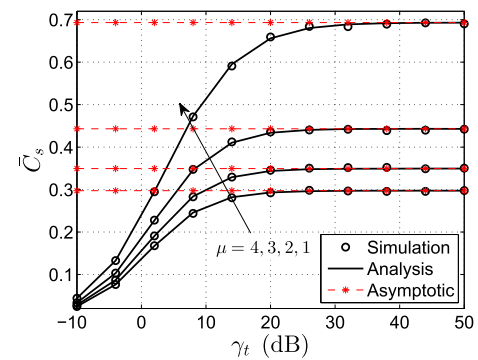


Fig. 2. ASC for various μ .

analysis are set as $\alpha_D = \alpha_E = \alpha$ and $\mu_D = \mu_E = \mu$. The curves are examined for various α and μ for comparison purposes while varying γ_t .

In Figs. 1-3, simulation and analytical results are compared for the ASC over α - μ fading channels. It is clear that our analytical results have been verified by the simulation results. Figs. 1 and 2 present the ASC vs. γ_t for various α or μ . It can be observed from Figs. 1 and 2 that the ASC for a lower α or μ outperforms the one for a higher α or μ ,

²The EGBMGF code given in [23] is a special case of this.

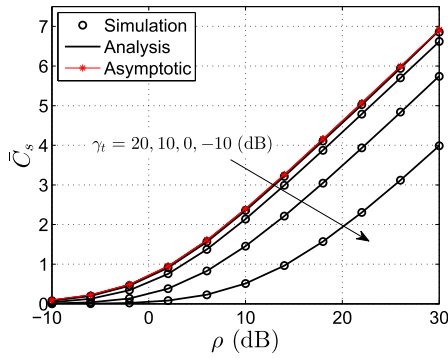


Fig. 3. ASC for various γ_t .

reflecting the nonlinearity and clustering, respectively. This is because low α and μ means serious nonlinearity and sparse clustering (i.e., worse channel conditions). It justifies that the inherent nonlinearity and clustering of fading channels can be exploited to prevent the information being overheard by the eavesdropper in physical layer security scheme. Furthermore, it can be observed that the ASC can be improved while increasing γ_t , which means improving the transmit SNR at S can enhance the security performance. This is because the appropriate code scheme can be utilized to widen the SNR gap between the main and the wiretap channels when the perfect CSI of the eavesdropping channel is available at S . When $\alpha_D = \alpha_E = 2$, $\mu_D = \mu_E = 1$, our results match the results in [3]. When $\alpha_D = \alpha_E = 2$, our results consistent with the results in [6].

Fig. 3 presents the ASC vs. ρ for various γ_t , while $\mu = 1$ and $\alpha = 2$. One can observe that ASC can be improved with increasing ρ due to a higher ρ representing the quality of the main channel superior than the eavesdropping channel. One also can find from Fig. 3 that the ASC gradually approaches to the upper bound as γ_t increases since the SNR at both D and E are improved simultaneously. Furthermore, we can find that there is a linear relationship between the growth rate of ASC and the ρ in the high ρ regime.

VI. CONCLUSION

In this work, the exact and asymptotic closed-form expressions for the average secrecy capacity over α - μ fading channel were derived and validated through simulations. The proposed models can be used to analyze the secrecy performance over small-scale fading channels (such as exponential, Rayleigh, Gamma, Nakagami- m , Weibull), large-scale fading channels (such as log-normal), and composite fading channels (such as generalized- K).

REFERENCES

- [1] Y. Huang, F. S. Al-Qahtani, T. Q. Duong, and J. Wang, "Secure transmission in MIMO wiretap channels using general-order transmit antenna selection with outdated CSI," *IEEE Trans. Commun.*, vol. 63, no. 8, pp. 2959–2971, Aug. 2015.
- [2] J. Zhu, Y. Zou, G. Wang, Y.-D. Yao, and G. K. Karagiannis, "On secrecy performance of antenna-selection-aided MIMO systems against eavesdropping," *IEEE Trans. Veh. Technol.*, vol. 65, no. 1, pp. 214–225, Jan. 2016.
- [3] M. Bloch, J. Barros, M. R. D. Rodrigues, and S. W. McLaughlin, "Wireless information-theoretic security," *IEEE Trans. Inf. Theory*, vol. 54, no. 6, pp. 2515–2534, Jun. 2008.
- [4] N. Yang, P. L. Yeoh, M. Elkashlan, R. Schober, and I. B. Collings, "Transmit antenna selection for security enhancement in MIMO wiretap channels," *IEEE Trans. Commun.*, vol. 61, no. 1, pp. 144–154, Jan. 2013.
- [5] L. Wang, M. Elkashlan, J. Huang, R. Schober, and R. Mallik, "Secure transmission with antenna selection in MIMO Nakagami- m fading channels," *IEEE Trans. Wireless Commun.*, vol. 13, no. 11, pp. 6054–6067, Nov. 2014.
- [6] O. Olabiya and A. Annamalai, "Ergodic secrecy rates of secure wireless communications," in *Proc. MILCOM*, Baltimore, MD, USA, Oct. 2014, pp. 18–23.
- [7] X. Liu, "Probability of strictly positive secrecy capacity of the weibull fading channel," in *Proc. GLOBECOM*, Atlanta, GA, USA, Dec. 2013, pp. 659–664.
- [8] X. Liu, "Average secrecy capacity of the Weibull fading channel," in *Proc. CCNC*, Las Vegas, NV, USA, Jan. 2016, pp. 841–844.
- [9] G. Pan, C. Tang, X. Zhang, T. Li, Y. Weng, and Y. Chen, "Physical layer security over non-small scale fading channels," *IEEE Trans. Veh. Technol.*, vol. 65, no. 3, pp. 1326–1339, Mar. 2016.
- [10] H. Lei et al., "Performance analysis of physical layer security over generalized- K fading channels using a mixture Gamma distribution," *IEEE Commun. Lett.*, vol. 20, no. 2, pp. 408–411, Feb. 2016.
- [11] H. Lei, C. Gao, I. S. Ansari, Y. Guo, G. Pan, and K. Qaraqe, "On physical layer security over SIMO generalized- K fading channels," *IEEE Trans. Veh. Technol.*, vol. 65, no. 9, pp. 7780–7785, Sep. 2016.
- [12] H. Lei, C. Gao, Y. Guo, and G. Pan, "On physical layer security over generalized gamma fading channels," *IEEE Commun. Lett.*, vol. 19, no. 7, pp. 1257–1260, Jul. 2015.
- [13] M. D. Yacoub, "The α - μ distribution: A physical fading model for the Stacy distribution," *IEEE Trans. Veh. Technol.*, vol. 56, no. 1, pp. 27–34, Jan. 2007.
- [14] K. P. Peppas, "A simple, accurate approximation to the sum of gamma-gamma variates and applications in MIMO free-space optical systems," *IEEE Photon. Technol. Lett.*, vol. 23, no. 13, pp. 839–841, Jul. 1, 2011.
- [15] B. Wang, G. Cui, W. Yi, L. Kong, and X. Yang, "Approximation to independent lognormal sum with α - μ distribution and the application," *Signal Process.*, vol. 111, pp. 165–169, Jun. 2015.
- [16] I. Gradshteyn and I. Ryzhik, *Table of Integrals, Series and Products*, 7th ed. San Diego, CA, USA: Academic, 2007.
- [17] V. S. Adamchik and O. I. Marichev, "The algorithm for calculating integrals of hypergeometric type functions and its realization in REDUCE system," in *Proc. ISSAC*, Tokyo, Japan, 1990, pp. 212–224.
- [18] M. D. Springer, *The Algebra of Random Variables*. New York, NY, USA: Wiley, 1979.
- [19] P. K. Mittal and K. C. Gupta, "An integral involving generalized function of two variables," *Proc. Indian Acad. Sci.-Sec. A*, vol. 75, no. 3, pp. 117–123, Mar. 1972.
- [20] A. Mathai, R. K. Saxena, and H. J. Haubold, *The H-Function Theory and Applications*. New York, NY, USA: Springer, 2010.
- [21] M. Abramowitz and I. A. Stegun, *Handbook of Mathematical Functions With Formulas, Graphs, and Mathematical Tables*, 9th ed. New York, NY, USA: Dover, 1972.
- [22] K. P. Peppas, "A new formula for the average bit error probability of dual-hop amplify-and-forward relaying systems over generalized shadowed fading channels," *IEEE Wireless Commun. Lett.*, vol. 1, no. 2, pp. 85–88, Apr. 2012.
- [23] I. S. Ansari, S. Al-Ahmadi, F. Yilmaz, M. S. Alouini, and H. Yanikomeroglu, "A new formula for the BER of binary modulations with dual-branch selection over generalized- K composite fading channels," *IEEE Trans. Commun.*, vol. 59, no. 10, pp. 2654–2658, Oct. 2011.