


## OPTO isolatore





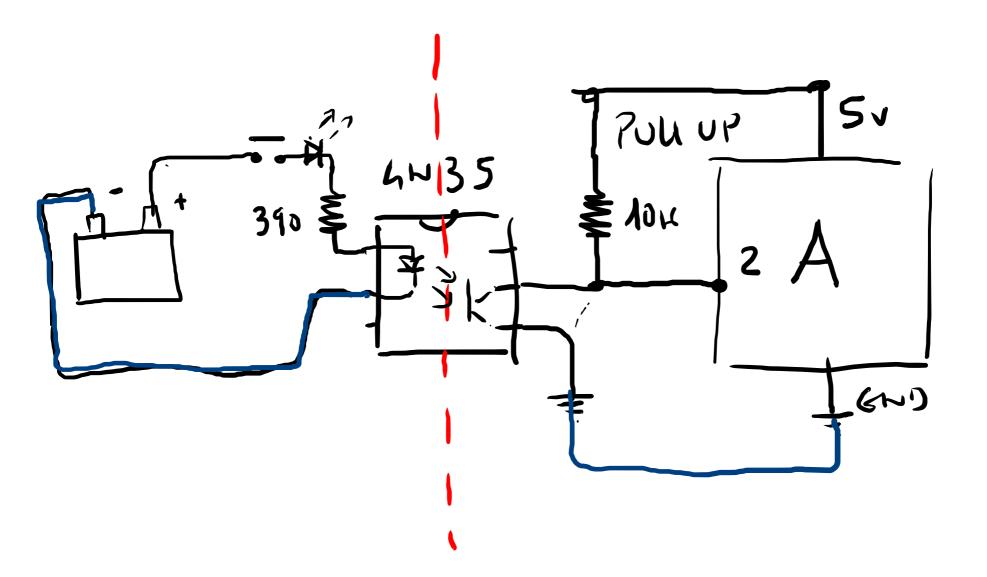

## POTENZIO METRO DIGITALE

MCP 41 \*\*\*

010 ~ 10K CS ~ 50K

050 ~ 50K SCK

160 ~ 100K SI

## MCP 41 010

byte comando	XX	XX	P2 P	
60010001	HOP O	0	0 1	
	write o	1 4		
	SHUTDUM 1	O		
• • • •	<b>Nop</b> 1	1		

byte "dati": le 0 a 255 -> positione potenzionetts

