

AuroraPhoto


Distributed Edge Control for Adaptive Aurora Capture and Star Sharpness

Simon Knight

AuroraPhoto Project

March 2026 • Version 0.1.0

Last updated: March 13, 2026

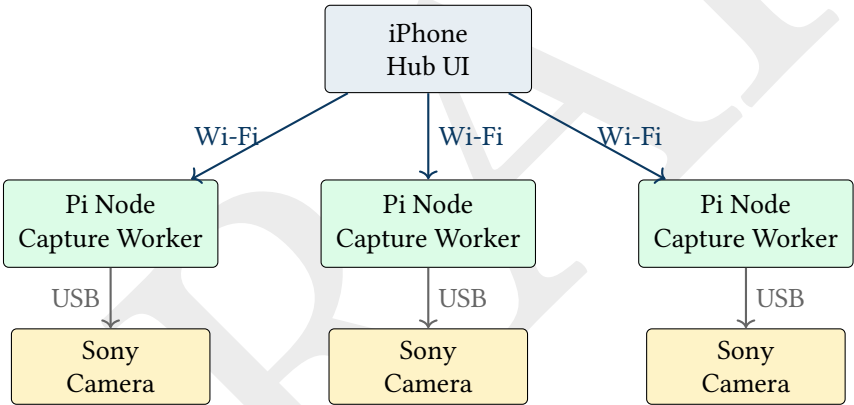

Abstract. AuroraPhoto is a distributed astrophotography control system aimed at capturing high-quality aurora and night-sky imagery under rapidly changing conditions. The core design uses an iPhone as a field-ready coordination hub and one or more Raspberry Pi capture nodes connected to Sony Alpha cameras over USB. Each node performs local (edge) image analysis to compute star sharpness (Half-Flux Radius, HFR) and exposure histograms from preview imagery, enabling low-latency focus correction and adaptive exposure profile switching during aurora “bursts”. This report specifies the target architecture, key control loops, failure modes specific to cold-field USB operation, and a roadmap-to-requirements traceability model suitable for implementation and validation.

Contents

1 Problem Framing	1
2 System Model and Component Boundaries	2
2.1 Component Responsibilities	2
2.2 Interfaces and Constraints	2
3 Control Loops	2
3.1 Coupled-loop View (Focus, Exposure, Burst)	2
3.2 Focus Loop (HFR Minimization)	3
3.3 Exposure Loop (Histogram Guard Rails)	3
3.4 Burst Loop (Activity-driven Profile Switching)	3
4 Distributed Synchronization	4
5 Reliability and Field Failure Modes	4
5.1 Sony USB “Hang” and Recovery	4
5.2 Thermal Focus Drift	4
6 Requirements Traceability	4
7 End-to-End Operational Scenarios	4
7.1 Scenario A: Field Bring-up and Node Enrollment	5
7.2 Scenario B: Focus Calibration at Dusk	5
7.3 Scenario C: Aurora Burst with Multi-node Synchronization	6
8 Formal State Models	6
8.1 Capture Node State Machine	6
8.2 Hub State Machine	6
9 Timing and Performance Budgets	7
9.1 Algorithmic Detail: HFR Estimation Pipeline (Per-frame)	7
9.2 Algorithmic Detail: Burst Detection as a Change-point Problem	7
9.3 Algorithmic Detail: Focus Search Under Noise (Coarse-to-fine)	8
9.4 Algorithmic Detail: Exposure Trade-offs as a Pareto Frontier	8
9.5 Reliability Analysis: Fault Tree and Recovery Confidence	8
10 Design Rules and Anti-patterns (Field-driven)	9
11 Implementation Roadmap (Conceptual)	9
12 Assumptions, Invariants, and Testable Claims	9
12.1 System Assumptions	9
12.2 Invariants	9
12.3 Testable Claims	10
13 Validation Protocols	10
13.1 Protocol: Preview Cadence and Latency Budget	10
13.2 Protocol: Focus Drift and Refocus Triggers	10
13.3 Protocol: Burst Benefit A/B Test	11
14 Open Questions and Research Risks	11
15 Estimation and Control Under Uncertainty	11
15.1 Belief State and Confidence Gates	11
15.2 Uncertainty Propagation (Conceptual)	11
16 Test Harness Design	12
16.1 Experiment Matrix (Fault Injection)	12
16.2 Calibration: Recovery Confidence	12
17 Multi-node Theory and Synchronization Error Budget	12
17.1 Error Decomposition	13
17.2 Timing Diagram: Delta-trigger vs Immediate Trigger	13
17.3 Tolerance Targets	13
18 Astronomical Phenomena and Photographic Response	14
18.1 Solar Eclipse Geometry and Contact Points	14

18.2 Lunar Eclipse Phases 14

18.3 Moon Phase and Night Sky Brightness 15

18.4 Light Levels Across Eclipse Stages 17

18.5 Camera Parameter Adaptation Strategy 17

18.6 Aperture Trade-offs for Astrophotography 19

18.7 Shutter Speed Trade-offs and Motion Considerations 20

18.8 Dynamic Range Challenge: Corona and Prominences 21

18.9 Aurora-specific Light Adaptation 22

18.10 Spectral Characteristics and White Balance 23

18.11 Focal Length and Field of View Selection 23

18.12 Optical Filters for Astrophotography 24

18.13 Atmospheric Effects on Imaging 24

18.14 Pre-totally Operational Timeline 25

18.15 Auroral Oval and Magnetic Latitude 27

18.16 Solar Cycle and Aurora Frequency 28

18.17 Color Temperature Progression During Eclipse 29

18.18 Signal-to-Noise Fundamentals 29

18.19 Histogram Interpretation for Astrophotography 30

18.20 Star Point Spread Function and Focus Physics 31

18.21 Multi-camera Deployment Geometry 31

18.22 Eclipse Stage Detail: What Happens Physically 32

18.23 Multi-Rig Eclipse Strategy and Corona Framing 32

18.24 Space Weather Monitoring and Aurora Prediction 34

18.25 Bayer Pattern and Color Reconstruction 35

18.26 Sensor Read Modes and Their Trade-offs 36

18.27 Dark Current and Temperature 36

18.28 Coma and Field Curvature in Fast Lenses 37

18.29 HDR Compositing Pipeline for Corona Imagery 38

18.30 Image Stacking for Noise Reduction 38

18.31 Sky Quality and the Bortle Scale 39

18.32 Weather and Clear Sky Planning 40

18.33 Eclipse State Machine Mapping 40

18.34 Telemetry Dashboard for Eclipse Operations 40

Revision History 41

Todo List 41

Contents

Acronyms and Terms

Term	Meaning
HFR	Half-Flux Radius; a star sharpness proxy computed from extracted point sources. Lower is sharper.
SNR	Signal-to-noise ratio; proxy for whether stars can be reliably measured in previews.
p95/p99	95th/99th percentile of a latency distribution; used to reason about tail latency.
Delta-trigger	Trigger scheduling method where nodes receive a command to act at a future timestamp to absorb network jitter.

Table 1. Acronyms and terms used in this report.

1 Problem Framing

Aurora photography presents an unusually adversarial control environment: scene illumination changes rapidly; the most visually valuable structure (discrete rays and curtains) can require short exposures; focus drifts with temperature; and field constraints (cold, battery, unreliable links) magnify small failure modes.

Insight:
The key product value is not “automation” as in “unattended intervalometer capture”; it is closed-loop control where preview analysis feeds back into exposure and focus decisions within seconds.

Design Decision 1: Edge-first Control

The system performs all time-critical perception (histogram checks, star sharpness) on the Raspberry Pi node. The phone coordinates, visualizes, and triggers, but does not become a compute bottleneck.

2 System Model and Component Boundaries

We model AuroraPhoto as a hub-and-spoke distributed control system consisting of three primary roles: a mobile coordination hub, one or more edge capture nodes, and camera devices.

2.1 Component Responsibilities

Component	Primary Responsibility	Interface
iPhone Hub	UI, settings, composition aids (compass/overlay), coordinated triggering, status dashboard	Wi-Fi
Pi Capture Node	Camera control, preview analysis (HFR, histogram), local buffering, watchdog/recovery	USB + Wi-Fi
Sony Camera	RAW acquisition, focus motor control, exposure parameter execution	USB (PTP/SDK)

Table 2. AuroraPhoto component boundaries and responsibilities.

2.2 Interfaces and Constraints

Two constraints dominate the architecture:

1. Preview-to-decision latency must be low (seconds) to preserve aurora beam definition.
2. Bandwidth is scarce in the field; RAW transfer is prohibitively expensive for real-time loops.

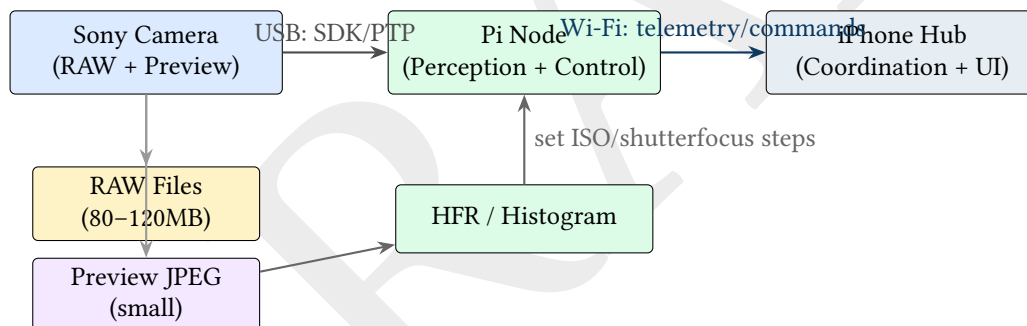


Figure 1. Data movement is asymmetric: previews drive decisions; RAW is buffered and transferred opportunistically.

3 Control Loops

AuroraPhoto is best described as three interacting control loops running at different time scales.

3.1 Coupled-loop View (Focus, Exposure, Burst)

The loops are coupled through shared observables (preview frames) and shared actuators (camera parameters). A useful mental model is a triad of controllers operating on different objectives but competing for the same camera time.

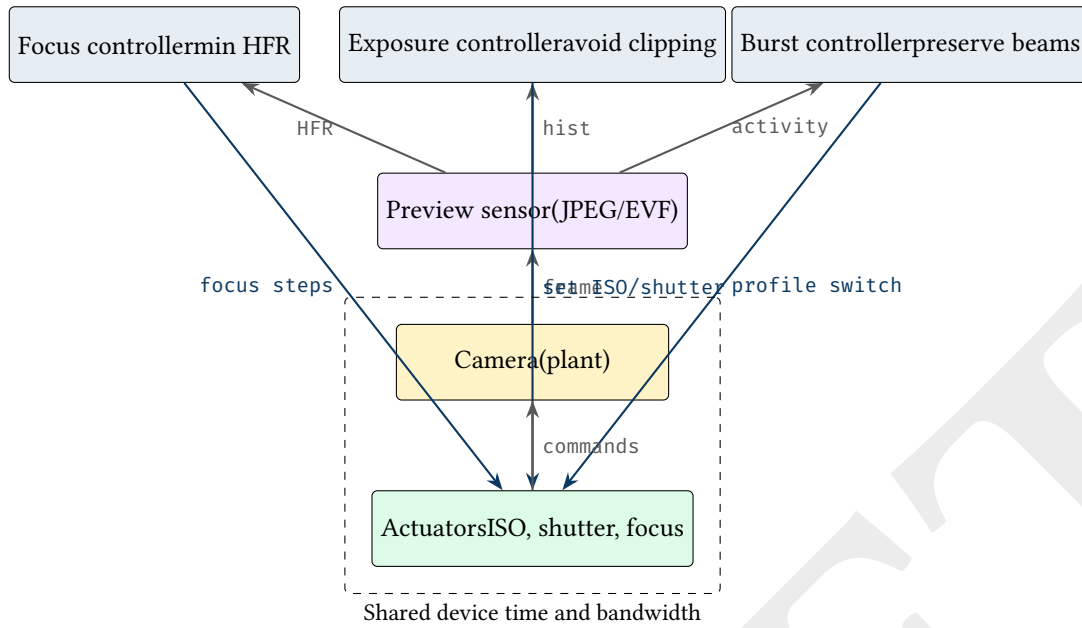


Figure 2. Coupled-loop view: three controllers observe the same preview stream and compete for shared actuation bandwidth.

3.2 Focus Loop (HFR Minimization)

The focus loop uses preview frames to detect stars and compute a scalar sharpness metric (HFR). The control objective is to minimize HFR by stepping the focus motor.

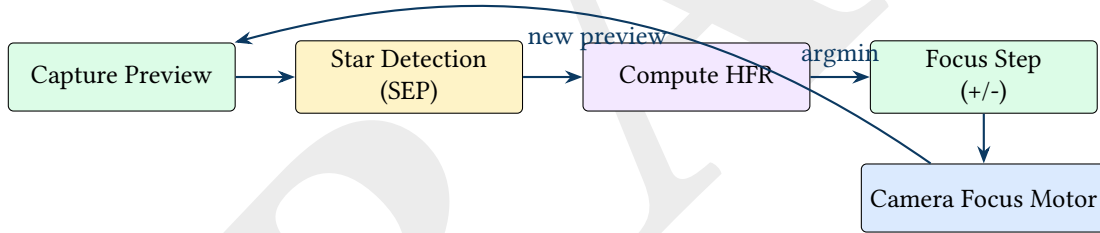


Figure 3. Focus loop: preview-driven HFR minimization on the edge node.

3.3 Exposure Loop (Histogram Guard Rails)

Aurora scenes often clip the green channel; once clipped, beam structure is irrecoverable.

: Green-channel Clip Avoidance

Treat preview histogram clipping as a hard constraint: if any channel exceeds a clipping threshold, shorten shutter and/or reduce ISO before continuing the sequence.




Figure 4. Exposure loop: histogram-based constraint enforcement to protect highlight detail.

3.4 Burst Loop (Activity-driven Profile Switching)

Burst logic switches between exposure profiles (e.g., “wait” vs “burst”) based on detected aurora activity. In v1, a heuristic can be histogram-based; in v2, ML classification is targeted.




Figure 5. Burst loop: activity detection escalates capture aggressiveness while preserving synchronization.

4 Distributed Synchronization

Multi-node capture requires synchronized triggering while tolerating intermittent connectivity.

Design Decision 2: Delta-triggering

Nodes maintain a shared schedule but wait for a “delta” trigger message from the hub. This reduces sensitivity to clock skew while enabling aligned bursts.

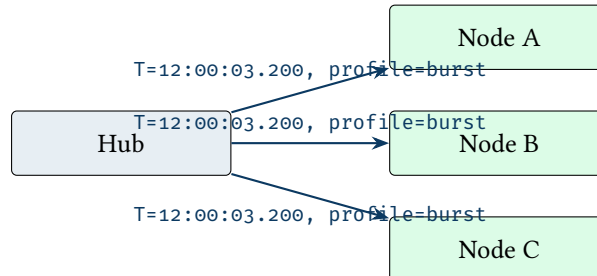


Figure 6. Delta-triggering: a hub message specifies a future trigger timestamp to absorb network jitter.

5 Reliability and Field Failure Modes

Field conditions expose failure classes not common in lab camera automation.

5.1 Sony USB “Hang” and Recovery

Sony cameras can appear present on the USB bus yet be unresponsive to PTP commands. The recovery strategy is to detect timeouts and power-cycle the relevant USB port (via a hub with per-port power switching).

USB Hang Risk

If recovery requires a physical unplug/replug, the system ceases to be “remote”. USB reset via controllable hubs is a design requirement (SHRP-04).

5.2 Thermal Focus Drift

Even if focus is correct at startup, temperature-driven drift can invalidate the imaging run. Monitoring HFR provides a quantitative trigger for refocus routines.

6 Requirements Traceability

7 End-to-End Operational Scenarios

This section describes the primary user-visible workflows as message-and-control sequences. The intent is to make the architecture testable: each scenario implies timing expectations, failure handling, and a minimum set of state transitions.

7.1 Scenario A: Field Bring-up and Node Enrollment

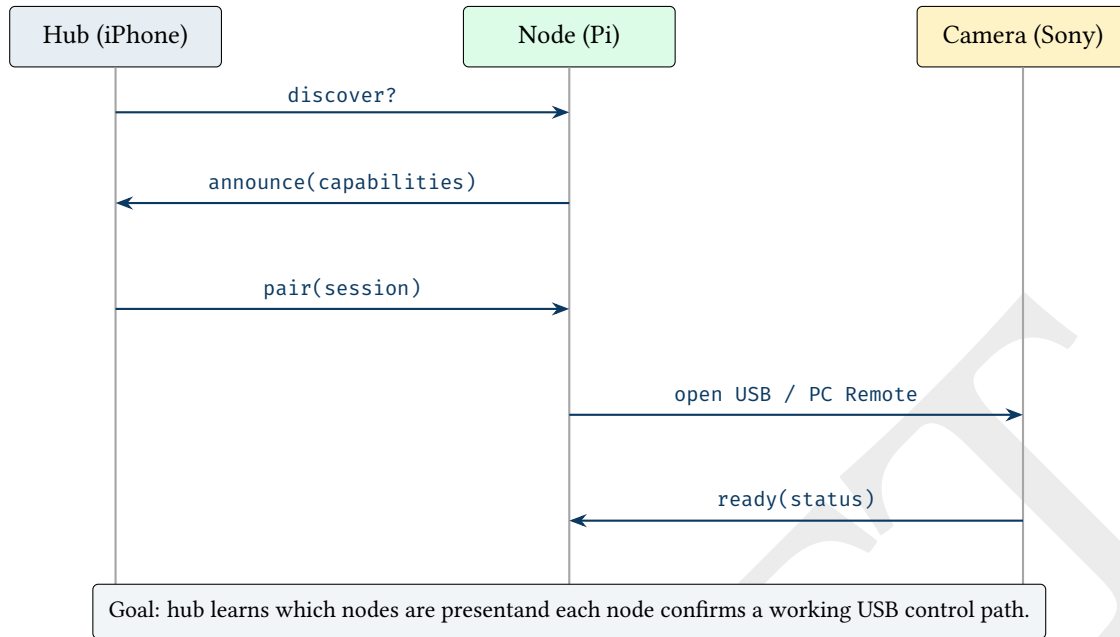


Figure 7. Sequence: bring-up and enrollment (conceptual protocol).

7.2 Scenario B: Focus Calibration at Dusk

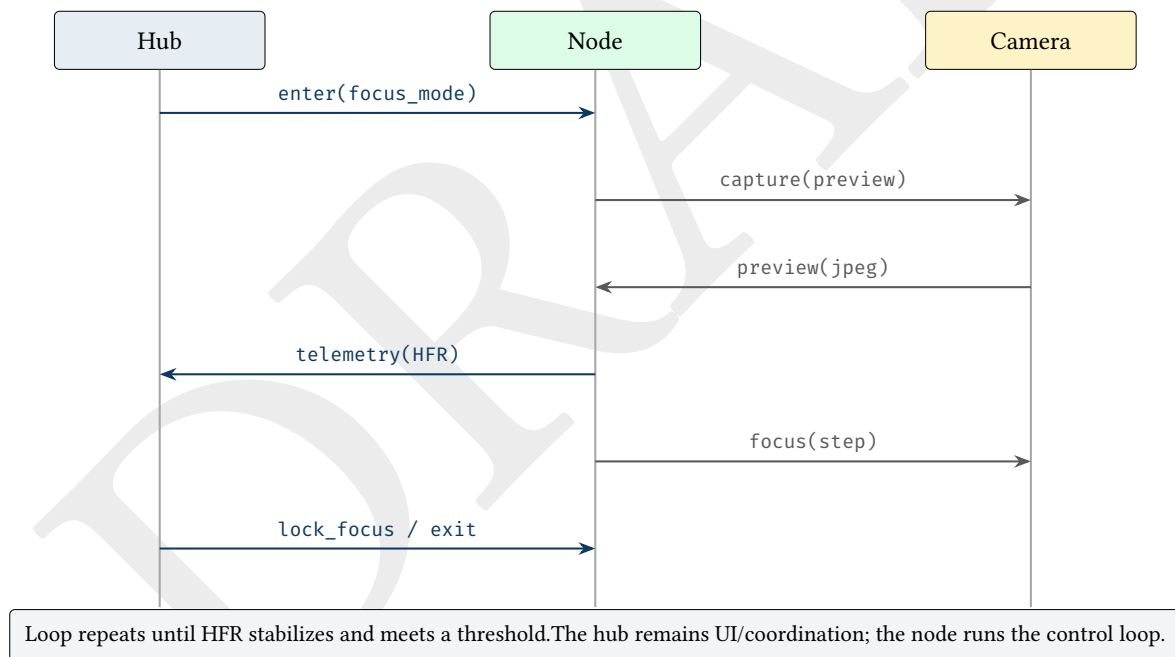


Figure 8. Sequence: focus calibration loop at dusk (conceptual).

7.3 Scenario C: Aurora Burst with Multi-node Synchronization

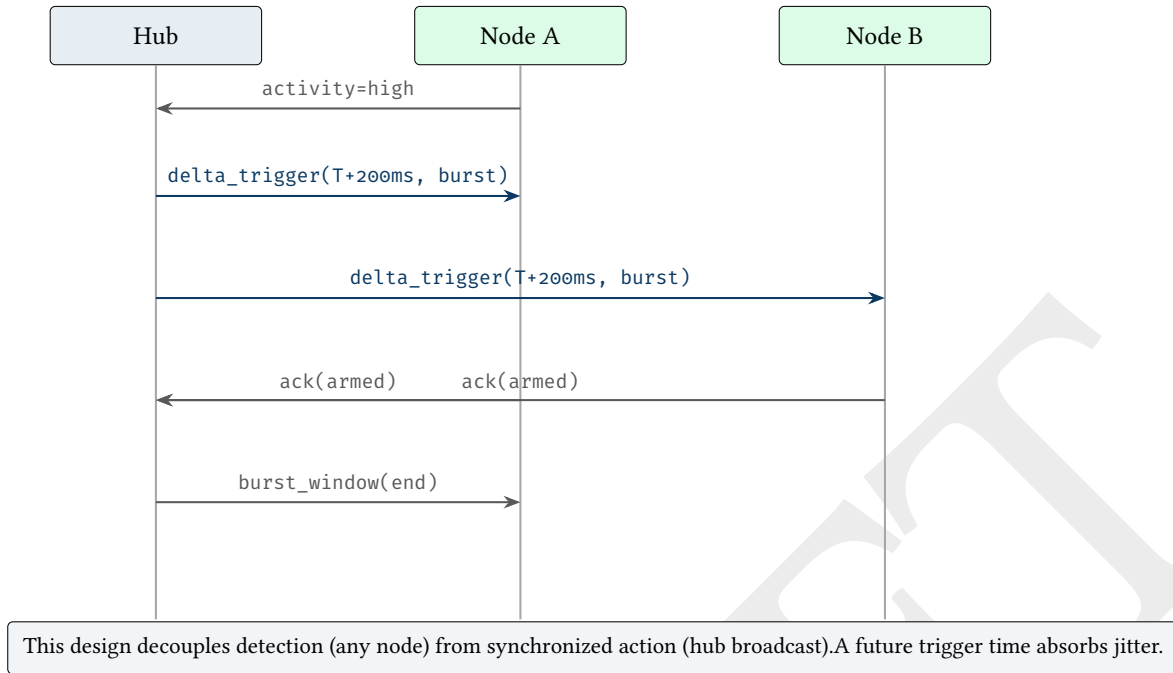


Figure 9. Sequence: one node detects activity; hub coordinates a synchronized burst.

8 Formal State Models

The system is safety-critical in the sense of opportunity cost: failure wastes an entire night of data. Clear state models simplify implementation and test harness design.

8.1 Capture Node State Machine

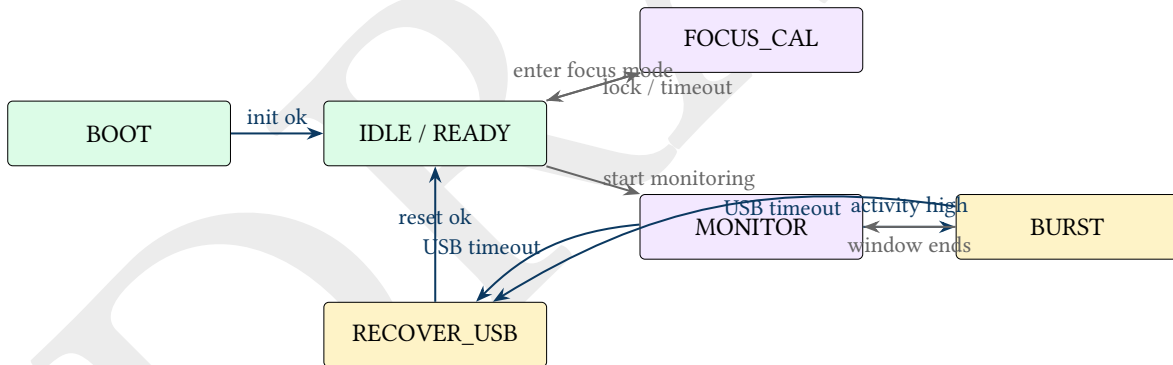


Figure 10. Conceptual node state machine including USB recovery as a first-class state.

8.2 Hub State Machine

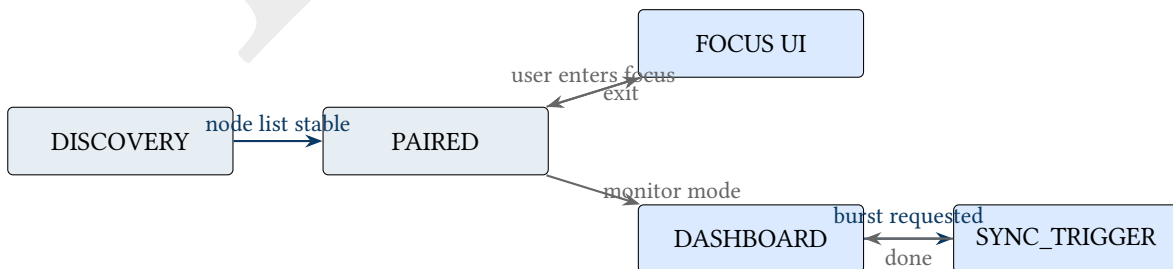


Figure 11. Conceptual hub state machine centered on coordination, not computation.

9 Timing and Performance Budgets

Although this report is conceptual, the control loops imply quantitative budgets. The key metric is closed-loop latency: the time from a preview frame being captured to a control action being applied.

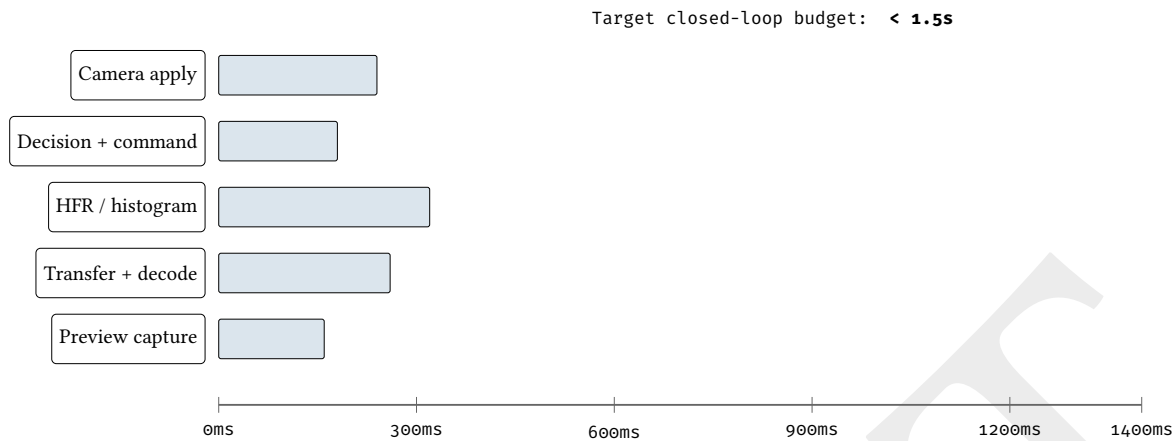


Figure 12. Conceptual latency budget for a single control iteration (focus/exposure).

9.1 Algorithmic Detail: HFR Estimation Pipeline (Per-frame)

HFR estimation is the core “advanced” perception primitive. The algorithm below is intentionally framed as a pipeline with uncertainty gates rather than a linear flowchart: each stage can emit confidence and failure reasons.

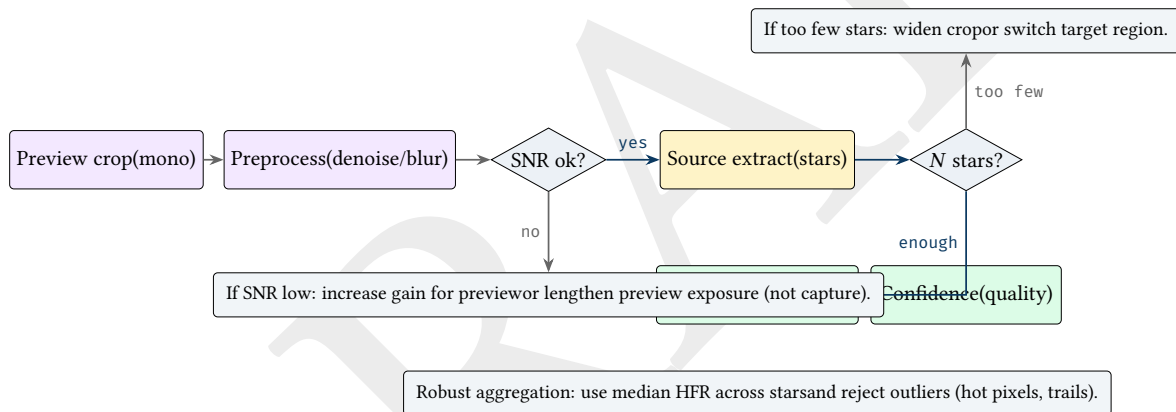


Figure 13. HFR estimation as a gated perception pipeline with explicit failure modes and confidence.

9.2 Algorithmic Detail: Burst Detection as a Change-point Problem

“Burst” events can be framed as change points in a time series of preview-derived signals (brightness, texture, motion, or ML scores). This motivates designs that use hysteresis, smoothing, and minimum-duration windows.

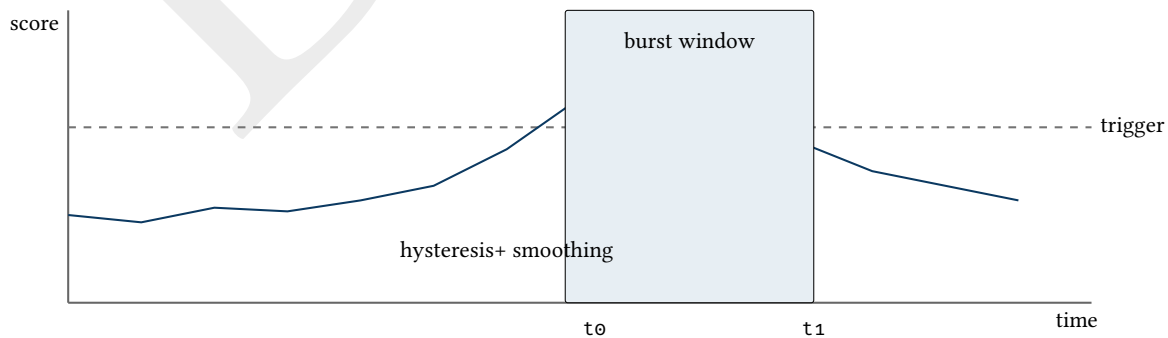


Figure 14. Burst detection as change-point detection on a scalar activity score with hysteresis and minimum-duration windows.

9.3 Algorithmic Detail: Focus Search Under Noise (Coarse-to-fine)

Autofocus for stars is an optimization under noisy measurements: each focus step yields a new preview frame and a stochastic HFR estimate. A robust strategy is a coarse-to-fine search: bracket the minimum with large steps, then refine with smaller steps and a stop condition based on improvement and measurement confidence.

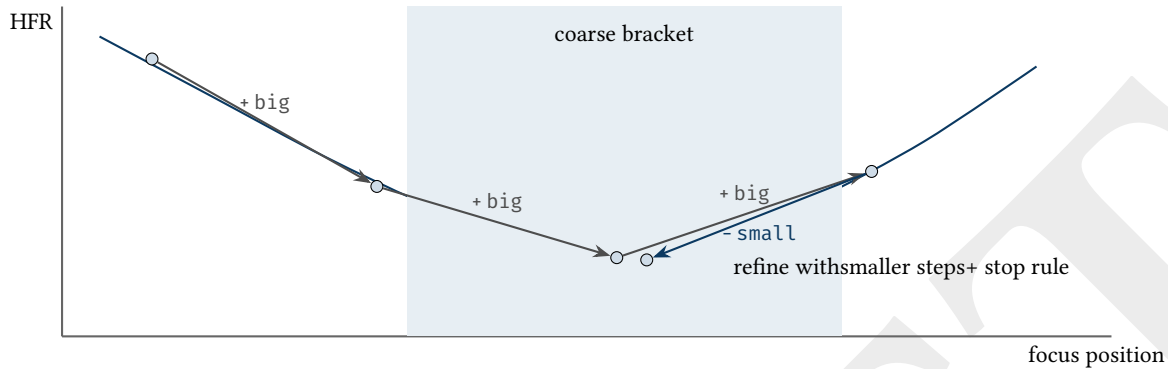


Figure 15. Focus search under noise: bracket the minimum with large steps, then refine locally with smaller steps and confidence-aware stopping.

9.4 Algorithmic Detail: Exposure Trade-offs as a Pareto Frontier

Aurora capture optimizes multiple competing objectives: avoid star trailing (short shutter), preserve beam structure (short shutter), avoid clipping (lower ISO/shutter), and avoid excessive noise (lower ISO / sufficient exposure). These are not simultaneously satisfiable; the system should operate on a Pareto frontier and switch regimes during bursts.


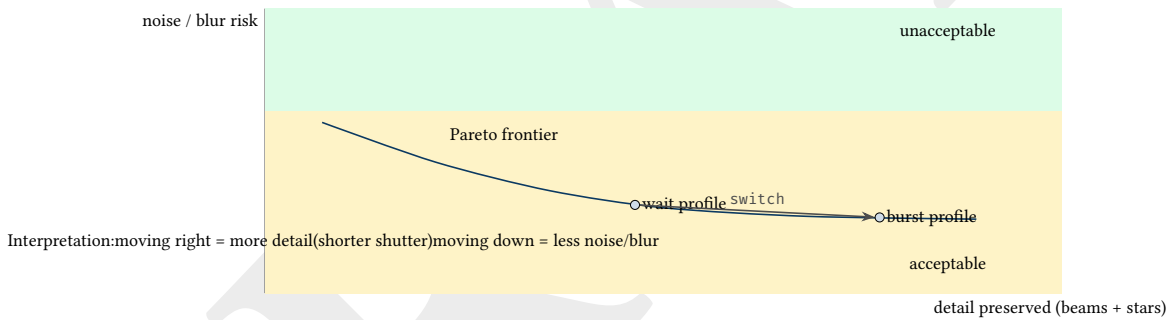


Figure 16. Multi-objective exposure tuning: operate along a Pareto frontier and switch operating points when activity changes.

9.5 Reliability Analysis: Fault Tree and Recovery Confidence

Many failures manifest identically (“no response”) but have different remedies. A lightweight fault tree helps separate detection signals from actionability and allows the system to emit a recovery confidence value.

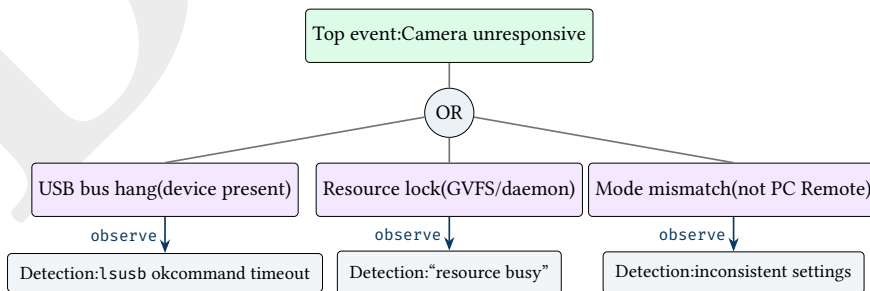

Recovery actions:(1) power-cycle USB port(2) kill locking process(3) set PC Remote + reconnectEmit: **recovery confidence** based on which leaf fired.

Figure 17. Fault tree: separate failure causes that share the same symptom, and tie each cause to a specific recovery action and confidence.

10 Design Rules and Anti-patterns (Field-driven)

This section elevates domain pitfalls into explicit design constraints.

: No RAW in Feedback Loops

Do not rely on RAW transfer for any real-time decision. Preview-derived metrics are the only viable feedback signal in the field.

: Recovery is a State

USB hang recovery is not an exception path; it is an expected state transition with explicit detection, actuation (power-cycle), and a return-to-service criterion.

: Edge-heavy Perception

All perception that closes a loop (HFR, histogram, activity) executes on the node to avoid Wi-Fi latency and bandwidth coupling.

11 Implementation Roadmap (Conceptual)

Even without committing to a specific API stack, the work packages can be defined by which loop they enable and how they can be validated.

Phase	Primary Deliverable	Validation
P1	Node USB control + preview acquisition	Repeatable shutter/ISO/focus commands in cold soak
P2	HFR and histogram metrics	HFR correlates with visible star sharpness; no highlight clipping
P3	Hub UI + telemetry dashboard	Field setup in gloves; stable node status and simple triggers
P4	Burst profile switching + delta-triggering	Multi-node burst alignment within tolerance; minimal missed bursts

Table 3. Conceptual roadmap aligned to control loops and validation.

12 Assumptions, Invariants, and Testable Claims

This report is intentionally conceptual (no fixed API), but it still aims to be falsifiable. Each claim below implies a test harness and measurable acceptance criteria.

12.1 System Assumptions

1. A low-resolution preview stream is available at a cadence sufficient for control (order 1–5 Hz).
2. Focus steps are repeatable (monotonic mapping between command and focus motor motion).
3. Preview-derived metrics (HFR, histogram, activity score) correlate strongly with the desired outcomes (sharp stars, unclipped highlights, preserved beam structure).

12.2 Invariants

: Safety over Aggression

If the histogram indicates clipping risk, the system must de-rate exposure even if that reduces activity score sensitivity.

: Loop Independence via Priority

When control loops conflict, resolve by priority: (1) prevent clipping, (2) maintain focus, (3) optimize burst/detail.

12.3 Testable Claims

Claim	Statement	How to Test
C1	Closed-loop exposure adjustments occur within a bounded latency window under nominal conditions.	Inject step-change brightness and measure time-to-command.
C2	HFR estimates are stable enough to drive focus search without oscillation.	Run repeated focus sweeps and compute variance / convergence.
C3	Burst switching preserves beam detail compared to a fixed-profile baseline.	A/B capture sequences; compare clipped pixels and structure metrics.
C4	USB hang recovery returns the node to service without human intervention in most cases.	Cold soak + scripted fault injection; count successful recoveries.

Table 4. Representative claims and validation strategies.

13 Validation Protocols

This section proposes field-realistic protocols. The goal is not perfect lab repeatability; it is a disciplined way to learn which assumptions fail.

13.1 Protocol: Preview Cadence and Latency Budget

Measure the end-to-end time from preview capture to actuation. Record distributions (median, 95th percentile), not just means.

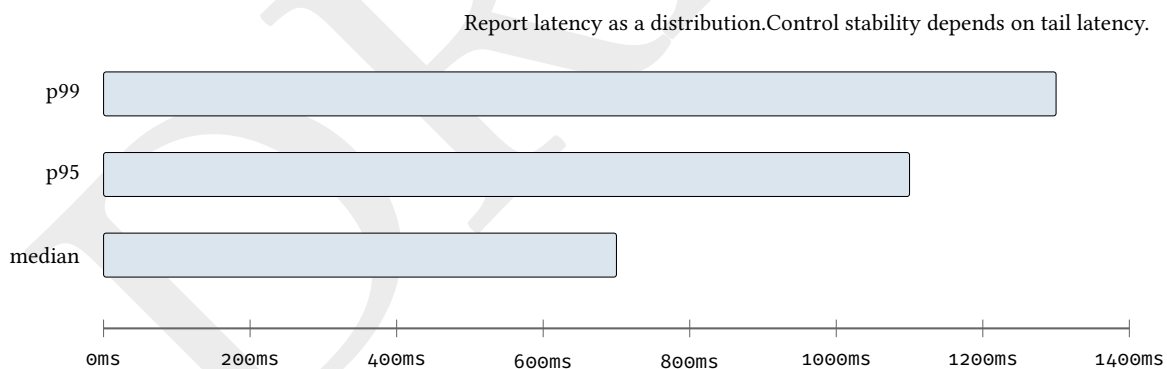


Figure 18. Latency reporting template (illustrative).

13.2 Protocol: Focus Drift and Refocus Triggers

Track HFR over time while temperature drops. Identify a drift threshold that predicts visible star degradation, then convert it into an alert or refocus trigger.

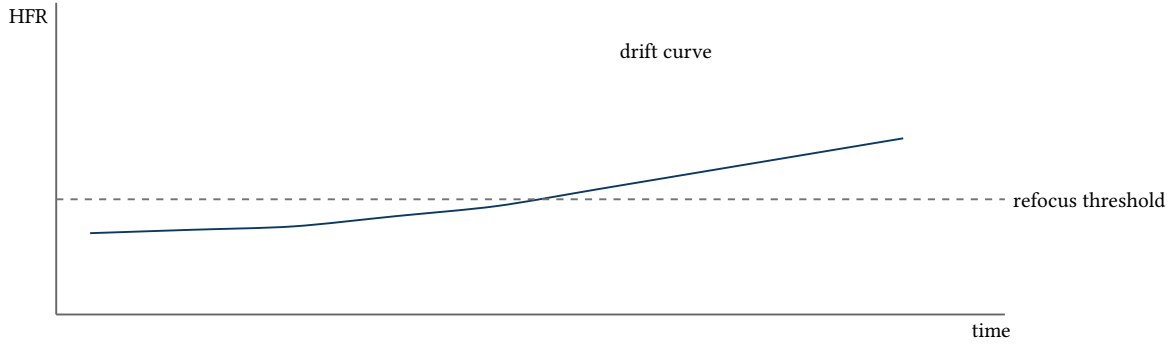


Figure 19. Focus drift protocol: estimate the threshold where refocus becomes necessary (illustrative).

13.3 Protocol: Burst Benefit A/B Test

Capture comparable sequences with (A) fixed exposure and (B) burst switching. Compare clipped pixels, median star sharpness, and a proxy for aurora structure preservation.

14 Open Questions and Research Risks

The following items are deliberately left as open research questions because their answers depend on real field performance.

1. Preview stream cadence/latency on target camera models under cold conditions.
2. The robustness of HFR estimates when aurora brightness overwhelms star contrast.
3. The best activity signal for burst switching in v1 (histogram heuristics vs texture/motion vs ML).
4. Multi-node synchronization tolerance required for downstream use (stitching vs simple multi-angle capture).

15 Estimation and Control Under Uncertainty

This section introduces a unifying mental model: the system maintains an internal belief about the scene and device health, then uses that belief to choose actions. The belief is not a full probabilistic model; it is a compact set of scores (HFR, histogram clip margin, activity score, device health) paired with confidence values.

15.1 Belief State and Confidence Gates

Design Decision 3: Confidence-first Control

The system should not act aggressively on low-confidence estimates. Confidence gates convert uncertain perception into conservative actions or requests for more evidence (more frames, wider crop, different preview settings).

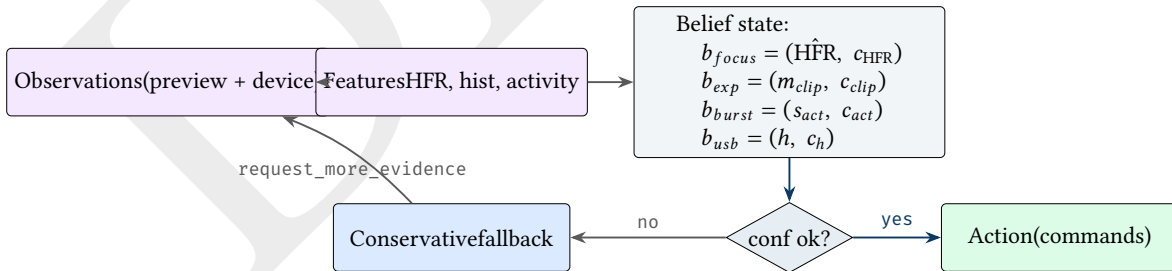


Figure 20. Belief-state framing: estimates are paired with confidence, and confidence gates determine whether to act or gather more evidence.

15.2 Uncertainty Propagation (Conceptual)

To avoid brittle behavior, confidence should decrease when conditions degrade (e.g., aurora overwhelms star contrast). The system can treat confidence as a function of SNR and star count.

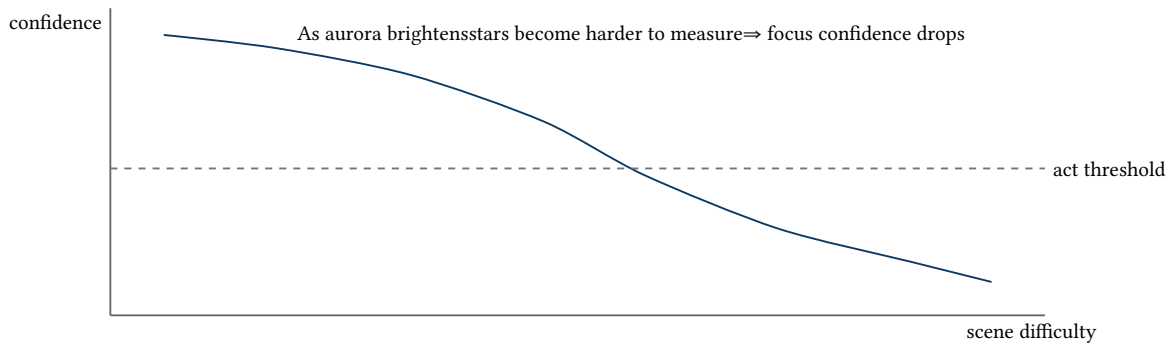


Figure 21. Confidence decreases with increasing scene difficulty; controllers de-rate actions below a threshold.

16 Test Harness Design

This section defines how to validate the system without relying on perfect aurora occurrences. The approach is to separate perception validation (offline datasets), control validation (synthetic perturbations), and reliability validation (fault injection).

16.1 Experiment Matrix (Fault Injection)

Fault	Detect	Recover	Assert	Score
USB hang	timeout	power-cycle	ready again	p_{rec}
Resource lock	busy	kill daemon	connect ok	p_{rec}
Low SNR	gate fail	needs tuning	safe mode	c

Key: treat each row as an executable test case. p_{rec} : recovery success probability estimate; c : confidence calibration.

Figure 22. Fault injection matrix template: each row defines a reproducible test with detection, recovery, and assertions.

16.2 Calibration: Recovery Confidence

Recovery confidence should be calibrated empirically. After repeated injections, the system can map detected leaf causes to observed recovery rates.

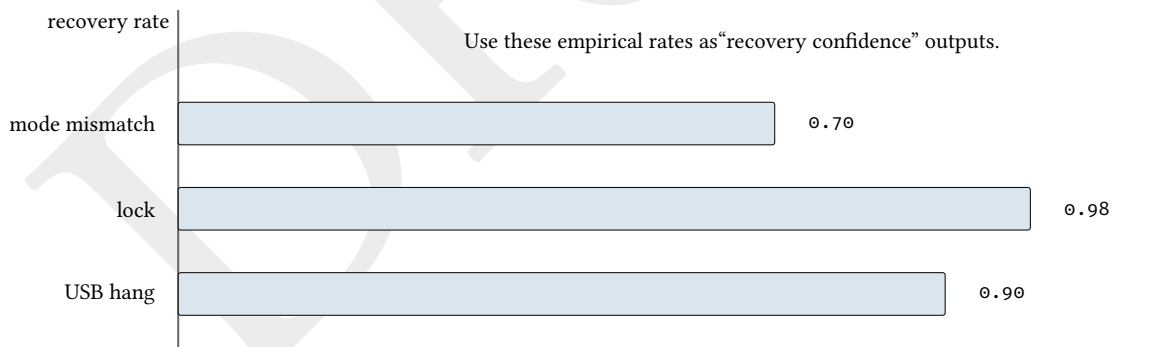


Figure 23. Recovery confidence calibration (illustrative): map detected fault classes to empirical recovery rates.

17 Multi-node Theory and Synchronization Error Budget

Multi-node capture is governed by the distribution of trigger misalignment. Misalignment is the sum of multiple independent (or partially correlated) sources.

17.1 Error Decomposition

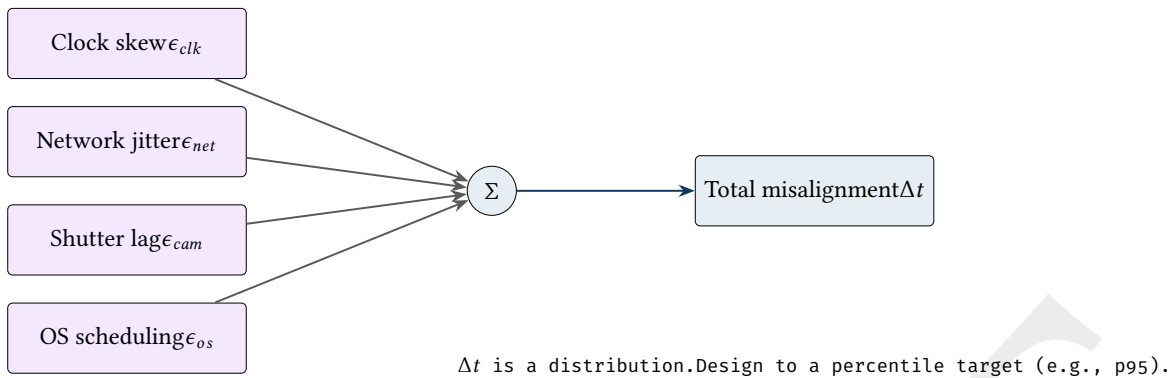


Figure 24. Synchronization error budget: decompose misalignment into clock, network, camera, and OS components.

17.2 Timing Diagram: Delta-trigger vs Immediate Trigger

Delta-triggering reduces sensitivity to network jitter by scheduling a future time.

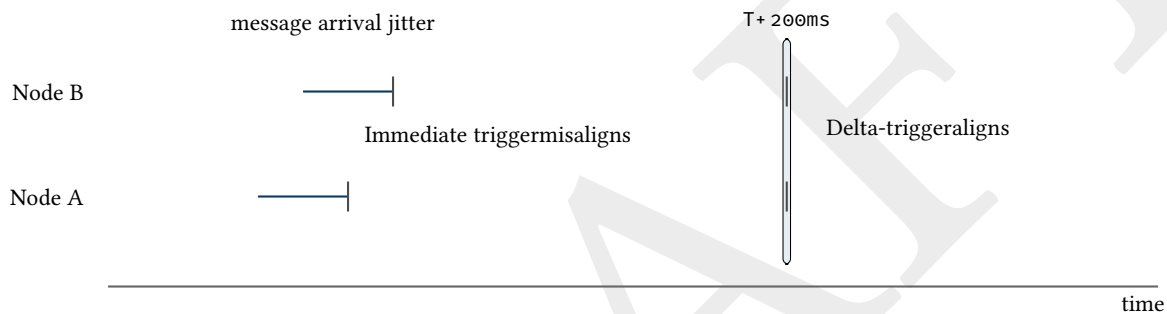


Figure 25. Delta-triggering aligns actions at a future timestamp despite message arrival jitter.

17.3 Tolerance Targets

Tolerance should be specified by downstream goals. For example, panorama stitching may tolerate looser sync than any attempt at parallax-based effects.

Use Case	Target (p95)	Notes
Multi-angle documentation	250 ms	Human perception tolerant; goal is capture coverage.
Panorama stitching (static scenes)	100 ms	Aurora motion may still dominate; depends on focal length.
Synchronized burst aesthetics	50 ms	More sensitive; requires tighter clocks and predictable shutter lag.

Table 5. Illustrative synchronization tolerance targets (to be validated).

The following requirements identifiers define v1 scope and support roadmap traceability.

Req ID	Description	Status
SHRP-01	Reliable USB camera control (ISO, shutter, aperture, trigger)	Pending
SHRP-02	Real-time HFR calculation for star sharpness monitoring	Pending
SHRP-03	Remote focus stepping via USB	Pending
SHRP-04	Programmatic recovery from Sony USB hangs	Pending
CAPT-01	Aurora burst logic (adaptive exposure profiles)	Pending
CAPT-02	Histogram-based exposure guard rails	Pending
CAPT-03	Intervalometer with interrupted sequence support	Pending
MOB-01	Low-latency iPhone viewfinder from node preview	Pending
MOB-03	Telemetry dashboard (battery/temp/HFR/health)	Pending
SYNC-01	Multi-node discovery and synchronized triggering	Pending

Table 6. Initial v1 requirements traceability table (imported from project planning).

18 Astronomical Phenomena and Photographic Response

This section covers the physical phenomena that AuroraPhoto must handle—eclipse geometry, lunar phases, light-level dynamics, and the photographic trade-offs they impose. Understanding these phenomena motivates the adaptive control strategies in the preceding sections.

18.1 Solar Eclipse Geometry and Contact Points

A total solar eclipse progresses through four contact points (C1–C4) as the Moon traverses the solar disc. The system must track these stages because illuminance changes by a factor of $\sim 10,000\times$ between partial phases and totality, requiring radically different exposure parameters at each transition.

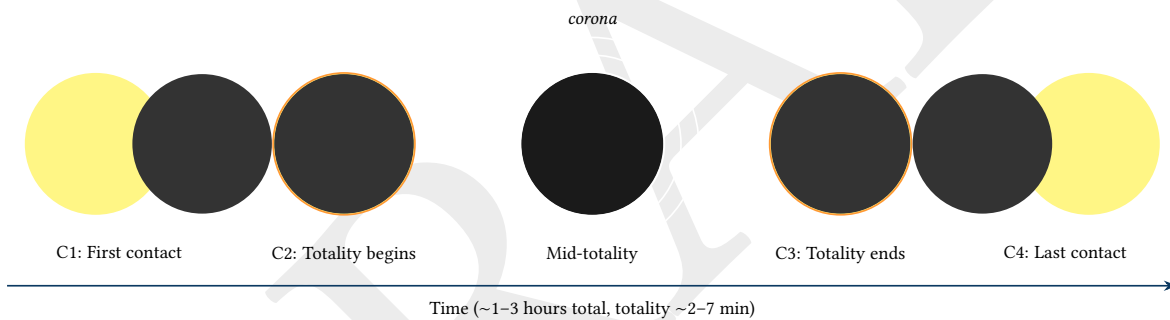


Figure 26. Solar eclipse contact sequence: C1 (first external tangency), C2 (totality onset), mid-totality with corona visible, C3 (totality end), C4 (last external tangency).

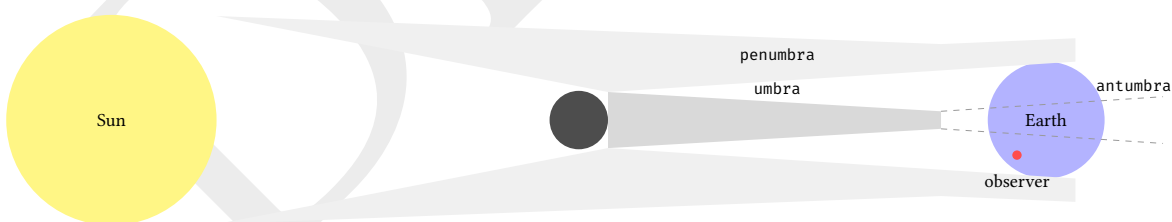


Figure 27. Eclipse shadow geometry (cross-section): the Moon casts an umbral cone (total shadow), penumbral cone (partial shadow), and antumbra (annular shadow region beyond the umbral vertex).

18.2 Lunar Eclipse Phases

During a lunar eclipse, the Moon passes through Earth's shadow cones. The progression from penumbral entry (P1) through umbral contacts (U1–U4) to penumbral exit (P4) spans several hours, with the total phase (U2–U3) lasting up to ~ 107 minutes.

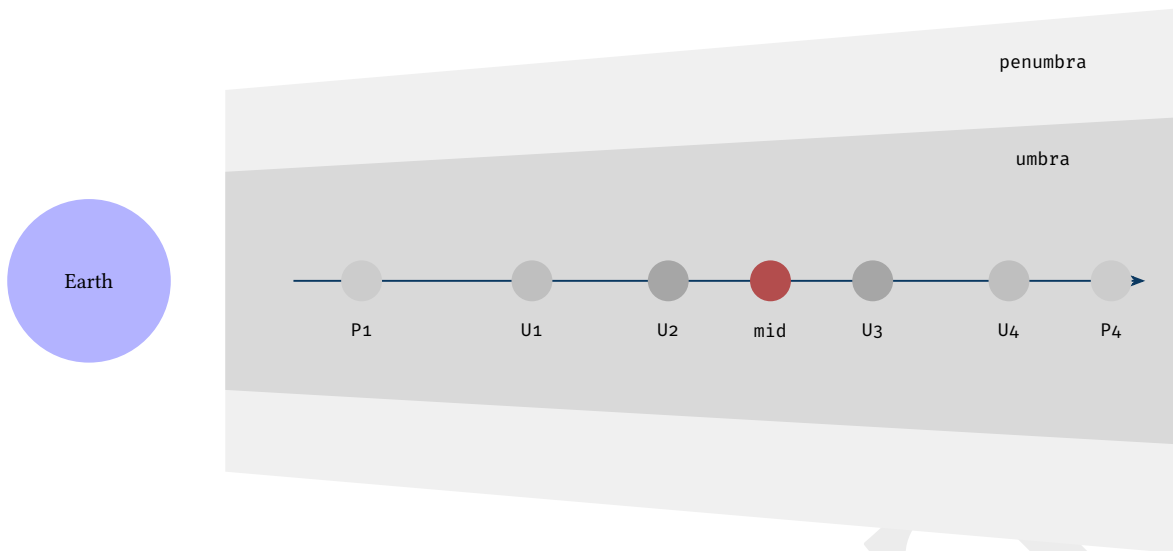


Figure 28. Earth shadow geometry: the Moon traverses the penumbral and umbral cones. P1/P4 mark penumbral entry/exit; U1–U4 mark umbral contacts; mid-eclipse occurs at deepest immersion.

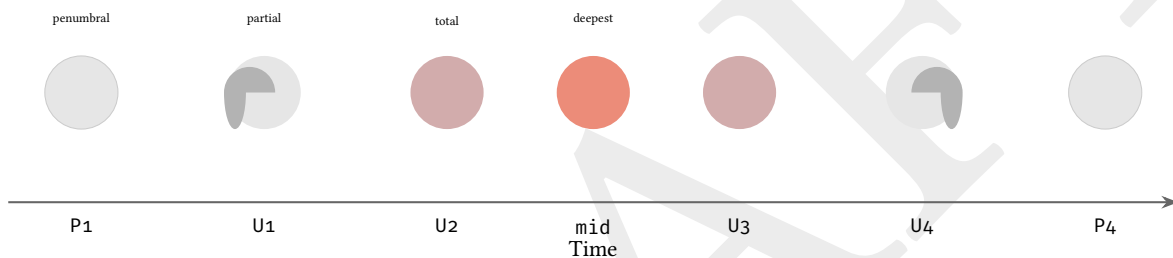


Figure 29. Lunar eclipse stage sequence: the Moon's appearance progresses from subtle penumbral darkening through partial shadow entry to deep red totality and back.

18.3 Moon Phase and Night Sky Brightness

The Moon's phase is the dominant factor in night sky brightness for ground-based astrophotography. A full Moon raises the sky background by ~ 4 magnitudes per square arcsecond compared to a new Moon, dramatically reducing contrast for aurora and star imaging.

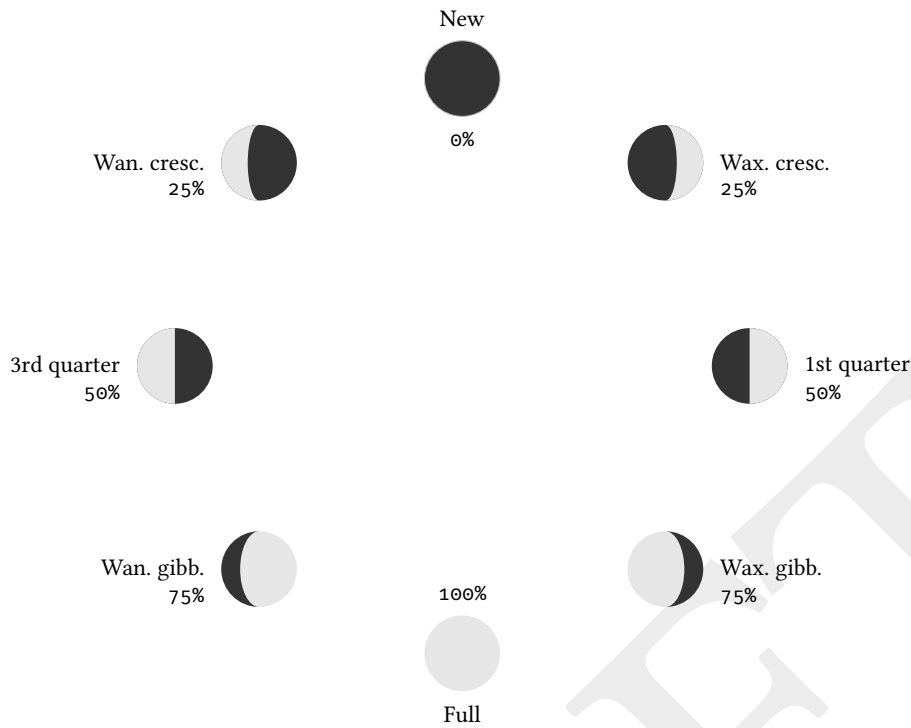


Figure 30. Lunar phase cycle with approximate illumination percentages. Each phase corresponds to a different sky brightness level and thus different imaging constraints.

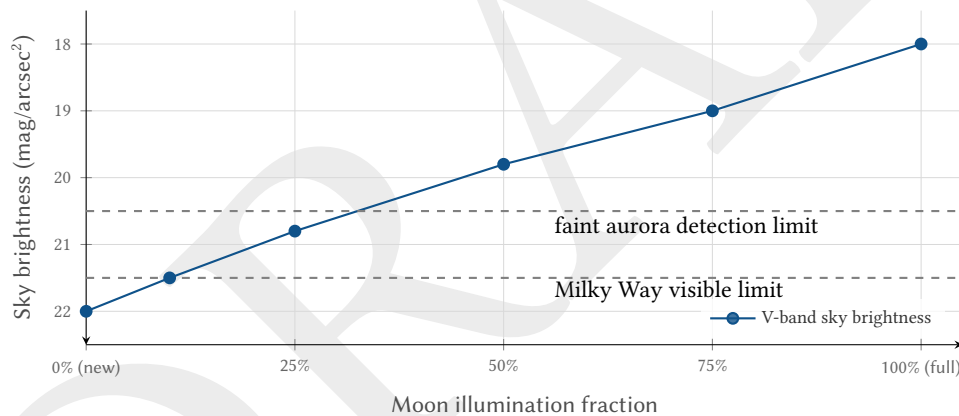


Figure 31. Sky brightness vs. moon illumination fraction. Lower magnitude values (top of plot) indicate brighter skies. Faint aurora and Milky Way structure become invisible as the sky brightens beyond their contrast limits.

Moon Phase	Sky (mag/arcsec ²)	Imaging Recommendation
New moon (<5%)	21.5–22.0	Ideal for all targets; faintest aurora and stars visible
Crescent (5–30%)	20.5–21.5	Good for aurora; mild sky glow, time shoots away from Moon
Quarter (40–60%)	19.5–20.5	Aurora still viable; stars washed in Moon-facing hemisphere
Gibbous (60–85%)	18.5–19.5	Bright aurora only; short exposures to manage sky glow
Full (>85%)	17.8–18.5	Difficult; only bright aurora (IBC III+) detectable

Table 7. Recommended imaging windows relative to moon phase. AuroraPhoto should factor moon phase into its exposure profile defaults.

18.4 Light Levels Across Eclipse Stages

The illuminance change during a total solar eclipse spans roughly five orders of magnitude. Understanding this curve is essential for designing the exposure ramp strategy: the system must transition smoothly from bright-sun settings to near-nighttime settings and back within minutes.

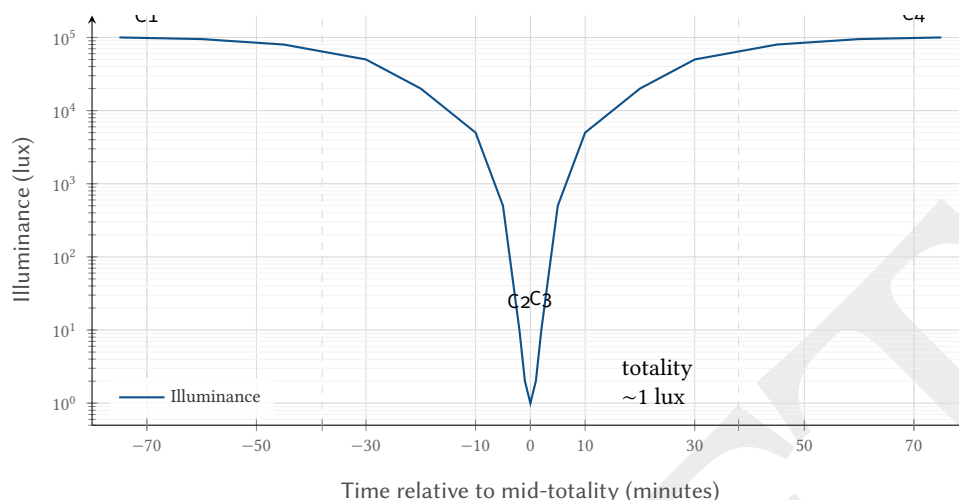


Figure 32. Solar eclipse illuminance curve (log scale). The drop from ~100,000 lux to ~1 lux occurs over just a few minutes around C2/C3, requiring a ~17 EV stop adjustment.

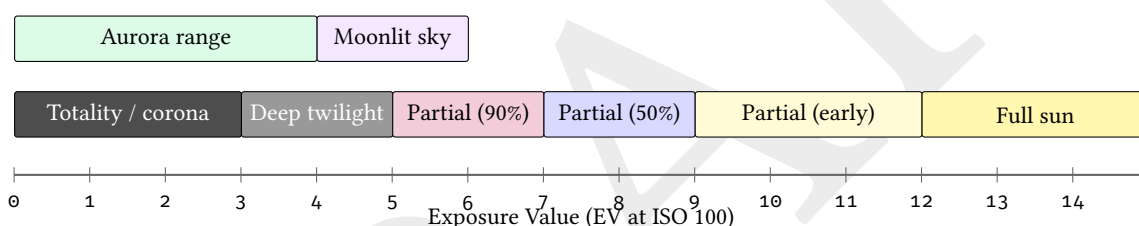


Figure 33. Equivalent EV scale showing the range of scene brightness from totality (EV 0–3) through partial eclipse stages to full sunlight (EV 14–15), with aurora and moonlit sky ranges for comparison.

Eclipse Stage	Illuminance	EV	Notes
Full sun (pre-C1)	100,000 lux	14–15	Solar filter required
Partial (25% covered)	75,000 lux	14	Solar filter still required
Partial (50% covered)	50,000 lux	13	Solar filter still required
Partial (90% covered)	10,000 lux	11	Noticeable dimming
Partial (99% covered)	1,000 lux	8	Overcast-equivalent
Diamond ring / Bailey's beads	10–100 lux	4–6	Remove solar filter
Totality (corona)	0.5–5 lux	0–3	Wide exposure bracket needed

Table 8. Typical illuminance and EV values at each solar eclipse stage.

18.5 Camera Parameter Adaptation Strategy

The extreme dynamic range of eclipse events requires a systematic approach to camera parameter changes. The strategy prioritizes shutter speed adjustment (fastest response, preserves optical quality) over ISO changes (affects noise floor), while holding aperture fixed (maintains optical performance and depth of field).

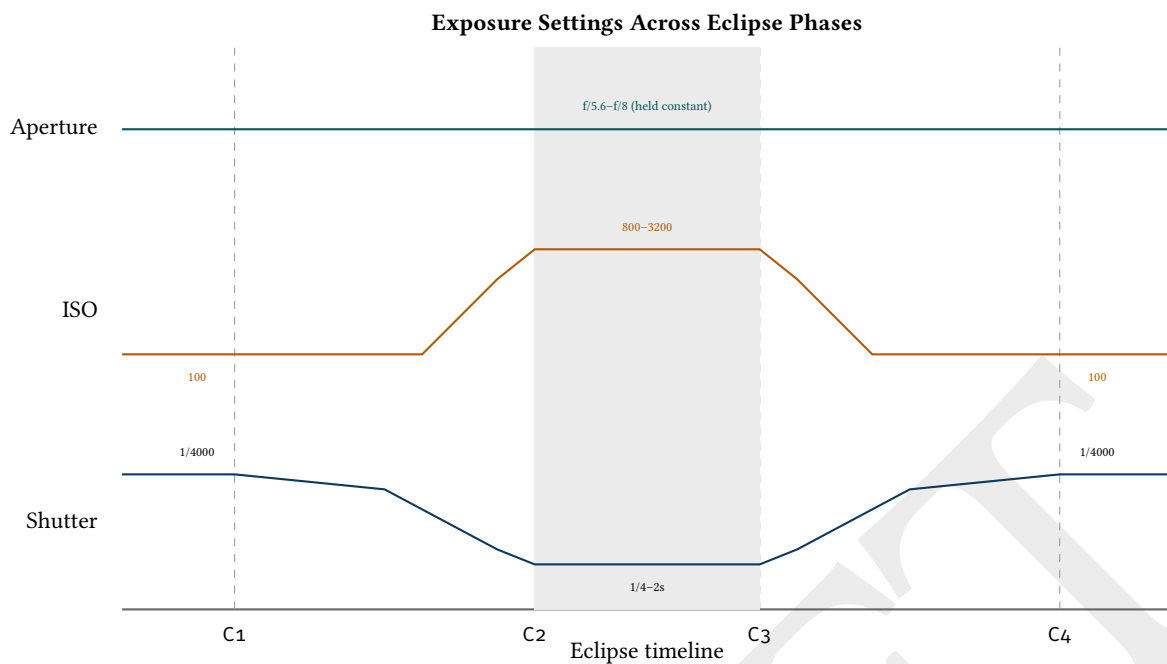


Figure 34. Multi-track exposure timeline: shutter speed and ISO ramp dramatically around C2/C3 while aperture is held constant to maintain optical quality.

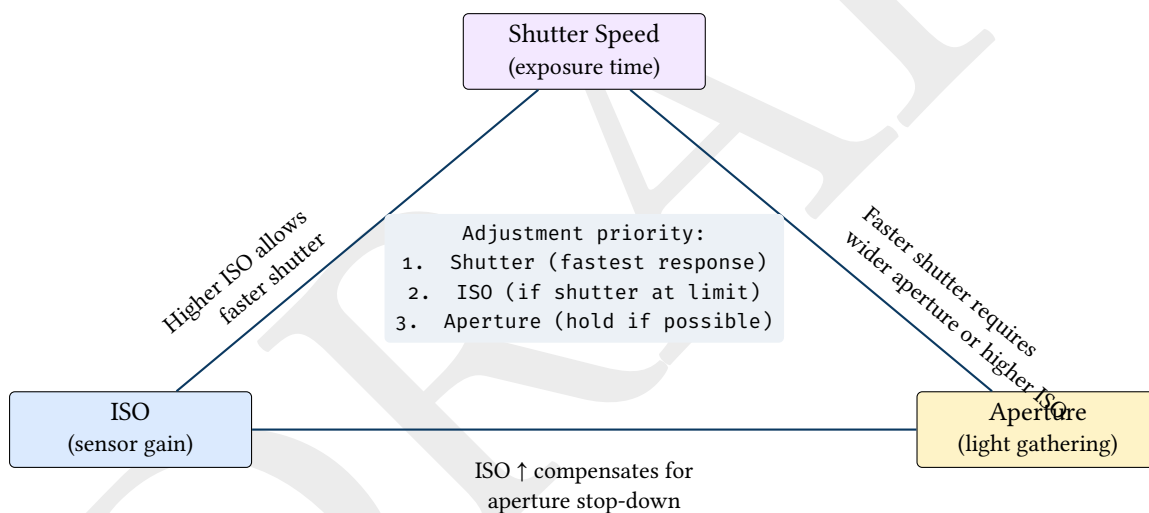


Figure 35. Exposure triangle: the three interdependent parameters. AuroraPhoto's control strategy prioritizes shutter adjustment, then ISO, while holding aperture fixed.

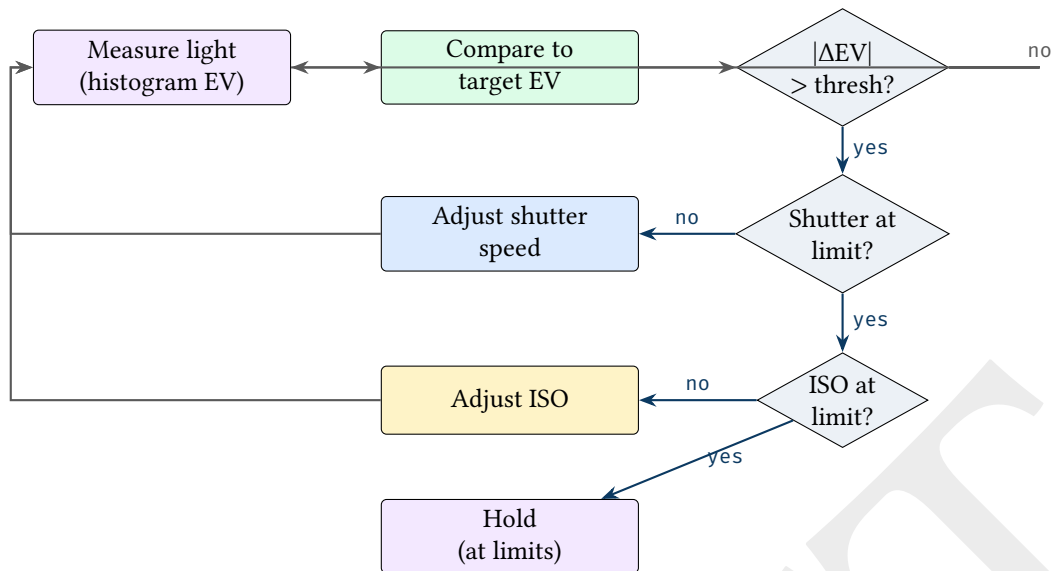


Figure 36. Automated exposure ramp strategy: measure light, compare to target, adjust shutter first, then ISO. Aperture is held constant throughout.

: Exposure Ramp Priority

Prioritize shutter speed adjustment over ISO to preserve signal-to-noise ratio; hold aperture constant to maintain optical quality and depth of field. Only increase ISO when shutter speed reaches its useful limit for the current target.

18.6 Aperture Trade-offs for Astrophotography

Aperture selection in astrophotography involves balancing light gathering against optical aberrations. Wide apertures gather more light but introduce coma, vignetting, and field curvature; stopped-down apertures improve sharpness but reduce light and eventually hit the diffraction limit.

Wide open (f/2.8)	Stopped down (f/8)
Light: high (4× more)	Light: moderate
Diffraction: negligible	Diffraction: growing
Coma/aberrations: worst	Coma/aberrations: minimal
Depth of field: shallow	Depth of field: deep
Vignetting: significant	Vignetting: minimal
Star SNR: best	Star SNR: lower

Figure 37. Aperture effects comparison: wide open (f/2.8) maximizes light gathering and SNR at the cost of optical aberrations; stopping down (f/8) improves sharpness across the field but reduces light throughput.

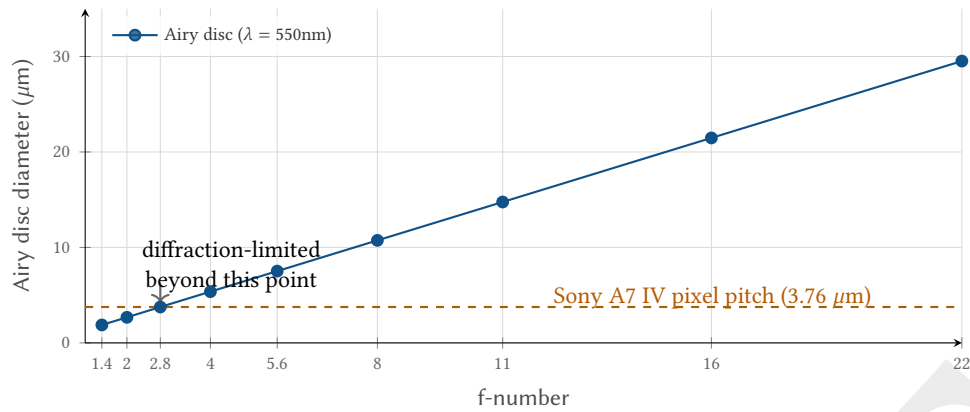


Figure 38. Diffraction-limited resolution vs. f-number: the Airy disc diameter grows linearly with f-number. Beyond the crossover with the sensor pixel pitch, further stopping down reduces resolving power.

Aperture	Pros	Cons
f/1.4–f/2	Maximum light; fastest shutter possible; best star SNR	Severe coma at edges; vignetting; narrow DoF; expensive glass
f/2.8–f/4	Good light/sharpness balance; reduced coma	Some vignetting; not diffraction-free on all lenses
f/5.6–f/8	Sharp across field; minimal vignetting; good for solar corona	Less light; longer exposures or higher ISO needed; approaching diffraction limit
f/11+	Maximum DoF; uniform illumination	Diffraction softening; significantly less light; not recommended for stars

Table 9. Aperture pros/cons matrix for eclipse and astrophotography.

18.7 Shutter Speed Trade-offs and Motion Considerations

Shutter speed selection must account for three sources of apparent motion: Earth’s rotation (causing star trailing), the Moon’s orbital motion during eclipse, and atmospheric seeing (high-frequency wavefront distortion). The classic “500 rule” and the more accurate NPF rule provide maximum exposure guidelines.

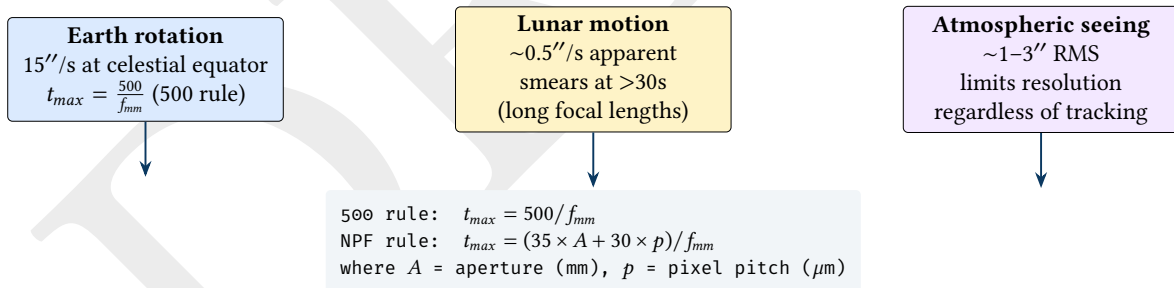


Figure 39. Three sources of motion blur in astrophotography, with formulas for maximum exposure before star trailing becomes visible.

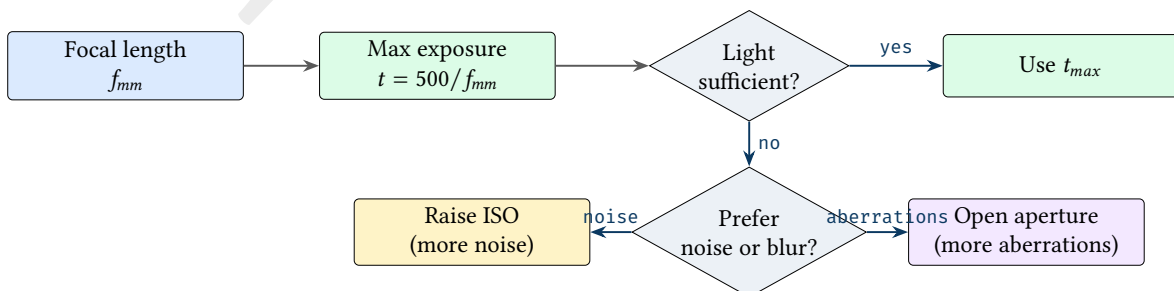


Figure 40. Shutter speed decision matrix: compute maximum exposure from focal length, then decide whether to raise ISO or open aperture if light is insufficient.

Shutter Speed	Pros	Cons
1/4000–1/1000s	Freezes diamond ring / Baily’s beads; no trailing	Very little light; requires wide aperture or high ISO
1/500–1/60s	Good for partial phases with solar filter; corona inner regions	Still limited light for totality features
1/30–1/4s	Captures corona mid-range; good aurora detail	Slight trailing at long focal lengths
1–4s	Outer corona; faint aurora features	Visible star trailing without tracking; higher noise from read noise accumulation
8–30s	Maximum light gathering for faint targets	Pronounced trailing; requires equatorial mount; aurora smearing

Table 10. Shutter speed trade-offs with example scenarios for eclipse and aurora photography.

18.8 Dynamic Range Challenge: Corona and Prominences

The solar corona alone spans approximately 12 EV stops of brightness—far exceeding the dynamic range of any single exposure. The inner corona (within 0.5 solar radii) is roughly 1 million times brighter than the outer corona (at 3+ solar radii). Capturing the full extent requires HDR bracketing with a wide spread of exposures.

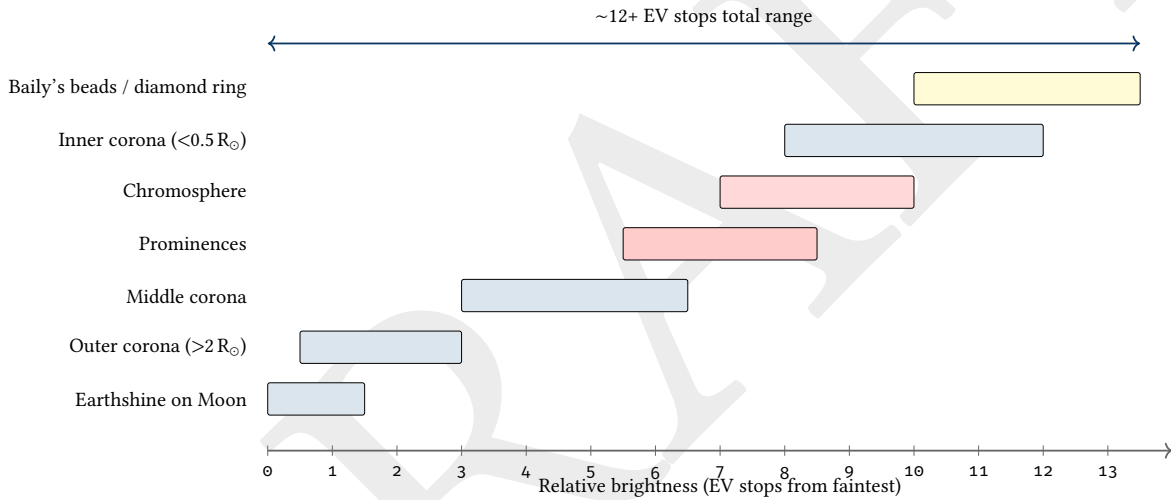


Figure 41. Dynamic range of eclipse features: from faint earthshine on the lunar surface to the brilliant diamond ring, the brightness span exceeds 12 EV stops.

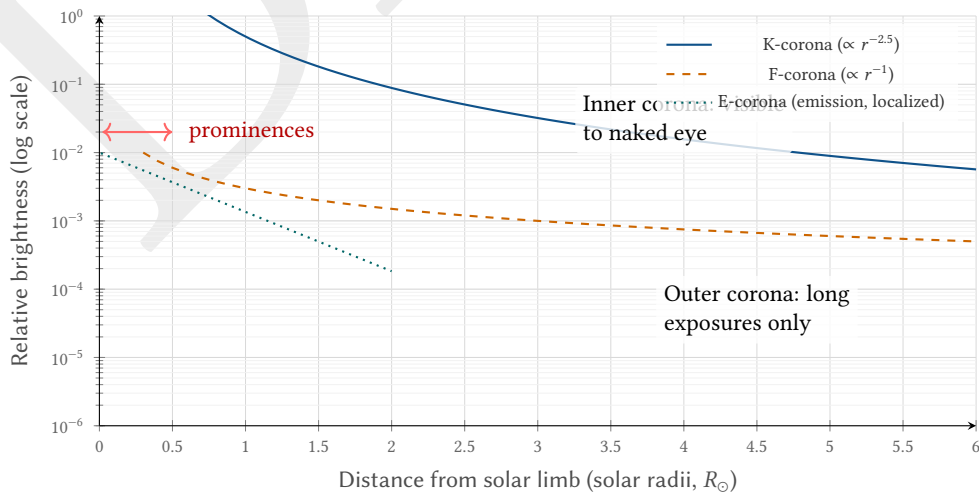


Figure 42. Corona radial brightness profile: the K-corona (electron-scattered) dominates the inner region and drops steeply ($\sim r^{-2.5}$), while the F-corona (dust-scattered) dominates at larger distances with a shallower decline. This radial gradient is the physical reason the dynamic range exceeds 12 EV stops.

12-exposure HDR bracket sequence

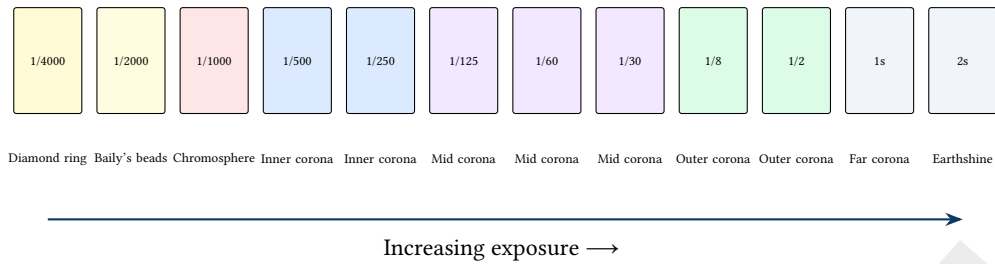


Figure 43. Bracketing strategy: a 12-exposure sequence from 1/4000s to 2s, with each exposure targeting a specific eclipse feature. The full bracket captures the complete dynamic range for HDR compositing.

18.9 Aurora-specific Light Adaptation

Aurora brightness is classified using the International Brightness Coefficient (IBC) scale, ranging from IBC I (barely visible, ~1 kR) to IBC IV (bright enough to read by, ~1000 kR). Unlike eclipses, aurora brightness is unpredictable and can change on timescales of seconds during substorm breakup events.

Insight:
The corona alone spans ~12 EV stops—no single exposure captures it. Automated HDR bracketing at totality onset is the single most critical automated action.

International Brightness Coefficient (IBC) Scale

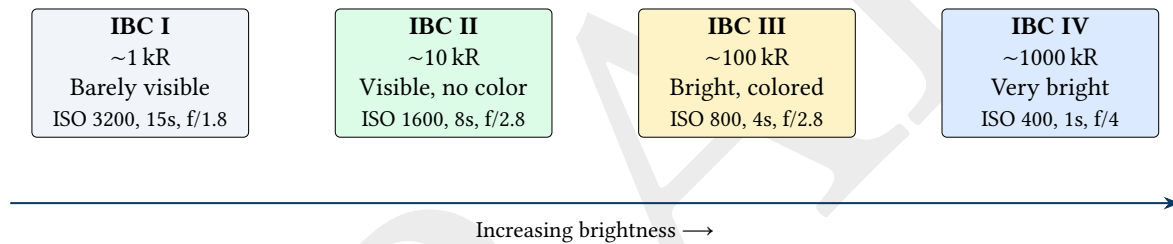


Figure 44. Aurora brightness classification (IBC I–IV) with corresponding camera settings. Each class requires different exposure parameters; AuroraPhoto's burst detection maps to transitions between these classes.

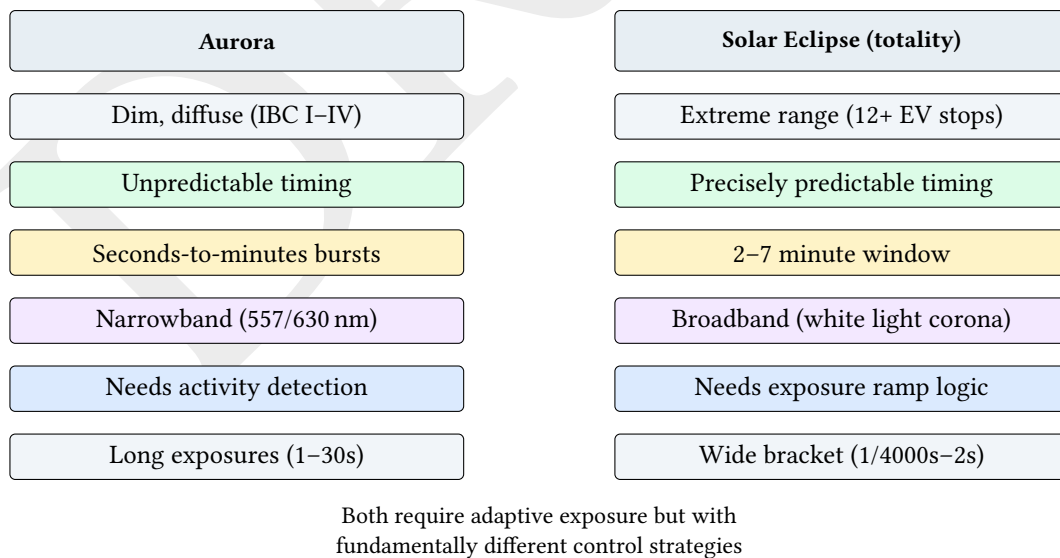


Figure 45. Aurora vs. solar eclipse light adaptation comparison. Aurora requires reactive burst detection (see §3); eclipses require pre-planned exposure ramp sequences.

Cross-reference to System Architecture

The aurora IBC classifications map directly to the burst detection and exposure control loops described in Sections 3 and 10. IBC transitions correspond to the “activity score” change points that trigger profile switching in the burst loop. The eclipse exposure ramp strategy maps to the automated parameter adjustment flowchart, providing a concrete use case for the histogram-based guard rails.

18.10 Spectral Characteristics and White Balance

Aurora and eclipse light differ fundamentally in their spectral composition. Aurora emission is dominated by discrete atomic and molecular lines, while the solar corona produces broadband continuum light. These differences have direct implications for camera white balance, sensor channel weighting, and filter selection.


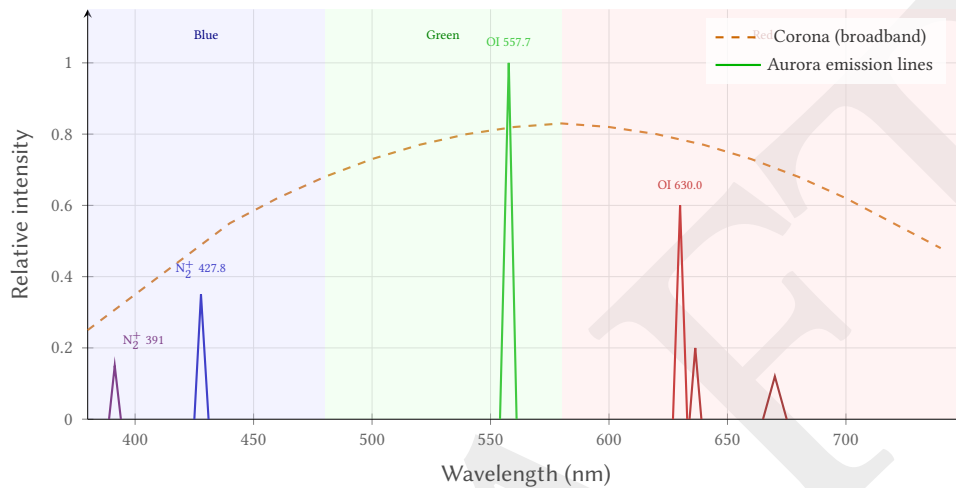


Figure 46. Spectral comparison: aurora produces discrete emission lines (dominant OI green at 557.7 nm, OI red at 630 nm, N₂⁺ blue at 427.8 nm) while the solar corona emits broadband continuum light. Bayer filter channel boundaries shown as background shading. The green channel’s sensitivity to the dominant 557.7 nm aurora line explains why green clips first.


18.11 Focal Length and Field of View Selection

Target selection drives focal length choice. The solar corona extends ~3° from the Sun’s center, aurora curtains can span 10–90°, and deep-sky objects vary widely. A field-of-view diagram helps match lenses to targets and informs the 500-rule calculations in the shutter speed subsection.

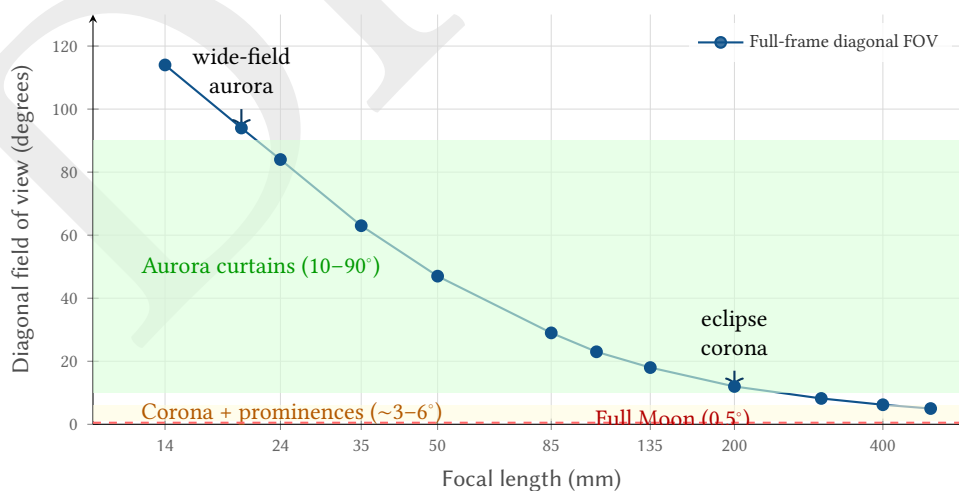

Insight:
The 557.7 nm green oxygen line falls squarely in the Bayer green channel, which has 2× the pixel count of red or blue. This is why the green-channel clip avoidance rule (§3.3) is critical for aurora capture.

Figure 47. Focal length vs. diagonal field of view (full-frame sensor) with target angular sizes overlaid. Wide-angle lenses (14–35 mm) suit aurora and landscape context; telephoto (200–500 mm) is needed for corona detail and lunar surface.

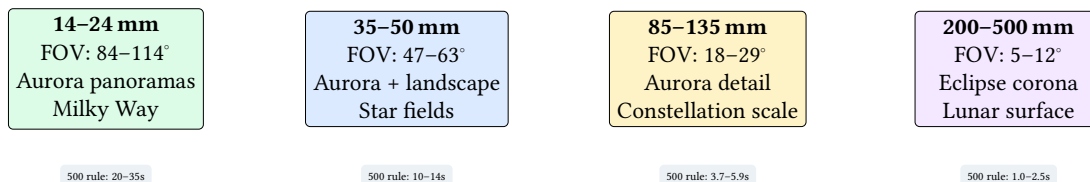

Increasing focal length → narrower FOV, shorter max exposure

Figure 48. Lens focal length categories with target assignments and maximum untracked exposure times (500 rule). Longer focal lengths demand faster shutter speeds, compressing the available exposure range.

18.12 Optical Filters for Astrophotography

Filters serve different roles depending on the target: solar filters for partial eclipse phases, narrowband filters for isolating aurora or chromospheric emission, and light pollution filters for improving contrast in non-pristine skies.


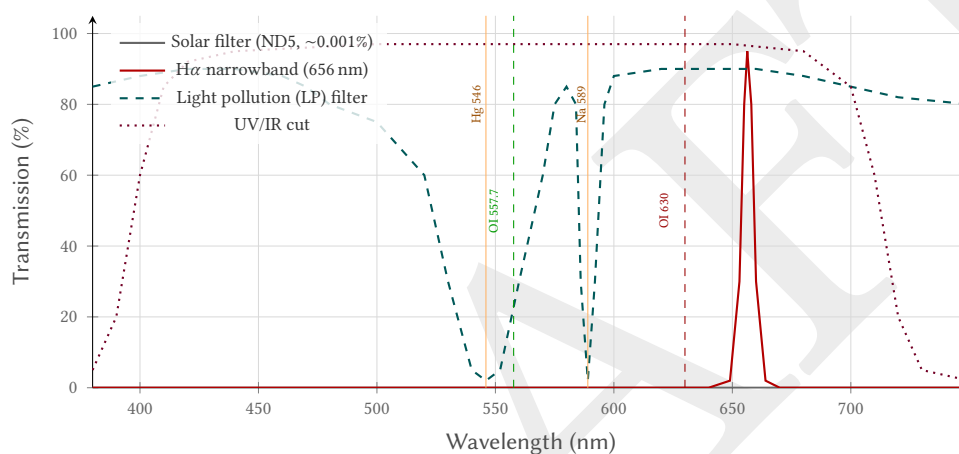


Figure 49. Filter transmission profiles: solar ND5 filters attenuate by ~5 orders of magnitude for safe partial-phase imaging; H α narrowband isolates chromospheric emission; light pollution filters reject sodium and mercury street lighting while passing aurora wavelengths.

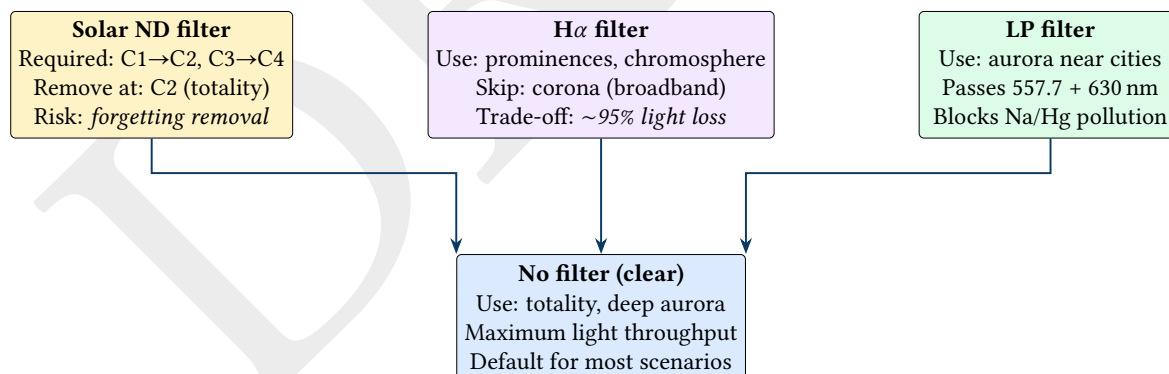

Filter removal is a critical automated or operator action—
AuroraPhoto should track filter state and warn if inappropriate

Figure 50. Filter selection logic: each filter serves a specific phase or target. Solar filter removal at C2 is the single most time-critical manual action during an eclipse.

18.13 Atmospheric Effects on Imaging

Two atmospheric phenomena significantly impact astrophotography: extinction (absorption and scattering that increases with air mass at low elevation angles) and twilight gradients (the transition from sunlit to dark sky that defines the usable imaging window).

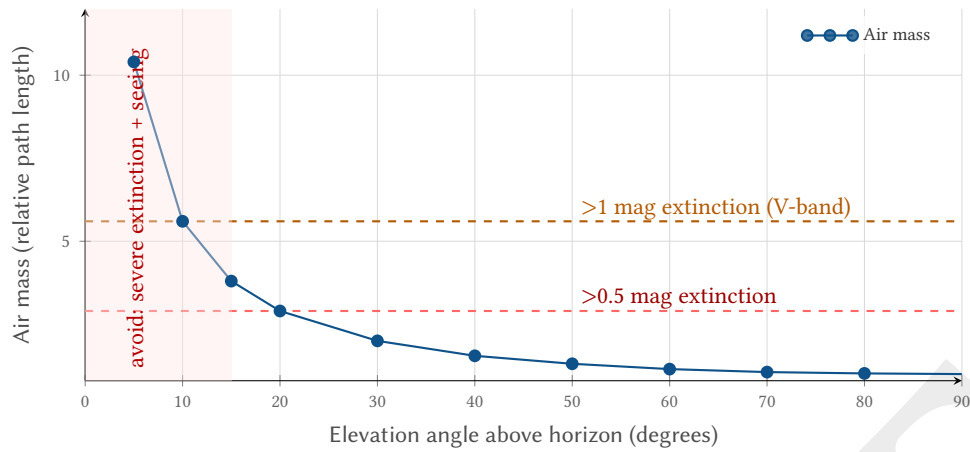


Figure 51. Air mass vs. elevation angle: atmospheric path length increases dramatically below 20° elevation, causing extinction (brightness loss), reddening, and degraded seeing. Targets below ~15° suffer severe quality penalties.

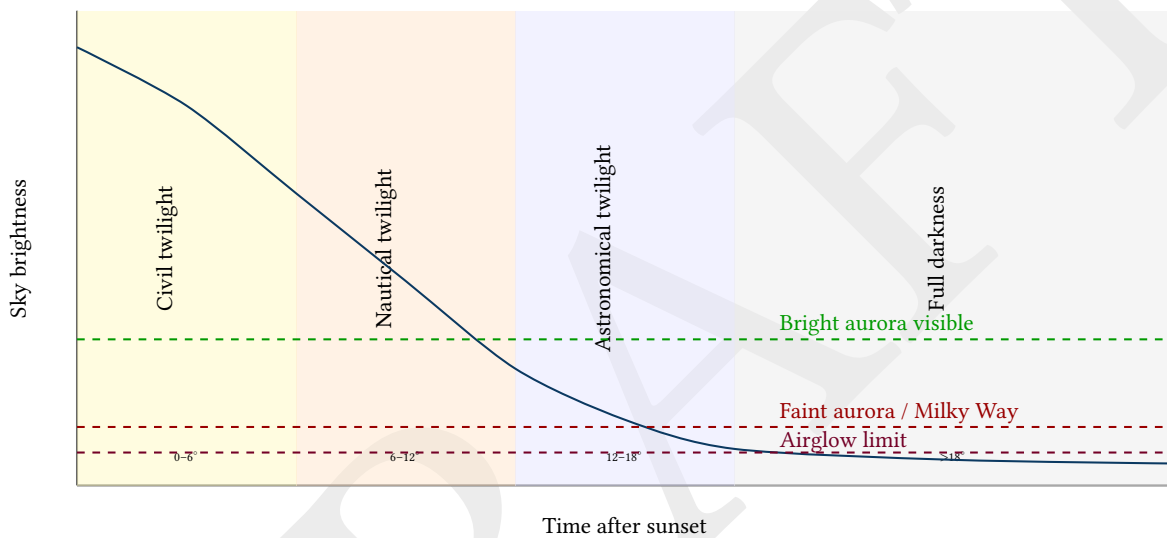


Figure 52. Twilight sky brightness progression: civil twilight (Sun 0–6° below horizon) is too bright for most astrophotography; nautical twilight allows bright aurora detection; full darkness (Sun >18° below) is needed for faint targets. AuroraPhoto should use solar depression angle to select initial exposure profiles.

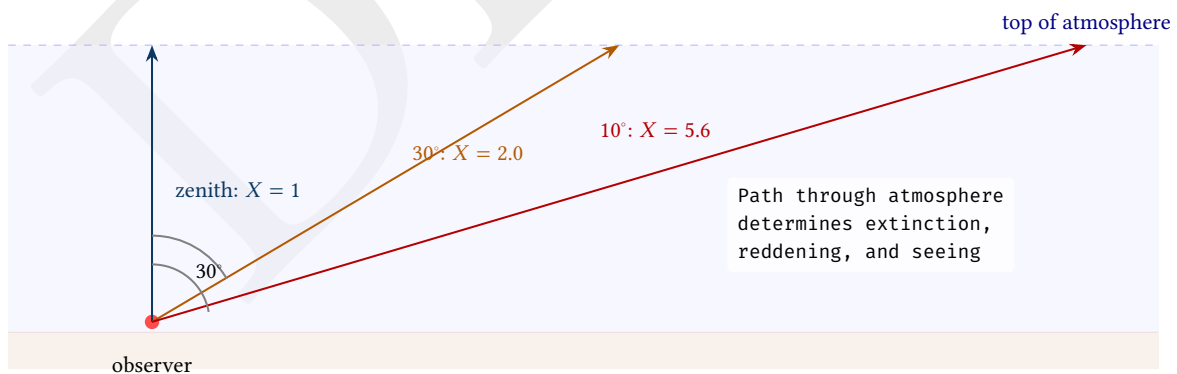


Figure 53. Air mass geometry: light from targets near the horizon traverses far more atmosphere than from the zenith, causing increased extinction (dimming), reddening, and scintillation.

18.14 Pre-totally Operational Timeline

An eclipse totality sequence requires precisely timed actions. This operational countdown ties the physical phenomena (contact points, illuminance changes) to the concrete camera operations that AuroraPhoto must automate or prompt.

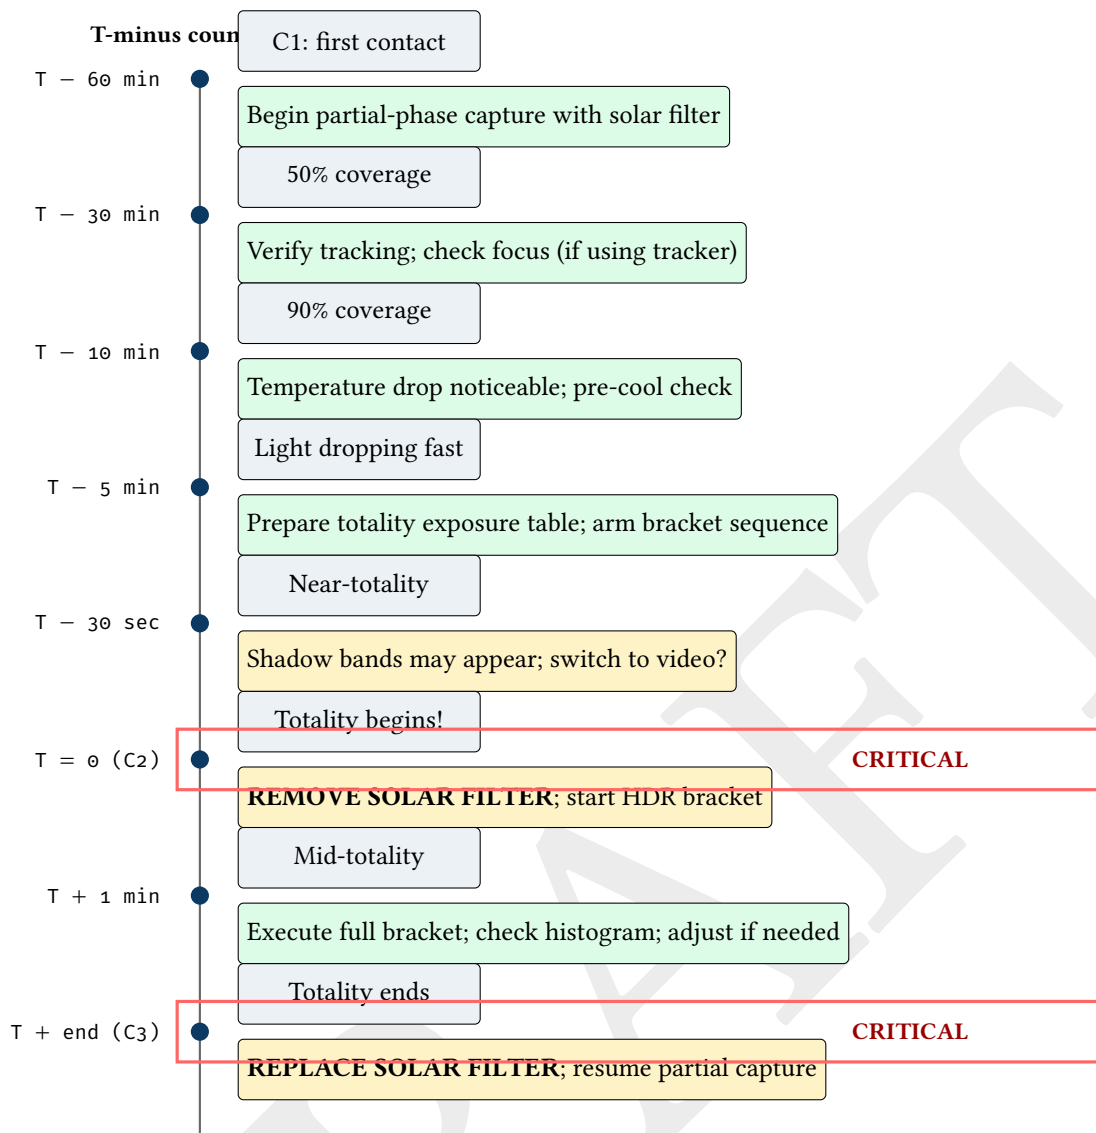


Figure 54. Pre-totality operational countdown: timed sequence of camera actions keyed to eclipse contact points. Solar filter removal at C2 and replacement at C3 are the most safety-critical actions (both for equipment and for image capture).

Solar Filter Safety

Failure to remove the solar filter at C2 wastes the entire totality window (the filter blocks >99.999% of light). Failure to replace the filter at C3 risks sensor damage from unfiltered sunlight. AuroraPhoto should track filter state and issue prominent warnings at C2 and C3 transitions.

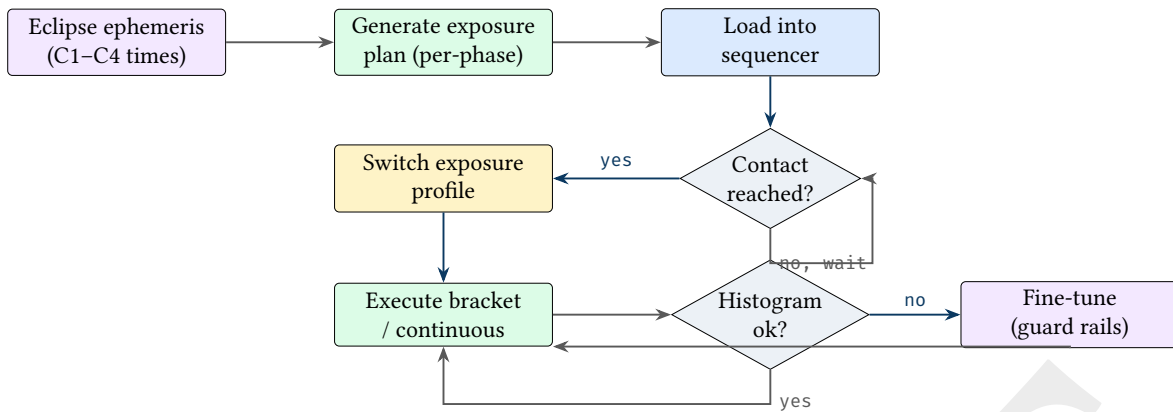


Figure 55. Eclipse automation pipeline: pre-computed ephemeris drives a time-keyed exposure plan, with histogram-based guard rails providing fine-tuning within each phase. This combines the predictable timing of eclipses with the reactive guard rails designed for aurora.

18.15 Auroral Oval and Magnetic Latitude

Aurora occurrence is governed by Earth’s magnetic field geometry. The auroral oval—an annular region centered on the geomagnetic poles—defines where aurora is most frequently observed. Understanding this geography informs both deployment planning and the expected frequency of aurora events at a given observing site.

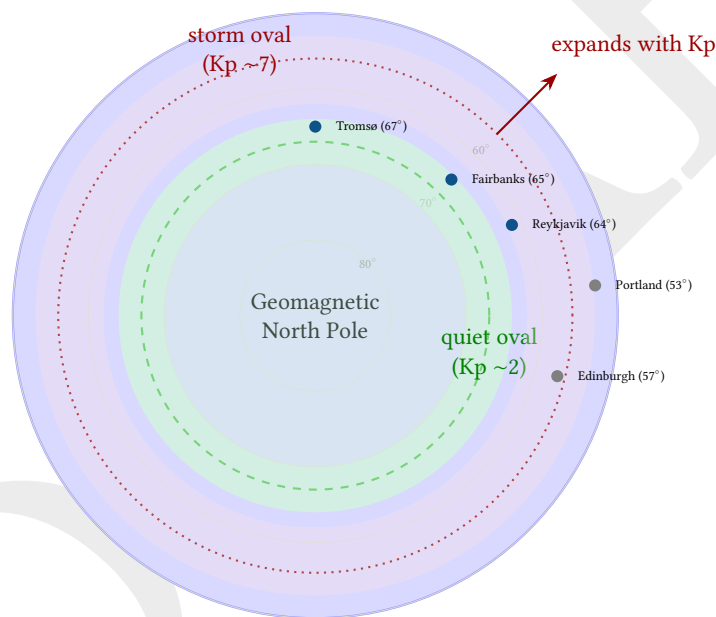


Figure 56. Auroral oval (polar view): during quiet conditions ($K_p \sim 2$) the oval sits at $\sim 65\text{--}70^\circ$ magnetic latitude; during geomagnetic storms ($K_p \sim 7+$) it expands equatorward, making aurora visible from mid-latitudes. AuroraPhoto deployments at sites within the quiet oval will see aurora most frequently.

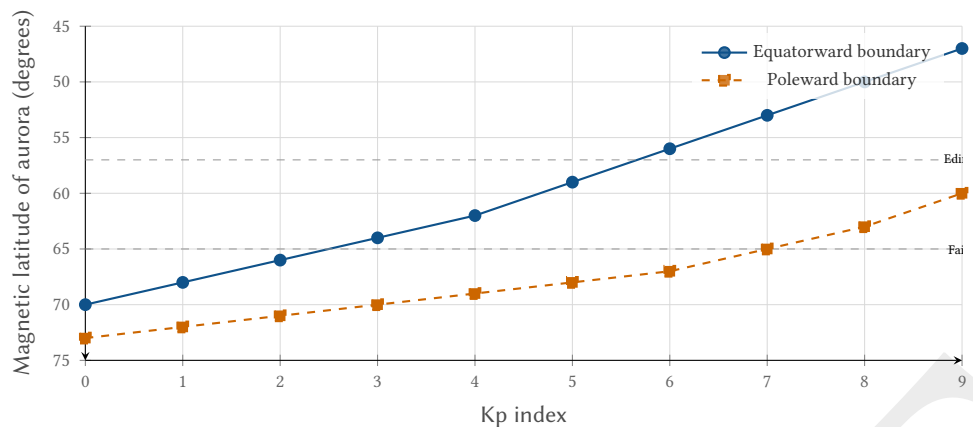


Figure 57. Auroral oval latitude vs. Kp index: higher geomagnetic activity pushes the oval equatorward. A site at 65° magnetic latitude sits under the oval for most Kp values; a site at 57° requires $Kp \geq 6$ for overhead aurora.

18.16 Solar Cycle and Aurora Frequency

The Sun follows an approximately 11-year activity cycle, driven by the reversal of its magnetic field. Solar maximum brings increased sunspot numbers, coronal mass ejections (CMEs), and geomagnetic storms—all of which drive aurora frequency and intensity. Planning multi-year imaging campaigns requires awareness of this cycle.


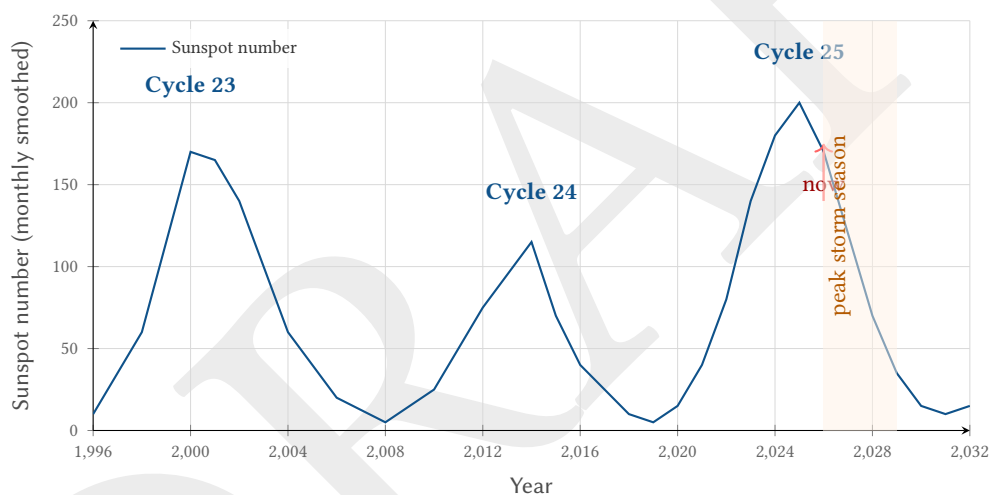


Figure 58. Solar cycle history and projection: Solar Cycle 25 is near its peak in 2025–2026, with the declining phase (2026–2029) historically producing the most intense geomagnetic storms and aurora. This is an optimal window for AuroraPhoto deployment.

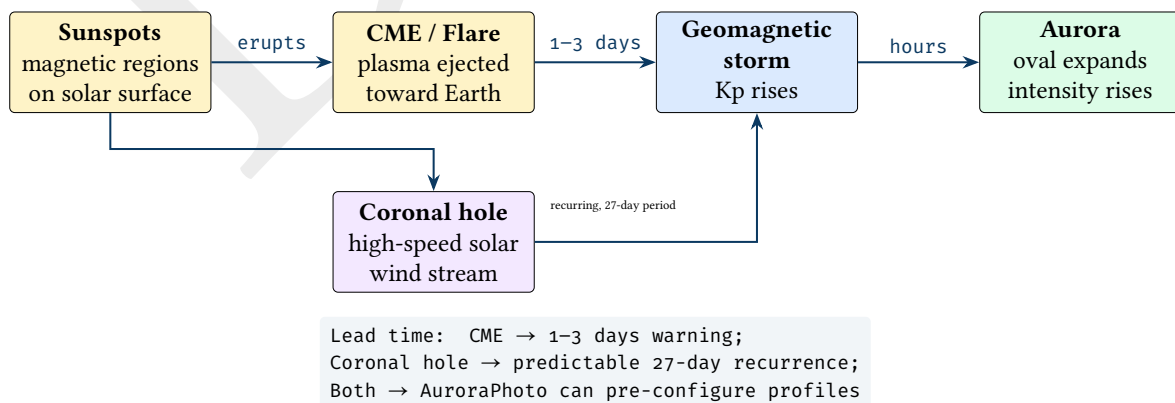

Insight:
The declining phase of the solar cycle (1–3 years after sunspot maximum) historically produces the most spectacular aurora due to coronal hole high-speed streams. The 2026–2029 window is prime time.

Figure 59. Solar-terrestrial chain: two pathways from solar activity to aurora. CMEs provide 1–3 days warning; coronal hole streams recur on a ~27-day solar rotation period, enabling advance planning.

18.17 Color Temperature Progression During Eclipse

The correlated color temperature (CCT) of ambient light changes significantly during a solar eclipse. This affects camera auto white balance behavior and the appearance of both the eclipse itself and the surrounding landscape. AuroraPhoto should lock white balance rather than allowing auto adjustment.

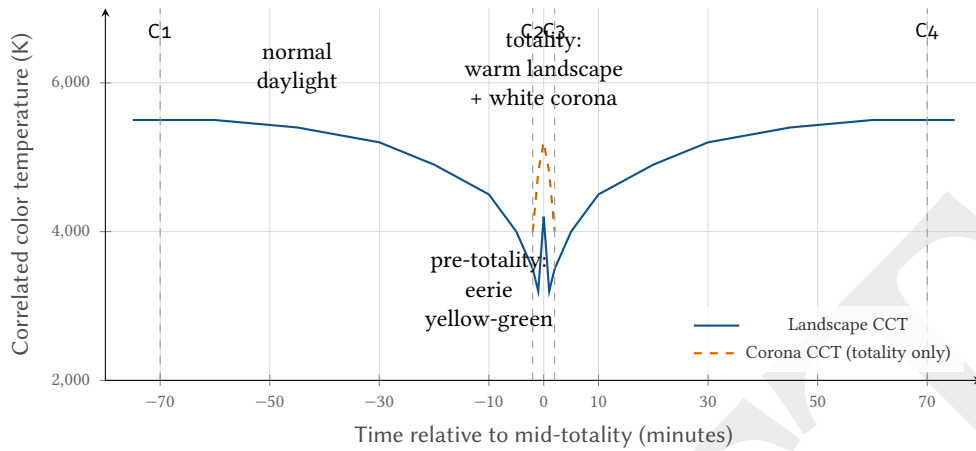


Figure 60. Color temperature progression: landscape CCT drops from ~5500 K (daylight) to ~3200 K just before totality as atmospheric scattering shifts toward warm tones. The corona itself is ~5000–5200 K (white). Auto white balance will oscillate—lock WB before the eclipse begins.

: White Balance Lock

Lock camera white balance to a fixed value (5200–5500 K daylight) before C1. Auto white balance will hunt during the rapid color temperature changes and produce inconsistent frames that complicate post-processing and timelapse assembly.

18.18 Signal-to-Noise Fundamentals

Every imaging decision in AuroraPhoto ultimately affects signal-to-noise ratio (SNR). Understanding the noise model explains why the exposure ramp strategy (§13.5) prioritizes shutter speed over ISO, and why the histogram guard rails (§3.3) exist.

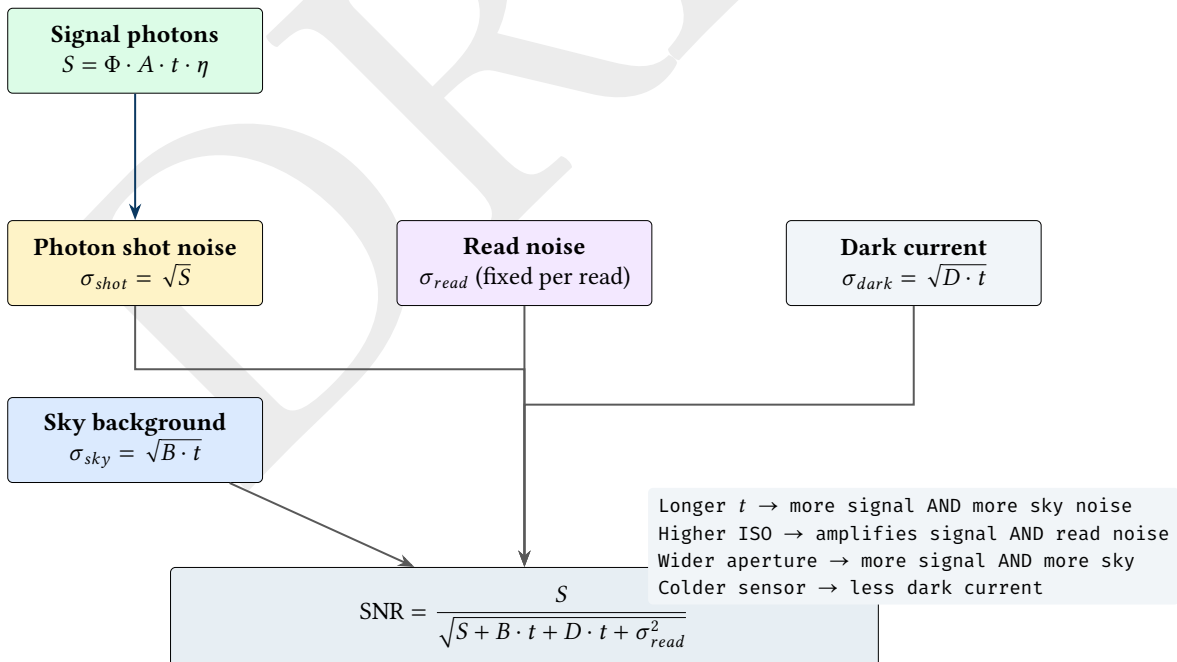


Figure 61. SNR model: signal is proportional to aperture area, exposure time, and quantum efficiency. Total noise combines photon shot noise, read noise, dark current, and sky background in quadrature. This model explains every exposure trade-off in the system.

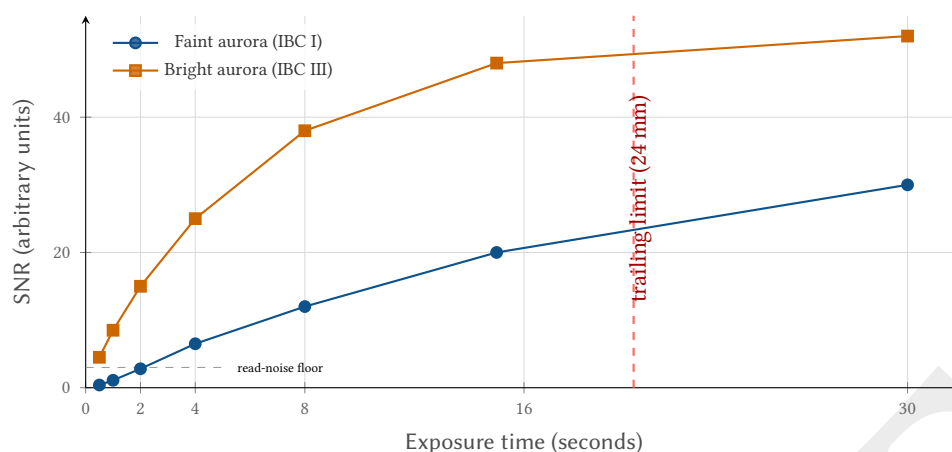


Figure 62. SNR vs. exposure time for faint and bright aurora targets. Faint targets are read-noise limited at short exposures and benefit greatly from longer integration; bright targets hit diminishing returns sooner. The star trailing limit imposes a hard ceiling on untracked exposure.

18.19 Histogram Interpretation for Astrophotography

The histogram is the primary feedback signal for AuroraPhoto's exposure guard rails. Different astronomical targets produce characteristic histogram shapes, and recognizing these patterns enables automated exposure decisions.

Insight:
For faint aurora (IBC I–II), doubling exposure time from 8s to 16s increases SNR by ~40%. For bright aurora (IBC III+), the same doubling yields only ~20%. The control system should be more aggressive about long exposures for faint targets.

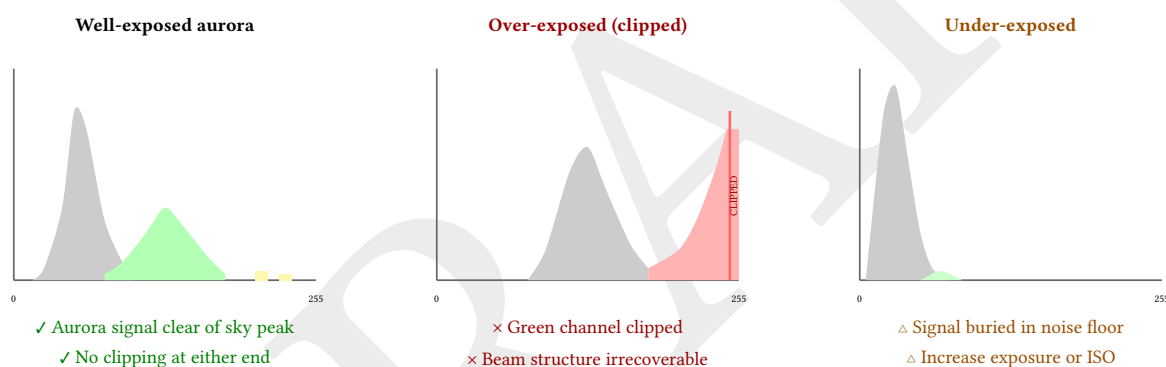


Figure 63. Histogram patterns for aurora imaging: well-exposed (left) shows aurora signal clearly separated from sky background with no clipping; over-exposed (center) has green channel piled against the right edge, destroying beam structure; under-exposed (right) buries the signal in the noise floor.

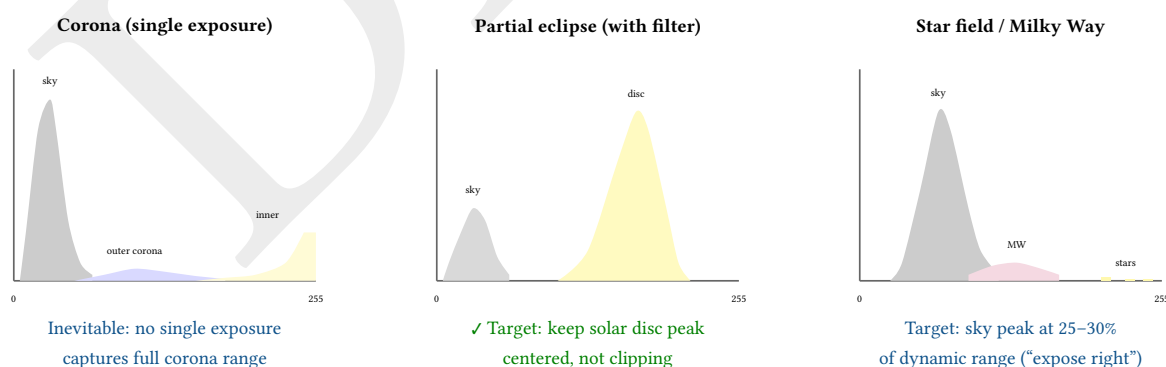


Figure 64. Histogram patterns for different targets: corona (left) inherently exceeds single-exposure dynamic range; partial eclipse with solar filter (center) should keep the disc peak centered; star fields (right) benefit from "exposing to the right" to maximize SNR while avoiding clipping.

: Histogram Guard Rail Thresholds

For aurora: trigger shutter reduction if any channel exceeds 95% of the histogram range. For star fields: target sky background peak at 25–30% of range (“expose to the right”). For eclipse totality: clipping of individual exposures is expected and acceptable within a bracket sequence.

18.20 Star Point Spread Function and Focus Physics

The point spread function (PSF) of a star image results from the convolution of diffraction, optical aberrations, atmospheric seeing, and defocus. The Half-Flux Radius (HFR) used by AuroraPhoto’s focus loop (§3.2) is a single-number summary of the PSF width.

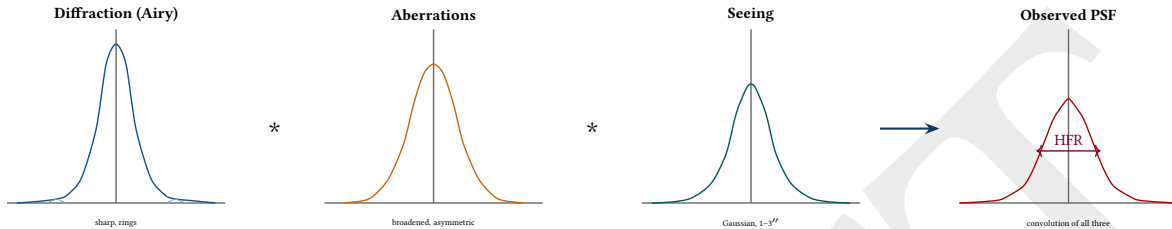


Figure 65. Star PSF composition: the observed profile is the convolution (*) of diffraction (Airy pattern), optical aberrations (lens-dependent), and atmospheric seeing (Gaussian). HFR measures the half-light radius of this combined profile.

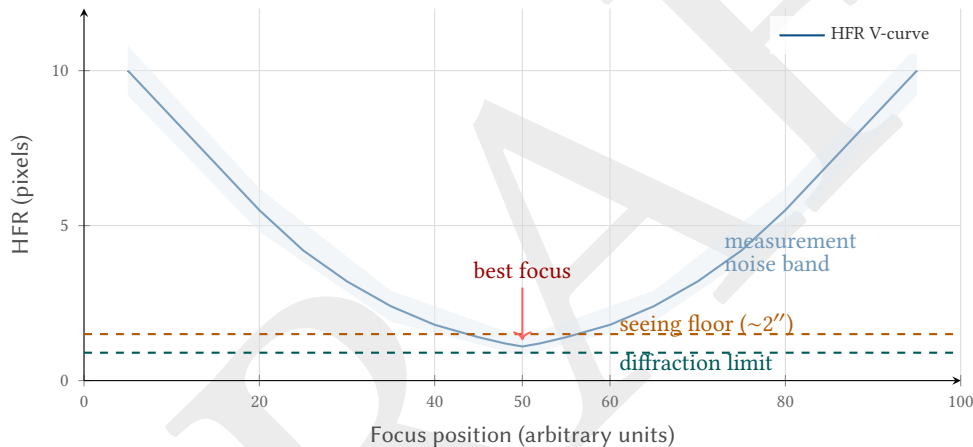


Figure 66. Focus V-curve: HFR follows a characteristic V-shape with minimum at best focus. The shaded band represents measurement noise (from photon statistics and sky background). The diffraction limit and seeing floor impose a hard minimum that even perfect focus cannot surpass.

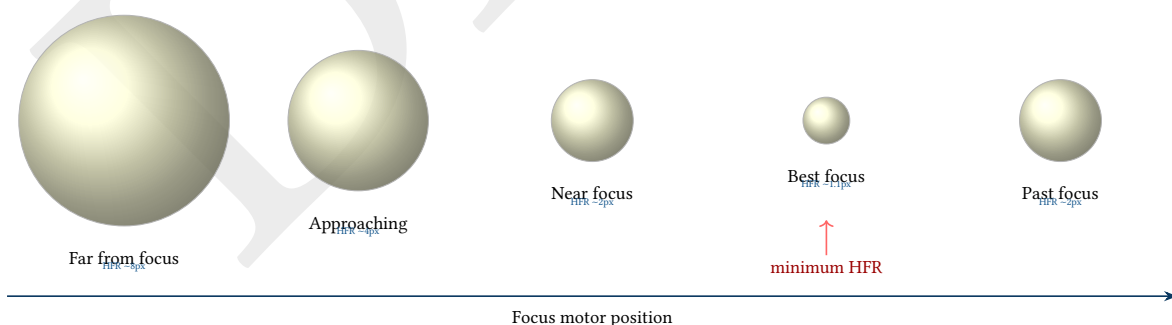


Figure 67. Visual representation of star images at different focus positions: defocused stars appear as large discs; the focus loop minimizes disc size (HFR) by stepping the motor to the V-curve minimum.

18.21 Multi-camera Deployment Geometry

An AuroraPhoto deployment typically uses multiple camera nodes for complementary coverage. The optimal geometry depends on the target: parallax-based 3D reconstruction requires baseline separation, panorama stitching requires overlapping fields, and multi-focal-length setups require co-located but differently configured nodes.

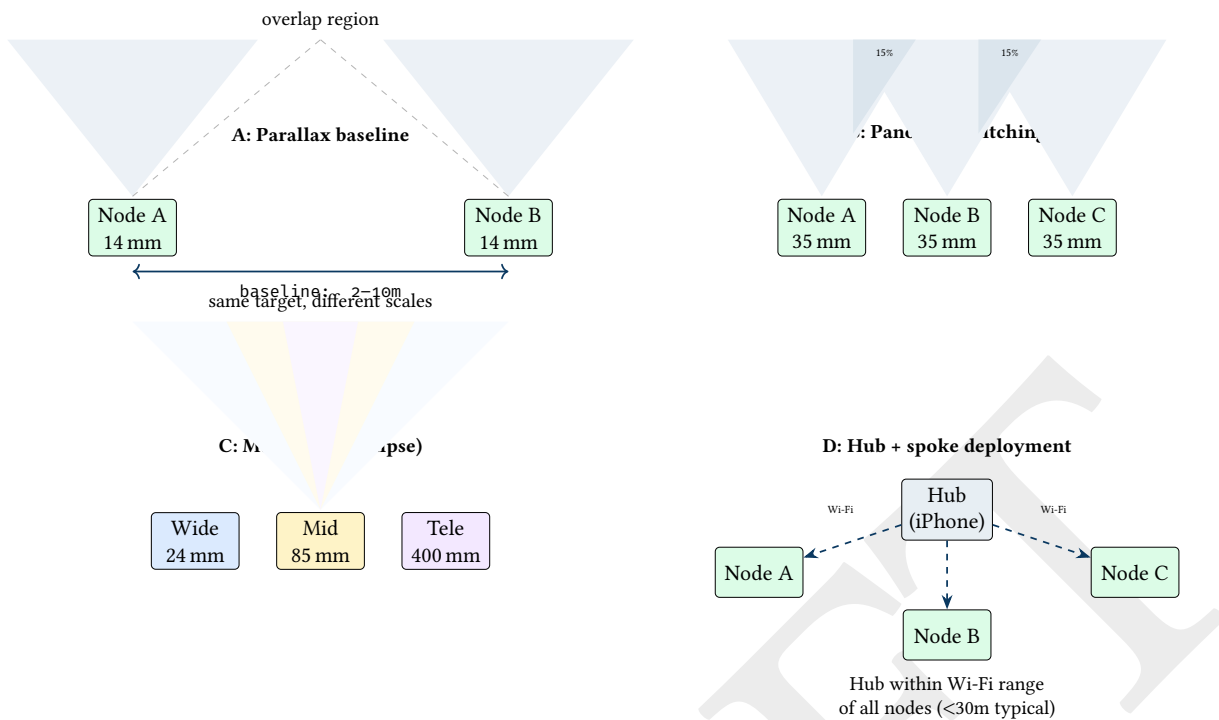


Figure 68. Multi-camera deployment geometries: (A) parallax baseline for potential 3D reconstruction, (B) panorama stitching with ~15% overlap, (C) co-located multi-focal-length for simultaneous wide/narrow coverage, (D) hub-and-spoke Wi-Fi topology constraint.

18.22 Eclipse Stage Detail: What Happens Physically

Each eclipse contact point involves specific physical phenomena that produce distinct photographic opportunities. Understanding what is visible at each stage—and for how long—drives both the exposure plan and the frame rate required to capture transient events.

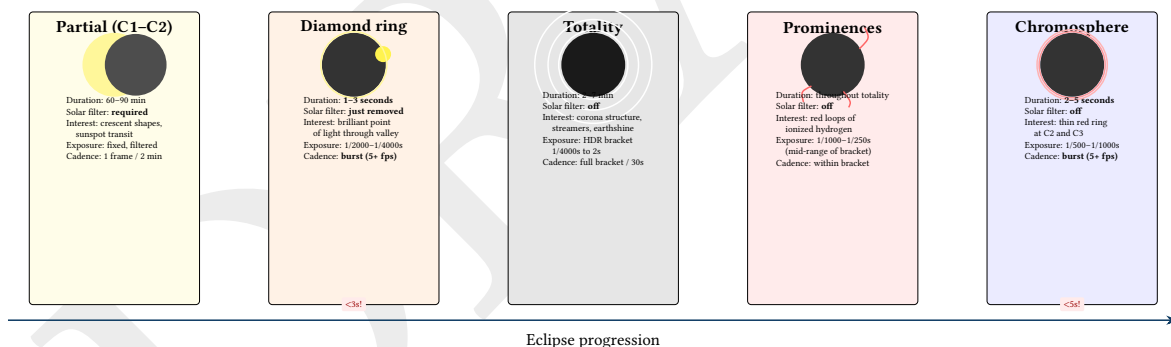


Figure 69. Eclipse stage detail: each phase presents distinct photographic targets with dramatically different durations and exposure requirements. Diamond ring and chromosphere events last only seconds and require burst-mode capture with pre-configured settings.

Transient Events

The diamond ring (1-3s) and chromosphere flash (2-5s) are the most time-critical moments of the eclipse. Missing them means waiting for the next eclipse. AuroraPhoto should pre-arm burst capture at these transition points with exposure settings locked to the expected brightness.

18.23 Multi-Rig Eclipse Strategy and Corona Framing

A complete eclipse imaging setup typically requires two or three rigs with different focal lengths and tracking strategies. The key insight is that the corona extends far beyond the solar disc—up to 3+ solar radii (~3° total diameter)—so a telephoto rig zoomed tightly on the Sun will miss the outer corona. Simultaneously, a wide-angle rig captures the eclipse in its landscape context for timelapse sequences.

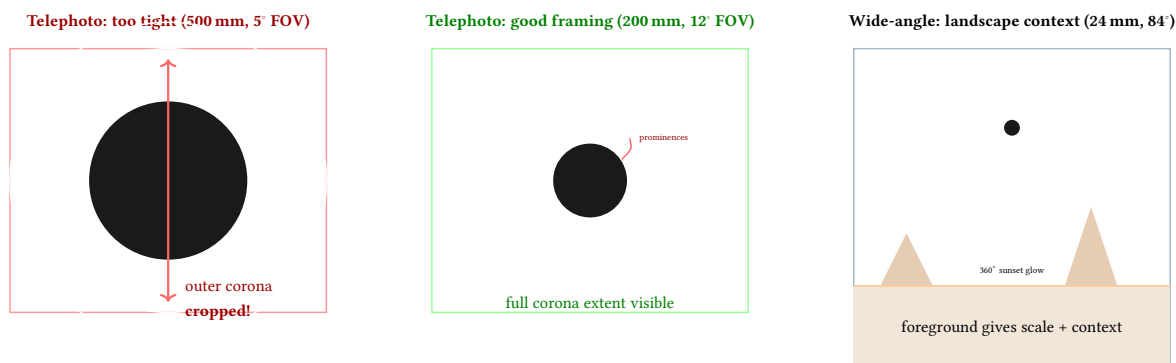


Figure 70. Corona framing: a 500 mm telephoto (left) crops the outer corona; 200 mm (center) provides room for the full coronal extent including streamers; 24 mm wide-angle (right) captures the eclipse in landscape context with the 360° horizon glow visible during totality.

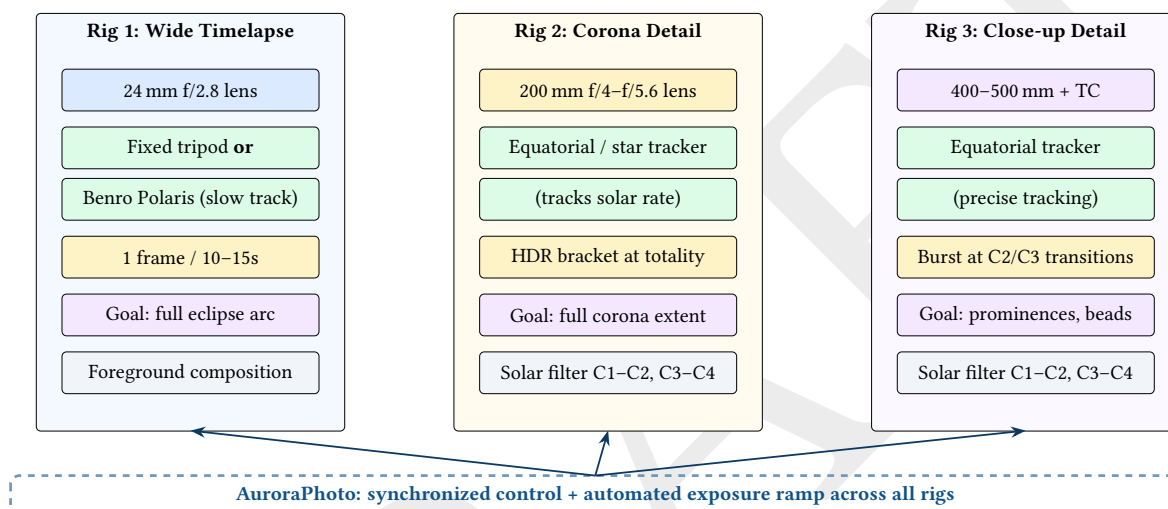


Figure 71. Three-rig eclipse deployment: (1) wide-angle on tripod or Benro Polaris for timelapse with foreground, (2) tracked 200 mm for full corona HDR, (3) tracked 400–500 mm for close-up prominences and transient events. AuroraPhoto coordinates exposure timing across all three.

The wide-angle rig has two operational modes:

- **Stationary (tripod):** Fixed composition with foreground (landmark, people, horizon). The Sun moves through the frame over the eclipse duration, creating a composite arc showing the progression from crescent to totality and back. Requires planning the Sun's path to ensure it stays in frame for the full 2–3 hours.
- **Slow-tracked (Benro Polaris):** The mount rotates slowly to follow the Sun, keeping it centered while the foreground gradually shifts. This produces smoother timelapse sequences and avoids the Sun drifting out of a tighter composition, but sacrifices the dramatic composite arc. Best for video-oriented output or when using moderate focal lengths (35–50 mm) where the Sun's motion would otherwise exit the frame.

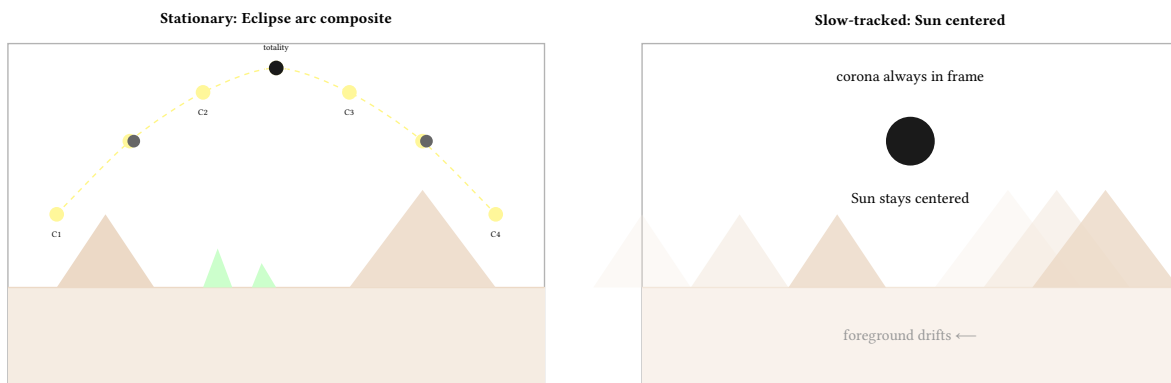


Figure 72. Wide-angle timelapse strategies: stationary (left) produces a dramatic composite arc showing the eclipse progression against fixed foreground—the classic “eclipse arc” image; slow-tracked on a Benro Polaris (right) keeps the Sun centered for smoother video timelapse but the foreground drifts. Both require planning the composition for the full eclipse duration.

Design Decision 4: Corona Framing Rule

For corona photography, select a focal length that provides at least 3° of sky around the eclipsed Sun (6° total field minimum). At 200 mm on full-frame (12° diagonal FOV), the corona fills roughly half the frame—ideal. At 500 mm (5° FOV), the outer corona and any extended streamers will be cropped. When in doubt, frame wider: you can crop in post-processing but cannot recover cropped corona.

18.24 Space Weather Monitoring and Aurora Prediction

Aurora is driven by solar activity. Real-time space weather data from upstream satellites provides advance warning of geomagnetic storms, enabling AuroraPhoto to pre-configure exposure profiles and alert operators before aurora onset. This subsection describes the data chain from solar observation to camera readiness.

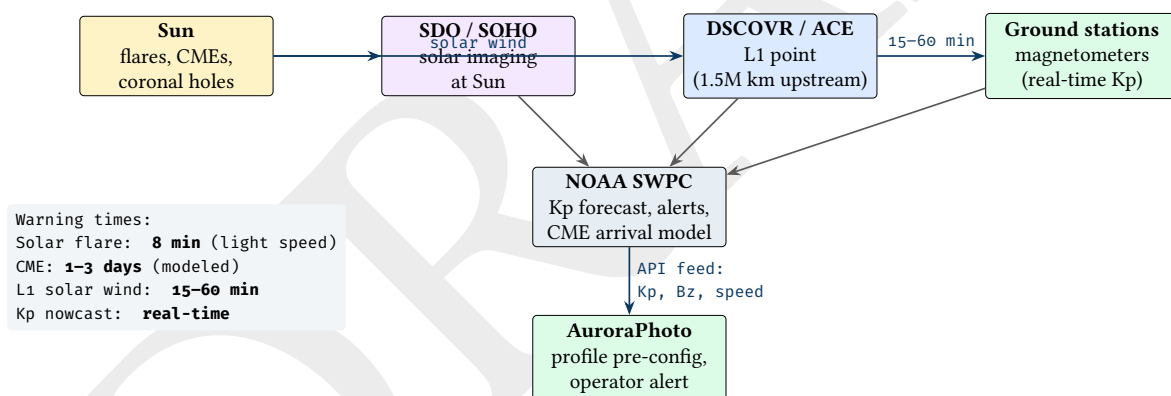


Figure 73. Space weather data chain: solar observations (SDO/SOHO) provide days of warning for CMEs; L1 satellites (DSCOVR/ACE) measure the solar wind 15–60 minutes before it hits Earth; ground magnetometers provide real-time Kp. AuroraPhoto can consume these feeds to pre-configure capture profiles.

Solar Flare Classification (X-ray flux at 1–8 Å)

A / B class $< 10^{-6} \text{ W/m}^2$ Background No aurora impact	C class 10^{-6} Minor Faint aurora at high lat	M class 10^{-5} Moderate Aurora to 60° Radio blackouts	X1–X9 10^{-4} Strong Aurora to 50° GPS disruption	X10+ $> 10^{-3}$ Extreme Aurora to 40° Power grid risk
---	---	---	--	---

Increasing intensity →

AuroraPhoto response: C-class → monitor; M-class → pre-arm aurora profiles; X-class → alert operator, switch to burst-ready mode, extend imaging window

Figure 74. Solar flare classification: each class represents a 10× increase in X-ray flux. M-class and above flares, if Earth-directed, can produce aurora visible at mid-latitudes and should trigger AuroraPhoto pre-configuration.

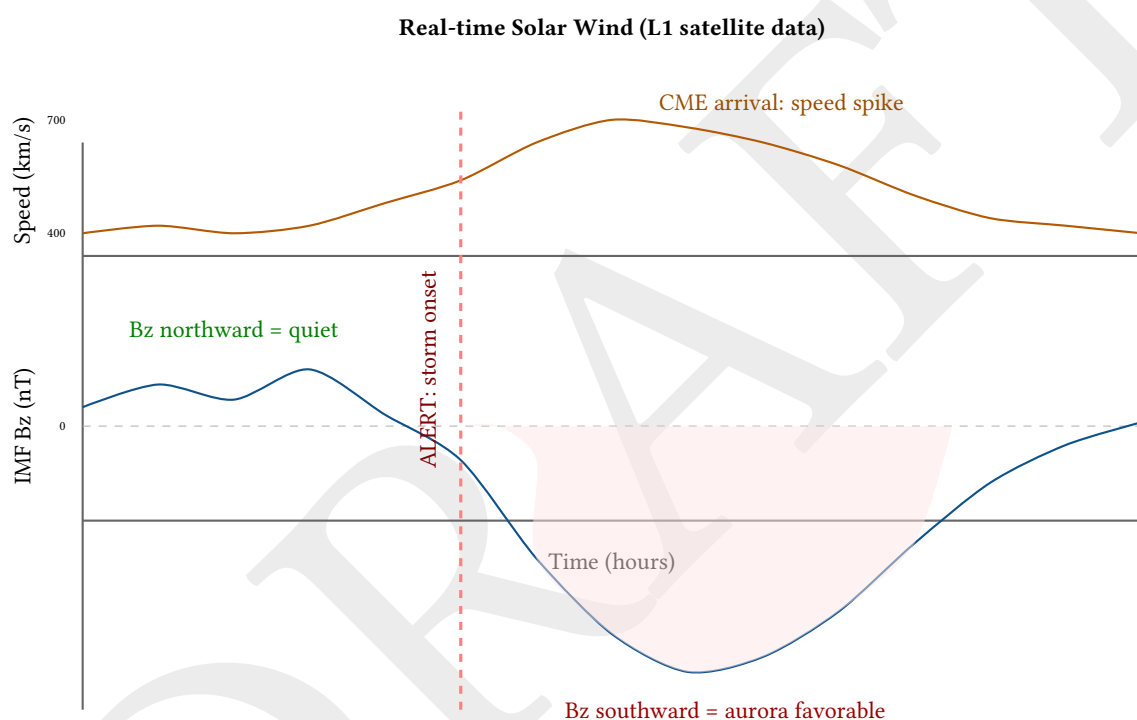


Figure 75. Real-time solar wind data from L1: the IMF Bz component (top trace) turning southward combined with elevated solar wind speed indicates geomagnetic storm onset. AuroraPhoto can monitor these parameters and issue pre-emptive alerts 15–60 minutes before aurora becomes visible.

: Space Weather Integration

AuroraPhoto should consume real-time Kp index and, optionally, L1 solar wind data (Bz component, proton density, speed) via NOAA SWPC APIs. When $K_p \geq 4$ or $B_z < -10 \text{ nT}$, automatically switch to aurora-ready mode: extend imaging window, pre-arm burst profiles, and alert the operator.

18.25 Bayer Pattern and Color Reconstruction

Digital camera sensors use a color filter array (CFA)—typically the Bayer pattern—where each pixel records only one color channel. This has specific implications for narrowband aurora imaging: the dominant 557.7 nm green line is captured by twice as many pixels as red or blue, creating both an advantage (higher effective resolution in green) and a challenge (demosaicing artifacts at sharp emission boundaries).

Bayer CFA Pattern

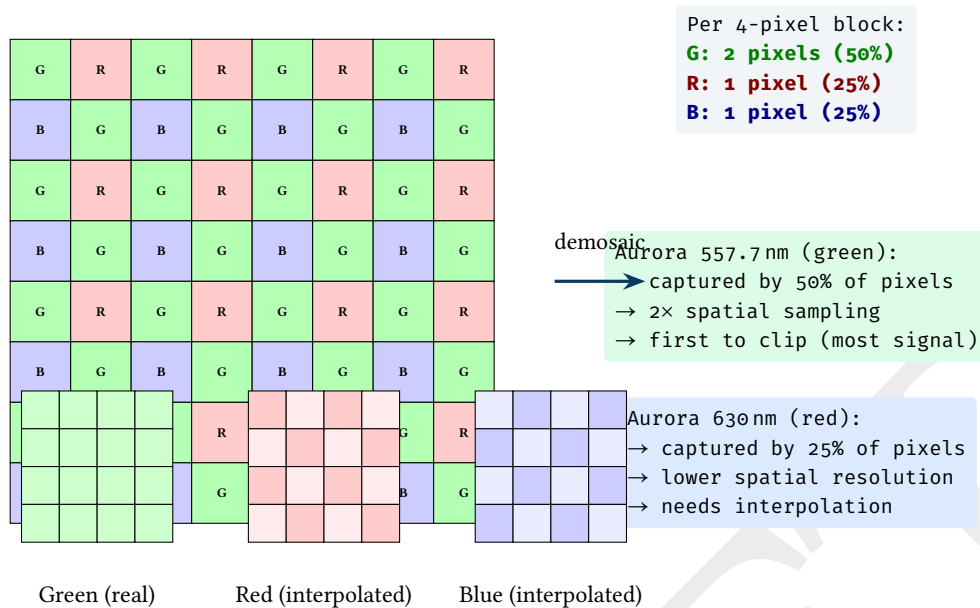


Figure 76. Bayer CFA pattern: green pixels outnumber red and blue 2:1. For aurora imaging, the dominant 557.7 nm green emission lands on 50% of the sensor pixels, giving higher effective resolution but also making green the first channel to clip. Demosaicing interpolates the missing color values, which can introduce artifacts at sharp aurora boundaries.

18.26 Sensor Read Modes and Their Trade-offs

Modern Sony Alpha cameras offer multiple shutter and readout modes, each with different implications for eclipse and aurora photography. The choice affects read noise, rolling shutter artifacts, shutter shock vibration, and maximum frame rate.

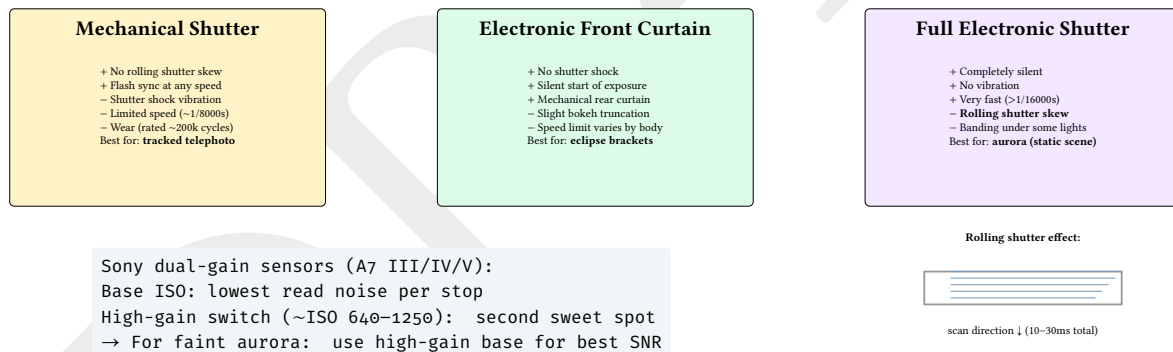


Figure 77. Sensor read mode trade-offs: mechanical shutter avoids rolling artifacts but adds vibration; EFCS is ideal for bracket sequences; full electronic is silent and vibration-free but introduces rolling shutter skew on fast-moving subjects. Sony's dual-gain architecture provides two optimal ISO settings.

18.27 Dark Current and Temperature

Dark current—thermally generated electrons that accumulate during exposure—decreases exponentially with sensor temperature. Cold-weather aurora shooting provides a significant noise advantage, but the relationship is worth quantifying to inform exposure decisions and dark frame calibration.

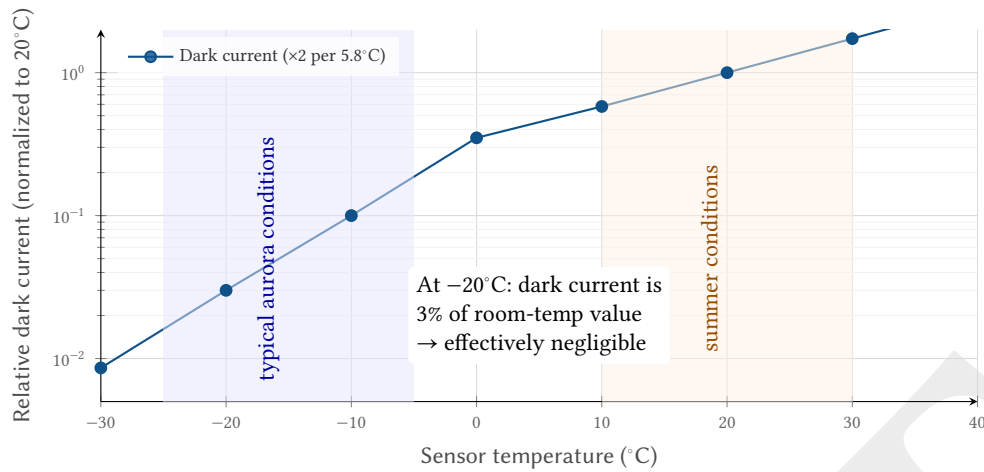


Figure 78. Dark current vs. sensor temperature: the exponential relationship ($\times 2$ per $\sim 5.8^\circ\text{C}$) means cold-weather aurora shooting at -20°C has $\sim 30\times$ less dark current than room temperature. This is a significant advantage for long exposures.

18.28 Coma and Field Curvature in Fast Lenses

Wide-aperture lenses used for aurora and star photography exhibit coma—an off-axis aberration that stretches point sources into comet-like shapes toward frame corners. This degrades star sharpness non-uniformly across the field and affects HFR measurements that sample stars at different field positions.

Insight:
At typical aurora shooting temperatures (-10 to -25°C), dark current is effectively negligible for exposures under 30s. Dark frame subtraction is still recommended but less critical than for warm-weather deep-sky imaging.

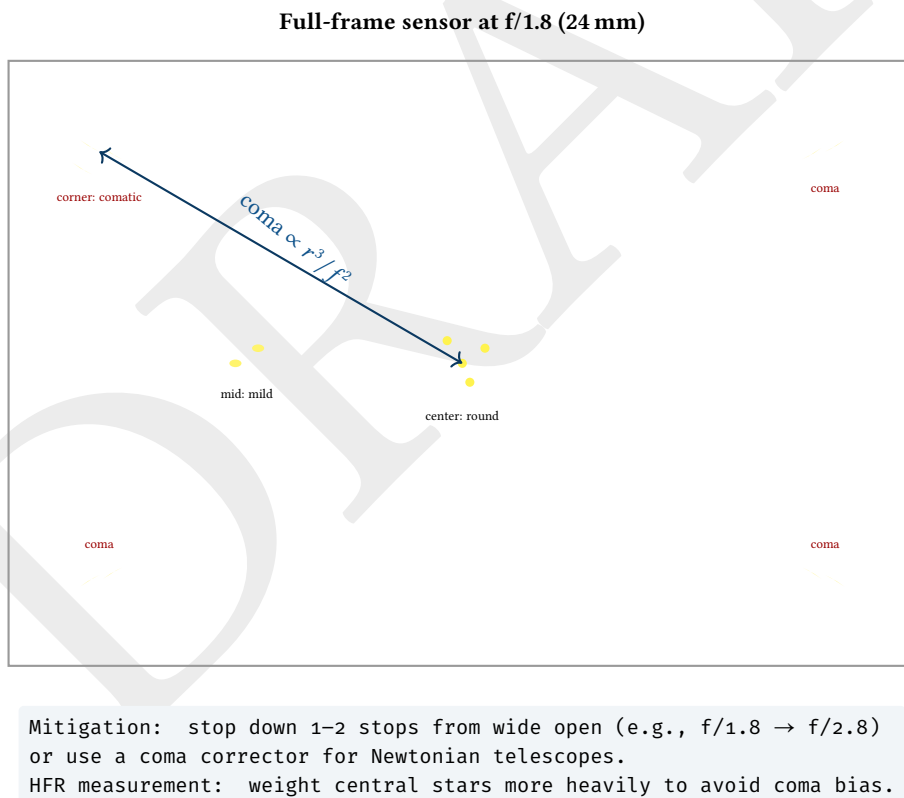


Figure 79. Coma across a full-frame sensor at f/1.8: stars in the center remain round while corner stars develop comet-like tails pointing away from the optical axis. Coma scales as r^3/f^2 (third-order Seidel aberration). AuroraPhoto’s HFR computation should weight central stars more heavily or reject corner stars to avoid coma-biased focus measurements.

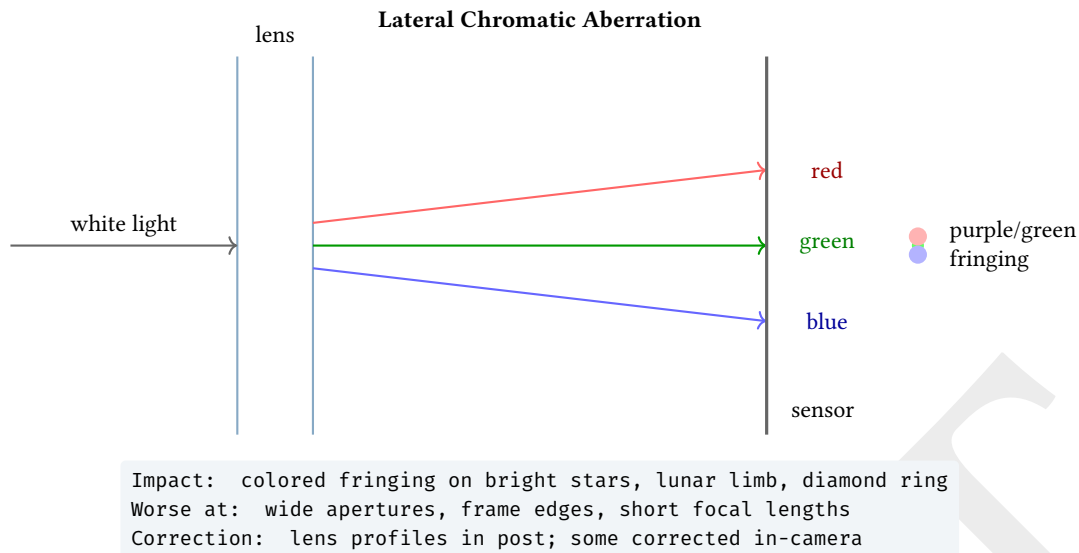


Figure 80. Lateral chromatic aberration: different wavelengths focus at slightly different positions, creating color fringing on high-contrast edges. Particularly problematic for diamond ring shots and the lunar limb during partial phases.

18.29 HDR Compositing Pipeline for Corona Imagery

The 12+ EV dynamic range of the solar corona requires compositing multiple exposures. The processing pipeline aligns frames, weights them by exposure, and applies specialized radial filtering to reveal coronal structure that no single exposure can capture.

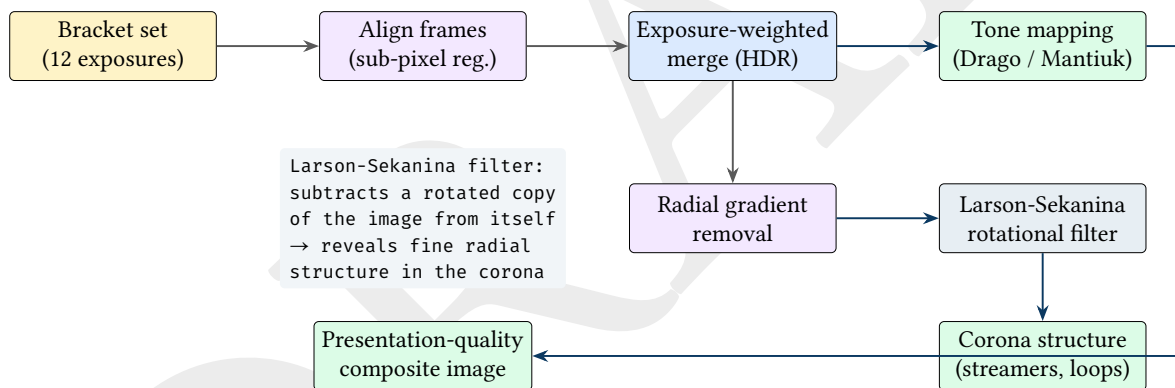


Figure 81. HDR compositing pipeline for corona imagery: bracket exposures are aligned, merged with exposure-based weighting, and processed through two paths—tone mapping for natural appearance, and radial filtering (Larson-Sekanina) to reveal fine coronal structure.

18.30 Image Stacking for Noise Reduction

Averaging N aligned frames of the same scene improves SNR by $\sqrt{N}$, enabling faint aurora and star detail to emerge from the noise floor. For untracked aurora frames, alignment must handle both the moving aurora and the (slowly) trailing stars separately.

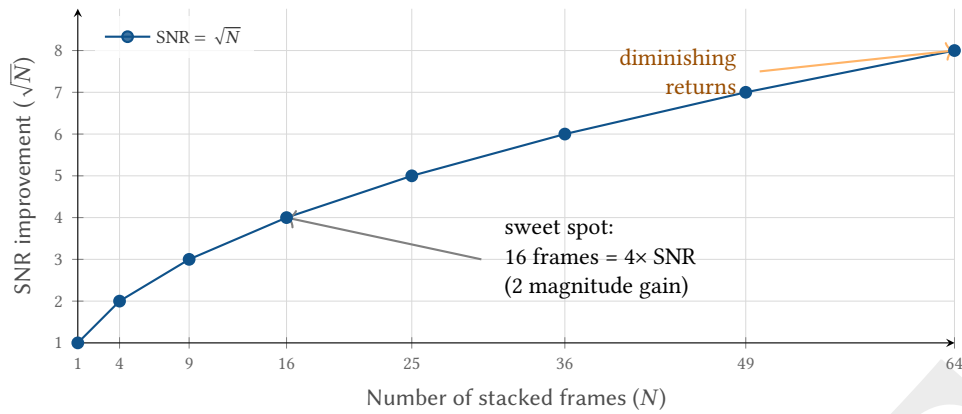


Figure 82. SNR improvement from stacking: 16 frames yield a 4× SNR improvement (equivalent to 2 magnitude gain), revealing structure invisible in single exposures. Beyond ~25–36 frames, returns diminish and other error sources (alignment, sky variation) dominate.

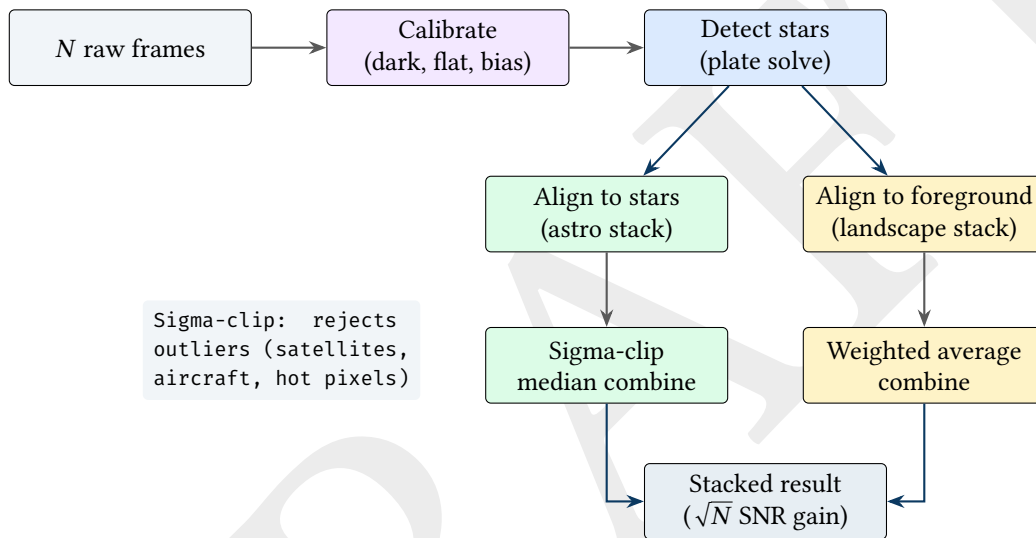


Figure 83. Image stacking pipeline: raw frames are calibrated, stars are detected for alignment, and frames are combined using either star-aligned stacking (sharp stars, blurred foreground) or foreground-aligned stacking (sharp landscape, trailed stars). Sigma-clipping during combination rejects transient artifacts.

18.31 Sky Quality and the Bortle Scale

The Bortle Dark-Sky Scale classifies observing sites from pristine (Class 1) to inner-city (Class 9). Sky quality directly determines the faintest aurora detectable and the exposure settings needed. AuroraPhoto should account for site Bortle class when selecting default exposure profiles.

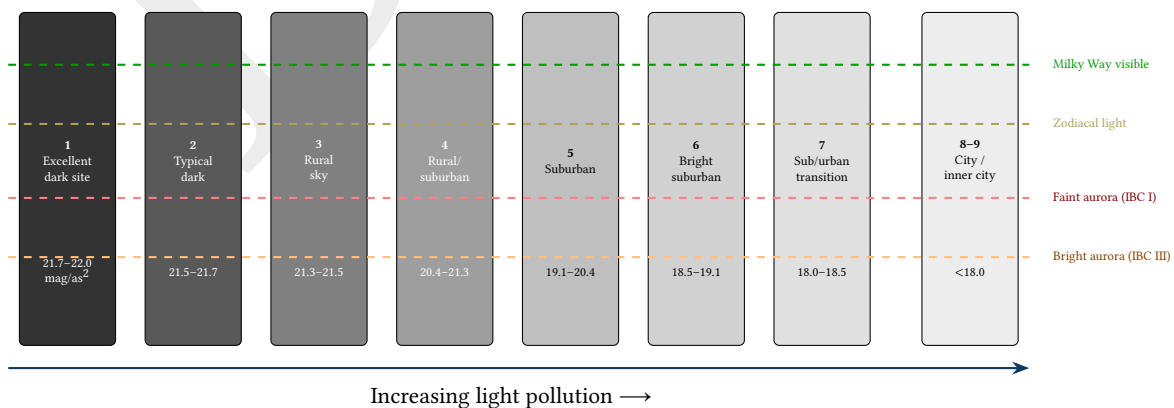


Figure 84. Bortle Dark-Sky Scale: site quality determines the faintest targets detectable. Faint aurora (IBC I) requires Bortle 4 or better; bright aurora (IBC III+) is visible even from Bortle 6–7 suburban sites. AuroraPhoto should factor Bortle class into default exposure profile selection.

18.32 Weather and Clear Sky Planning

Cloud cover is the single largest risk factor for astronomical photography—all other planning is moot under overcast skies. Statistical clear-sky probability varies dramatically by location and season, and real-time satellite cloud imagery enables go/no-go decisions.

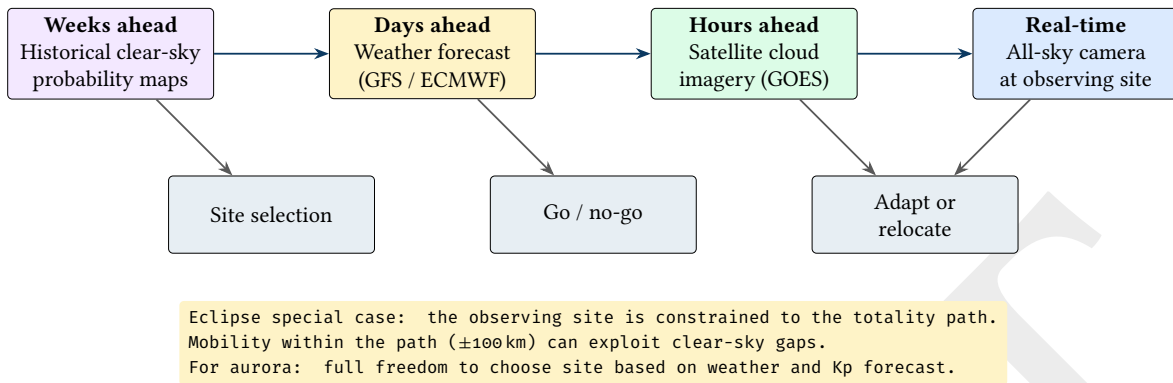


Figure 85. Weather planning cascade: long-range climatology informs site selection, medium-range forecasts drive go/no-go decisions, and real-time satellite imagery enables last-minute adaptation. Eclipse observations are constrained to the totality path but have some mobility within it.

18.33 Eclipse State Machine Mapping

The capture node state machine defined in §6 can be extended with eclipse-specific states that map to the physical phenomena described in this section. This bridges the gap between the astronomical science and the system architecture.

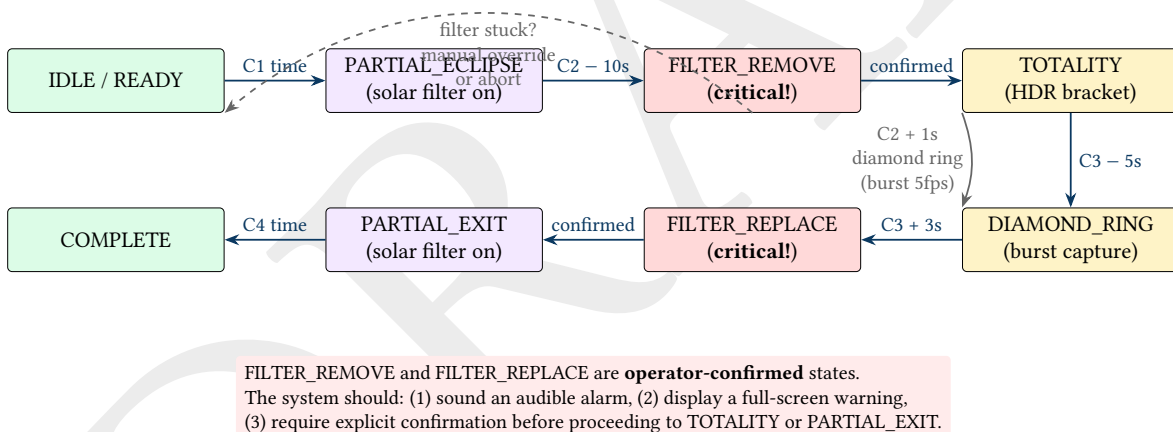


Figure 86. Eclipse-specific state machine: extends the capture node states with eclipse phases. FILTER_REMOVE (at C2) and FILTER_REPLACE (at C3) are operator-confirmed critical transitions. The DIAMOND_RING state triggers burst capture at the C2/C3 transitions.

18.34 Telemetry Dashboard for Eclipse Operations

During an eclipse, the iPhone hub must display time-critical information at a glance. This mockup shows the essential telemetry elements for eclipse operations, organized by urgency.

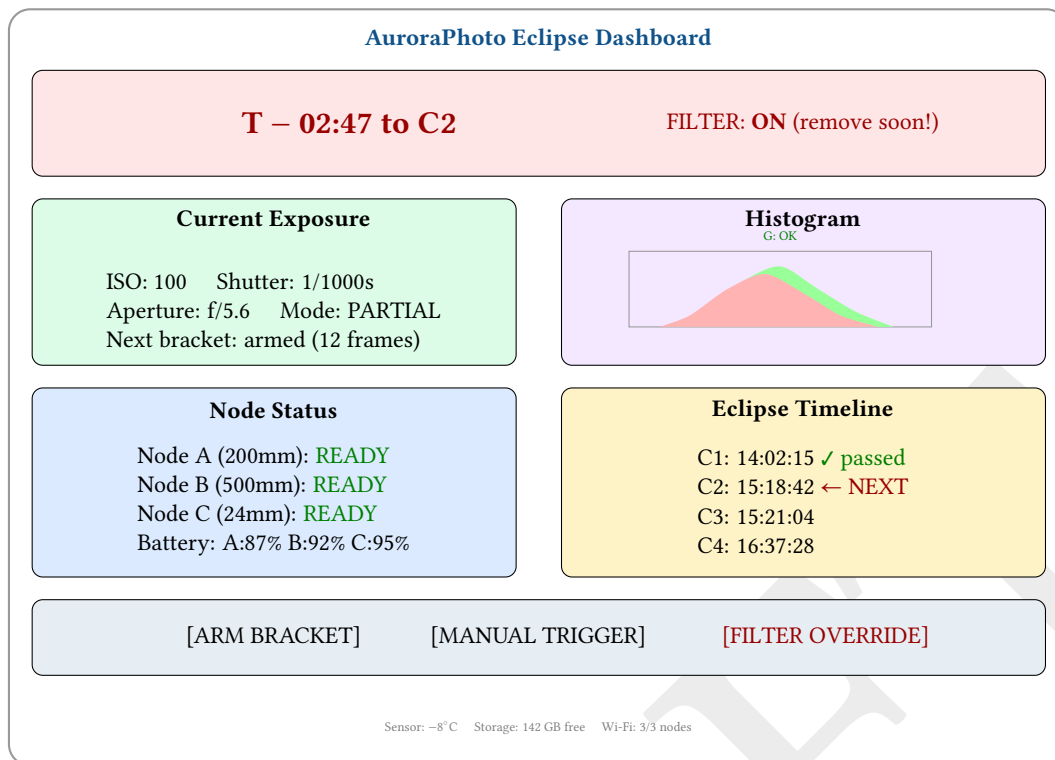


Figure 87. Eclipse telemetry dashboard mockup: the countdown to the next contact point dominates the top bar; filter state is always visible with prominent warnings. Current exposure, live histogram, node status, and eclipse timeline are shown in a four-panel layout with action buttons for manual override.

Design Decision 5: Dashboard Design: Eclipse Mode

The eclipse dashboard prioritizes three things above all else: (1) countdown to next contact point, (2) solar filter state with audible/visual warnings, and (3) bracket sequence readiness. All other telemetry (node health, storage, temperature) is secondary. The filter state indicator must be the largest, most prominent element on screen during the C2 and C3 transitions.

Revision History

Version	Date	Changes
0.1.0	March 2026	Initial technical report skeleton; architecture + control-loop diagrams

Todo list