

Pico WiFi DMX User Manual

This manual explains how to use the browser-based DMX controller with the Pico firmware. It is written for daily operation: creating fixtures, controlling lights, saving scenes, building chasers, creating motion effects, and using GPIO buttons or ADC inputs.

The web interface is normally opened from XAMPP:

```
http://localhost/dmx/
```

The Pico itself is controlled over the network with its base URL, for example:

```
http://192.168.0.24/
```

Enter the Pico base URL once in any page. The browser stores it and shares it with the other pages. Across the UI, live Pico updates only happen while a Pico base URL is set; clearing the URL puts the page into browser-only editing.

This applies to every page that can talk to the Pico:

- **Fixture Controller** edits values locally, and only sends DMX changes when the Pico base URL is set.
- **Chaser** can edit steps locally without a URL; live step preview, Chase Playback, and Pico slot actions need a Pico base URL.
- **Motion FX** can edit effect recipes locally without a URL; browser preview, scene-to-Pico center updates, and Pico slot actions need a Pico base URL.
- **GPIO Control** can edit and save mappings locally without a URL; upload, readback, and status polling need a Pico base URL.
- **DMX Buffer Monitor** only polls Pico buffers when a Pico base URL is set.
- **Pico Performance Test** only runs when a Pico base URL is set.

The screenshots in this manual are generated by `scripts/update_user_manual.ps1`. Toolbox screenshots are captured as named page elements, so the manual can be regenerated after UI changes without hand-cropping images.

Main Pages

Page	Purpose
Fixture Controller	Fixture profiles, patching, live control, groups, scenes, default and blackout values
Chaser	Step-based chases with fade, loop modes, direction, pause/resume, and Pico slot upload
Motion FX	Continuous effects for pan/tilt pairs or scalar controls such as dimmer, zoom, iris, prism, and gobo
GPIO Control	Map Pico GPIO buttons and ADC inputs to lighting actions
DMX Buffer Monitor	Read all 512 values from either the live output frame or the base/position buffer
Pico Performance Test	Test Pico HTTP/DMX update performance, buffer readback, and core timing logs

1. Fixture Controller

DMX Fixture Controller v0.9.6

Setup loaded from server

Pico base URL

http://192.168.0.24/

Motion

Chaser

GPIO

Manual

Show

New Show

Patch CSV

Export Setup

Import Setup

Fixture Library

Search manufacturer or fixture

American DJ Inno Pocket

Export Library

Import Library

Loaded 623 built-in library fixtures.

Spica 250M

5Star Systems · 2 modes

Twister 4

Abstract · 2 modes

PAR 180 COB 3in1

Acoustic Control · 1 mode

ALC4

ADB · 6 modes

Europe 105

ADB · 10 modes

WARP/M

ADB · 2 modes

5Star Systems - Spica 250M

Moving Head, Color Changer

Mode

16bit - 16ch

Import profile

11 converted controls · 16 channels

Pan/Tilt (panTilt16 · Pan 1/2, Tilt 3/4)

Pan/Tilt Speed (slider8 · CH 5)

Reset (slider8 · CH 6)

Color Wheel (wheel · CH 7)

Prism (slider8 · CH 9)

Prism rotation (slider8 · CH 10)

Gobo Wheel (wheel · CH 11)

Gobo rotation (wheel · CH 12)

Focus (slider8 · CH 14)

Shutter / Strobe (slider8 · CH 15)

Dimmer (slider8 · CH 16)

Fixture Profiles

Name

Mode

Channels

Add profile

Moving Head 16ch

16ch

16

Add / Edit Control

Type, Label & Channels

Type

Label

Pan coarse

Pan fine

Pan/Tilt 16-bit XY

Pan/Tilt 16-bit

1


2

The Fixture Controller is the central page. Use it first when setting up a new show or fixture set.

Set the Pico Base URL

1. Open `http://localhost/dmx/`.
2. Enter the Pico base URL, for example `http://192.168.0.24/`.
3. The Pico base URL field checks `/status.json` automatically. It turns dark green when the Pico is reachable, dark red when it cannot connect, and keeps retrying in the background so it can recover after flashing or rebooting the Pico.
4. Control changes are sent to the Pico when a Pico base URL is set. If the field is empty, the page edits locally only and does not send live DMX updates.
5. Fixture setup changes are autosaved to the XAMPP server. Use **Export Setup** before large changes when you want an extra backup of the complete show setup.

Fixture Library

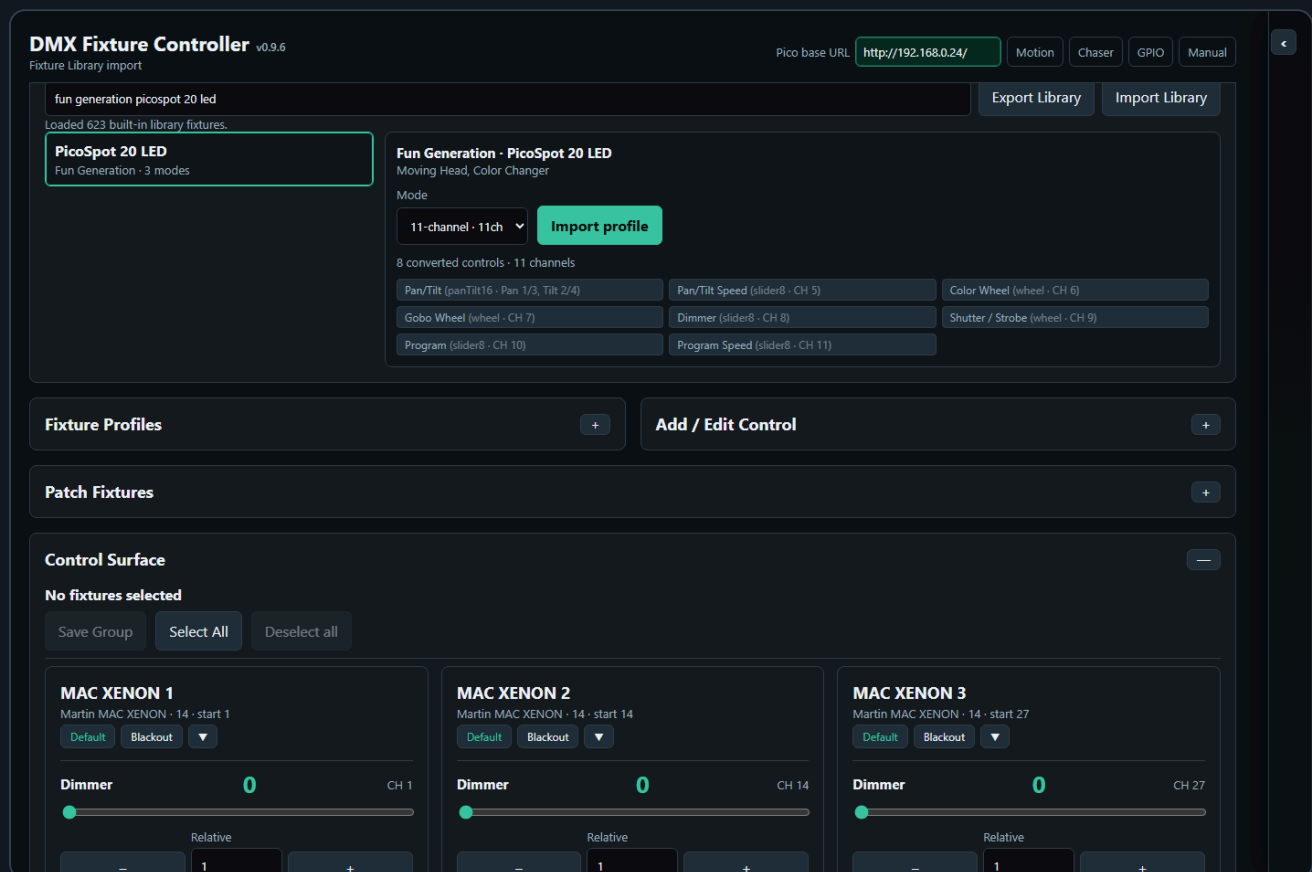

The **Fixture Library** panel imports fixture profiles from the converted Open Fixture Library export. Use it when you want to start from an existing fixture definition instead of building every channel by hand.

The library loads automatically when the controller page opens. While it is loading, the search field is disabled and the panel shows a loading status. If loading fails, the panel shows a **Retry** button.

Command buttons that save, import, export, or update setup data briefly show their result on the button itself. For example, **Update Library** changes to **Updating...** and then **Updated** when the fixture library write is complete.

Use **Export Library** to download the currently loaded fixture catalog as `pico_dmx_fixture_library.json`. Use **Import Library** to upload a converted fixture library catalog to the XAMPP server. After import, the controller loads that custom library first; if no custom library is saved, it falls back to the built-in converted library asset. The development script `scripts/sync_fixture_library_from_xampp.ps1` can refresh that bundled fallback from the current XAMPP catalog after validating the library schema, fixture count, and fixture keys. When fixtures differ, the script asks whether to take each XAMPP change or keep the bundled copy; -

`AcceptAllChanges` , `-KeepExistingChanges` , and `-DryRun` are available for intentional automated runs.

1. Type part of the manufacturer, fixture name, category, or mode in **Search manufacturer or fixture**.
2. Select the matching fixture from the results list.
3. Choose the desired DMX mode from the **Mode** dropdown.
4. Review the converted controls and channel count in the preview.
5. Click **Import profile**.

The imported fixture is added to **Fixture Profiles** and becomes the active profile. You can edit it like any manually created profile, including changing labels, defaults, blackout values, and wheel options.

The converter keeps the richer Open Fixture Library data where the controller can use it:

- Pan/tilt channels are grouped as 8-bit or 16-bit pan/tilt controls when matching channels are present.
- RGB, RGBW, and RGBWA color intensity channels are grouped into color controls.
- Wheel slots keep their OFL names and colors when the library provides them.
- Wheel DMX ranges are preserved. Normal slot buttons send the midpoint of the range.
- Adjustable wheel functions such as `WheelShake` , `WheelRotation` , and `WheelSlotRotation` show a bounded speed/range slider after you select that option.
- Unsupported or ambiguous channels are kept as simple 8-bit sliders so no channel is silently lost.

Create a Fixture Profile

The screenshot displays the DMX Fixture Controller v0.9.6 interface. At the top, there's a header with the title and version, a Pico base URL field set to `http://192.168.0.24/`, and tabs for Motion, Chaser, GPIO, and Manual. Below the header is a navigation bar with buttons: New Show, Patch CSV, Export Setup, and Import Setup.

The main content area is divided into two primary sections. The top section is the **Fixture Library**, which includes a search bar labeled "Search manufacturer or fixture" and buttons for "Export Library" and "Import Library". It lists several fixtures: Spica 250M (5Star Systems - 2 modes), Twister 4 (Abstract - 2 modes), PAR 180 COB 3in1 (Acoustic Control - 1 mode), ALC4 (ADB - 6 modes), Europe 105 (ADB - 10 modes), and WARP/M (ADB - 2 modes). The Spica 250M fixture is selected, showing its details: "Moving Head, Color Changer", "Mode" set to "16bit - 16ch", and a list of 11 converted controls (16 channels) including Pan/Tilt, Color Wheel, Gobo Wheel, Shutter / Strobe, and Dimmer.

The bottom section is the **Fixture Profiles** section, which includes a table for existing profiles and an "Add / Edit Control" section. The table has columns for Name, Mode, and Channels, and an "Add profile" button. The "Add / Edit Control" section has a "Type, Label & Channels" section with a dropdown for "Type" (set to "Pan/Tilt 16-bit XY"), a "Label" field (set to "Pan/Tilt 16-bit"), and "Pan coarse" (set to 1) and "Pan fine" (set to 3) fields. Below this are "Tilt coarse" and "Tilt fine" fields.

A fixture profile describes the DMX personality of one fixture type. Use this section when the wanted fixture is not available in the **Fixture Library**, or when you want to fine-tune an imported profile.

1. Open **Fixture Profiles**.
2. Enter a profile name, mode name, and channel count. These fields update the selected profile automatically.
3. Click **Add profile**.

4. Select the profile.
5. Use **Add / Edit Control** to add controls such as dimmer, pan/tilt, RGB, RGBW, RGBWA, wheel, or 16-bit slider.

Each control stores its own DMX channel mapping. For example, a moving head can have:

- Dimmer on channel 1
- Pan/Tilt 16-bit on channels 2/3 and 4/5
- RGBWA color on channels 6-10
- Gobo wheel on channel 12

Pan/Tilt controls also have fixture-profile mapping options:

- **Reverse Pan DMX** sends the logical Pan value as `max - value`.
- **Reverse Tilt DMX** sends the logical Tilt value as `max - value`.
- **Swap Pan/Tilt axes** sends logical Pan through the fixture's Tilt channels and logical Tilt through the fixture's Pan channels.

These options belong to the fixture profile, so every patched fixture using that profile follows the same mapping. The controller, chaser, and browser motion output keep showing logical Pan/Tilt values; only the physical DMX bytes are changed. This means scenes, palettes, chases, and motion centers remain readable even when a fixture is mounted backwards or rotated.

To change an existing control, click **Edit** in the Fixture Profiles list. The **Add / Edit Control** card opens automatically and loads the selected control. After editing, click **Save control**. If a Pico base URL is set, saving an existing control immediately resends the current live value for every patched fixture using that profile/control, so Pan/Tilt reverse or axis-swap changes are applied to the output right away. The **Fixture Profiles** collapse button also controls the Add / Edit Control card, so both profile editing areas can be hidden together.

Click **Update Library** when the selected profile should become part of the fixture library. The controller saves the current profile name, mode, channel count, and controls into the fixture library catalog on the XAMPP server. If the same fixture and mode already exist in the library, that mode is replaced; otherwise a new custom fixture entry is added. For existing Open Fixture Library modes, Update Library preserves richer wheel metadata such as `WheelShake`, `WheelRotation`, slot numbers, and speed ranges even when the edited controller profile only shows plain wheel values. Pan/Tilt reverse and axis-swap options are not written into the fixture library, because they describe how a fixture is mounted in one show rather than the fixture's DMX personality.

Default and Blackout Values

Each control can store a **Default** value and a **Blackout** value.

Default values are useful for a normal starting look, for example:

- Dimmer open
- Pan/Tilt centered
- RGB white
- Gobo open

Blackout values are useful for quickly shutting down output, for example:

- Dimmer 0
- RGB black

- White and amber 0
- Pan/Tilt at a safe position if needed

For RGB, RGBW, and RGBWA controls, use the color picker for RGB. White and amber channels are edited separately when the fixture type has them.

Patch Fixtures

Patch fixtures after the profile is ready.

1. Open **Patch Fixtures**.
2. Enter a fixture name.
3. Select the fixture profile.
4. Enter the DMX start address.
5. Set **Count** to the number of fixtures you want to patch.
6. Click **Patch fixture**.


Use **Next free** to find the next available address after already patched fixtures.

When **Count** is greater than 1, the controller creates a numbered run of fixtures. For example, name **RGB Spot** with count **10** creates **RGB Spot 1** through **RGB Spot 10**. The first fixture uses the start address you entered. The following fixtures are spaced by the channel count of the selected fixture profile.

After a multi-fixture patch, the controller asks whether to create a Saved Group for the newly patched fixtures. The suggested group name is the patch name. Press **Cancel** to skip group creation, or enter a name to save the new fixtures as a group.

The patched fixture list is shown as rows of compact cards. Each row represents one consecutive run of the same fixture profile, so two separate MAC runs remain visually separate even when they use the same profile.

Live Fixture Control

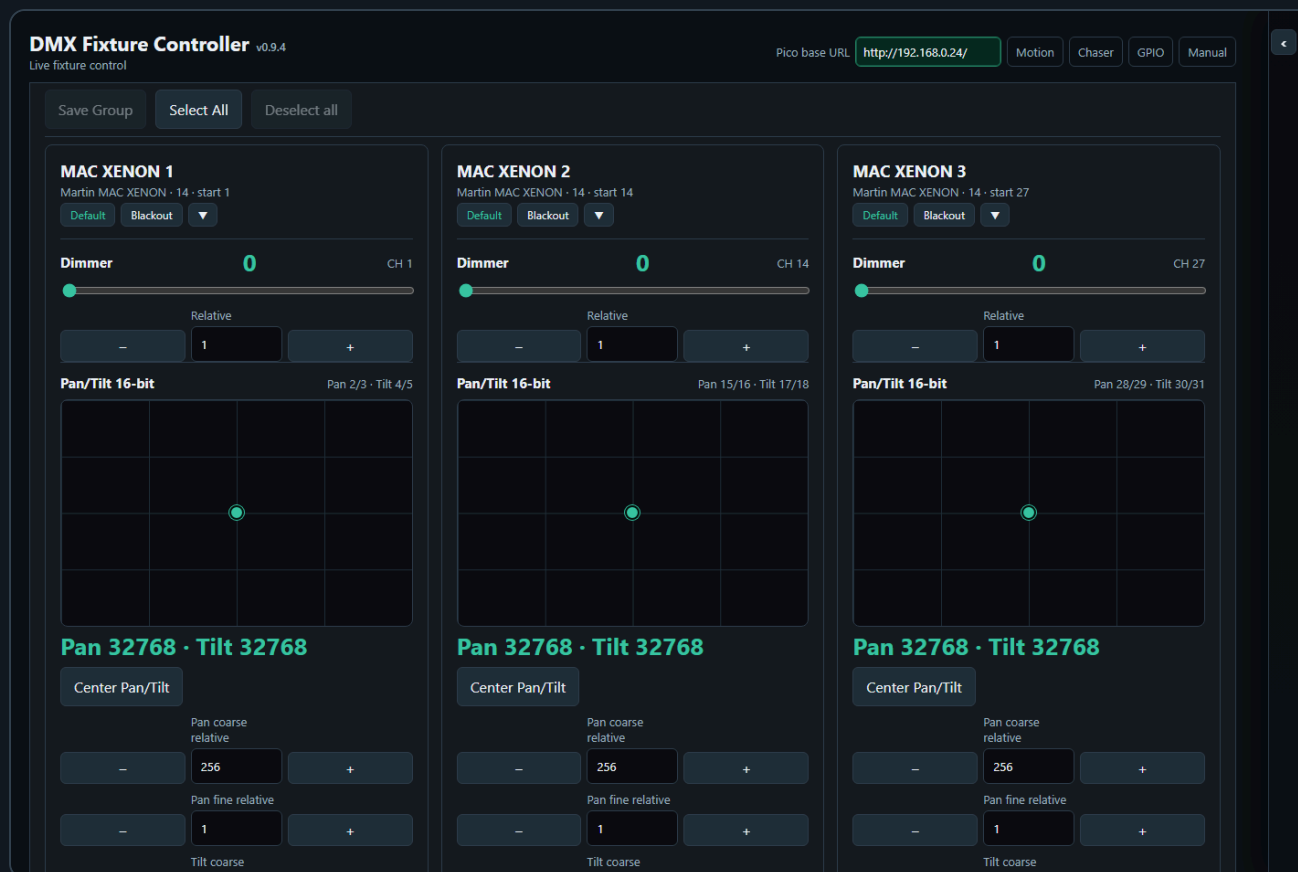

The **Control Surface** shows one card per patched fixture.

Each fixture card contains the controls from its profile:

- Sliders for dimmer and simple channels
- XY pads for absolute pan/tilt positioning
- Relative pan/tilt nudge controls for small position corrections
- Color pickers and swatches for color controls
- Wheel buttons, a DMX value slider, and a direct numeric DMX value field for indexed wheel values
- Coarse/fine relative nudges for 16-bit channels

For pan/tilt controls, drag inside the XY pad when you want to move directly to an absolute position. Use **Pan coarse relative**, **Pan fine relative**, **Tilt coarse relative**, and **Tilt fine relative** when you want to adjust from the current position without jumping to a new absolute value. The number field in each relative row sets how many DMX increments the next **-** or **+** click will move. The fine relative buttons move the combined 16-bit value by that many steps, including byte borrow and carry: for example **256 - 1** becomes coarse **0**, fine **255**, and **255 + 1** becomes coarse **1**, fine **0**. The value is clamped at the valid DMX range, so it cannot go below **0** or above **65535**. If the fixture profile reverses or swaps Pan/Tilt, the XY pad and relative controls still show logical Pan/Tilt movement while the DMX output is mapped for the physical fixture.


Wheel / indexed controls require unique DMX option values. If two wheel options use the same DMX value, the Add / Edit Control card refuses to save the control. This prevents ambiguous wheel buttons where the UI could not know which option should be highlighted after recall or chase editing. On the Controller page and in Controller Group Edit, wheel controls can be changed with the option buttons, the DMX value slider, or the direct numeric DMX value field.

Use **Guided wheel editor** when creating or correcting indexed controls such as color wheels, gobo wheels, and shutter/strobe ranges. The modal lets you edit each option as fields: option name, DMX range start/end, function type, slot number, speed labels, and optional visual color/image data. This is the

recommended way to define rich functions such as `WheelShake`, `WheelRotation`, and `ShutterStrobe` without memorizing the raw text syntax.

The **Wheel options** text box remains editable for advanced use and accepts one option per line. Basic lines use `Name=DMX` or `Name=start-end`, for example `Open=0-15`. Richer OFL-style metadata can be added after pipe characters. Use `kind=WheelSlot` with `slot=2` for a named slot, `kind=WheelShake` with `shake=slow-fast` for a bounded shake speed range, `kind=WheelRotation` with `speed=slow CW-fast CW` for a bounded rotation range, and `kind=ShutterStrobe` with `speed=slow-fast` for a bounded strobe range. For example: `Gobo 2 shake=125-140|kind=WheelShake|slot=2|shake=slow-fast`.

Fixture profiles imported from the **Fixture Library** keep richer Open Fixture Library wheel information when it is available. Wheel slots use their real names and colors, for example `White`, `Red`, or `Gobo 2`. If an OFL wheel option covers a DMX range, the button sends the middle of that range so the value is safely inside the fixture function. Adjustable wheel ranges such as `WheelShake`, `WheelRotation`, `WheelSlotRotation`, and `ShutterStrobe` also show a bounded range slider after you select them. For example, the Fun Generation PicoSpot 20 LED in 11-channel mode imports `Gobo 2 shake` as a wheel button and shows a **Shake speed** slider limited to its real DMX range.

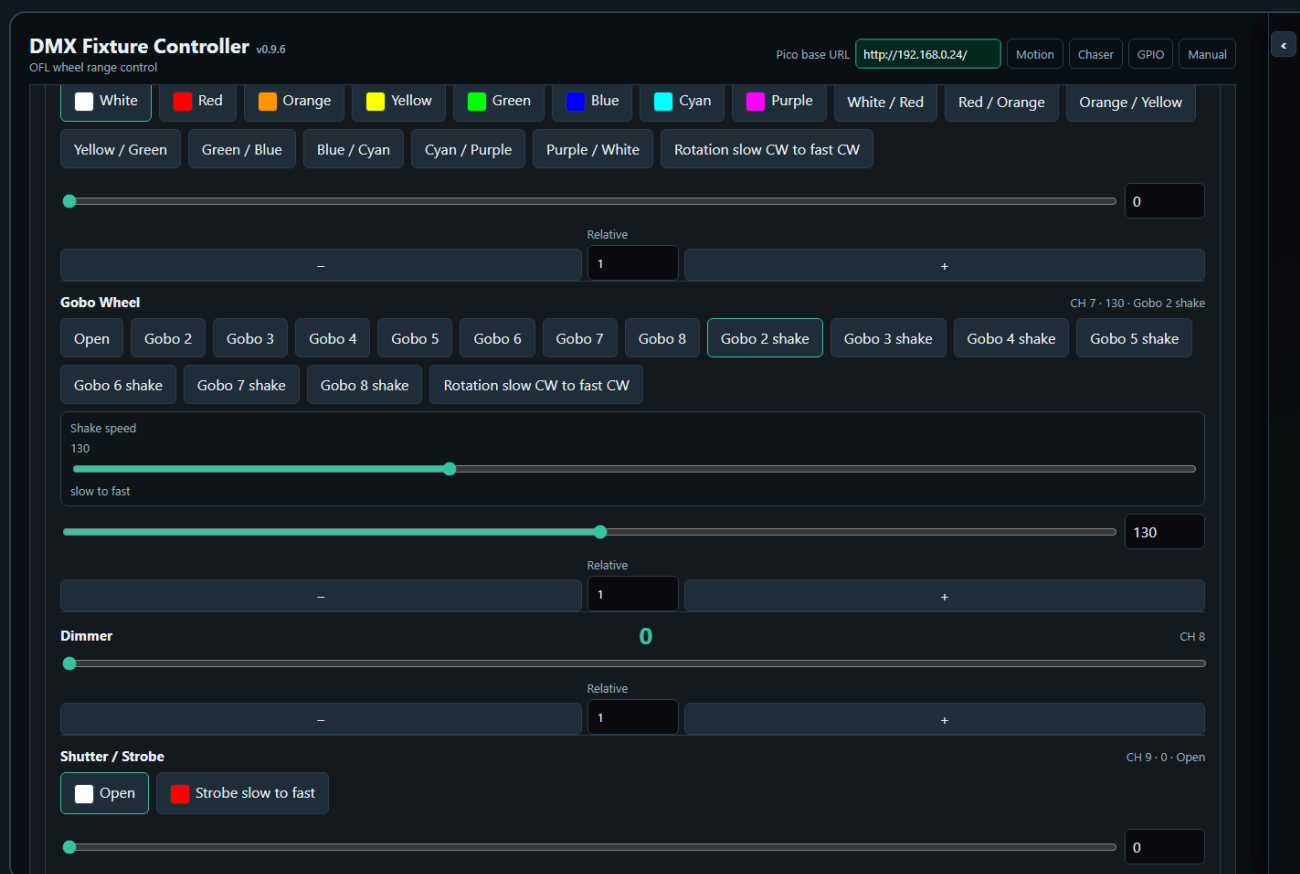

Use **Default** or **Blackout** on a fixture card to recall the stored values for that fixture only.

Use the small button in the **Control Surface** header to collapse all visible fixture cards or expand them again. The button affects only the fixtures currently shown by the active group, scene, or palette filter.

Click a fixture card header or empty card area to include or exclude that fixture for group editing. The selected card uses the same accent outline style as other selectable tiles in the app. Clicking sliders, color controls, wheel buttons, Default, Blackout, or collapse controls does not change fixture selection.

After a hard page reload, no fixture cards are selected automatically. This keeps Group Edit disabled until you deliberately choose the fixtures you want to edit.

Use **Select All** in the group bar above the control surface when you want to select every patched fixture. Use **Deselect all** to clear the current manual selection. When you manually select fixture cards, the

control surface stays visible so you can keep building or adjusting the selection. Saved Groups can also be selected from the Groups toolbox to filter the control surface.

Fixture Controller Toolboxes

The Fixture Controller uses four toolboxes in the shared right-side **Toolboxes** sidebar.

GPIO

Manual

Report Library

CH 5)

7)

CH 9)

CH 11)

+

+

—

CH 14

TOOLBOXES



Groups



Group
Edit

Cols

2

Rows

4

Move

MAC XENON Backdrop

6 fixtures

RGB Spot Backdrop

12 fixtures

MAC XENON Front

4 fixtures

RGB Spot Front

8 fixtures

FAL

6 fixtures

Scenes



Cols

6

Rows

3

Move

Scene 1

Scene 2

Scene 3

Chaser 1...

5

6

Scene 7

8

9

Scene 10

11

12

13

14

15

16

17

18

Show is the project-level card for setup files. **New Show** starts a fresh show after confirmation, clearing fixtures, live values, groups, scenes, palettes, chases, motion effects, GPIO mappings, Pico playback slots, and saved toolbox layout while keeping the reusable fixture library. **Export Setup** downloads the complete show backup, **Import Setup** restores one, and **Patch CSV** exports the patched channel table. The card can be collapsed when you do not need these buttons.

Groups stores fixture groups and shares the selected group filter with other toolbox pages. Use it to select fixtures quickly, edit group tile names and visuals from the small pencil icon, delete groups from the small , import/export group JSON, reorder group tiles with **Move**, and open **Group Edit** when the current scope supports it.

GPIO

Manual

Report Library

CH 5)

7)

CH 9)

CH 11)

+

+

—

CH 14

TOOLBOXES



Scenes




Cols

6


Rows

3

Move




Scene 1




Scene 2



Scene 3




Chaser 1...



5



6



Scene 7



8



9



Scene 10



11




12



13



14



15



16



17



18

Groups



Group
Edit


Cols

2

Rows

4

Move

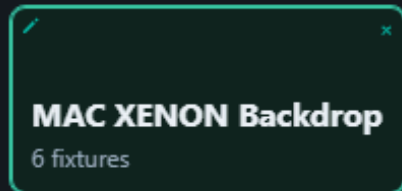

MAC XENON Backdrop

6 fixtures



RGB Spot Backdrop

12 fixtures



MAC XENON Front

4 fixtures




RGB Spot Front

8 fixtures



FAL

6 fixtures

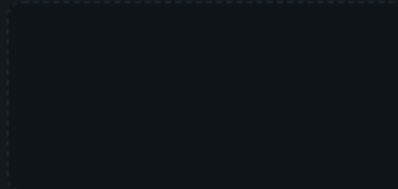

Scenes stores complete looks for the current working scope. Empty slots save, filled slots recall, the small  deletes, **Move** reorders tiles, and the small top-left pencil icon opens **Edit Tile** for that slot's name, background, and optional drawing/upload.

Manual

CH 14

➤

▼

16



Palettes stores reusable value fragments such as positions, colors, gobos, dimmer looks, or Fan Out results. Palette recall applies only the stored controls and leaves unrelated values untouched. **Move** reorders palette tiles without recalling them.

In Groups, Scenes, and Palettes, **Move** sits beside the **Cols** and **Rows** layout controls because it organizes the tile grid. Click **Move** to enable move mode, then drag a filled tile to a new position. While dragging, the source tile gets the same accent outline used when moving toolboxes, and the target position shows an accent insertion line. On touch screens, tap the filled source tile and then tap the destination.

Dropping onto an empty slot moves the tile there; dropping onto another filled tile swaps the two slots. Groups use the same tile-slot behavior as Scenes and Palettes; the fixture order stored inside a group is not changed by moving the group tile.

GPIOManual

Report Library

CH 5)

7)

CH 9)

CH 11)

+

+

—

CH 14

TOOLBOXES

>

Fan Out

—

Affecting 18 fixtures in selected order

Control

Dimmer

▼

Mode

Symmetric spread

▼

Spread

0

Spread step

—

1

+

Save

Recall

Snapshot

Apply

Clear

MAC XE...
0 → 0

MAC XE...
0 → 0

MAC XE...
0 → 0

MAC XE...
0 → 0

MAC XE...
0 → 0

MAC XE...
0 → 0

RGB Spot 1
0 → 0

RGB Spot 2
0 → 0

RGB Spot 3
0 → 0

RGB Spot 4
0 → 0

RGB Spot 5
0 → 0

RGB Spot 6
0 → 0

RGB Spot 7
0 → 0

RGB Spot 8
0 → 0

RGB Spot 9
0 → 0

RGB Spot...
0 → 0

RGB Spot...
0 → 0

RGB Spot...
0 → 0

Palettes

—

Merge

Scope

Position

▼

Fan Out shapes the currently selected fixtures or groups by spreading one compatible control through the selected order. It is documented in more detail below because its output can be saved as scenes or palettes.

Fan Out Toolbox

The Fixture Controller includes a **Fan Out** toolbox in the shared Toolboxes sidebar. It shapes the current controller values for the selected group or selected fixture cards, so the result can immediately be saved as a scene.

1. Select one or more Saved Groups, or select fixture cards manually.
2. In **Fan Out**, choose the control to shape, for example Dimmer, Pan, Tilt, or another compatible single-value control.
3. Click **Snapshot** to use the current controller values as the fan base.
4. Adjust **Spread**, or use **Start to end** mode with From/To offsets.
5. In **Symmetric spread** mode, is the center of the slider. Positive and negative Spread values run the same shape in opposite directions through the selected fixture order.
6. The Control Surface updates continuously while you change the fan values.
7. The affected fixture controls are highlighted in the Control Surface.
8. Save the resulting look with the Scene Toolbox if you want to keep the actual DMX look.

In **Symmetric spread** mode, the **Spread** slider is centered at and can move into positive or negative values. Positive Spread sends the fan in one direction through the selected fixture order; negative Spread sends it in the opposite direction. The **Spread step** field and the / buttons provide fine adjustment of the signed Spread value. Set the step size to the number of DMX increments you want to add or subtract, then click or . The buttons clamp at the valid signed range for the selected Fan Out control. **Start to end** mode hides the Spread nudge row because that mode is edited directly with the **From** and **To** number fields.

The current Fan Out working state is autosaved to the XAMPP server UI-state file. This includes the selected Fan Out control, mode, signed Spread, From/To offsets, and Spread step size, so the toolbox can restore the last working shape after a reload. Saved Fan Out presets are separate: use **Save** when you want to keep a named Fan Out recipe for later recall.

The Fan Out toolbox only shows controls that are available on every fixture in the selected set. For pan/tilt controls, Pan and Tilt appear as separate fan targets. Applying a fan writes the calculated values into the controller just like moving the controls by hand. When a Pico base URL is set, the changed DMX values are also sent to the Pico.

Fan Out calculates from a stored base value for each fixture, control, and axis. **Snapshot** stores those base values. In **Symmetric spread**, the spread is added around the base values:

```
final value = snapshotted base value + spread offset
```

For example, with five fixtures and a spread of , the offsets are , , , , and . If every fixture has a base value of , the result is , , , , and . With a spread of , the same offsets run in the opposite direction. If the fixtures have different base values, each fixture still keeps its own base as the starting point.

The offset is assigned by fixture position in the current Fan Out order:

```
fixture position = 0 ... fixture count - 1
```

$\text{offset position} = \text{fixture position} / (\text{fixture count} - 1)$

In **Symmetric spread**, the first fixture receives $-\text{spread} / 2$, the last fixture receives $+\text{spread} / 2$, and fixtures between them are spaced evenly. In **Start to end** mode, the first fixture receives the **From** offset, the last fixture receives the **To** offset, and fixtures between them are spaced evenly.

Fan Out order is important:

- If one or more saved groups are selected, the Controller uses the fixture order stored inside those groups. When several groups are selected, the groups are read in selected group order and duplicate fixtures are skipped after their first appearance.
- If no saved group is selected, the Controller uses the manual fixture selection order from the Control Surface.
- Negative **Spread** reverses the symmetric fan direction. It does not change the saved group, patch order, or fixture selection.

For a physical left-to-right fan, the saved group fixture order must match the physical fixture order. If a group was saved in a different order, the Fan Out math is still correct, but the visible stage result can look crossed or random.

Use **Save** in the Fan Out toolbox to store the fan setup itself: selected group or fixture IDs, selected control, mode, spread, and From/To offsets. Use **Recall** to restore that fan setup later. Recalling a Fan Out preset reapplies the fan to the controller values; it does not create a scene by itself. Use the Scene Toolbox when you want to store the resulting lighting look.

Palette Toolbox

The Fixture Controller also includes a **Palettes** toolbox. Palettes are reusable value fragments, while scenes are complete looks for their saved scope.

Use palettes for building blocks such as:

- Positions
- Colors
- Gobos
- Dimmer levels
- Fan Out results that you want to reuse as an overlay

The small top-left pencil icon on a filled palette slot opens **Edit Tile** for that slot. Use **Name** to rename the tile text, and use the visual controls for a background color plus an optional drawn/uploaded visual on top. The visual is independent from the palette scope. The drawing canvas uses the selected background color, and the brush automatically switches between a light and dark stroke for readable contrast. Use **Default background** to restore the standard slot color, or **No icon** to keep only the colored button. Scope still decides which DMX values are saved; the name and visual are readable labels shown in the palette slot grid and stored inside the palette JSON.

Edit Tile

×

Target

Slot 1: Warm beam (Color) ▾

Name

Warm beam

Background color

Default background

Upload visual

Choose file No file chosen



No icon

Choose a background color, then draw or upload an optional visual on top. Both are saved inside the JSON.

Choose a background color and optionally draw/upload a visual. This is only a label; the Scope still decides which DMX values are saved.

Save tile

Close

Palette save rules:

- If Fan Out is active, the palette saves only the Fan Out affected controls.
- If Fan Out is not active and fixtures are selected, the palette saves only the selected **Scope** for those fixtures.
- **Position** saves pan/tilt or position controls.
- **Color** saves RGB, RGBW, RGBWA, CMY, CMYK, and controls labeled as color-related.
- **Beam / Gobo** saves controls labeled as gobo, beam, prism, zoom, focus, iris, frost, strobe, or shutter.
- **Dimmer** saves controls labeled as dimmer, intensity, or shutter.
- **All controls** saves every control on the selected fixtures and should be used deliberately.
- If nothing is selected, the palette is not saved; select fixtures or apply Fan Out first.

Palette recall rules:

- Recalling a palette applies only the stored values.
- Unrelated controller values are left unchanged.
- The active group filter is cleared.
- The Control Surface is filtered to the fixtures involved in the palette.
- When a Pico base URL is set, only the recalled palette controls are sent to the Pico.

Filled palette slots recall palettes. Merging is done with the separate **Merge** button so recall and edit actions stay distinct.

Use **Merge** when you have a current fixture selection or active Fan Out result:

- The controller opens a palette matrix picker, so you choose the saved palette tile visually instead of typing a slot number.
- Empty slots are shown for orientation but cannot be selected as merge targets.
- If the current scope matches the saved palette scope, the values are merged and the palette keeps its scope.
- This allows one **Color** palette to contain RGB controls, color wheels, and RGBWA controls from different fixture types while still remaining a Color palette.
- If the current scope differs from the saved palette scope, the controller asks whether to change the saved palette to **All controls** and merge.
- If you cancel a merge prompt, the palette is not changed.

Use **Move** when you want to reorder palette tiles. The same interaction is also available in the Groups and Scenes toolboxes:

- Click **Move** to enable palette move mode.
- Drag a filled palette tile to an empty slot to move it there; the tile shows the same drag outline and insertion marker used for moving toolboxes.
- Drag a filled palette tile onto another filled palette tile to swap their positions.
- On touch screens, tap a filled tile to select it, then tap the destination slot.
- While Move is active, clicking a palette tile does not recall or save it.
- Click **Move** again when you are done organizing the palette grid.

2. Scenes And Palettes

GPIO

Manual

Report Library

CH 5)

7)

CH 9)

CH 11)

+

+

—

CH 14

TOOLBOXES



Scenes




Cols

6


Rows

3

Move




Scene 1




Scene 2



Scene 3




Chaser 1...



5



6



Scene 7



8



9



Scene 10



11




12



13



14



15



16



17



18

Groups



Group
Edit


Cols

2

Rows

4

Move

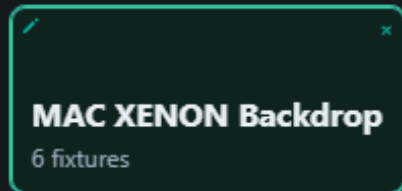

MAC XENON Backdrop

6 fixtures



RGB Spot Backdrop

12 fixtures



MAC XENON Front

4 fixtures




RGB Spot Front

8 fixtures



FAL

6 fixtures

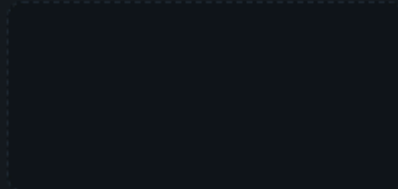

The Scene Toolbox is available on the Fixture Controller page.

Use scenes to store fixture/control looks. A scene stores controller values by fixture/control key, not a raw 512-channel DMX dump.

The small top-left pencil icon on a filled scene slot opens the same **Edit Tile** modal used by palettes. A scene can be renamed and can have a background color plus an optional drawn/uploaded visual in its slot. The canvas background follows the selected background color, and the brush color is calculated for contrast against it. **Default background** restores the standard slot color, and **No icon** removes the drawn/uploaded image. This name and visual are only labels for finding the scene quickly; scene save and recall still use the stored fixture values.

1. Set your desired fixture values.
2. Click an empty scene slot.
3. Enter a scene name.
4. Click a filled slot once to recall it.
5. Use the small  on a filled slot to delete it.

Scene Save Rules

Scene saving uses the current working scope:

- If Fan Out is active, the scene saves only the fixtures affected by Fan Out.
- For each Fan Out fixture, the scene saves all controls of that fixture, not only the fanned control. This keeps related values such as Tilt stable when saving a Pan fan.
- If Fan Out is not active and fixtures are selected, the scene saves only the selected fixtures.
- Selected Saved Groups count as selected fixtures, so a group-filtered scene saves only the fixtures in the selected groups.
- If a scene was recalled and the control surface is filtered to that scene's involved fixtures, saving again uses those involved fixtures.
- If nothing is selected, the controller asks before saving all patched fixtures.
- If you cancel that prompt, no scene is saved.

This means a scene is normally scoped to the fixtures you are actually working with. It does not silently save unrelated fixtures unless you explicitly confirm the all-fixtures fallback.

Scene Recall Rules

Scene recall loads the stored values back into the Fixture Controller, redraws the fixture cards, and updates the live-value snapshot used by the Chaser page.

When a Pico base URL is set, scene recall also sends the recalled DMX values to the Pico in one batch. To work browser-only, clear the Pico base URL before recalling or editing looks.


Recalling a scene clears the active group selection and shared group filter. It then selects the fixtures involved in the recalled scene and filters the Control Surface to only those fixtures. This makes the recalled scene visible without leaving an old group filter active, and without showing unrelated fixtures.

If a saved scene was created before fixtures were repatched, the controller tries to remap old fixture IDs to the current patch by matching the same fixture profile in DMX start-address order. This lets older scenes continue to recall after a fixture run was recreated, as long as the fixture profiles and control IDs still match.

The red **Clear all DMX channels** button clears controller values. When a Pico base URL is set, it also calls `/dmx/clear` on the Pico. This clears both live DMX output and the motion base buffer.

The Scene Toolbox sits in the shared **Toolboxes** sidebar. Its slot grid follows the configured rows and columns, and the tile size expands to the available sidebar width while keeping the old minimum slot size.

3. Groups

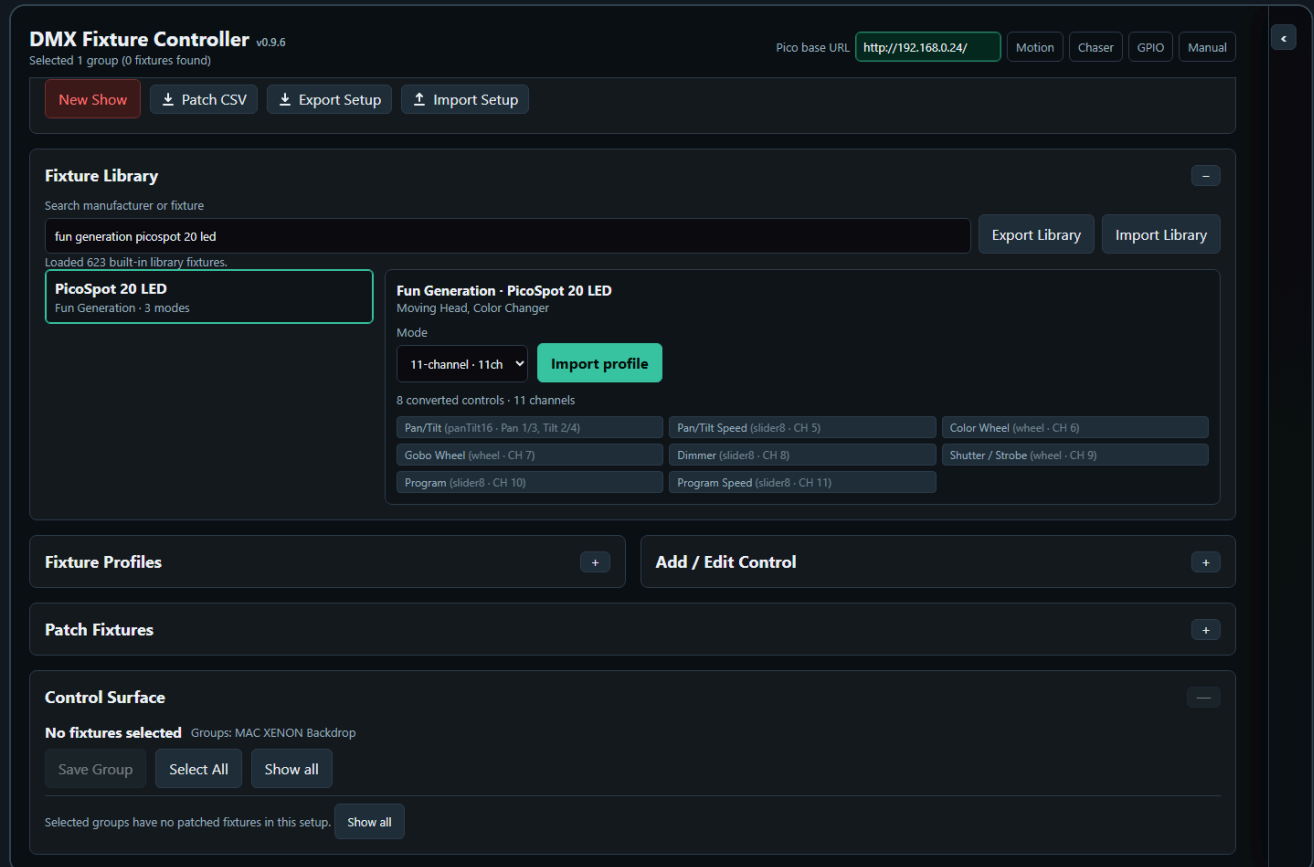


Groups let you control multiple fixtures at once.

Create a Group

1. Select two or more fixture cards.
2. Click **Save Group**.
3. Enter a group name.
4. The group appears in **Saved Groups**.

Saved Group Selection

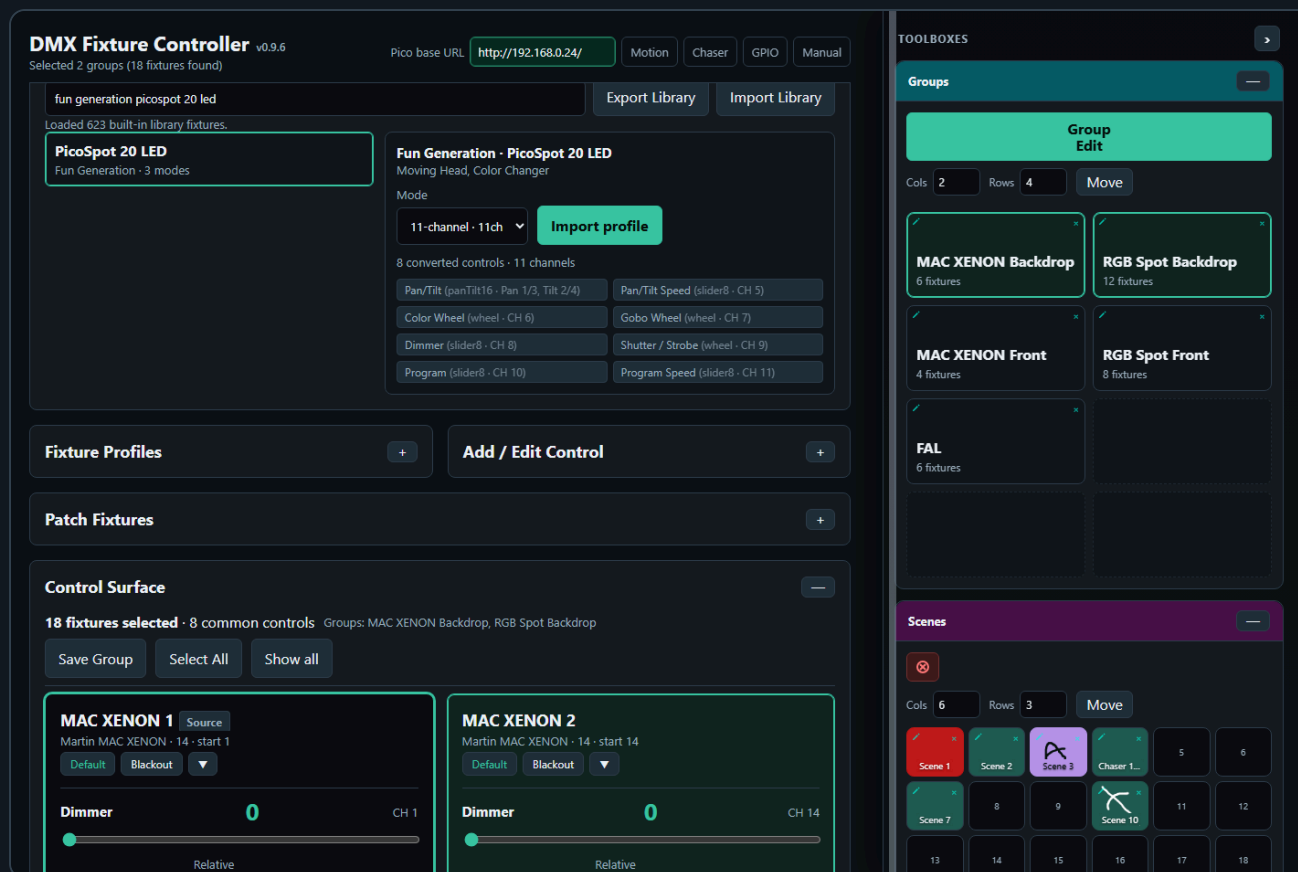

The Saved Groups card shows groups in a compact matrix. Each group has four actions:

- **Select** adds the group to the active group filter.
- **Deselect** removes only that group from the active filter.
- The small pencil on a group tile opens **Edit Tile** for that saved group's name, background color, and optional drawn/uploaded visual.
- The small **x** on a group tile removes that saved group after confirmation.

More than one saved group can be selected at the same time. The control surface shows the union of all fixtures from the selected groups. This makes it possible to work with several fixture groups together without editing the group definitions.

The group bar above the control surface shows how many fixtures are selected and which saved groups are active. Use **Select All** to select every patched fixture explicitly. Use **Deselect all** to clear a manual fixture selection. When a saved-group filter is active, the same button is shown as **Show all** and clears the saved-group filter to return to the full fixture list.

Group selection is shared across toolbox pages that use the Groups toolbox. It is a working filter: selecting groups limits the visible fixtures for controller editing, Fan Out targeting, and Chaser participating-control setup. Recalling a scene, editing a saved chase step, or loading a saved chase clears the group filter because the recalled data itself becomes the source of truth.

Edit a Group

1. Load a saved group or select multiple fixtures.
2. Click **Group Edit**.
3. Adjust common controls in the modal.

On the Fixture Controller, **Group Edit** lives in the **Groups** toolbox. It requires an explicit fixture selection. If nothing is selected, Group Edit is disabled. Select individual fixture cards, load one or more saved

groups, or press **Select All** before opening Group Edit from the Groups toolbox.

The Group Edit modal shows controls that exist in the current edit scope. It can be used for one fixture or many fixtures where the page supports single-fixture editing. Mixed fixture types are allowed; each control is applied only to fixtures that actually have a matching control, so incompatible fixtures are ignored for that control.

The selected **Source** fixture is the template for the modal values. When you open Group Edit, the modal reads the Source fixture's current matching control values and shows those values in the sliders, wheel buttons, color controls, XY pads, and relative nudge controls. Opening the modal does not overwrite the other selected fixtures and does not send DMX by itself.

The source selection is automatic. Loading a saved group makes the first fixture stored in that group the Source. With manual fixture selection, the clicked/selected fixture becomes the Source; if that fixture is removed from the selection, the page picks the next selected fixture that can provide the control.

The values are applied when you actually edit a control in the modal. Moving a slider, typing a direct numeric DMX value, dragging an XY pad, choosing a wheel slot, changing a color, pressing Center, using relative nudges, or using Default/Blackout writes the change to every selected fixture that has the matching control. Absolute edits write the shown Source value to the matching fixtures. Relative nudges keep each selected fixture relative to its own current value, so a group pan/tilt nudge moves the selected fixtures together without forcing them all to the same absolute position. When a Pico base URL is set, each Group Edit change is sent to the Pico immediately. To use Group Edit browser-only, clear the Pico base URL first.

Group Edit remembers the relative step-size fields you set, for example **Pan fine relative** or **Tilt fine relative**. Those settings are autosaved to the XAMPP server UI-state file and restored the next time Group Edit opens, so your preferred nudge sizes survive reloads.

If the controller is currently scoped by a recalled scene, recalled palette, or Fan Out result, **Group Edit** uses that scope. In that case it shows only controls that are part of the active scope and exist in the selected fixture scope. Editing a scoped control writes only to matching fixtures.

Use **Default** or **Blackout** to recall the stored default or blackout values for every fixture in the selected group.

Group Edit Contract


Controller, Chaser, and Motion FX all use the same basic Group Edit idea: the modal is available when the current page scope contains at least one editable control. Controller and Motion FX can use the same modal for a single fixture or a group of fixtures; Chaser uses the current participating-control scope for step editing. The fixtures do not need to use the same fixture profile.

Keep these rules as the contract:

- Mixed fixture types are allowed.
- A control is editable only when the page can match it by control identity, such as type and label.
- Wheel / indexed controls are stricter: same-named wheels are kept separate when their option lists differ, so a MAC Gobo wheel and a Scanner Gobo wheel are not accidentally edited as one control.
- The modal shows the matching fixture/profile scope for each control.
- Opening the modal reads the Source fixture values into the modal but does not apply or send anything yet.
- Editing a control writes only to fixtures that actually have the matching control.
- The first edit in the modal is the moment the value is written to the group; on pages with live output, that edit is also sent to the Pico when a Pico base URL is set.
- Incompatible fixtures remain selected but are ignored for that specific control.

- Group selection is a filter. If groups are selected, Group Edit uses only compatible fixtures inside those groups.
- Direct scope changes, such as Select All, Participating Controls All, or Motion All, clear the saved-group filter and make the page scope the source of truth.

4. Chaser

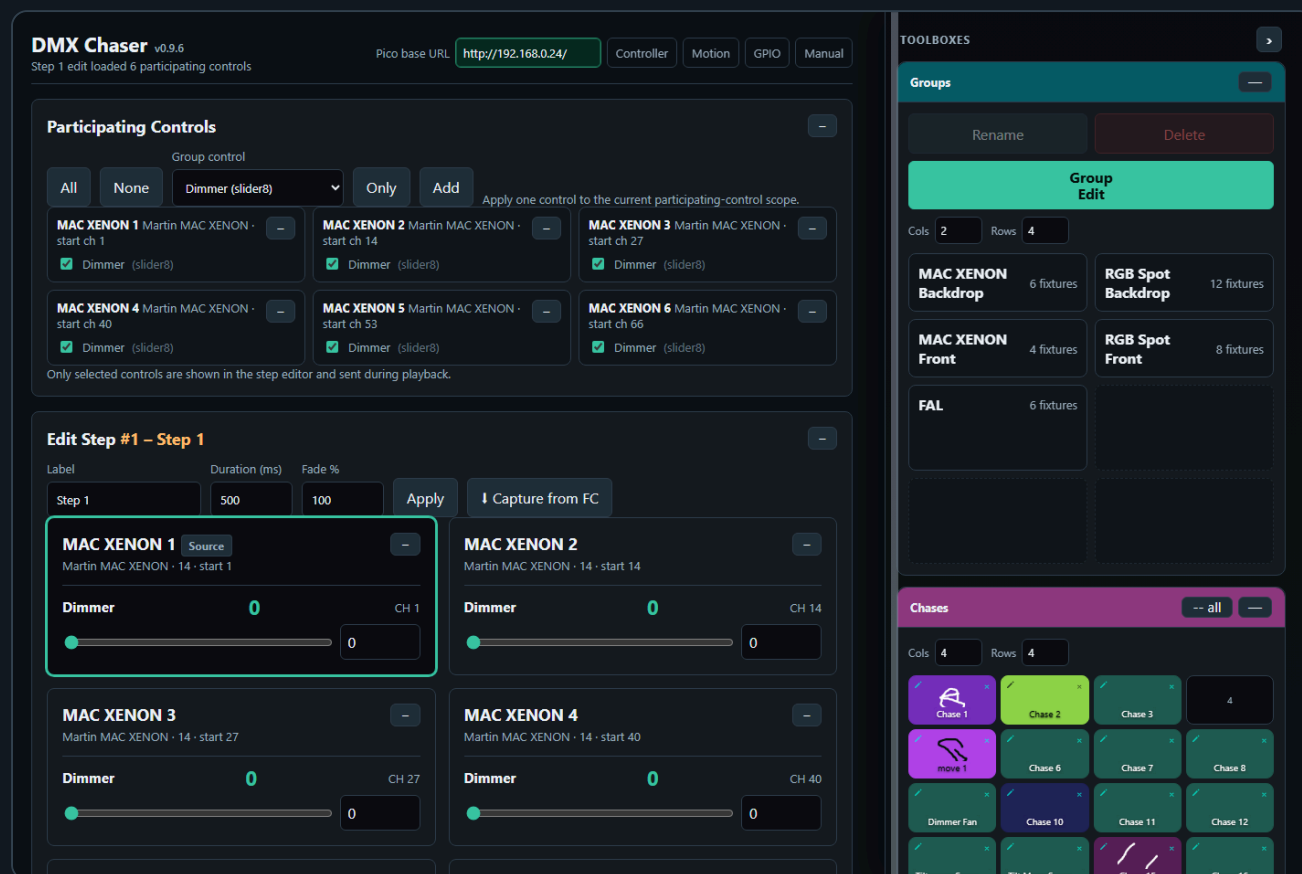

The Chaser page creates step-based sequences. The main page stays focused on **Participating Controls** and **Edit Step**, while the repeated working tools sit in the **Toolboxes** sidebar.

The Chaser screenshot is captured with the important boxes visible on purpose: **Groups**, **Chases**, **Chase Steps**, and **Chase Playback**. Toolbox headers can be dragged up or down to reorder them in the sidebar. The order is shared with the other pages: if a page does not use one of the toolbox types, the next available toolbox moves up.

Basic Workflow

1. Open **Chaser**.
2. Select participating fixture controls.
3. Create steps with **Add step**, **Capture + Add**, or **Capture from FC**.
4. Set step duration and fade in **Edit Step**.
5. Store the chase in the **Chases** toolbox if you want quick recall.
6. Test timing in **Chase Playback**.
7. Click an empty Pico slot to upload the current chase to that slot.
8. Play the slot from the Pico.

Main Work Area

The Chaser page is arranged from top to bottom as **Participating Controls**, **Edit Step**, and **Pico Playback**. Use the cards in that order when building a chase: choose the fixture controls that may participate, edit the selected step values, then upload or play Pico slots after the chase behaves correctly.

The **Toolboxes** sidebar sits beside the main work area on desktop-sized screens. It contains the repeated tools for Groups, Chases, Palettes, Chase Steps, Fan Out, and Chase Playback.

Toolbox Sidebar

Controller, Chaser, and Motion FX use a shared right-side toolbox sidebar on desktop-sized screens.

- Drag the vertical resize line on the left edge of the sidebar to change its width.
- The sidebar width is shared across all toolbox pages.
- Double-click the resize line to reset the default width.
- The page content and the toolbox sidebar scroll independently. The page scrollbar sits beside the toolbox separation line, while the toolbox scrollbar stays inside the toolbox sidebar.
- Use the arrow button in the Toolboxes header to collapse or reopen the whole sidebar. The collapsed state is shared across toolbox pages.
- Drag a toolbox by its colored header to reorder the sidebar. The toolbox body is not a drag handle, so slot clicks, sliders, and buttons are safe on touch screens. On iPad, toolbox reordering uses the app's pointer drag on the colored header instead of Safari's native drag/drop; the header also suppresses text selection/copy callouts as much as Safari allows.
- On narrow screens, the sidebar changes into a bottom toolbox drawer.

The Chaser page uses several toolboxes:

- **Groups** filters the fixture list by one or more saved fixture groups. It uses the cyan header, like the group tools on the controller page.

GPIO

Manual

trol scope.

KENON ·

KENON ·

CH 14

0

CH 40

0

TOOLBOXES



Groups



Rename

Delete

Group
Edit

Cols

2

Rows

4

**MAC XENON
Backdrop**

6 fixtures

**RGB Spot
Backdrop**

12 fixtures

**MAC XENON
Front**

4 fixtures

**RGB Spot
Front**

8 fixtures

FAL

6 fixtures

Chases

-- all



Cols

4

Rows

4



Chase 1



Chase 2



Chase 3

4



move 1



Chase 6



Chase 7

Chase 8

Dimmer Fan

Chase 10

Chase 11

Chase 12

Tilt move Sorea...

Tilt Move Sorea...

Chase 15

Chase 16

- **Chases** stores complete editable chases in a slot matrix. Clicking an empty slot saves the current chase. Clicking a filled slot loads that chase.
- The small top-left pencil icon on a filled **Chases** slot opens **Edit Tile** for the chase name, background color, and optional drawn/uploaded visual. **Default background** restores the standard slot color, and **No icon** removes the overlay image. This is only a label; loading a chase still uses the stored chase steps and playback settings.

GPIO Manual



TOOLBOXES

Chases

-- all



Cols


4

Rows


4



Chase 1



Chase 2




Chase 3




4




move 1



Chase 6




Chase 7




Chase 8




Dimmer Fan




Chase 10




Chase 11




Chase 12




Tilt move Sprea...



Tilt Move Sprea...



Chase 15



Chase 16

Groups



Rename

Delete

Group
Edit

Cols

2

Rows

4

**MAC XENON
Backdrop**

6 fixtures

**RGB Spot
Backdrop**

12 fixtures

**MAC XENON
Front**

4 fixtures

**RGB Spot
Front**

8 fixtures

FAL

6 fixtures

ontrol scope.

KENON ·

KENON ·

CH 14

0

CH 40

0

- **Palettes** stores and recalls reusable step fragments. Clicking an empty palette slot saves the currently selected step's fixture/control values to the shared palette JSON. Clicking a filled palette slot recalls compatible values into the selected step and rebuilds **Participating Controls** from the palette's stored fixture/control keys. If no step is selected, Chaser creates a new selected step from the palette. **Merge** adds the selected step's values into an existing palette; if the palette scope differs, Chaser asks before changing it to **All controls**. The small top-left pencil icon opens **Edit Tile** for a saved palette slot's name and visual appearance. When a Pico base URL is set, recalled palette values are also sent to the Pico.

Only Add

Play

Edit Tile

x

Target

Slot 1: Chase 1

Name

Doc Chase

Background color

Default background

Upload visual

Choose file

No file chosen



No icon

Choose a background color, then draw or upload an optional visual on top. Both are saved inside the chases JSON.

Choose a background color and optionally draw/upload a visual. This is only a label for the chase slot; loading still uses the stored chase data.

Save tile

Close

GPIO

Manual

—

trol scope.

KENON ·

—

KENON ·

—

—

—

CH 14

0

—

CH 40

0

TOOLBOXES



Palettes



Merge



Empty slot saves the selected step values. Filled slot recalls compatible values into the selected step. Merge adds selected step values to an existing palette.

Cols

4

Rows

4



5

6

7

8

9

10

11

12

13

14

15

16

Chase Steps (2/32)

-- all



+ Add step

↓ Capture + Add

Update chase

Clear Steps

Dupe

Up

Down

Delete

1 **Step 1**
500ms · fade 100%

2 **Step 2**
500ms · fade 100%

- **Chase Steps** contains the step list and step actions. Use it to add, capture, edit, duplicate, delete, and reorder steps. In the Toolboxes sidebar, drag the lower edge of the Chase Steps box to set its height. The top buttons remain visible while the step list scrolls inside the box.
- **Chases**, **Chase Steps**, and **Chase Playback** share one toolbox color and collapse together. Use **-- all** on any of those boxes to collapse the whole color group, and **+ all** to reopen it.

TOOLBOXES

Chase Steps (2/32)

-- all



+ Add step

↓ Capture + Add

Update chase

Clear Steps

Dupe

Up

Down

Delete

1

Step 1

500ms · fade 100%

2

Step 2

500ms · fade 100%

Chases

-- all



Cols

4

Rows

4



Chase 1

Chase 2

Chase 3

4



move 1

Chase 6

Chase 7

Chase 8

Dimmer Fan

Chase 10

Chase 11

Chase 12

Tilt move Sprea...

Tilt Move Sprea...



Chase 15

Chase 16

Groups



Rename

Delete

- **Fan Out** is a live step-shaping tool. It works on the currently selected step and writes directly into **Edit Step** as soon as you change the Fan Out mode, spread, or range values. There is no separate Snapshot or Apply action on the Chaser page.
- **Fan Out control selection** is filtered by the selected step. The control dropdown only shows compatible single-value controls that are actually part of the selected step's participating controls and exist on at least two fixtures. If one or more groups are selected, the same rule is applied inside the selected groups only.
- **Fan Out order** comes from the current participating fixture/control list. If a group filter is active, only fixtures inside the selected groups participate, but the calculation still follows the participating order that is shown for the current step/scope. In Symmetric spread mode, negative Spread runs the shape from the opposite side of the fixture row.
- **Fan Out base values** come from the values currently displayed in **Edit Step**. Selecting another step, loading another chase, capturing values, or using **Group Edit** refreshes the Fan Out base from the step values now shown on screen. This keeps spread calculations from drifting away from the edited step.
- **Clear** in the Chaser Fan Out toolbox resets the Fan Out shaping controls to neutral. It does not recall an older preset and it does not undo values that have already been written into the selected step.
- Editing **Edit Step**, using **Group Edit**, and changing **Fan Out** updates the selected step immediately. When a Pico base URL is set, those changed selected-step values are also sent to the Pico. Chase Playback sends the current chase continuously while it runs and therefore requires a Pico base URL.

GPIO

Manual

—

trol scope.

KENON ·

—

KENON ·

—

—

CH 14

0

—

CH 40

0

TOOLBOXES

>

Fan Out

—

Affecting 6 fixtures from participating controls

Control

Dimmer

▼

Mode

Symmetric spread

▼

Spread



80

Spread step

—

1

+

Save

Recall

Snapshot

Apply

Clear

MAC XE...

0 -> 0

MAC XE...

0 -> 0

MAC XE...

0 -> 0

MAC XE...

0 -> 8

MAC XE...

0 -> 24

MAC XE...

0 -> 40

Palettes

—

Merge



Empty slot saves the selected step values. Filled slot recalls compatible values into the selected step. Merge adds selected step values to an existing palette.

Cols

4

Rows

4



- **Chase Playback** runs the current chase from the browser for checking timing and fades before uploading to the Pico. **Mode** chooses **Single**, **Loop**, **Loop N**, or **Ping Pong**. **Direction** chooses whether playback starts at the first step and moves forward or starts at the last step and moves backward. **Loops** is only used by **Loop N**; normal **Loop** runs forever. **Ping Pong** reverses at the end of the chase instead of jumping back to the first or last step. The **Fade % (all steps)** field applies one fade value to every step immediately. Use **Edit Step > Fade %** when one step needs its own fade value.
- While Chase Playback runs, the currently playing step automatically becomes the selected step. This means **Edit Step** follows the chase visually and always shows the values of the last played step. Recalling a saved chase still selects Step 1 first, so playback starts from a predictable view.
- Selecting a step in **Chase Steps** or manually changing controls in **Edit Step** stops browser Chase Playback. This prevents playback from immediately overwriting the values you are trying to edit.

GPIOManual

control scope.

KENON ·

KENON ·

CH 14

0

CH 40

0

TOOLBOXES

Chase Playback

-- all

Play

Stop

Prev

Next

Mode

Loop

Direction

Forward

BPM

120

Beats/step

1

Tap tempo

Fade % (all steps)

0

Apply

Update rate (Hz)

25

Stopped

Fan Out

Affecting 6 fixtures from participating controls

Control

Dimmer

Mode

Symmetric spread

Spread

80

Spread step

1

+

Save

Recall

Snapshot

Apply

Clear

MAC XE...
0 -> 0

MAC XE...
0 -> 0

MAC XE...
0 -> 0


MAC XE...
0 -> 8

MAC XE...
0 -> 24

On page load, the Chaser working area starts with no steps selected. Use the **Chases** toolbox to recall a saved chase. Loading a chase from the **Chases** box updates the step list, selects Step 1, and rebuilds participating controls and the currently edited step together. If the chase contains steps, the participating controls are rebuilt from the values stored in the chase, so old fixture/group filters do not hide the controls used by that chase.

Saved chases also recall the playback controls that were saved with them, including browser mode, Loop N count, Ping Pong, direction, BPM, and Pico speed. The Chases toolbox tiles still show only the chase name and visual so they stay consistent with the other toolboxes. Uploading to a Pico slot uses the current **Chase Playback** playmode, loop count, and direction, so the Pico slot behaves like the chase you previewed in the browser. Per-slot playback details are shown in the **Pico Playback** slot tiles after a chase has been uploaded to a Pico slot. Each loaded Pico slot shows compact lines for loop state, direction, and Ping Pong state.

The collapse state, toolbox order, shared sidebar width, and the user-defined Chase Steps box height are stored by the server UI-state file, so the working layout survives reloads. Collapsing **Participating Controls** or **Edit Step** only hides that card body: the sticky page header keeps the same height, and the next card moves up to use the freed space.

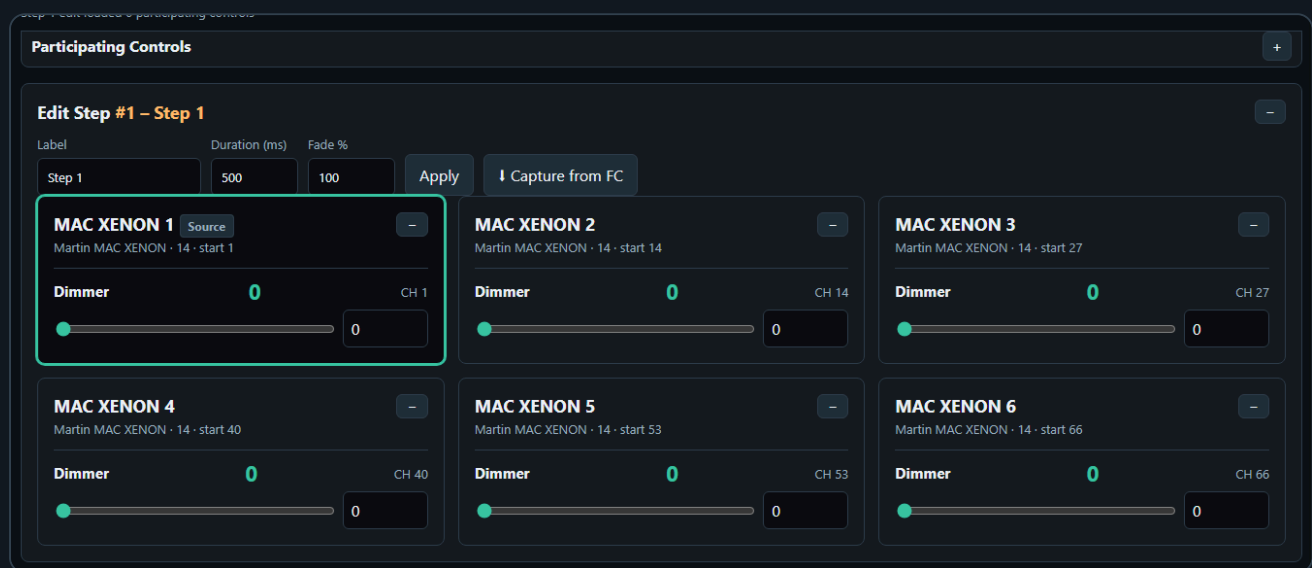

Chase Steps Toolbox Buttons

The **Chase Steps** toolbox uses shared action buttons instead of per-step buttons. Click a step card to select the step first; the selected step is highlighted and loaded into **Edit Step**.

- **Add step** creates a new selected step from the stored default values of the currently participating controls. If a fixture profile has no custom default for a control, Chaser uses the control type fallback.
- **Capture + Add** creates a new selected step only when Fixture Controller live values exist for at least one currently participating control. If no matching live values are available, no empty step is created.
- **Clear Steps** deletes all current working steps after confirmation. It does not delete saved Chases toolbox entries or Pico slot payloads.
- **Dupe** duplicates the selected step directly after itself and selects the copy.
- **Up** and **Down** move the selected step in the step order and keep the same step loaded in **Edit Step**.
- You can also drag a step card with mouse or touch and drop it before or after another step card to reorder the chase. A short click still selects the step. The selected step and the currently playing step stay attached to the same step data after the move.
- **Delete** removes the selected step. If another step remains, it becomes the selected step.

Participating Controls

Participating controls define which fixture controls belong to the chase. This keeps the chaser from editing unrelated channels.



For example, a dimmer chase might include only dimmer controls. A color chase might include only RGB or RGBWA controls.

If no group is selected, all patched fixtures are available. If one or more groups are selected in the Groups toolbox, only fixtures from those groups are shown while you are choosing the scope. Any direct change in **Participating Controls** then clears the group selection. This avoids mixing two different filters: after you press **All**, **None**, **Only**, **Add**, or tick an individual checkbox, the participating-control set becomes the source of truth.

The **Group control** dropdown is built from the fixtures currently visible in the participating-control scope, not from the controls that are already ticked. With no Groups filter, the dropdown stays based on all visible patched fixtures even after **Only** narrows the selected participating controls. With a Groups filter, the dropdown is based on the selected groups. When an edited step is active, the visible step fixtures define the dropdown scope.

All selects every valid participating control for all patched fixtures, clears the Groups filter, expands the participating fixture list, stops browser Chase Playback, clears the selected step, clears **Edit Step**, clears the Source fixture, and resets Fan Out bases. Existing steps in **Chase Steps** are not deleted. After **All**, use **Add step**, **Capture + Add**, or **Group Edit** to create or edit a step from the full participating-control scope.

Group Edit edits the current participating-control scope. It becomes available when the current scope contains at least one matching selected control on two or more participating fixtures, even when those fixtures use different fixture profiles. A step does not need to be selected first. If no step is selected, the first Group Edit value change creates a new step from the current participating controls and writes the edit into that step. If a step is selected, Group Edit edits that selected step.

The fixtures may use different profiles; the modal only shows matching controls that are actually selected as participating controls and exist on at least two fixtures. For example, if only Dimmer is selected, Group Edit opens with Dimmer only and applies a changed Dimmer value to every involved fixture that has a matching Dimmer control.

Group Edit uses the **Source** fixture from **Edit Step** as the reference value. Opening the modal reads the Source fixture's current selected-step values into the modal controls. It does not automatically overwrite the other fixtures, does not create a new step, and does not send output by itself.

The values are written when you change a control in the modal. If no step is selected, the first Group Edit value change creates a new step from the current participating controls and writes the edited value into that step. If a step is selected, the edit writes into that selected step. When a Pico base URL is set, changed selected-step values are also sent to the Pico.

Chaser Selection Rules

The Chaser page has two different selection modes: defining a new participating-control set, and editing or recalling an existing step. They intentionally behave differently.

Keep these rules as the contract for the Chaser page:

- **Participating Controls** define the fixture/control scope for new steps and for Group Edit.
- **Edit Step** shows the currently selected step, not a separate preview copy.
- If a saved chase is recalled, Step 1 is selected immediately and becomes the visible **Edit Step**.
- If **Chase Playback** is running, playback overrules manual step rendering: every played step automatically becomes the selected step and redraws **Participating Controls** plus **Edit Step**.
- During fades, **Edit Step** updates the existing sliders, readouts, XY dots, colors, and wheel highlights continuously from the interpolated playback values. The full card is only rebuilt when the played step changes.
- When playback stops or pauses, the last played step remains selected.
- Manual previous/next playback also selects the stepped-to chase step and redraws **Edit Step**.
- Group filters are only temporary scope builders. Direct Participating Controls changes clear the group filter.
- **All** clears the selected step/edit context but keeps the existing step list unchanged.
- **Group Edit** does not require a selected step. If no step is selected, the first Group Edit value change creates a new step from the current participating controls. If a step is selected, Group Edit edits that step.
- Opening **Group Edit** loads the current Source fixture values into the modal only. The output or selected step changes only after you edit a modal control.

When you define participating controls manually:

- If no group is selected, the Participating Controls panel shows all patched fixtures.
- If one or more groups are selected, the panel is temporarily filtered to the fixtures in those groups.
- **All** selects every currently visible control and clears the group selection.
- **None** clears the participating-control selection, collapses the fixture list, and clears the group selection.
- The control dropdown lists controls from the selected groups while a group filter is active. If no group is selected, it lists controls from the current participating-control scope.
- The control dropdown plus **Only** selects one matching control type from the current scope, clears all other controls, and then clears the group selection.
- The control dropdown plus **Add** adds one matching control type from the current scope without clearing existing participating controls, then clears the group selection.
- Ticking or unticking an individual participating-control checkbox also clears the group selection.

When you click a step in the **Chase Steps** toolbox:

- The step values are checked against the current fixture setup.
- Invalid fixture/control references are removed from the edited step.
- The Participating Controls panel is rebuilt from the chase values.
- If no group is selected, only fixtures and controls that are actually stored in the selected step are shown, and **Group Edit** becomes step-dependent.
- If a group is selected, the selected step is filtered to that group and **Group Edit** uses the grouped fixtures as its edit scope.

- The Edit Step card shows the same scoped fixture/control set, so editing Step 2 cannot accidentally show or edit unrelated controls from another group or old filter.

When you click a saved chase in the **Chases** toolbox:

- The selected Groups filter is cleared first.
- The saved steps, playback settings, and Chase Playback settings are loaded.
- The first step becomes the edited step.
- Participating Controls and Edit Step are rebuilt from that loaded step.
- If the saved chase was made before fixtures were repatched, the page tries to remap old fixture IDs to the current setup by matching the same fixture profile in DMX start-address order.
- If no valid step values can be found, the page falls back to the saved participating-control map stored with the chase.

This means group selection is a tool for building, filtering, and group-editing a step. Loading a saved chase clears the group filter because the recalled chase data becomes the source of truth. After recall, **Group Edit** can still become available without a selected group because it uses the fixtures participating in the selected step.

Create Chase Steps

A chase step stores values for the selected **Participating Controls**. It does not store every patched fixture automatically.

To create a step manually:

The screenshot shows the 'Edit Step #1 - Step 1' window. At the top, there are input fields for 'Label' (Step 1), 'Duration (ms)' (500), and 'Fade %' (100), followed by 'Apply' and 'Capture from FC' buttons. Below these are six control cards for 'MAC XENON' fixtures. Each card has a 'Dimmer' slider and a 'CH' label. The first card, 'MAC XENON 1', is highlighted with a green border. The cards are arranged in a 2x3 grid. The first card is 'MAC XENON 1' (Martin MAC XENON · 14 · start 1) with a 'Dimmer' slider at 0 and 'CH 1'. The second card is 'MAC XENON 2' (Martin MAC XENON · 14 · start 14) with a 'Dimmer' slider at 0 and 'CH 14'. The third card is 'MAC XENON 3' (Martin MAC XENON · 14 · start 27) with a 'Dimmer' slider at 0 and 'CH 27'. The fourth card is 'MAC XENON 4' (Martin MAC XENON · 14 · start 40) with a 'Dimmer' slider at 0 and 'CH 40'. The fifth card is 'MAC XENON 5' (Martin MAC XENON · 14 · start 53) with a 'Dimmer' slider at 0 and 'CH 53'. The sixth card is 'MAC XENON 6' (Martin MAC XENON · 14 · start 66) with a 'Dimmer' slider at 0 and 'CH 66'.

1. Select the controls that should participate in **Participating Controls**.
2. In the **Chase Steps** toolbox, click **Add step**.
3. Click the new step in the **Chase Steps** list.
4. In **Edit Step**, set **Label**, **Duration (ms)**, and **Fade %**.
5. Adjust the controls shown in **Edit Step**. Those control values are written into the selected step immediately. When a Pico base URL is set, they are also sent to the Pico.
6. Click **Apply** after changing the label, duration, or fade.

Add step starts from the stored default values of the selected participating controls. If a fixture profile has no custom default for a control, Chaser uses the control type fallback: centered pan/tilt, zero for sliders, wheels, and color channels.

After **Add step** or **Capture + Add**, the first fixture in the new step is automatically marked as the **Source** fixture in **Edit Step**. Click another fixture card in **Edit Step** to make it the Source fixture. Group Edit uses

the Source fixture's current step values as its starting values before writing changes to the matching participating fixtures.

Use the **Palettes** toolbox when the selected step should become a reusable fragment. Empty palette slots save exactly the selected step's stored values, not the whole chase and not all DMX channels. Filled palette slots recall compatible palette values into the selected step and make the palette's stored controls the active participating-control scope. Other values already stored in the step remain stored, but **Edit Step** focuses on the recalled palette controls. If no step is selected, recalling a palette creates a new selected step from that palette.

To capture a new step from the Fixture Controller:

1. Open **Fixture Controller** in another browser tab or window.
2. Build the look there by moving controls, recalling a scene, or recalling a palette.
3. Return to **Chaser**.
4. Make sure **Participating Controls** contains the controls you want to capture.
5. In the **Chase Steps** toolbox, click **Capture + Add**.

Capture + Add creates a new step and copies the current Fixture Controller live values for the selected participating controls.

To capture into an existing step:

1. Click the step in the **Chase Steps** list.
2. Build the wanted look in **Fixture Controller**.
3. Return to **Chaser**.
4. In **Edit Step**, click **Capture from FC**.

Capture from FC updates the selected step with the current Fixture Controller live values for the selected participating controls.

Capture From Fixture Controller

Use **Capture from FC** or **Capture + Add** to read the current Fixture Controller live values and use them as chase step values.

This is useful when you want to build a chase visually:

1. Create a look on the Fixture Controller.
2. Capture it into the Chaser.
3. Change the look.
4. Capture the next step.

If Chaser reports that no Fixture Controller values are available, open the Fixture Controller page and move a control or recall a scene first. Capture only reads controls that are selected as participating controls, so unselected controls are ignored.

Pico Slot Playback

Chasers can be uploaded to 32 Pico slots. Each slot can run on the Pico without the browser staying open. The Pico slot strip is the upload target: click an empty slot to upload the current chase. Click a loaded slot once to select it for play, pause, resume, speed, or stop. Click the selected loaded slot again if you want to replace it with the current chase; the page asks before overwriting.

Pico Playback

PICO PLAYBACK

Slot

0

▼

Speed

1.0

x

Mode

Loop

▼

Direction

Forward

▼

▶ Play Slot

Pause

Resume

⌚ Set Speed

⏏ Stop Slot

■ Stop All

↶ Restore Saved Slots to Pico

Pico slots:

● — not started

SLOT 0 — ▶ EMPTY	SLOT 1 — ▶ EMPTY	SLOT 2 — ▶ EMPTY	SLOT 3 — ▶ EMPTY	SLOT 4 — ▶ EMPTY	SLOT 5 — ▶ EMPTY	SLOT 6 — ▶ EMPTY	SLOT 7 — ▶ EMPTY	SLOT 8 — ▶ EMPTY	SLOT 9 — ▶ EMPTY	SLOT 10 — ▶ EMPTY	SLOT 11 — ▶ EMPTY	SLOT 12 — ▶ EMPTY
SLOT 13 — ▶ EMPTY	SLOT 14 — ▶ EMPTY	SLOT 15 — ▶ EMPTY	SLOT 16 — ▶ EMPTY	SLOT 17 — ▶ EMPTY	SLOT 18 — ▶ EMPTY	SLOT 19 — ▶ EMPTY	SLOT 20 — ▶ EMPTY	SLOT 21 — ▶ EMPTY	SLOT 22 — ▶ EMPTY	SLOT 23 — ▶ EMPTY	SLOT 24 — ▶ EMPTY	SLOT 25 — ▶ EMPTY
SLOT 26 — ▶ EMPTY	SLOT 27 — ▶ EMPTY	SLOT 28 — ▶ EMPTY	SLOT 29 — ▶ EMPTY	SLOT 30 — ▶ EMPTY	SLOT 31 — ▶ EMPTY							


Supported playback options:

- Single run
- Loop
- Loop N times
- Ping Pong
- Forward or reverse direction
- Speed multiplier
- Pause and resume

Direction sets the first playback direction for the slot. In Ping Pong mode the Pico reverses direction whenever it reaches either end of the chase.

Each chaser slot supports up to 32 steps.

5. Motion FX

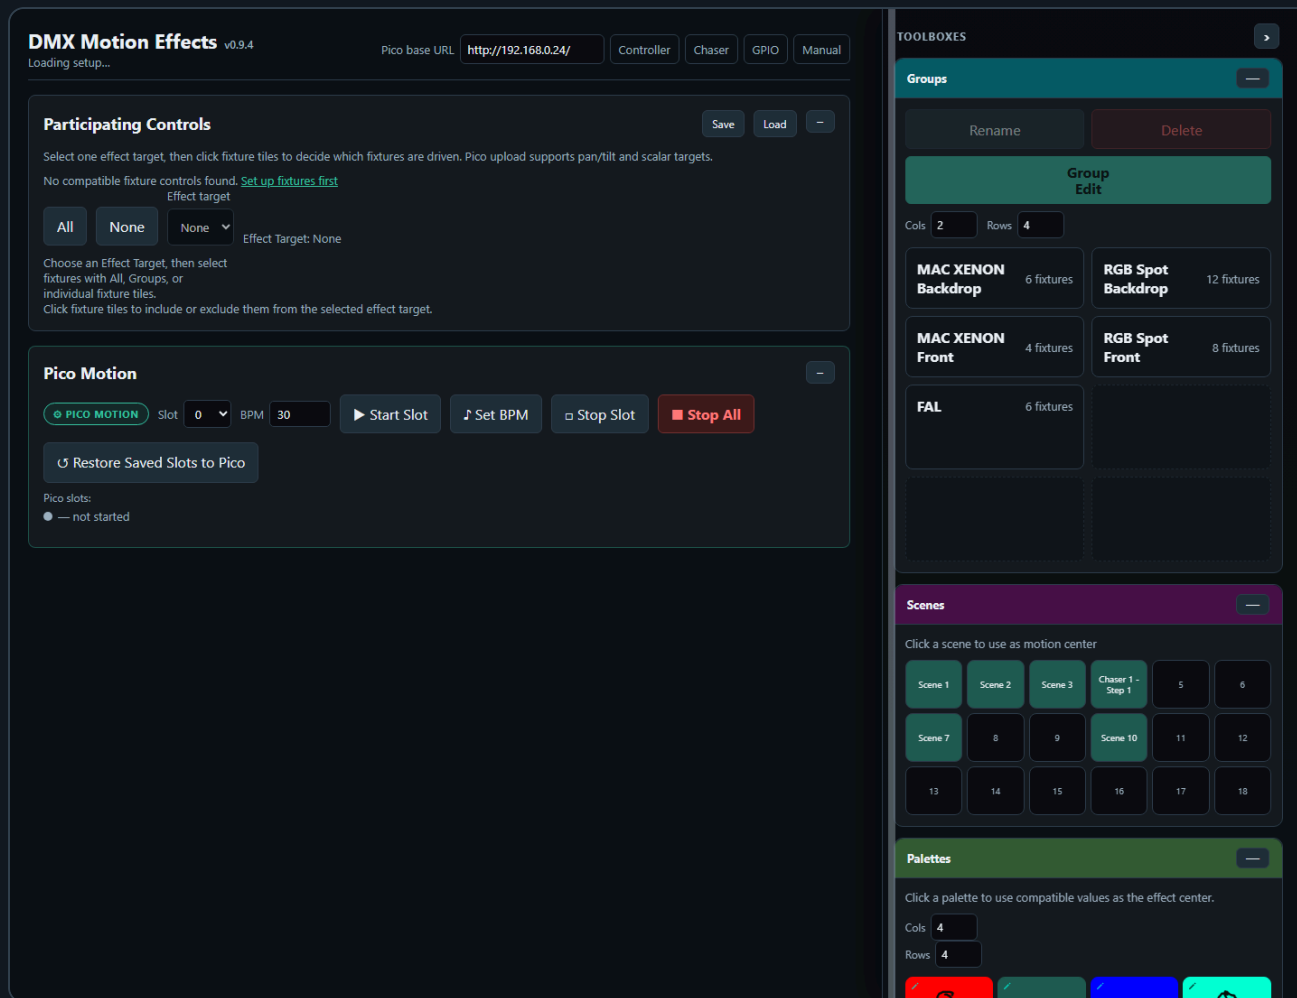

Motion FX creates continuous effects for one selected effect target at a time. It can drive a combined pan/tilt target, or one scalar DMX target such as dimmer, prism, gobo, zoom, or iris.

Supported effects include:

- Pan/tilt targets: Circle, Figure-8, Pan swing, Tilt swing
- Scalar targets: Sine, Pulse

Pan/tilt is treated as one combined two-axis target. Pan/tilt effects are relative to the current scene position, so the effect moves around the position that was last written into the Pico base buffer. Scalar controls are one-axis targets and use their displayed center value plus the **Amplitude** slider as the effect depth. Browser playback is only an overlay for testing; when you press **Stop**, Motion FX restores the stored base values to the output so the last moving effect position does not become the next center.


Participating Controls

The **Participating Controls** panel uses an **Effect target** dropdown. The default target is **None**. With **None** selected, no fixture tiles are enabled, Group Edit is disabled, and no effect can be played or uploaded.

Hard reload, including Ctrl+F5, resets **Effect target** to **None** and clears playback participation. Normal navigation away from Motion FX and back in the same browser tab restores the current working target, fixture participation, and parameters from session state. The saved server preset is not auto-applied on page load; use **Load**, import a Motion JSON file, or recall a saved **Effect** tile when you want to explicitly restore saved target and participant data.

One effect can only target one control type at a time: either pan/tilt, or one scalar control type. Choosing an effect target filters the fixture matrix to compatible fixtures, but it does not automatically enable those fixtures. This keeps target choice separate from fixture participation and prevents mixed targets such as dimmer plus gobo plus pan/tilt in one effect.

The **Participating Controls** card can be collapsed when you only need the toolboxes. In collapsed mode it stays compact and does not change the sticky page-header height.



The fixture matrix is a selection and preview surface:

- Click a fixture tile to include or exclude it from the effect.
- Use **All** to clear any group filter and enable every fixture for the current target.
- Use **None** to disable every visible fixture for the current target.
- Selecting groups applies an additional filter and enables compatible fixtures inside the selected groups.
- Pan/tilt targets show a small XY plot with the current position.
- Scalar targets show a small value bar with the current value.

Center values come from the current base buffer or from recalling a scene as the motion center. Phase spread, amplitude, BPM, and effect shape are set in the **Effect Parameters** toolbox. The amplitude controls are target-aware and effect-aware. Circle and Figure-8 show **Pan amp** and **Tilt amp**. Pan Swing shows only **Pan amp**. Tilt Swing shows only **Tilt amp**. Scalar effects show one **Amplitude** slider. Hidden axes are forced to zero for preview and Pico upload, but their last two-axis values are remembered when you return to Circle or Figure-8.

The **Effect** dropdown is target-aware. It only shows effects that make sense for the selected **Effect target**.

The same target rules are used for Pico upload. Pan/tilt and scalar effects can be uploaded to one of the Pico Motion slots, and the Pico reads the effect center from its base buffer while playing. Pan/Tilt profile mapping is included in the uploaded target: swapped axes use the swapped physical channels, and reversed axes invert the motion offset around the current base value.

The Motion FX page also includes the shared **Palettes** toolbox. Clicking a palette recalls any values that are compatible with Motion FX and uses them as the current effect center. For example, a position palette can set pan/tilt centers, while a dimmer or beam palette can set scalar centers. The small pencil opens **Edit Tile** so palette names and visuals can be adjusted from Motion too. Motion recalls, imports, exports, and saves the shared palette JSON.

The **Effects** toolbox stores reusable effect recipes. Click an empty effect slot to save the selected Effect target, participating fixtures, effect type, BPM, amplitudes, spread, and phase offsets. Effects do not store the current center/base values, so the same saved effect can be reused with different scene or palette centers. Clicking a saved effect recalls the recipe without sending DMX and without uploading to a Pico slot. The small pencil opens **Edit Tile** for the effect name, background, and optional drawing/upload.

- If the target is pan/tilt, the uploaded slot stores pan and tilt channel addresses and plays two-axis effects.
- If the target is pan/tilt, one-axis effects still store the pan/tilt channel addresses, but unused amplitude axes are uploaded as zero: Pan Swing uses **AMP1** and zero **AMP2**; Tilt Swing uses zero **AMP1** and **AMP2**.
- If the target is scalar, the uploaded slot stores that one control's DMX channel address and plays one-axis effects such as sine or pulse. Scalar uploads use **AMP1** for **Amplitude** and force **AMP2** to zero.
- Click an empty Pico slot to upload the current effect to that slot.
- Click a loaded slot once to select it for start, stop, or BPM changes.
- Click the selected loaded slot again to replace it with the current effect; the page asks before overwriting.
- Slots store channel mappings, BPM, amplitude, spread, effect type, and target phase. They do not store fixed center values.
- The center value is read from the Pico base buffer during playback. This means a scene recall or live controller change can define the center before the slot starts.
- Up to 64 Motion FX slots can be loaded on the Pico.

For scalar targets, set the current value first, then upload/start the slot. For example, set a dimmer to its desired base brightness and use Sine if you want the Pico to pulse above and below that base value.

Motion FX Toolboxes

The Motion FX page uses five toolboxes in the shared sidebar.

GPIO

Manual

TOOLBOXES



Groups



Rename

Delete

Group Edit

Cols

2

Rows

4

**MAC XENON
Backdrop**

6 fixtures

**RGB Spot
Backdrop**

12 fixtures

**MAC XENON
Front**

4 fixtures

**RGB Spot
Front**

8 fixtures

FAL

6 fixtures

SLOT 8



• EMPTY

SLOT 17



Circle

30.0 BPM

6 tgt

• READY

SLOT 26



• EMPTY

SLOT 35



• EMPTY

SLOT 44



• EMPTY

SLOT 53

Scenes



Click a scene to use as motion center

Scene 1

Scene 2

Scene 3

Chaser 1 -
Step 1

5

6

Scene 7

8

9

Scene 10

11

12

13

14

15

16

17

18

Palettes



Groups filters the fixture matrix for the selected effect target. When **Effect target** is **None**, Group Edit is disabled. Choosing a real target does not automatically enable fixtures for playback, but it does make Group Edit available as soon as at least one fixture has that target. For example, after a hard reload, choosing **Dimmer** lets Group Edit work across every MAC and RGB Spot fixture that has a Dimmer control while playback participation remains off. Choosing **Pan/Tilt** can also open Group Edit for a single moving light. Pressing **All** clears the group filter and enables every fixture available for the current target. Selecting one or more groups enables compatible fixtures inside those groups. If some fixtures are already enabled, Group Edit uses that enabled subset; if none are enabled yet, Group Edit uses all fixtures compatible with the selected target.

The Motion FX fixture grid marks the current **Source** fixture with the same highlighted selection language used by the Controller. The Source fixture supplies the values shown in the Group Edit modal. Click another enabled fixture tile to make it the Source; click the current Source tile again when you want to remove that fixture from participation.

Motion FX Group Edit uses the Controller-style motion controls: pan/tilt edits use the XY pad for absolute center placement and relative nudge rows for movement from the current values. The modal no longer exposes separate absolute Pan/Tilt sliders. Use **Pan coarse relative**, **Pan fine relative**, **Tilt coarse relative**, and **Tilt fine relative** for 16-bit moving lights when you want to move one fixture or a selected group without forcing every fixture to the same absolute value. Relative nudges keep each fixture offset from its own current center, then send the changed center values to the Pico when a Pico base URL is set.

—

II

SLOT 8

—

• EMPTY

SLOT 17

Circle

30.0 BPM

6 tgt

• READY

SLOT 26

—

• EMPTY

SLOT 35

—

• EMPTY

SLOT 44

—

• EMPTY

SLOT 53

—

• EMPTY

TOOLBOXES



Effect Parameters

-- all —

BROWSER

Start

Effect

None

BPM

30

Hz

25

Pan amp

20%

Tilt amp

15%

Phase spread

0°

Effect preview

No fixtures selected

Groups

—

Effect Parameters is the live effect editor. It contains the target-aware effect dropdown, BPM, amplitude, phase spread, browser preview controls, and the Pico slot upload/play controls. The shown amplitude controls follow the selected effect: two-axis effects show both axes, Pan Swing and Tilt Swing show only the moving axis, and scalar targets show one **Amplitude** control.

Effects stores reusable effect recipes. It saves the selected target, fixture participation, effect type, BPM, amplitude, spread, and phase offsets. It does not store fixed center values.

Scenes is read-only on Motion FX. Recalling a scene updates the motion center/base values used by effects. When a Pico base URL is set, the stored values are also sent to the Pico.

GPIO

Manual

SLOT 8

• EMPTY

SLOT 17 ✕

Circle

30.0 BPM

6 tgt

• READY

SLOT 26

• EMPTY

SLOT 35

• EMPTY

SLOT 44

• EMPTY

SLOT 53

TOOLBOXES



Palettes



Click a palette to use compatible values as the effect center.

Cols


4

Rows


4



Step 1 palette



Step 1 palette



Step 3 palette



Step 3 palette st...

5

6

7

8

9

10

11

12

13

14

15

16

Scenes



Click a scene to use as motion center

Scene 1

Scene 2

Scene 3

Chaser 1 -
Step 1

5

6

Scene 7

8

9

Scene 10

11

12

13

14

15

16

17

18

Effects

-- all



Click an empty slot to save the current effect recipe. Click a filled slot to recall it.

Cols

4

Rows

4



✕



✕

3

4

Palettes recalls compatible palette values into Motion FX. A position palette can set pan/tilt centers, while color, dimmer, or beam palettes can set scalar centers when the selected effect target matches.

Recommended Workflow

1. Use the Fixture Controller to position the fixtures.
2. Save or recall a scene.
3. Open Motion FX.
4. Select one **Effect target**.
5. Set BPM, effect shape, amplitude, and spread in the **Effect Parameters** toolbox.
6. Optionally recall a palette from the **Palettes** toolbox to set the center for the selected target.
7. Optionally save or recall the recipe from the **Effects** toolbox.
8. Click an empty Pico slot to upload the effect, then start the slot when you want autonomous playback without browser timing jitter.
9. Use browser playback from the **Effect Parameters** toolbox when you want quick live testing before uploading.

The Motion FX page also has a read-only scene toolbox. Clicking a scene updates the effect center. When a Pico base URL is set, it also sends the position to the Pico.

6. GPIO Control

GPIO Control v0.9.4

Ready

Pico base URL

http://192.168.1.50

Controller

Chaser

Motion

Monitor

Manual

GPIO Mappings

not connected

GPIO polling enabled

Add mapping

Add ADC speed/BPM

Push to Pico

Read from Pico

Save local

Clear local

Mapping 1

Remove

GPIO pin	Pull	Trigger	Action
GPIO14	Pull-up	Falling	dmx clear
Slot	Debounce ms		
0	30		

Mapping 2

Remove

GPIO pin	Pull	Trigger	Action
GPIO15	Pull-up	Falling	chaser toggle
Slot	Debounce ms		
0	30		

Slot 0 playmode not read yet

Status

Pico GPIO status

No status yet.

Generated config body

ENABLE 1
MAP 14 pullup falling dmx_clear 0 30
MAP 15 pullup falling chaser_toggle 0 30

GPIO Control maps physical Pico inputs to lighting actions.

GPIO Control does not use the shared toolbox sidebar. Its setup is kept in normal page panels because GPIO mapping is configuration work, not a live fixture/scene/palette workflow.

The GPIO editor loads its mapping setup from the XAMPP server first, using `gpio_setup.php` and `data/gpio_setup.json`. Browser storage is only a fallback if the server file is not available. Adding, removing, or changing a mapping autosaves the setup back to the server, so a PC and iPad should show the same mappings after reload.

Chaser GPIO actions do not define their own playmode. They start, stop, pause, resume, toggle, or tap the selected Pico chaser slot. The playmode belongs to that slot, so the button follows whatever was uploaded from the Chaser page: **Single**, **Loop**, **Loop N**, or **Ping Pong**, plus forward/reverse direction. When a Pico base URL is set, the GPIO page reads the chaser slot status and shows the slot mode, direction, loop state, step count, and live/ready state beside chaser mappings and chaser speed ADC mappings.

Digital GPIO pins can trigger:

- DMX clear
- Output-only clear
- Stop all
- Chaser play, stop, toggle, pause, resume, pause toggle
- Chaser tap tempo
- Motion start, stop, toggle
- Motion tap tempo

ADC pins can control:

- Chaser speed multiplier
- Motion FX BPM

Only GPIO26, GPIO27, and GPIO28 support ADC input on the Pico 2 W.

Add a Digital Button Mapping

1. Open **GPIO Control**.
2. Click **Add mapping**.
3. Select a free GPIO pin.
4. Choose pull mode and trigger edge.
5. Choose the action.
6. Set the slot number if the action needs one.
7. Upload the config to the Pico.

The page disables reserved pins and pins already used by other mappings.

Editing the mapping saves the setup on the XAMPP server, but the Pico only receives it after **Push to Pico**. Use **Read from Pico** when the Pico already has the mapping you want to bring back into the editor.

Add an ADC Mapping

1. Add an ADC mapping.
2. Select GPIO26, GPIO27, or GPIO28.
3. Choose `chaser_speed` or `motion_bpm`.
4. Set the target slot.

5. Set the min and max value.
6. Upload the config.

ADC values are filtered on the firmware side with a short mean filter to reduce ripple.

Tap Tempo

Tap actions use the time between button presses.

The beat divider can be set to:

- 1 beat
- 1/2 beat
- 1/4 beat
- 1/8 beat
- 1/16 beat

The firmware ignores very long gaps between taps so stopping for a while does not create an extremely slow tempo when tapping resumes.

7. Pico Performance Test

Pico Performance Test v0.9.3

Pico base URL

Controller
Chaser
Motion
GPIO
Monitor
Manual

Connection & Core Timing

Check Pico
Run Full Test

IDLE

Pico status

No check run yet.

IDLE

Core0 DMX loop

No timing data yet.

IDLE

Core1 service loop

No timing data yet.

IDLE

HTTP callbacks

No HTTP timing data yet.

IDLE

DMX frame counters

No frame counter data yet.

IDLE

Buffer readback

No readback test run yet.

IDLE

DMX write load

No write benchmark run yet.

Buffer Readback

Start channel

Channels

Value

Read Back

1	512	73	
---	-----	----	--

Writes a known batch, reads live output and base buffer, then compares the tested channels.

Timing History

Clear

Run	Time	Status	Core0 slack	Core0 late	Core1 slack	HTTP peak	DMX	Buffer
-----	------	--------	-------------	------------	-------------	-----------	-----	--------

DMX Write Test

Preset

Start channel

Value

Channels / request

Request count

Duration s

▶ Start
■ Stop

Quick check ▾	1	128	512	500	0
---------------	---	-----	-----	-----	---

BATCH x512 POST /dmx/b body: chval,...

Throughput

req / s

Channels / s

effective DMX updates/s

Avg latency

ms / request

Median

ms

p95 / p99

ms

Jitter

p95 - median

Min latency

ms

Max latency

ms

Completed

requests

Error

%

The Pico Performance Test page checks the full browser-to-Pico control path.

Pico Performance Test does not use the shared toolbox sidebar. It is a developer/test page for measuring request performance, buffer readback, and firmware timing health.

Use **Check Pico** to read `/status.json` and `/logs.txt`. The page parses the latest Core0/Core1 performance lines, HTTP callback timing, and DMX frame counters. A healthy steady-state run should show no late Core0 cycles and comfortable Core0 slack.

Use **Buffer Readback** to write a known batch with `/dmx/b`, then compare the tested channels from both `/dmx/output.json` and `/dmx/base.json`.

Use **DMX Write Test** to compare:

- Single-channel updates
- Scene-sized batch updates
- Large batch updates
- Longer soak tests

The write-test result panel shows:

- Throughput
- Effective DMX channel updates per second
- Average latency
- Median latency
- p95 and p99 latency
- Jitter
- Errors

Use **Run Full Test** to run the Pico status/log check, buffer readback, write test, and a final timing-log check in one sequence.

The **Timing History** table records each Pico timing check. A manual **Check Pico** adds one row immediately. **Run Full Test** records the final post-load timing sample, so the row reflects Core0/Core1 slack after the write and readback checks have run.

Use **Export CSV** to save results for later comparison.

Pico Performance Test and GPIO Control link to the **DMX Buffer Monitor**.

8. DMX Buffer Monitor

DMX Buffer Monitor v0.9.3

Set Pico base URL to monitor buffers

Pico base URL

http://192.168.1.50

Controller

Chaser

Motion

Performance

Manual

Buffer

DMX output

☒ Auto refresh

Refresh ms50

Refresh Hz20

Clear highlights

Clear all

Channels: —

Frame: —

Changed: —

Last update: —

CH 1	CH 2	CH 3	CH 4	CH 5	CH 6	CH 7	CH 8	CH 9	CH 10	CH 11	CH 12	CH 13	CH 14	CH 15	CH 16	CH 17	CH 18	CH 19	CH 20	CH 21
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 22	CH 23	CH 24	CH 25	CH 26	CH 27	CH 28	CH 29	CH 30	CH 31	CH 32	CH 33	CH 34	CH 35	CH 36	CH 37	CH 38	CH 39	CH 40	CH 41	CH 42
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 43	CH 44	CH 45	CH 46	CH 47	CH 48	CH 49	CH 50	CH 51	CH 52	CH 53	CH 54	CH 55	CH 56	CH 57	CH 58	CH 59	CH 60	CH 61	CH 62	CH 63
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 64	CH 65	CH 66	CH 67	CH 68	CH 69	CH 70	CH 71	CH 72	CH 73	CH 74	CH 75	CH 76	CH 77	CH 78	CH 79	CH 80	CH 81	CH 82	CH 83	CH 84
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 85	CH 86	CH 87	CH 88	CH 89	CH 90	CH 91	CH 92	CH 93	CH 94	CH 95	CH 96	CH 97	CH 98	CH 99	CH 100	CH 101	CH 102	CH 103	CH 104	CH 105
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 106	CH 107	CH 108	CH 109	CH 110	CH 111	CH 112	CH 113	CH 114	CH 115	CH 116	CH 117	CH 118	CH 119	CH 120	CH 121	CH 122	CH 123	CH 124	CH 125	CH 126
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 127	CH 128	CH 129	CH 130	CH 131	CH 132	CH 133	CH 134	CH 135	CH 136	CH 137	CH 138	CH 139	CH 140	CH 141	CH 142	CH 143	CH 144	CH 145	CH 146	CH 147
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 148	CH 149	CH 150	CH 151	CH 152	CH 153	CH 154	CH 155	CH 156	CH 157	CH 158	CH 159	CH 160	CH 161	CH 162	CH 163	CH 164	CH 165	CH 166	CH 167	CH 168
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 169	CH 170	CH 171	CH 172	CH 173	CH 174	CH 175	CH 176	CH 177	CH 178	CH 179	CH 180	CH 181	CH 182	CH 183	CH 184	CH 185	CH 186	CH 187	CH 188	CH 189
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 190	CH 191	CH 192	CH 193	CH 194	CH 195	CH 196	CH 197	CH 198	CH 199	CH 200	CH 201	CH 202	CH 203	CH 204	CH 205	CH 206	CH 207	CH 208	CH 209	CH 210
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 211	CH 212	CH 213	CH 214	CH 215	CH 216	CH 217	CH 218	CH 219	CH 220	CH 221	CH 222	CH 223	CH 224	CH 225	CH 226	CH 227	CH 228	CH 229	CH 230	CH 231
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 232	CH 233	CH 234	CH 235	CH 236	CH 237	CH 238	CH 239	CH 240	CH 241	CH 242	CH 243	CH 244	CH 245	CH 246	CH 247	CH 248	CH 249	CH 250	CH 251	CH 252
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 253	CH 254	CH 255	CH 256	CH 257	CH 258	CH 259	CH 260	CH 261	CH 262	CH 263	CH 264	CH 265	CH 266	CH 267	CH 268	CH 269	CH 270	CH 271	CH 272	CH 273
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
CH 274	CH 275	CH 276	CH 277	CH 278	CH 279	CH 280	CH 281	CH 282	CH 283	CH 284	CH 285	CH 286	CH 287	CH 288	CH 289	CH 290	CH 291	CH 292	CH 293	CH 294
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

The monitor displays all 512 channels as tiles and reads one Pico buffer at a time.

Use **DMX output** to see the actual output frame currently held by the DMX engine, including values produced by Pico-side Chaser or Motion FX playback.

Use **Base / position** to inspect the scene base buffer used as the center for Motion FX.

Use **Refresh ms** to control the polling interval directly. Use **Refresh Hz** when you prefer rate instead. Both fields stay synchronized, so `500 ms` is shown as `2 Hz`. Longer intervals are calmer for observation; shorter intervals are useful when checking fast changes. **Auto refresh** starts or stops polling without changing the selected buffer.

Use **Clear all** when you want to clear both Pico buffers from the monitor page. It calls the Pico clear endpoint immediately, clears the DMX output buffer and the base/position buffer, and then refreshes the displayed tiles.

9. Backup and Import

Use **Fixture Controller > Show > Export Setup** before large changes or before moving the show to another computer.

The exported setup file includes:

- Fixture profiles and patched fixtures
- Current live fixture values

- Groups
- Scenes
- Palettes
- Saved chases and saved Pico chaser slot payloads
- Motion FX settings, saved effects, and saved Pico motion slot payloads
- GPIO mappings
- Custom imported fixture library catalog, if one is saved on the XAMPP server
- Toolbox layout, collapse state, grid sizes, and other saved UI state

The file also stores the project name, project version, export time, and setup format version. During import, the controller checks the setup format before writing anything to the server. Older supported formats are upgraded automatically to the current format. If a future setup file uses a newer format than the installed software understands, import stops and asks you to update the controller software first.

Use **Import Setup** on the Fixture Controller to restore the complete setup file. Import replaces the saved setup on the XAMPP server and reloads the controller page after the restore.

Patch CSV is separate. It exports the patched DMX channel table for documentation or troubleshooting, not for restoring the show.

9. Clear Functions

There are two different clear actions:

Action	What it clears	When to use
DMX clear	Live DMX output and the motion base buffer	Full reset of output and base position
Output-only clear	Live DMX output only	Black out output while keeping the stored motion center

Use output-only clear when you want Motion FX to resume around the same stored center after the blackout.

Troubleshooting

The UI does not control the Pico

- Check that the Pico is powered and connected to WiFi.
- Open the Pico URL directly in a browser, for example `http://192.168.0.24/`.
- Make sure the base URL in the UI ends with `/`.
- Make sure the Fixture Controller has the correct Pico base URL.

Chaser capture does not contain the expected values

- Move or recall the values on the Fixture Controller first.

- Make sure the participating controls include the controls you want to capture.
- Save or reload the Fixture Controller setup if fixtures were changed recently.

Motion FX moves around the wrong center

- Recall the desired scene first.
- On the Motion FX page, click the same scene in the scene toolbox.
- Then start the motion slot.

GPIO mapping does not react

- Check `/gpio/status` or the status panel on the GPIO page.
- Confirm that the selected pin is not reserved or already used.
- Check pull mode and trigger edge.
- For ADC, use only GPIO26, GPIO27, or GPIO28.

A chaser has more than 32 steps

The firmware supports 32 steps per chaser slot. Keep the chase within this limit before uploading to the Pico.