Parameters

Electrical Parameters:	
Working power	12-30V DC
BUSPRO power consumption	45mA/24V DC
Environmental Conditions:	
Working temperature	-5℃~45℃
Working relative humidity	Up to 90%
Storage temperature	-20℃~+60℃
Storage relative humidity	Up to 93%
Approved:	
CE	
RoHS	
Product Information:	
Dimensions	105×170×40 (mm)
Net weight	361g
Housing material	Glass
Installation	Wall Box
Protection rating	IP20

HDL Buspro Cable Guide

HDL Buspro	HDL Buspro/KNX	CAT5/CAT5E
COM	Black	Brown White/Orange White
DATA-	White	Blue White/Green White
DATA+	Yellow	Blue/Green
24V DC	Red	Brown/Orange

Safety Precautions



- Read all instructions in detail before using.
- Do not get AC power into the HDL Buspro interface.
- Avoid shaking the device when using, keep it away from dust and water.
- If water or other liquids get into the device, please dry it in time.
- Ensure good ventilation.

Overview



HDL-MHBRF.1010 is Door Bell touch panel which is installed outside the room nearby the door. It can control the panel to indicate your requirement in door bell panel , such as DND, Clean Room, and Pick Laundry.

Functions

- Show different number of room, DND, Clear Room, and Laundry.
- 2 dry contacts.
- Door bell.
- Open the Door by RF card & history record function.
- Support HDL Buspro online upgrading.


Important Notes

- Buspro cable – CAT5E or HDL Buspro/KNX cable
- Buspro Connection - Series connection (hand-in-hand)
- Installation-Wall box installation, outside the room nearby the door.

Installation Steps

- Wall box installation.
- Mark up each connection cable.
- Connect the load and HDL Buspro, check if there is any short circuit in output connection cable.
- Check the HDL Buspro connection, avoid any mistakes.

Dimensions and Wiring



Front View

Room number is displayed here, Universal switch number is 4


DND, Universal switch number is 2

Clear, Universal switch number is 3


Laundry, Universal switch number is 1

Door open, Universal switch number is 6

Doorbell, Universal switch number is 5




Back View

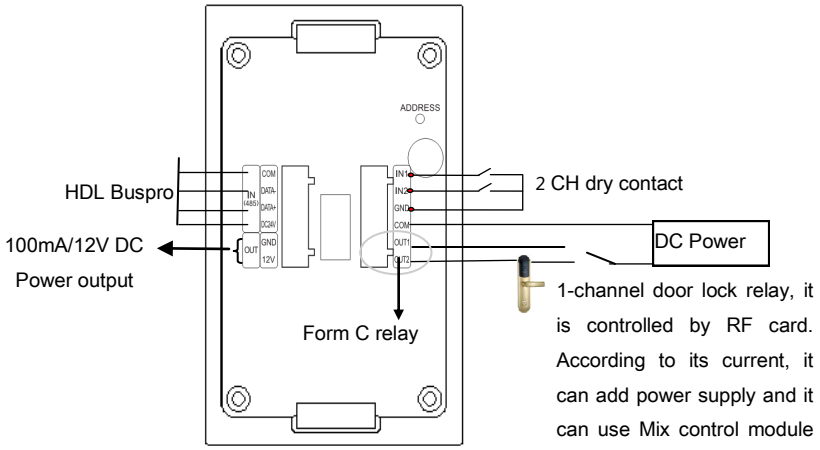

1-channel door lock relay, it is controlled by RF card. According to its current, it can add power supply and it can use Mix control module to open the door .

The control setting of relay(can be controlled by relay itself or other panel devices):
Sub wet ID, device ID: the doorbell ID.
Type: Single channel adjust
Parameter 1: 1
Parameter 2: 0(Off) / 100(On)
Parameter 3:0:0

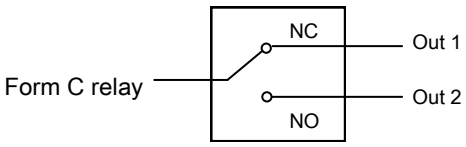

The lock connection depends on the out1 or out2 type

Note :

1. **Door bell touch panel has special back box , it can fix and protect the panel .The back box has holes for making the wire connections.**
2. **When the state is DND, the doorbell button will be disabled.**

Package Contents

Device	1pc
Datasheet	1pc
RF card	1pc
Warranty card	1pc