ISO 9001:2008
SYSTEM CERTIFICATION
SGS

NHD-C12864LZ-FSW-FBW-3V3

COG (Chip-On-Glass) Liquid Crystal Display Module

NHD-	Newhaven Display
C12864-	128 x 64 Pixels
LZ-	Model
F-	Transflective
SW-	Side White LED backlight
F-	FSTN (+)
B-	6:00 Optimal View
W-	Wide Temperature
3V3-	$3V_{DD}$, 3V Backlight
	RoHS Compliant

Document Revision History

Revision	Date	Description	Changed by
0	1/10/10	Initial Release	MC
1	7/7/11	Packaging Procedure added	AK
2	12/12/12	Example initialization program updated	AK
3	4/10/13	Serial interface timing added	AK
4	3/17/15	Pin Description updated	RM
5	10/16/15	Mechanical Drawing Updated	TJ
6	6/29/16	Electrical and Optical Characteristics Updated	SB
7	10/27/16	Electrical Characteristics and Mechanical Drawing Updated	TM
8	7/26/17	Backlight Redesign & LCD Panel Changed for Improved Contrast	SB

Functions and Features

- **128 x 64 pixels**
- **Parallel / Serial MPU interface**
- **Built-in ST7565R-G Controller**
- **+3.0V power supply**
- **1/65 duty cycle; 1/9 bias**
- **RoHS Compliant**

Mechanical Drawing

128*64 DOTS

VIEWING DIRECTION

SECTION A-A

BACK VIEW

COM&SEG LAYOUT

DETAIL A

FRONT

BACK

Newhaven Display
NHD-C12864LZ-FSW-FBW-3V3_revA

PRODUCT CODE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14
CONNECTION	CS1	/RES	A0	/WR	/RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VDD
PIN	15	16	17	18	19	20	21	22	23	24	25	26	27	28
CONNECTION	VSS	VOUT	CAP3P	CAP1N	CAP1P	CAP2P	CAP2N	V4	V3	V2	V1	V0	C86	P/S

Notes:
1. Driving: 1/65 Duty, 1/9 Bias
2. Voltage: 3.0V VDD, 8.5V VLCD
3. Display Type: FSTN Positive / Transflective
4. Optimal View: 6:00
5. Backlight: White LED
6. Driver IC: ST7565R

Rev	Description	Date

Unit mm

Gen. Tol. ±0.3

Date 07/26/17

Part Number: NHD-C12864LZ-FSW-FBW-3V3

NEWHAVEN DISPLAY INTERNATIONAL

Pin Description and Wiring Diagram

Pin No.	Symbol	External Connection	Function Description
1	/CS1	MPU	Active LOW chip select
2	/RES	MPU	Active LOW Reset signal
3	A0	MPU	Register select signal. 0: instruction; 1: data register
4	R/W /WR	MPU	6800 Mode: Read/Write select signal. R/W=1: Read R/W: =0: Write 8080 Mode: Active LOW Write Signal
5	E /RD	MPU	6800 Mode: Active HIGH Enable Signal 8080 Mode: Active LOW Read Signal
6	DB0	MPU	Parallel Interface
7	DB1	MPU	DB0-DB7: Bi-directional 8-bit data bus
8	DB2	MPU	
9	DB3	MPU	Serial Interface:
10	DB4	MPU	DB0-DB5: No connect in serial mode
11	DB5	MPU	DB6= Serial clock (SCL)
12	DB6	MPU	DB7= Serial data input (SI)
13	DB7	MPU	
14	V_{DD}	Power Supply	Supply Voltage for LCD and logic (+3.0V)
15	V_{SS}	Power Supply	Ground
16	V_{OUT}	Power Supply	Connect to 1uF cap to VSS
17	CAP3+	Power Supply	Connect to 1uF cap to CAP1- (PIN-18)
18	CAP1-	Power Supply	Connect to 1uF cap to CAP3+(PIN17) and CAP1+(PIN19)
19	CAP1+	Power Supply	Connect to 1uF cap to CAP1- (PIN-18)
20	CAP2+	Power Supply	Connect to 1uF cap to CAP2- (PIN-21)
21	CAP2-	Power Supply	Connect to 1uF cap to CAP2+ (PIN-20)
22	V_4	Power Supply	1.0uF-2.2uF cap to VSS
23	V_3	Power Supply	1.0uF-2.2uF cap to VSS
24	V_2	Power Supply	1.0uF-2.2uF cap to VSS
25	V_1	Power Supply	1.0uF-2.2uF cap to VSS
26	V_0	Power Supply	1.0uF-2.2uF cap to VSS
27	C86	MPU	MPU interface Select pin. C86=H: 6800; C86=L: 8080
28	PS	MPU	Parallel/Serial select. PS= H: Parallel; PS=L: Serial

LCD connector: 1.27mm pitch pins.
Backlight connector: 1.5mm wide pins.
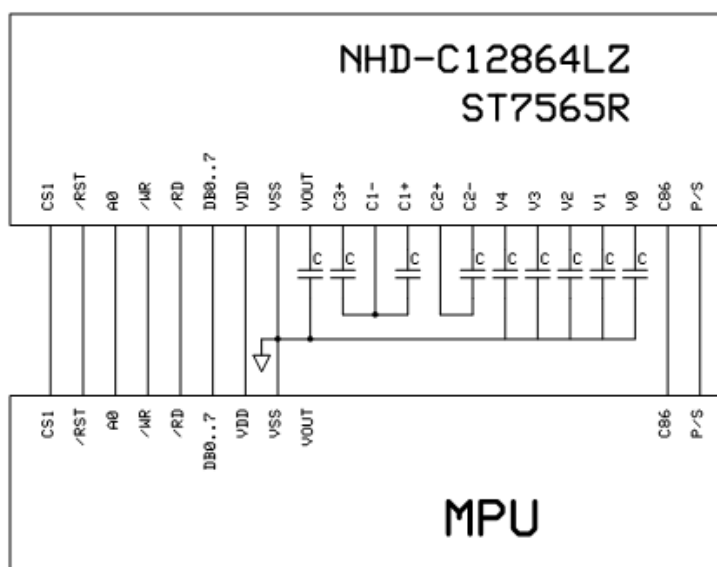
Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	T_{OP}	Absolute Max	-20	-	+70	ºC
Storage Temperature Range	T_{ST}	Absolute Max	-30	-	+80	ºC
Supply Voltage	V_{DD}	-	2.7	3.0	3.3	V
Supply Current	I_{DD}	V_{DD} = 3.0V	0.2	0.5	2.0	mA
Supply for LCD (contrast)	V_{LCD}	T_{OP} = 25°C	8.2	8.5	8.8	V
"H" Level input	V_{IH}	-	$0.8 * V_{DD}$	-	V_{DD}	V
"L" Level input	V_{IL}	-	V_{SS}	-	$0.2 * V_{DD}$	V
"H" Level output	V_{OH}	-	$0.8 * V_{DD}$	-	V_{DD}	V
"L" Level output	V_{OL}	-	V_{SS}	-	$0.2 * V_{SS}$	V
LED Backlight current	I_{LED}	-	-	80	100	mA
LED Backlight voltage	V_{LED}	I_{LED} = 80mA	2.7	3.0	3.3	V

*The LED of the backlight is driven by current drain; drive voltage is for reference only. Drive voltage must be selected to ensure backlight current drain is below MAX level stated.

Optical Characteristics

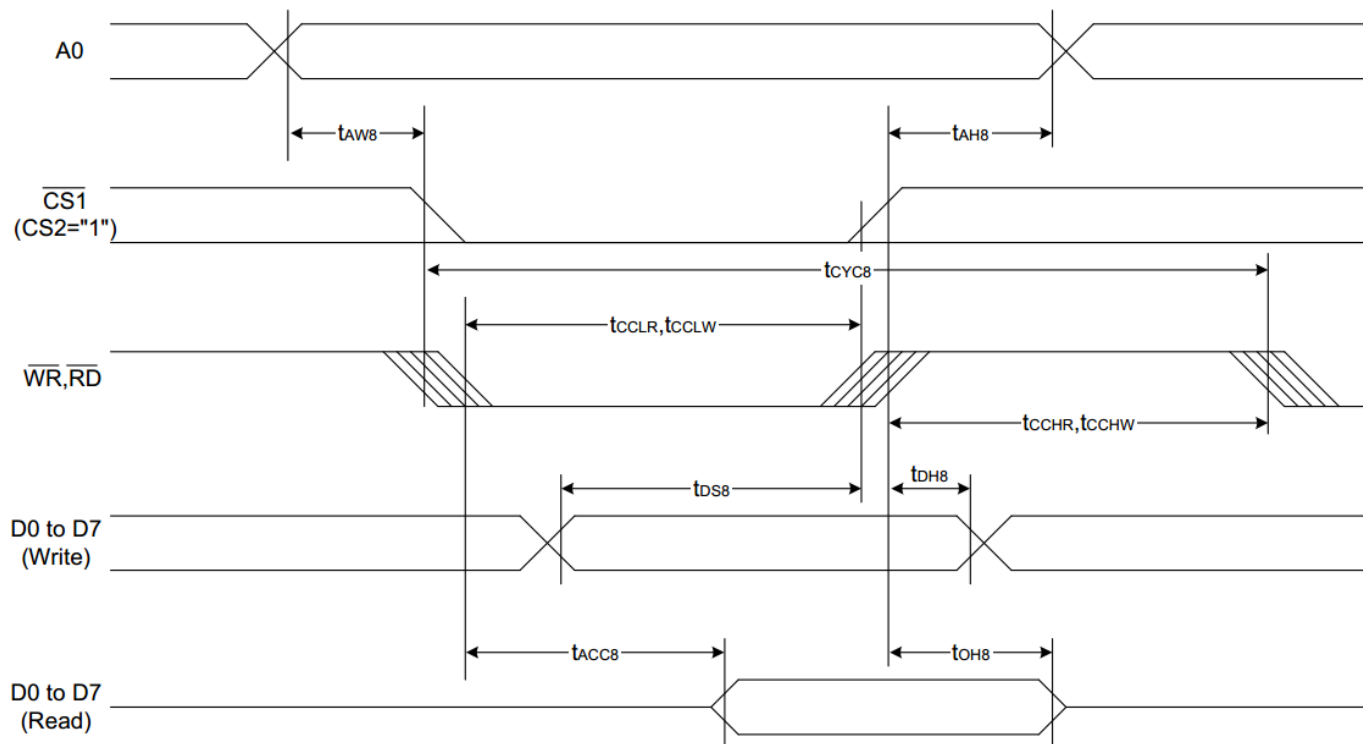| Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Optimal Viewing Angles	Top	φY+		-	35	-	º
	Bottom	φY-	Cr ≥ 2	-	35	-	º
	Left	θX-		-	40	-	º
	Right	θX+		-	40	-	º
Contrast Ratio		CR	-	2	5	-	-
Response Time	Rise	T_F	T_{OP} = 25°C	-	110	210	ms
	Fall	T_F		-	150	250	ms

Controller Information

Built-in ST7565R-G controller.
Please download specification at http://www.newhavendisplay.com/app_notes/ST7565R.pdf

Table of Commands

Command	A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1	D0	Function
(1) Display ON/OFF	0	1	0	1	0	1	0	1	1	1	0 1	LCD display ON/OFF 0: OFF, 1: ON
(2) Display start line set	0	1	0	0	1	Display start address						Sets the display RAM display start line address
(3) Page address set	0	1	0	1	0	1	1	Page address				Sets the display RAM page address
(4) Column address set upper bit	0	1	0	0	0	0	1	Most significant column address				Sets the most significant 4 bits of the display RAM column address.
Column address set lower bit				0	0	0	0	Least significant column address				Sets the least significant 4 bits of the display RAM column address.
(5) Status read	0	0	1	Status				0	0	0	0	Reads the status data
(6) Display data write	1	1	0	Write data								Writes to the display RAM
(7) Display data read	1	0	1	Read data								Reads from the display RAM
(8) ADC select	0	1	0	1	0	1	0	0	0	0	0 1	Sets the display RAM address SEG output correspondence 0: normal, 1: reverse
(9) Display normal/ reverse	0	1	0	1	0	1	0	0	1	1	0 1	Sets the LCD display normal/ reverse 0: normal, 1: reverse
(10) Display all points ON/OFF	0	1	0	1	0	1	0	0	1	0	0 1	Display all points 0: normal display 1: all points ON
(11) LCD bias set	0	1	0	1	0	1	0	0	0	1	0 1	Sets the LCD drive voltage bias ratio 0: 1/9 bias, 1: 1/7 bias (ST7565R)
(12) Read-modify-write	0	1	0	1	1	1	0	0	0	0	0	Column address increment At write: +1 At read: 0
(13) End	0	1	0	1	1	1	0	1	1	1	0	Clear read/modify/write
(14) Reset	0	1	0	1	1	1	0	0	0	1	0	Internal reset
(15) Common output mode select	0	1	0	1	1	0	0	0 1	*	*	*	Select COM output scan direction 0: normal direction 1: reverse direction
(16) Power control set	0	1	0	0	0	1	0	1	Operating mode			Select internal power supply operating mode
(17) V$_0$ voltage regulator internal resistor ratio set	0	1	0	0	0	1	0	0	Resistor ratio			Select internal resistor ratio(Rb/Ra) mode
(18) Electronic volume mode set	0	1	0	1	0	0	0	0	0	0	1	Set the V$_0$ output voltage electronic volume register
Electronic volume register set				0	0	Electronic volume value						
(19) Sleep mode set	0	1	0	1	0	1	0	1	1	0	0 1	0: Sleep mode, 1: Normal mode
				*	*	*	*	*	*	0	0	
(20) Booster ratio set	0	1	0	1	1	1	1	1	0	0	0	select booster ratio 00: 2x,3x,4x 01: 5x 11: 6x
				0	0	0	0	0	0	step-up value		
(21) NOP	0	1	0	1	1	1	0	0	0	1	1	Command for non-operation
(22) Test	0	1	0	1	1	1	1	*	*	*	*	Command for IC test. Do not use this command

Timing Characteristics

**System Bus Read/Write Characteristics 1 (For the 8080 Series MPU)**

(VDD = 3.3V, Ta = −30 to 85℃)

Item	Signal	Symbol	Condition	Rating Min.	Rating Max.	Units
Address hold time	A0	tAH8		0	—	
Address setup time		tAW8		0	—	
System cycle time		tCYC8		240	—	
Enable L pulse width (WRITE)	WR	tCCLW		80	—	
Enable H pulse width (WRITE)		tCCHW		80	—	
Enable L pulse width (READ)	RD	tCCLR		140	—	
Enable H pulse width (READ)		tCCHR		80		Ns
WRITE Data setup time	D0 to D7	tDS8		40	—	
WRITE Address hold time		tDH8		0	—	
READ access time		tACC8	CL = 100 pF	—	70	
READ Output disable time		tOH8	CL = 100 pF	5	50	

System Bus Read/Write Characteristics 2 (For the 6800 Series MPU)
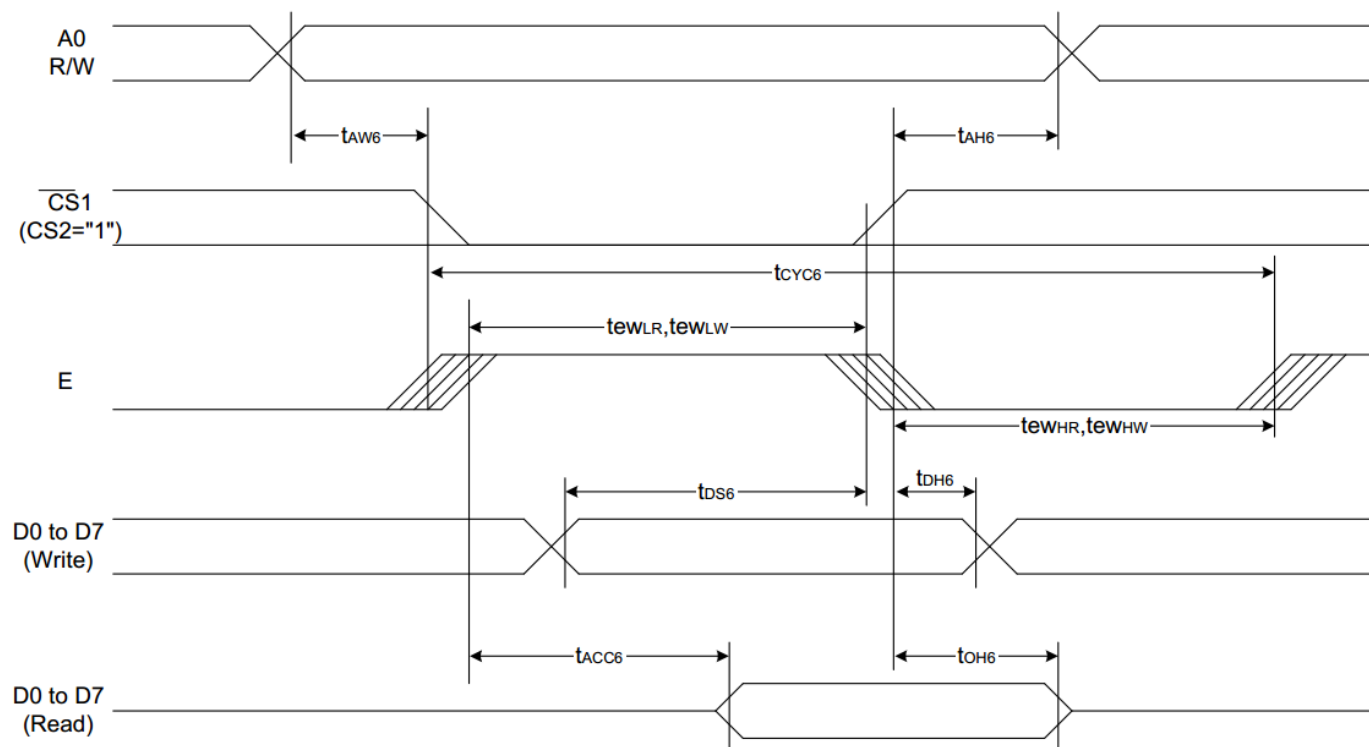
(VDD = 3.3V, Ta = −30 to 85℃)

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
Address hold time	A0	tAH6		0	—	
Address setup time		tAW6		0	—	
System cycle time		tCYC6		240	—	
Enable L pulse width (WRITE)	WR	tEWLW		80	—	
Enable H pulse width (WRITE)		tEWHW		80	—	
Enable L pulse width (READ)	RD	tEWLR		80	—	ns
Enable H pulse width (READ)		tEWHR		140	—	
WRITE Data setup time	D0 to D7	tDS6		40	—	
WRITE Address hold time		tDH6		0	—	
READ access time		tACC6	CL = 100 pF	—	70	
READ Output disable time		tOH6	CL = 100 pF	5	50	

[8]

The 4-line SPI Interface
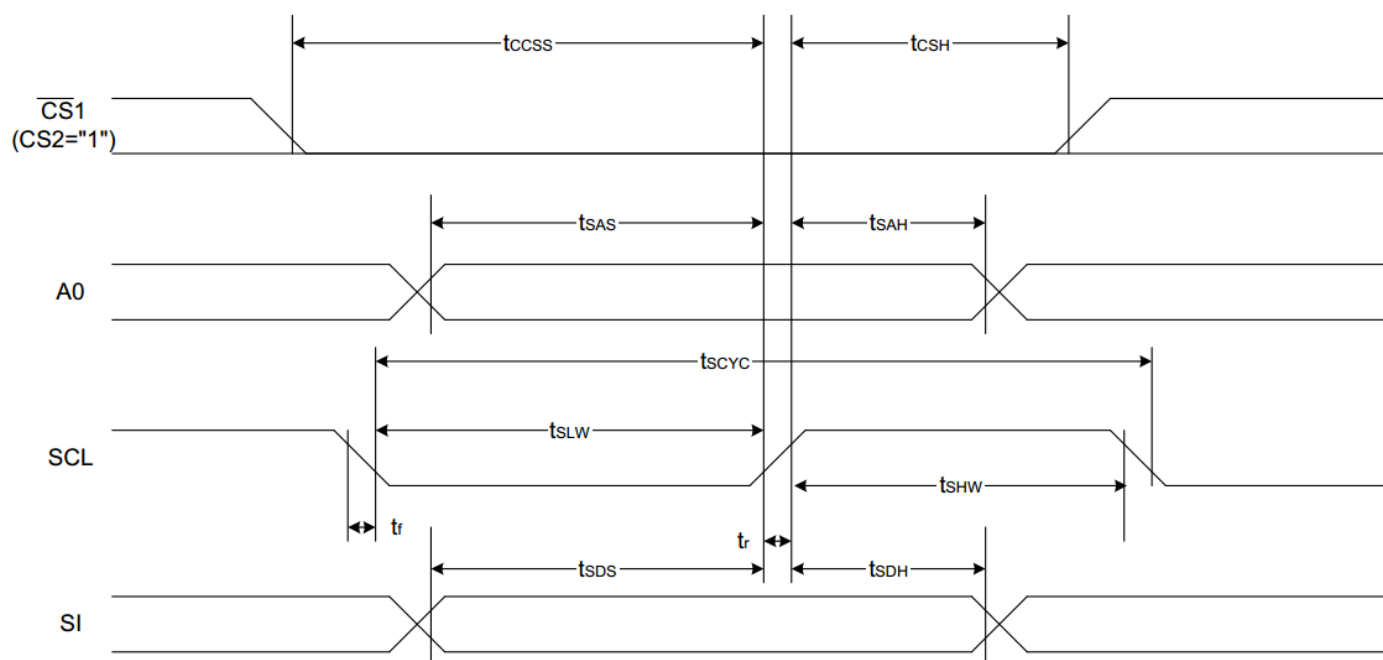
Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
4-line SPI Clock Period	SCL	T_{scyc}		50	—	ns
SCL "H" pulse width		T_{shw}		25	—	
SCL "L" pulse width		T_{SLW}		25	—	
Address setup time	A0	T_{SAS}		20	—	
Address hold time		T_{sah}		10	—	
Data setup time	SI	T_{sds}		20	—	
Data hold time		T_{SDH}		10	—	
CS-SCL time	CS	T_{css}		20	—	
CS-SCL time		T_{csh}		40	—	

[9]

Example Initialization Program

```c
void comm_out(unsigned int c)
{
        CS1 = 0;                        //Active Low
         AO = 0;                        //LOW = instruction
        delay(1);
        WRT = 0;                        // /WR in 8080 mode; R/W in 6800 mode
        P1 = c;
         delay(1);
        WRT = 1;                        // /WR in 8080 mode; R/W in 6800 mode
        CS1 = 1;                        //inactive
        delay(5);
}

void data_out(unsigned int d)
{
        CS1 = 0;                        //Active Low
         AO = 1;                        //High = Data
        delay(1);
        WRT = 0;
         //RDD = 1;
        P1 = d;
        delay(1);
        WRT = 1;
        CS1 = 1;                         //inactive

}

void init()
{
        RDD = 1;                        // /RD in 8080 mode; E in 6800 mode
        WRT = 1;                        // /WR in 8080 mode; R/W in 6800 mode
        CS1 = 0;
        RST = 1;                        // /RST in 8080 mode; /RES in 6800 mode
        RST = 0;                         // /RST in 8080 mode; /RES in 6800 mode
        delay(2);
        RST = 1;                        // /RST in 8080 mode; /RES in 6800 mode
        delay(2);
        comm_out(0xA2);                 //added 1/9 bias

        comm_out(0xA0);                 //ADC segment driver direction (A0=Normal)
        comm_out(0xC8);                 //added
        comm_out(0xC0);                 //COM output scan direction (C0= Normal)
        comm_out(0x40);                 //Operating Mode
        delay(0);
        comm_out(0x25);                  //resistor ratio
        delay(0);

        comm_out(0x81);                 //electronic volume mode set
        delay(0);
        comm_out(0x19);                 //electronic volume register set
        delay(0);
        comm_out(0x2F);                 //power control set
        delay(0);
        comm_out(0xAF);                 //display ON/OFF - set to ON
```
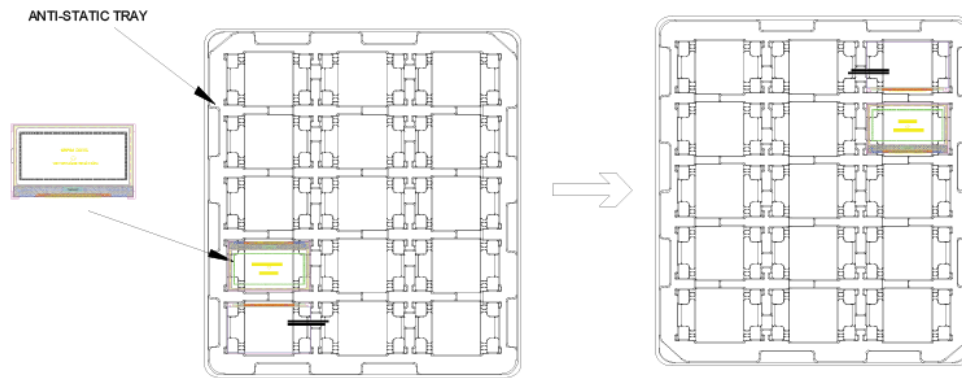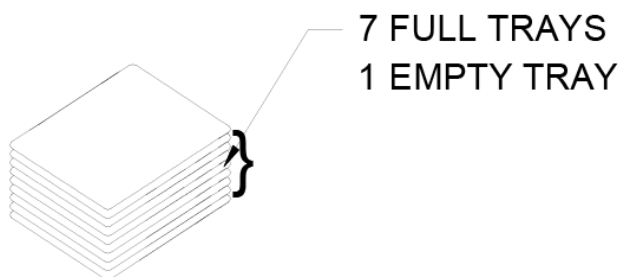
Packing Procedure

1. Packing Materials

NO.	Item	Dimensions (LxWxH) (mm)	Quantity
1	Tray	366x296x21.1	15
2	Box	382x310x165	105
3	Carton	400x321x363	210

2. Packing Method

A. Place display on the tray & Rotate Stacked trays by 180°

ANTI-STATIC TRAY

B.

7 FULL TRAYS
1 EMPTY TRAY

C.

Label
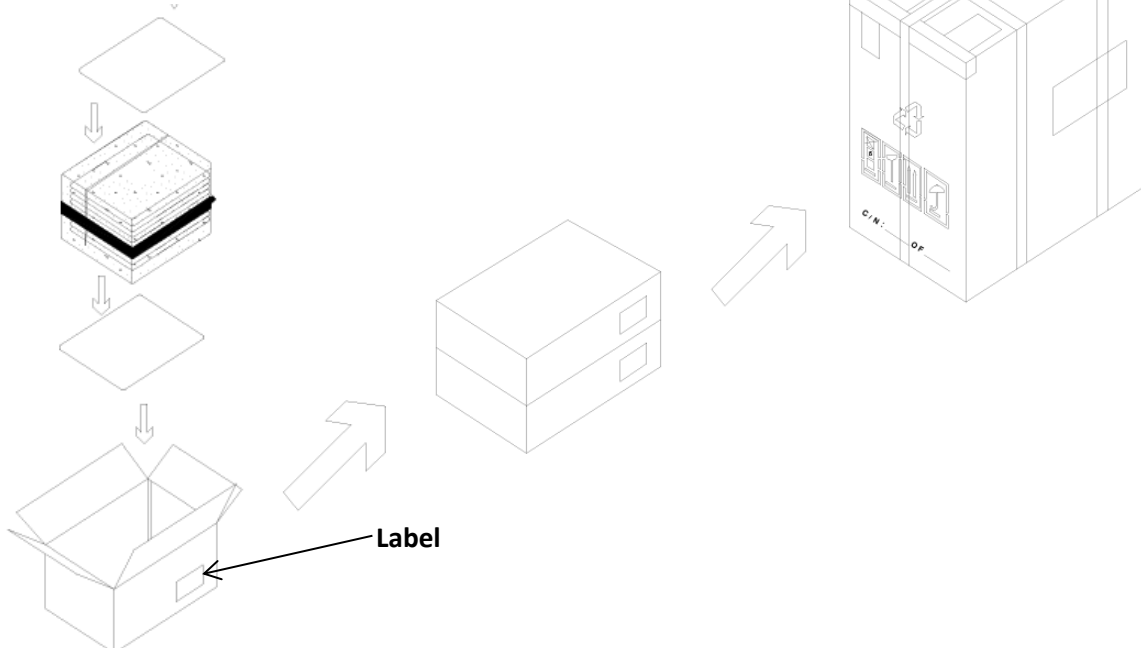
Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80^{o}C , 48hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30^{o}C , 48hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70^{o}C , 48hrs	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20^{o}C , 48hrs	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+40^{o}C , 90% RH , 48hrs	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	-0^{o}C, 30min -> 25^{o}C, 5min -> 50^{o}C, 30min = 1 cycle For 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	10-55Hz, 1.5mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes	3
Static electricity test	Endurance test applying electric static discharge.	VS=800V, RS=1.5kΩ, CS=100pF One time	

Note 1: No condensation to be observed.
Note 2: Conducted after 4 hours of storage at 25^{o}C, 0%RH.
Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information

See Terms & Conditions at http://www.newhavendisplay.com/index.php?main_page=terms